

EFM32TG Reference Manual

Tiny Gecko Series

- 32-bit ARM Cortex-M3 processor running at up to 32 MHz
- Up to 32 kB Flash and 4 kB RAM memory
- Energy efficient and autonomous peripherals
- Ultra low power Energy Modes with sub- μ A operation
- Fast wake-up time of only 2 μ s

The EFM32TG microcontroller series revolutionizes the 8- to 32-bit market with a combination of unmatched performance and ultra low power consumption in both active- and sleep modes. EFM32TG devices consume as little as 150 μ A/MHz in run mode, and as little as 1.0 μ A with a Real Time Counter running, Brown-out and full RAM and register retention.

EFM32TG's low energy consumption outperforms any other available 8-, 16-, and 32-bit solution. The EFM32TG includes autonomous and energy efficient peripherals, high overall chip- and analog integration, and the performance of the industry standard 32-bit ARM Cortex-M3 processor.


1 Energy Friendly Microcontrollers

1.1 Typical Applications

The EFM32TG Tiny Gecko is the ideal choice for demanding 8-, 16-, and 32-bit energy sensitive applications. These devices are developed to minimize the energy consumption by lowering both the power and the active time, over all phases of MCU operation. This unique combination of ultra low energy consumption and the performance of the 32-bit ARM Cortex-M3 processor, help designers get more out of the available energy in a variety of applications.

Ultra low energy EFM32TG microcontrollers are perfect for:

- Gas metering
- Energy metering
- Water metering
- Smart metering
- Alarm and security systems
- Health and fitness applications
- Industrial and home automation

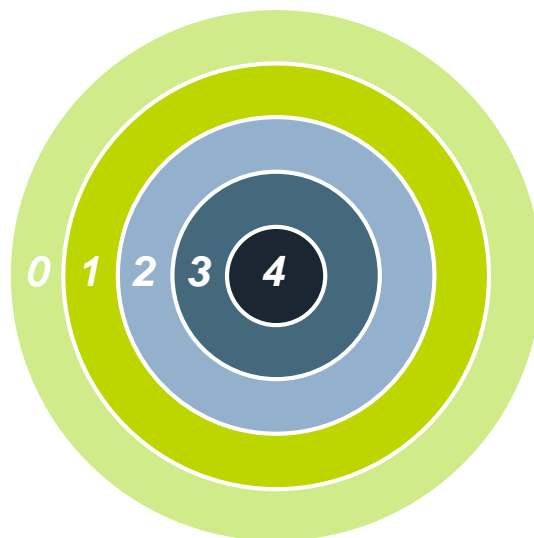

1.2 EFM32TG Development

Because EFM32TG use the Cortex-M3 CPU, embedded designers benefit from the largest development ecosystem in the industry, the ARM ecosystem. The development suite spans the whole design process and includes powerful debug tools, and some of the world's top brand compilers. Libraries with documentation and user examples shorten time from idea to market.

The range of EFM32TG devices ensure easy migration and feature upgrade possibilities.

2 About This Document

This document contains reference material for the EFM32TG series of microcontrollers. All modules and peripherals in the EFM32TG series devices are described in general terms. Not all modules are present in all devices, and the feature set for each device might vary. Such differences, including pin-out, are covered in the device-specific datasheets.

2.1 Conventions

Register Names

Register names are given as a module name prefix followed by the short register name:

TIMERn_CTRL - Control Register

The "n" denotes the numeric instance for modules that might have more than one instance.

Some registers are grouped which leads to a group name following the module prefix:

GPIO_Px_DOUT - Port Data Out Register,

where x denotes the port instance (A,B,...).

Bit Fields

Registers contain one or more bit fields which can be 1 to 32 bits wide. Multi-bit fields are denoted with (x:y), where x is the start bit and y is the end bit.

Address

The address for each register can be found by adding the base address of the module (found in the Memory Map), and the offset address for the register (found in module Register Map).

Access Type

The register access types used in the register descriptions are explained in Table 2.1 (p. 3) .

Table 2.1. Register Access Types

| Access Type | Description |
|-------------|---|
| R | Read only. Writes are ignored. |
| RW | Readable and writable. |
| RW1 | Readable and writable. Only writes to 1 have effect. |
| RW1H | Readable, writable and updated by hardware. Only writes to 1 have effect. |
| W1 | Read value undefined. Only writes to 1 have effect. |
| W | Write only. Read value undefined. |
| RWH | Readable, writable and updated by hardware. |

Number format

0x prefix is used for hexadecimal numbers.

0b prefix is used for binary numbers.

Numbers without prefix are in decimal representation.

Reserved

Registers and bit fields marked with *reserved* are reserved for future use. These should be written to 0 unless otherwise stated in the Register Description. Reserved bits might be read as 1 in future devices.

Reset Value

The reset value denotes the value after reset.

Registers denoted with X have an unknown reset value and need to be initialized before use. Note that, before these registers are initialized, read-modify-write operations might result in undefined register values.

Pin Connections

Pin connections are given as a module prefix followed by a short pin name:

USn_TX (USARTn TX pin)

The pin locations referenced in this document are given in the device-specific datasheet.

2.2 Related Documentation

Further documentation on the EFM32TG family and the ARM Cortex-M3 can be found at the Silicon Laboratories and ARM web pages:

www.silabs.com

www.arm.com

3 System Overview

3.1 Introduction

The EFM32 MCUs are the world's most energy friendly microcontrollers. With a unique combination of the powerful 32-bit ARM Cortex-M3, innovative low energy techniques, short wake-up time from energy saving modes, and a wide selection of peripherals, the EFM32TG microcontroller is well suited for any battery operated application, as well as other systems requiring high performance and low-energy consumption, see Figure 3.1 (p. 7) .

3.2 Features

- **ARM Cortex-M3 CPU platform**
 - High Performance 32-bit processor @ up to 32 MHz
 - Wake-up Interrupt Controller
- **Flexible Energy Management System**
 - 20 nA @ 3 V Shutoff Mode
 - 0.6 μ A @ 3 V Stop Mode, including Power-on Reset, Brown-out Detector, RAM and CPU retention
 - 1.0 μ A @ 3 V Deep Sleep Mode, including RTC with 32.768 kHz oscillator, Power-on Reset, Brown-out Detector, RAM and CPU retention
 - 51 μ A/MHz @ 3 V Sleep Mode
 - 150 μ A/MHz @ 3 V Run Mode, with code executed from flash
- **32/16/8/4 KB Flash**
- **4/2 KB RAM**
- **Up to 56 General Purpose I/O pins**
 - Configurable push-pull, open-drain, pull-up/down, input filter, drive strength
 - Configurable peripheral I/O locations
 - 16 asynchronous external interrupts
 - Output state retention and wake-up from Shutoff Mode
- **8 Channel DMA Controller**
 - Alternate/primary descriptors with scatter-gather/ping-pong operation
- **8 Channel Peripheral Reflex System**
 - Autonomous inter-peripheral signaling enables smart operation in low energy modes
- **Integrated LCD Controller for up to 8x20 Segments**
 - Voltage boost, adjustable contrast adjustment and autonomous animation feature
- **Hardware AES with 128/256-bit Keys in 54/75 cycles**
- **Communication interfaces**
 - 2x Universal Synchronous/Asynchronous Receiver/Transmitter
 - SPI/SmartCard (ISO 7816)/IrDA (USART0)/I2S (USART1)
 - Triple buffered full/half-duplex operation
 - 4-16 data bits
 - 1x Low Energy UART
 - Autonomous operation with DMA in Deep Sleep Mode
 - 1x I²C Interface with SMBus support
 - Address recognition in Stop Mode
- **Timers/Counters**
 - 2x 16-bit Timer/Counter
 - 3 Compare/Capture/PWM channels
 - 16-bit Low Energy Timer
 - 24-bit Real-Time Counter
 - 1x 16-bit Pulse Counter

- Asynchronous pulse counting/quadrature decoding
- Watchdog Timer with dedicated RC oscillator @ 50 nA
- **Ultra low power precision analog peripherals**
 - 12-bit 1 Msamples/s Analog to Digital Converter
 - 8 input channels and on-chip temperature sensor
 - Single ended or differential operation
 - Conversion tailgating for predictable latency
 - 12-bit 500 ksamples/s Digital to Analog Converter
 - 2 single ended channels/1 differential channel
 - Up to 3 Operational Amplifiers
 - Supports rail-to-rail inputs and outputs
 - Programmable gain
 - 2x Analog Comparator
 - Programmable speed/current
 - Capacitive sensing with up to 8 inputs
 - Supply Voltage Comparator
- **Ultra low power sensor interface**
 - Autonomous sensor monitoring in Deep Sleep Mode
 - Wide range of sensors supported, including LC sensors and capacitive buttons
- **Ultra efficient Power-on Reset and Brown-Out Detector**
- **2-pin Serial Wire Debug interface**
 - 1-pin Serial Wire Viewer
- **Temperature range -40 - 85°C**
- **Single power supply 1.98 - 3.8 V**
- **Packages**
 - QFN24
 - QFN32
 - QFN64
 - TQFP48
 - TQFP64

3.3 Block Diagram

Figure 3.1 (p. 7) shows the block diagram of EFM32TG. The color indicates peripheral availability in the different energy modes, described in Section 3.4 (p. 7) .

Figure 3.1. Block Diagram of EFM32TG

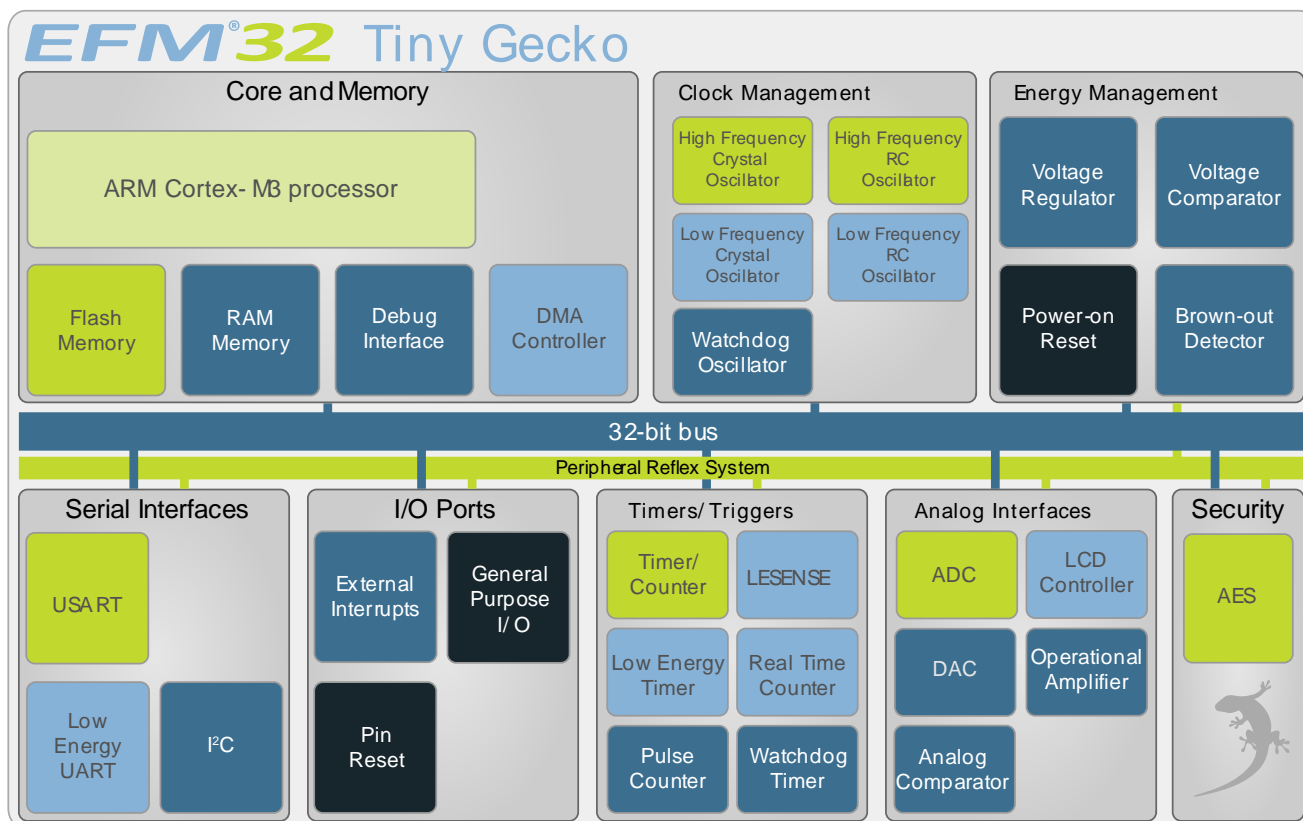
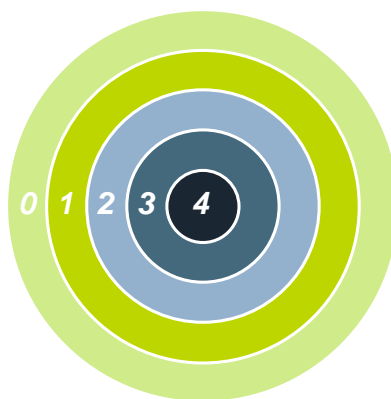


Figure 3.2. Energy Mode Indicator

**Note**

In the energy mode indicator, the numbers indicates Energy Mode, i.e EM0-EM4.






3.4 Energy Modes

There are five different Energy Modes (EM0-EM4) in the EFM32TG, see Table 3.1 (p. 8). The EFM32TG is designed to achieve a high degree of autonomous operation in low energy modes. The intelligent combination of peripherals, RAM with data retention, DMA, low-power oscillators, and short wake-up time, makes it attractive to remain in low energy modes for long periods and thus saving energy consumption.

Tip

Throughout this document, the first figure in every module description contains an Energy Mode Indicator showing which energy mode(s) the module can operate (see Table 3.1 (p. 8)).

Table 3.1. Energy Mode Description

| Energy Mode | Name | Description |
|---|--|--|
|  | EM0 – Energy Mode 0 (Run mode) | In EM0, the CPU is running and consuming as little as 150 μ A/MHz, when running code from flash. All peripherals can be active. |
|  | EM1 – Energy Mode 1 (Sleep Mode) | In EM1, the CPU is sleeping and the power consumption is only 51 μ A/MHz. All peripherals, including DMA, PRS and memory system, are still available. |
|  | EM2 – Energy Mode 2 (Deep Sleep Mode) | In EM2 the high frequency oscillator is turned off, but with the 32.768 kHz oscillator running, selected low energy peripherals (LCD, RTC, LETIMER, PCNT, LEUART, I ² C, LESENSE, OPAMP, WDOG and ACMP) are still available. This gives a high degree of autonomous operation with a current consumption as low as 1.0 μ A with RTC enabled. Power-on Reset, Brown-out Detection and full RAM and CPU retention is also included. |
|  | EM3 - Energy Mode 3 (Stop Mode) | In EM3, the low-frequency oscillator is disabled, but there is still full CPU and RAM retention, as well as Power-on Reset, Pin reset, EM4 wake-up and Brown-out Detection, with a consumption of only 0.6 μ A. The low-power ACMP, asynchronous external interrupt, PCNT, and I ² C can wake-up the device. Even in this mode, the wake-up time is a few microseconds. |
|  | EM4 – Energy Mode 4 (Shutoff Mode) | In EM4, the current is down to 20 nA and all chip functionality is turned off except the pin reset, GPIO pin wake-up, GPIO pin retention and the Power-On Reset. All pins are put into their reset state. |

3.5 Product Overview

Table 3.2 (p. 8) shows a device overview of the EFM32TG Microcontroller Series, including peripheral functionality. For more information, the reader is referred to the device specific datasheets.

Table 3.2. EFM32TG Microcontroller Series

| EFM32TG Part # | Flash | RAM | GPIO(pins) | LCD | USART | LEUART | I ² C | Timer(PWM) | LETIMER | RTC | PCNT | Watchdog | ADC(pins) | DAC(pins) | ACMP(pins) | AES | EBI | LESENSE | Op-Amps | Package |
|----------------|-------|-----|------------|-----|-------|--------|------------------|------------|---------|-----|------|----------|-----------|-----------|------------|-----|-----|---------|---------|---------|
| 108F4 | 4 | 1 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | - | - | 2 (4) | - | - | Y | - | QFN24 |
| 108F8 | 8 | 2 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | - | - | 2 (4) | - | - | Y | - | QFN24 |
| 108F16 | 16 | 4 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | - | - | 2 (4) | - | - | Y | - | QFN24 |
| 108F32 | 32 | 4 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | - | - | 2 (4) | - | - | Y | - | QFN24 |

| EFM32TG Part # | Flash | RAM | GPIO(pins) | LCD | USART | LEUART | I ² C | Timer(PWM) | LETIMER | RTC | PCNT | Watchdog | ADC(pins) | DAC(pins) | ACMP(pins) | AES | EBI | LESENSE | Op-Amps | Package |
|----------------|-------|-----|------------|-----|-------|--------|------------------|------------|---------|-----|------|----------|-----------|-----------|------------|-----|-----|---------|---------|---------|
| 110F4 | 4 | 1 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (2) | 2 (1) | 2 (4) | Y | - | Y | 3 | QFN24 |
| 110F8 | 8 | 2 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (2) | 2 (1) | 2 (4) | Y | - | Y | 3 | QFN24 |
| 110F16 | 16 | 4 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (2) | 2 (1) | 2 (4) | Y | - | Y | 3 | QFN24 |
| 110F32 | 32 | 4 | 17 | - | 1 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (2) | 2 (1) | 2 (4) | Y | - | Y | 3 | QFN24 |
| 210F8 | 8 | 2 | 24 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (5) | Y | - | Y | 3 | QFN32 |
| 210F16 | 16 | 4 | 24 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (5) | Y | - | Y | 3 | QFN32 |
| 210F32 | 32 | 4 | 24 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (5) | Y | - | Y | 3 | QFN32 |
| 222F8 | 8 | 2 | 37 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (12) | Y | - | Y | 3 | QFP48 |
| 222F16 | 16 | 4 | 37 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (12) | Y | - | Y | 3 | QFP48 |
| 222F32 | 32 | 4 | 37 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (12) | Y | - | Y | 3 | QFP48 |
| 225F8 | 8 | 2 | 37 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (12) | Y | - | Y | 3 | BGA48 |
| 225F16 | 16 | 4 | 37 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (12) | Y | - | Y | 3 | BGA48 |
| 225F32 | 32 | 4 | 37 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (4) | 2 (1) | 2 (12) | Y | - | Y | 3 | BGA48 |
| 230F8 | 8 | 2 | 56 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (16) | Y | - | Y | 3 | QFN64 |
| 230F16 | 16 | 4 | 56 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (16) | Y | - | Y | 3 | QFN64 |
| 230F32 | 32 | 4 | 56 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (16) | Y | - | Y | 3 | QFN64 |
| 232F8 | 8 | 2 | 53 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (16) | Y | - | Y | 3 | QFP64 |
| 232F16 | 16 | 4 | 53 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (16) | Y | - | Y | 3 | QFP64 |
| 232F32 | 32 | 4 | 53 | - | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (16) | Y | - | Y | 3 | QFP64 |
| 822F8 | 8 | 2 | 37 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (5) | 2 (1) | 2 (4) | Y | - | Y | 3 | QFP48 |
| 822F16 | 16 | 4 | 37 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (5) | 2 (1) | 2 (4) | Y | - | Y | 3 | QFP48 |
| 822F32 | 32 | 4 | 37 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (5) | 2 (1) | 2 (4) | Y | - | Y | 3 | QFP48 |
| 825F8 | 8 | 2 | 37 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (5) | 2 (1) | 2 (4) | Y | - | Y | 3 | BGA48 |
| 825F16 | 16 | 4 | 37 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (5) | 2 (1) | 2 (4) | Y | - | Y | 3 | BGA48 |
| 825F32 | 32 | 4 | 37 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (5) | 2 (1) | 2 (4) | Y | - | Y | 3 | BGA48 |
| 840F8 | 8 | 2 | 56 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (8) | Y | - | Y | 3 | QFN64 |
| 840F16 | 16 | 4 | 56 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (8) | Y | - | Y | 3 | QFN64 |

| EFM32TG Part # | Flash | RAM | GPIO(pins) | LCD | USART | LEUART | I ² C | Timer(PWM) | LETIMER | RTC | PCNT | Watchdog | ADC(pins) | DAC(pins) | ACMP(pins) | AES | EBI | LESENSE | Op-Amps | Package |
|----------------|-------|-----|------------|-----|-------|--------|------------------|------------|---------|-----|------|----------|-----------|-----------|------------|-----|-----|---------|---------|---------|
| 840F32 | 32 | 4 | 56 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (8) | Y | - | Y | 3 | QFN64 |
| 842F8 | 8 | 2 | 53 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (8) | Y | - | Y | 3 | QFP64 |
| 842F16 | 16 | 4 | 53 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (8) | Y | - | Y | 3 | QFP64 |
| 842F32 | 32 | 4 | 53 | Y | 2 | 1 | 1 | 2 (6) | 1 | 1 | 1 | 1 | 1 (8) | 2 (2) | 2 (8) | Y | - | Y | 3 | QFP64 |

3.6 Device Revision

The device revision number is read from the ROM Table. The major revision number and the chip family number is read from PID0 and PID1 registers. The minor revision number is extracted from the PID2 and PID3 registers, as illustrated in Figure 3.3 (p. 10). The Fam[5:2] and Fam[1:0] must be combined to complete the chip family number, while the Minor Rev[7:4] and Minor Rev[3:0] must be combined to form the complete revision number.

Figure 3.3. Revision Number Extraction

| PID2 (0xE00FFE8) | | | PID3 (0xE00FFEC) | | |
|------------------|----------------|-----|------------------|----------------|-----|
| 31:8 | 7:4 | 3:0 | 31:8 | 7:4 | 3:0 |
| | Minor Rev[7:4] | | | Minor Rev[3:0] | |


| PID0 (0xE00FFE0) | | | PID1 (0xE00FFE4) | | |
|------------------|----------|----------------|------------------|----------|--|
| 31:7 | 6:5 | 5:0 | 31:4 | 3:0 | |
| | Fam[1:0] | Major Rev[5:0] | | Fam[5:2] | |

For the latest revision of the Tiny Gecko family, the chip family number is 0x01 and the major revision number is 0x01. The minor revision number is to be interpreted according to Table 3.3 (p. 10).

Table 3.3. Minor Revision Number Interpretation

| Minor Rev[7:0] | Revision |
|----------------|----------|
| 0x00 | A |
| 0x01 | B |
| 0x02 | C |

4 System Processor



Quick Facts

What?

The industry leading Cortex-M3 processor from ARM is the CPU in the EFM32TG microcontrollers.

Why?

The ARM Cortex-M3 is designed for exceptional short response time, high code density, and high 32-bit throughput while maintaining a strict cost and power consumption budget.

How?

Combined with the ultra low energy peripherals available, the Cortex-M3 makes the EFM32TG devices perfect for 8- to 32-bit applications. The processor is featuring a Harvard architecture, 3 stage pipeline, single cycle instructions, Thumb-2 instruction set support, and fast interrupt handling.

4.1 Introduction

The ARM Cortex-M3 32-bit RISC processor provides outstanding computational performance and exceptional system response to interrupts while meeting low cost requirements and low power consumption.

The ARM Cortex-M3 implemented is revision r2p1.

4.2 Features

- Harvard Architecture
 - Separate data and program memory buses (No memory bottleneck as for a single-bus system)
- 3-stage pipeline
- Thumb-2 instruction set
 - Enhanced levels of performance, energy efficiency, and code density
- Single-cycle multiply and efficient divide instructions
 - 32-bit multiplication in a single cycle
 - Signed and unsigned divide operations between 2 and 12 cycles
- Atomic bit manipulation with bit banding
 - Direct access to single bits of data
 - Two 1MB bit banding regions for memory and peripherals mapping to 32MB alias regions
 - Atomic operation which cannot be interrupted by other bus activities
- 1.25 DMIPS/MHz
- 24-bit System Tick Timer for Real-Time Operating System (RTOS)
- Excellent 32-bit migration choice for 8/16 bit architecture based designs
 - Simplified stack-based programmer's model is compatible with traditional ARM architecture and retains the programming simplicity of legacy 8- and 16-bit architectures
- Unaligned data storage and access


- Continuous storage of data requiring different byte lengths
- Data access in a single core clock cycle
- Integrated power modes
 - Sleep Now mode for immediate transfer to low power state
 - Sleep on Exit mode for entry into low power state after the servicing of an interrupt
 - Ability to extend power savings to other system components
- Optimized for low latency, nested interrupts

4.3 Functional Description

For a full functional description of the ARM Cortex-M3 (r2p1) implementation in the EFM32TG family, the reader is referred to the *EFM32 Cortex-M3 Reference Manual*.

4.3.1 Interrupt Operation

Figure 4.1. Interrupt Operation

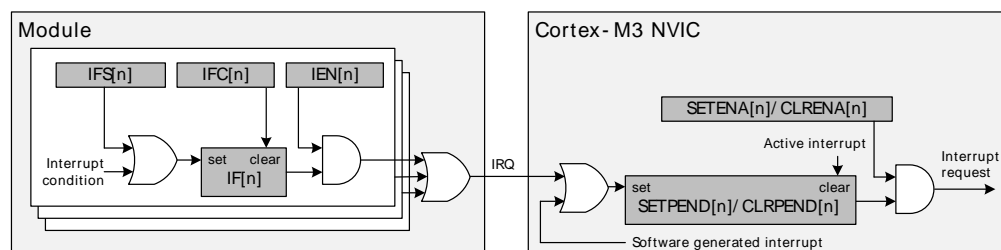



The EFM32TG devices have up to 23 interrupt request lines (IRQ) which are connected to the Cortex-M3. Each of these lines (shown in Table 4.1 (p. 12)) are connected to one or more interrupt flags in one or more modules. The interrupt flags are set by hardware on an interrupt condition. It is also possible to set/clear the interrupt flags through the IFS/IFC registers. Each interrupt flag is then qualified with its own interrupt enable bit (IEN register), before being OR'ed with the other interrupt flags to generate the IRQ. A high IRQ line will set the corresponding pending bit (can also be set/cleared with the SETPEND/CLRPEND bits in ISPR0/ICPR0) in the Cortex-M3 NVIC. The pending bit is then qualified with an enable bit (set/cleared with SETENA/CLRENA bits in ISER0/ICER0) before generating an interrupt request to the core. Figure 4.1 (p. 12) illustrates the interrupt system. For more information on how the interrupts are handled inside the Cortex-M3, the reader is referred to the *EFM32 Cortex-M3 Reference Manual*.

Table 4.1. Interrupt Request Lines (IRQ)

| IRQ # | Source |
|-------|-------------|
| 0 | DMA |
| 1 | GPIO_EVEN |
| 2 | TIMER0 |
| 3 | USART0_RX |
| 4 | USART0_TX |
| 5 | ACMP0/ACMP1 |
| 6 | ADC0 |
| 7 | DAC0 |
| 8 | I2C0 |
| 9 | GPIO_ODD |

| IRQ # | Source |
|-------|-----------|
| 10 | TIMER1 |
| 11 | USART1_RX |
| 12 | USART1_TX |
| 13 | LESENSE |
| 14 | LEUART0 |
| 15 | LETIMER0 |
| 16 | PCNT0 |
| 17 | RTC |
| 18 | CMU |
| 19 | VCMP |
| 20 | LCD |
| 21 | MSC |
| 22 | AES |

5 Memory and Bus System

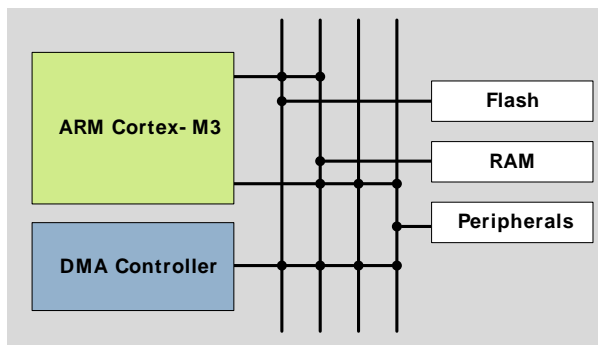

Quick Facts

What?

A low latency memory system, including low energy flash and RAM with data retention, makes extended use of low-power energy-modes possible.

Why?

RAM retention reduces the need for storing data in flash and enables frequent use of the ultra low energy modes EM2 and EM3 with as little as 0.6 μ A current consumption.


How?

Low energy and non-volatile flash memory stores program and application data in all energy modes and can easily be reprogrammed in system. Low leakage RAM, with data retention in EM0 to EM3, removes the data restore time penalty, and the DMA ensures fast autonomous transfers with predictable response time.

5.1 Introduction


The EFM32TG contains an AMBA AHB Bus system allowing bus masters to access the memory mapped address space. A multilayer AHB bus matrix, using a Round-robin arbitration scheme, connects the master bus interfaces to the AHB slaves (Figure 5.1 (p. 15)). The bus matrix allows several AHB slaves to be accessed simultaneously. An AMBA APB interface is used for the peripherals, which are accessed through an AHB-to-APB bridge connected to the AHB bus matrix. The AHB bus masters are:

- **Cortex-M3 ICode:** Used for instruction fetches from Code memory (0x00000000 - 0x1FFFFFFF).
- **Cortex-M3 DCode:** Used for debug and data access to Code memory (0x00000000 - 0x1FFFFFFF).
- **Cortex-M3 System:** Used for instruction fetches, data and debug access to system space (0x20000000 - 0xDFFFFFFF).
- **DMA:** Can access SRAM, Flash and peripherals (0x00000000 - 0xDFFFFFFF).

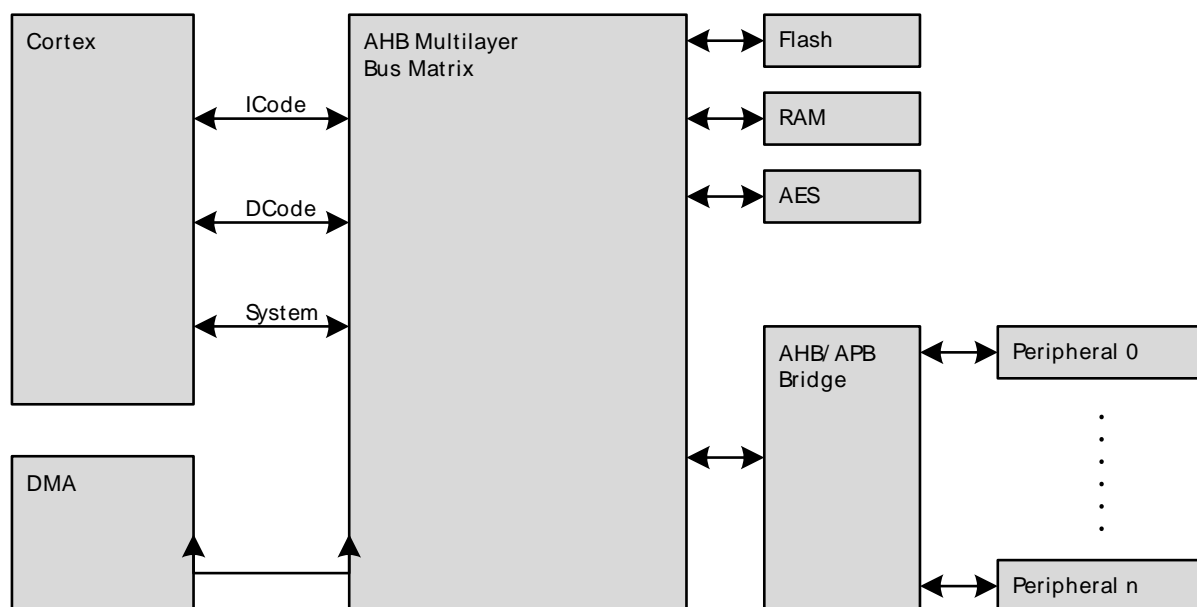Figure 5.1. EFM32TG Bus System

5.2 Functional Description

The memory segments are mapped together with the internal segments of the Cortex-M3 into the system memory map shown by Figure 5.2 (p. 16)

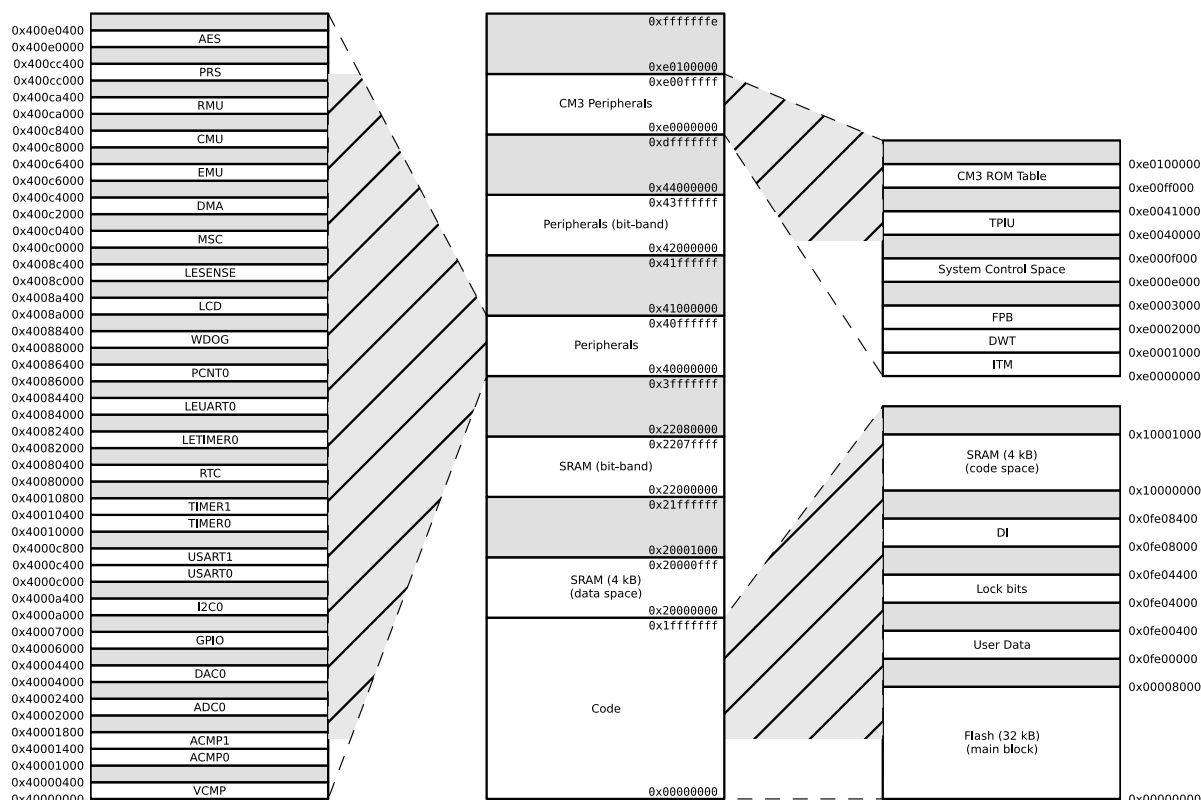Figure 5.2. System Address Space

The embedded SRAM is located at address 0x20000000 in the memory map of the EFM32TG. When running code located in SRAM starting at this address, the Cortex-M3 uses the System bus to fetch instructions. This results in reduced performance as the Cortex-M3 accesses stack, other data in SRAM and peripherals using the System bus. To be able to run code from SRAM efficiently, the SRAM is also mapped in the code space at address 0x10000000. When running code from this space, the Cortex-M3 fetches instructions through the I/D-Code bus interface, leaving the System bus for data access. The SRAM mapped into the code space can however only be accessed by the CPU, i.e. not the DMA.

5.2.1 Bit-banding

The SRAM bit-band alias and peripheral bit-band alias regions are located at 0x22000000 and 0x42000000 respectively. Read and write operations to these regions are converted into masked single-bit reads and atomic single-bit writes to the embedded SRAM and peripherals of the EFM32TG.

The standard approach to modify a single register or SRAM bit in the aliased regions, requires software to read the value of the byte, half-word or word containing the bit, modify the bit, and then write the byte, half-word or word back to the register or SRAM address. Using bit-banding, this read-modify-write can be done in a single atomic operation. As read-writeback, bit-masking and bit-shift operations are not necessary in software, code size is reduced and execution speed improved.

The bit-band regions allows addressing each individual bit in the SRAM and peripheral areas of the memory map. To set or clear a bit in the embedded SRAM, write a 1 or a 0 to the following address:

Memory SRAM Area Set/Clear Bit

$$bit_address = 0x22000000 + (address - 0x20000000) \times 32 + bit \times 4, \quad (5.1)$$

where *address* is the address of the 32-bit word containing the bit to modify, and *bit* is the index of the bit in the 32-bit word.

To modify a bit in the Peripheral area, use the following address:

Memory Peripheral Area Bit Modification

$$bit_address = 0x42000000 + (address - 0x40000000) \times 32 + bit \times 4, \quad (5.2)$$

where *address* and *bit* are defined as above.

Note that the AHB-peripheral AES does not support bit-banding.

5.2.2 Peripherals

The peripherals are mapped into the peripheral memory segment, each with a fixed size address range according to Table 5.1 (p. 17) , Table 5.2 (p. 18) and Table 5.3 (p. 19) .

Table 5.1. Memory System Core Peripherals

| Core peripherals | |
|--------------------------|------------|
| Address range | Peripheral |
| 0x400E0400 – 0x41FFFFFF | Reserved |
| 0x400E0000 – 0x400E03FF | AES |
| 0x400CC400 – 0x400FFFFFF | Reserved |
| 0x400CC000 – 0x400CC3FF | PRS |
| 0x400CA400 – 0x400CBFFF | Reserved |
| 0x400CA000 – 0x400CA3FF | RMU |
| 0x400C8400 – 0x400C9FFF | Reserved |
| 0x400C8000 – 0x400C83FF | CMU |
| 0x400C6400 – 0x400C7FFF | Reserved |
| 0x400C6000 – 0x400C63FF | EMU |
| 0x400C4000 – 0x400C5FFF | Reserved |
| 0x400C2000 – 0x400C3FFF | DMA |
| 0x400C0400 – 0x400C1FFF | Reserved |
| 0x400C0000 – 0x400C03FF | MSC |

Table 5.2. Memory System Low Energy Peripherals

| Low energy peripherals | |
|-------------------------|------------|
| Address range | Peripheral |
| 0x4008A400 – 0x400BFFFF | Reserved |
| 0x4008C000 – 0x4008C3FF | LESENSE |
| 0x4008A000 – 0x4008A3FF | LCD |
| 0x40088400 – 0x40089FFF | Reserved |
| 0x40088000 – 0x400883FF | WDOG |
| 0x40086C00 – 0x40087FFF | Reserved |
| 0x40086000 – 0x400863FF | PCNT0 |
| 0x40084800 – 0x40085FFF | Reserved |
| 0x40084000 – 0x400843FF | LEUART0 |
| 0x40082400 – 0x40083FFF | Reserved |
| 0x40082000 – 0x400823FF | LETIMER0 |
| 0x40080400 – 0x40081FFF | Reserved |
| 0x40080000 – 0x400803FF | RTC |

Table 5.3. Memory System Peripherals

| Peripherals | |
|-------------------------|------------|
| Address range | Peripheral |
| 0x40010C00 – 0x4007FFFF | Reserved |
| 0x40010400 – 0x400107FF | TIMER1 |
| 0x40010000 – 0x400103FF | TIMER0 |
| 0x4000E400 – 0x4000FFFF | Reserved |
| 0x4000CC00 – 0x4000DFFF | Reserved |
| 0x4000C400 – 0x4000C7FF | USART1 |
| 0x4000C000 – 0x4000C3FF | USART0 |
| 0x4000A400 – 0x4000BFFF | Reserved |
| 0x4000A000 – 0x4000A3FF | I2C0 |
| 0x40008400 – 0x40009FFF | Reserved |
| 0x40007000 – 0x40007FFF | Reserved |
| 0x40006000 – 0x40006FFF | GPIO |
| 0x40004400 – 0x40005FFF | Reserved |
| 0x40004000 – 0x400043FF | DAC0 |
| 0x40002400 – 0x40003FFF | Reserved |
| 0x40002000 – 0x400023FF | ADC0 |
| 0x40001800 – 0x40001FFF | Reserved |
| 0x40001400 – 0x400017FF | ACMP1 |
| 0x40001000 – 0x400013FF | ACMP0 |
| 0x40000400 – 0x40000FFF | Reserved |
| 0x40000000 – 0x400003FF | VCMP |

5.2.3 Bus Matrix

The Bus Matrix connects the memory segments to the bus masters:

- Code: CPU instruction or data fetches from the code space
- System: CPU read and write to the SRAM and peripherals
- DMA: Access to SRAM, Flash and peripherals

5.2.3.1 Arbitration

The Bus Matrix uses a round-robin arbitration algorithm which enables high throughput and low latency while starvation of simultaneous accesses to the same bus slave are eliminated. Round-robin does not assign a fixed priority to each bus master. The arbiter does not insert any bus wait-states.

5.2.3.2 Access Performance

The Bus Matrix is a multi-layer energy optimized AMBA AHB compliant bus with an internal bandwidth equal to 4 times a single AHB-bus.

The Bus Matrix accepts new transfers initiated by each master in every clock cycle without inserting any wait-states. The slaves, however, may insert wait-states depending on their internal throughput and the clock frequency.

The Cortex-M3, the DMA Controller, and the peripherals run on clocks that can be prescaled separately. When accessing a peripheral which runs on a frequency equal to or faster than the HFCORECLK, the number of wait cycles per access, in addition to master arbitration, is given by:

Memory Wait Cycles with Clock Equal or Faster than HFCORECLK

$$N_{\text{cycles}} = 2 + N_{\text{slave cycles}}, \quad (5.3)$$

where $N_{\text{slave cycles}}$ is the wait cycles introduced by the slave.

When accessing a peripheral running on a clock slower than the HFCORECLK, wait-cycles are introduced to allow the transfer to complete on the peripheral clock. The number of wait cycles per access, in addition to master arbitration, is given by:

Memory Wait Cycles with Clock Slower than CPU

$$N_{\text{cycles}} = (2 + N_{\text{slave cycles}}) \times f_{\text{HFCORECLK}}/f_{\text{HFPERCLK}}, \quad (5.4)$$

where $N_{\text{slave cycles}}$ is the number of wait cycles introduced by the slave.

For general register access, $N_{\text{slave cycles}} = 1$.

More details on clocks and prescaling can be found in Chapter 11 (p. 99) .

5.3 Access to Low Energy Peripherals (Asynchronous Registers)

5.3.1 Introduction

The Low Energy Peripherals are capable of running when the high frequency oscillator and core system is powered off, i.e. in energy mode EM2 and in some cases also EM3. This enables the peripherals to perform tasks while the system energy consumption is minimal.

The Low Energy Peripherals are:

- Liquid Crystal Display driver - LCD
- Low Energy Timer - LETIMER
- Low Energy UART - LEUART
- Pulse Counter - PCNT
- Real Time Counter - RTC
- Watchdog - WDOG
- Low Energy Sensor Interface - LESENSE

All Low Energy Peripherals are memory mapped, with automatic data synchronization. Because the Low Energy Peripherals are running on clocks asynchronous to the core clock, there are some constraints on how register accesses can be done, as described in the following sections.

5.3.1.1 Writing

Every Low Energy Peripheral has one or more registers with data that needs to be synchronized into the Low Energy clock domain to maintain data consistency and predictable operation. There are two

different synchronization mechanisms on the Tiny Gecko; immediate synchronization, and delayed synchronization. Immediate synchronization is available for the RTC, LETIMER and LESENSE, and results in an immediate update of the target registers. Delayed synchronization is used for the other Low Energy Peripherals, and for these peripherals, a write operation requires 3 positive edges on the clock of the Low Energy Peripheral being accessed. Registers requiring synchronization are marked "Asynchronous" in their description header.

5.3.1.1.1 Delayed synchronization

After writing data to a register which value is to be synchronized into the Low Energy Peripheral using delayed synchronization, a corresponding busy flag in the <module_name>_SYNCBUSY register (e.g. LEUART_SYNCBUSY) is set. This flag is set as long as synchronization is in progress and is cleared upon completion.


Note

Subsequent writes to the same register before the corresponding busy flag is cleared is not supported. Write before the busy flag is cleared may result in undefined behavior.

In general, the SYNCBUSY register only needs to be observed if there is a risk of multiple write access to a register (which must be prevented). It is not required to wait until the relevant flag in the SYNCBUSY register is cleared after writing a register. E.g EM2 can be entered immediately after writing a register.

See Figure 5.3 (p. 21) for a more detailed overview of the write operation.

Figure 5.3. Write operation to Low Energy Peripherals

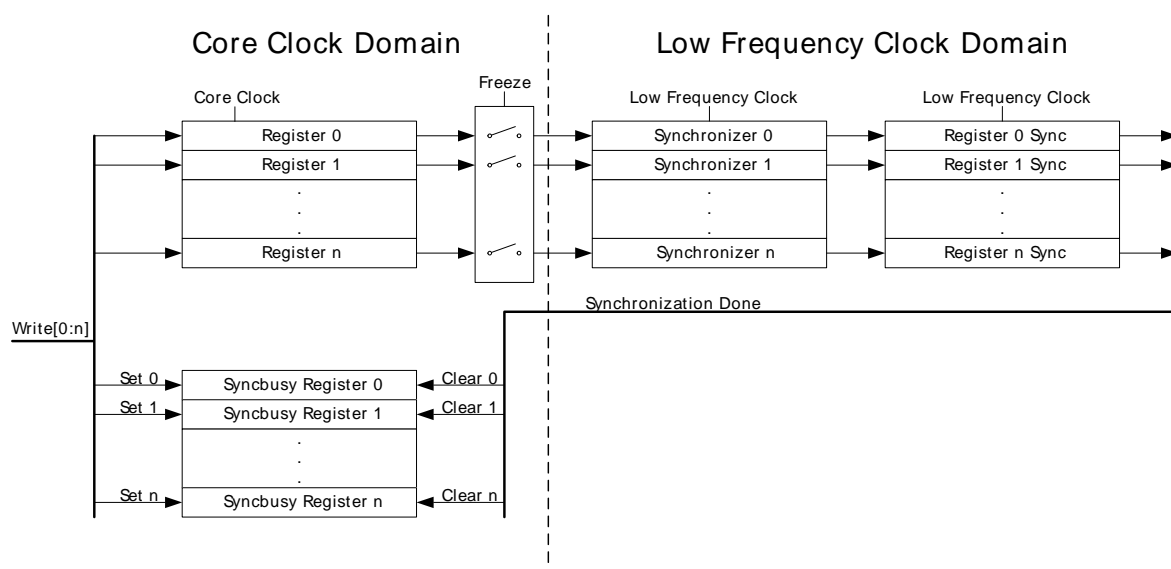

5.3.1.1.2 Immediate synchronization

Contrary to the peripherals with delayed synchronization, data written to peripherals with immediate synchronization, takes effect in the peripheral immediately. They are updated immediately on the peripheral write access. If a write is set up close to a peripheral clock edge, the write is delayed to after the clock edge. This will introduce wait-states on peripheral access. In the worst case, there can be three wait-state cycles of the HFCORECLK_LE and an additional wait-state equivalent of up to 315 ns.

For peripherals with immediate synchronization, the SYNCBUSY registers are still present and serve two purposes: (1) commands written to a peripheral with immediate synchronization are not executed before the first peripheral clock after the write. During this period, the SYNCBUSY flag in the command register

is set, indicating that the command has not yet been executed; (2) to maintain backwards compatibility with the EFM32G series, SYNCBUSY registers are also present for other registers. These are however, always 0, indicating that register writes are always safe.

Note

If the application must be compatible with the EFM32G series, all Low Energy Peripherals should be accessed as if they only had delayed synchronization, i.e. using SYNCBUSY.


5.3.1.2 Reading

When reading from Low Energy Peripherals, the data is synchronized regardless of the originating clock domain. Registers updated/maintained by the Low Energy Peripheral are read directly from the Low Energy clock domain. Registers residing in the core clock domain, are read from the core clock domain. See Figure 5.4 (p. 22) for a more detailed overview of the read operation.

Note

Writing a register and then immediately reading back the value of the register may give the impression that the write operation is complete. This is not necessarily the case. Please refer to the SYNCBUSY register for correct status of the write operation to the Low Energy Peripheral.

Figure 5.4. Read operation from Low Energy Peripherals

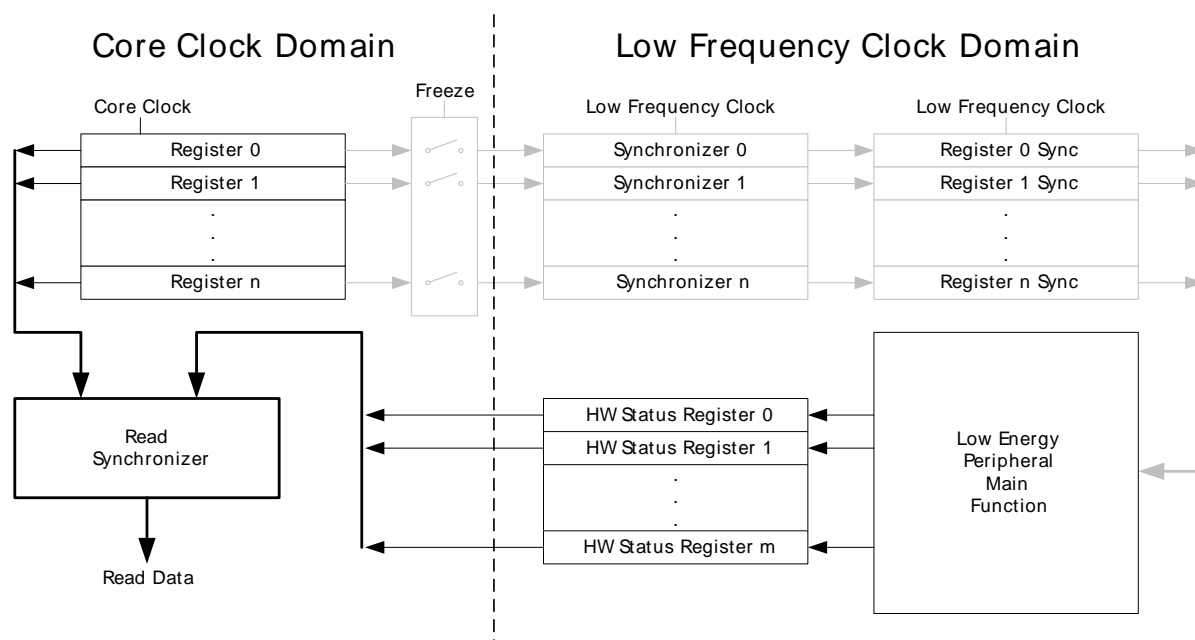

5.3.2 FREEZE register

For Low Energy Peripherals with delayed synchronization there is a `<module_name>_FREEZE` register (e.g. `RTC_FREEZE`), containing a bit named `REGFREEZE`. If precise control of the synchronization process is required, this bit may be utilized. When `REGFREEZE` is set, the synchronization process is halted, allowing the software to write multiple Low Energy registers before starting the synchronization process, thus providing precise control of the module update process. The synchronization process is started by clearing the `REGFREEZE` bit.

Note

The `FREEZE` register is also present on peripherals with immediate synchronization, but has no effect.

5.4 Flash

The Flash retains data in any state and typically stores the application code, special user data and security information. The Flash memory is typically programmed through the debug interface, but can also be erased and written to from software.

- Up to 32 kB of memory
- Page size of 512 bytes (minimum erase unit)
- Minimum 20 000 erase cycles
- More than 10 years data retention at 85°C
- Lock-bits for memory protection
- Data retention in any state

5.5 SRAM

The primary task of the SRAM memory is to store application data. Additionally, it is possible to execute instructions from SRAM, and the DMA may used to transfer data between the SRAM, Flash and peripherals.

- Up to 4 kB memory
- Bit-band access support
- 4 kB blocks may be individually powered down when not in use
- Data retention of the entire memory in EM0 to EM3

5.6 Device Information (DI) Page


The DI page contains calibration values, a unique identification number and other useful data. See the table below for a complete overview.

Table 5.4. Device Information Page Contents

| DI Address | Register | Description |
|------------|----------------|--|
| 0x0FE08020 | CMU_LFRCTRL | Register reset value. |
| 0x0FE08028 | CMU_HFRCTRL | Register reset value. |
| 0x0FE08030 | CMU_AUXHFRCTRL | Register reset value. |
| 0x0FE08040 | ADC0_CAL | Register reset value. |
| 0x0FE08048 | ADC0_BIASPROG | Register reset value. |
| 0x0FE08050 | DAC0_CAL | Register reset value. |
| 0x0FE08058 | DAC0_BIASPROG | Register reset value. |
| 0x0FE08060 | ACMP0_CTRL | Register reset value. |
| 0x0FE08068 | ACMP1_CTRL | Register reset value. |
| 0x0FE08078 | CMU_LCDCTRL | Register reset value. |
| 0x0FE080A0 | DAC0_OPACTRL | Register reset value |
| 0x0FE080A8 | DAC0_OPAOFFSET | Register reset value |
| 0x0FE081B0 | DI_CRC | [15:0]: DI data CRC-16. |
| 0x0FE081B2 | CAL_TEMP_0 | [7:0] Calibration temperature (°C). |
| 0x0FE081B4 | ADC0_CAL_1V25 | [14:8]: Gain for 1V25 reference, [6:0]: Offset for 1V25 reference. |

| DI Address | Register | Description |
|------------|------------------------|--|
| 0x0FE081B6 | ADC0_CAL_2V5 | [14:8]: Gain for 2V5 reference, [6:0]: Offset for 2V5 reference. |
| 0x0FE081B8 | ADC0_CAL_VDD | [14:8]: Gain for VDD reference, [6:0]: Offset for VDD reference. |
| 0x0FE081BA | ADC0_CAL_5VDIFF | [14:8]: Gain for 5VDIFF reference, [6:0]: Offset for 5VDIFF reference. |
| 0x0FE081BC | ADC0_CAL_2XVDD | [14:8]: Reserved (gain for this reference cannot be calibrated), [6:0]: Offset for 2XVDD reference. |
| 0x0FE081BE | ADC0_TEMP_0_READ_1V25 | [15:4] Temperature reading at 1V25 reference, [3:0] Reserved. |
| 0x0FE081C8 | DAC0_CAL_1V25 | [22:16]: Gain for 1V25 reference, [13:8]: Channel 1 offset for 1V25 reference, [5:0]: Channel 0 offset for 1V25 reference. |
| 0x0FE081CC | DAC0_CAL_2V5 | [22:16]: Gain for 2V5 reference, [13:8]: Channel 1 offset for 2V5 reference, [5:0]: Channel 0 offset for 2V5 reference. |
| 0x0FE081D0 | DAC0_CAL_VDD | [22:16]: Reserved (gain for this reference cannot be calibrated), [13:8]: Channel 1 offset for VDD reference, [5:0]: Channel 0 offset for VDD reference. |
| 0x0FE081D4 | AUXHFRCO_CALIB_BAND_1 | [7:0]: Tuning for the 1.2 MHZ AUXHFRCO band. |
| 0x0FE081D5 | AUXHFRCO_CALIB_BAND_7 | [7:0]: Tuning for the 6.6 MHZ AUXHFRCO band. |
| 0x0FE081D6 | AUXHFRCO_CALIB_BAND_11 | [7:0]: Tuning for the 11 MHZ AUXHFRCO band. |
| 0x0FE081D7 | AUXHFRCO_CALIB_BAND_14 | [7:0]: Tuning for the 14 MHZ AUXHFRCO band. |
| 0x0FE081D8 | AUXHFRCO_CALIB_BAND_21 | [7:0]: Tuning for the 21 MHZ AUXHFRCO band. |
| 0x0FE081D9 | AUXHFRCO_CALIB_BAND_28 | [7:0]: Tuning for the 28 MHZ AUXHFRCO band. |
| 0x0FE081DC | HFRCO_CALIB_BAND_1 | [7:0]: Tuning for the 1.2 MHZ HFRCO band. |
| 0x0FE081DD | HFRCO_CALIB_BAND_7 | [7:0]: Tuning for the 6.6 MHZ HFRCO band. |
| 0x0FE081DE | HFRCO_CALIB_BAND_11 | [7:0]: Tuning for the 11 MHZ HFRCO band. |
| 0x0FE081DF | HFRCO_CALIB_BAND_14 | [7:0]: Tuning for the 14 MHZ HFRCO band. |
| 0x0FE081E0 | HFRCO_CALIB_BAND_21 | [7:0]: Tuning for the 21 MHZ HFRCO band. |
| 0x0FE081E1 | HFRCO_CALIB_BAND_28 | [7:0]: Tuning for the 28 MHZ HFRCO band. |
| 0x0FE081E7 | MEM_INFO_PAGE_SIZE | [7:0] Flash page size in bytes coded as $2^{\text{MEM_INFO_PAGE_SIZE} + 10} \& 0xFF$. I.e. the value 0xFF = 512 bytes. |
| 0x0FE081F0 | UNIQUE_0 | [31:0] Unique number. |
| 0x0FE081F4 | UNIQUE_1 | [63:32] Unique number. |
| 0x0FE081F8 | MEM_INFO_FLASH | [15:0]: Flash size, kbyte count as unsigned integer (eg. 128). |
| 0x0FE081FA | MEM_INFO_RAM | [15:0]: Ram size, kbyte count as unsigned integer (eg. 16). |
| 0x0FE081FC | PART_NUMBER | [15:0]: EFM32 part number as unsigned integer (eg. 230). |
| 0x0FE081FE | PART_FAMILY | [7:0]: EFM32 part family number (Gecko = 71, Giant Gecko = 72, Tiny Gecko = 73, Leopard Gecko=74, Wonder Gecko=75). |
| 0x0FE081FF | PROD_REV | [7:0]: EFM32 Production ID. |

6 DBG - Debug Interface

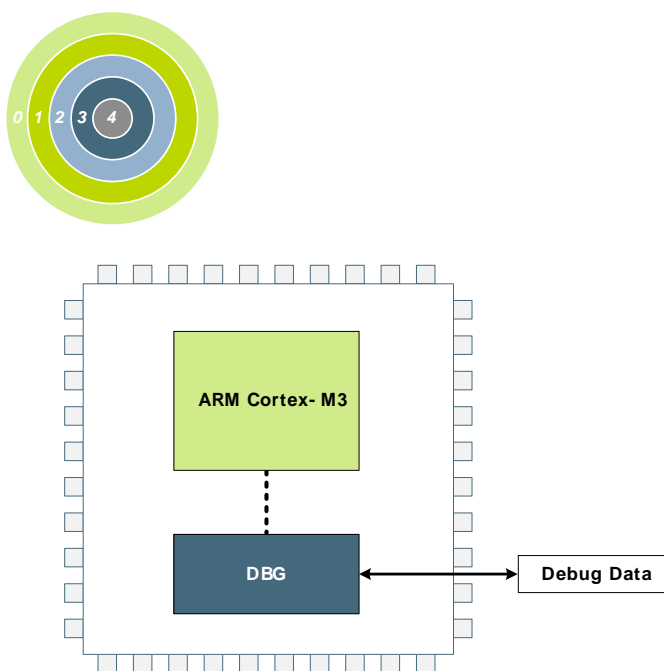

Quick Facts

What?

The DBG (Debug Interface) is used to program and debug EFM32TG devices.

Why?

The Debug Interface makes it easy to re-program and update the system in the field, and allows debugging with minimal I/O pin usage.

How?

The Cortex-M3 supports advanced debugging features. EFM32TG devices only use two port pins for debugging or programming. The internal and external state of the system can be examined with debug extensions supporting instruction or data access break- and watch points.

6.1 Introduction

The EFM32TG devices include hardware debug support through a 2-pin serial-wire debug (SWD) interface. In addition, there is also a Serial Wire Viewer pin which can be used to output profiling information, data trace and software-generated messages.

For more technical information about the debug interface the reader is referred to:

- ARM Cortex-M3 Technical Reference Manual
- ARM CoreSight Components Technical Reference Manual
- ARM Debug Interface v5 Architecture Specification

6.2 Features

- Flash Patch and Breakpoint (FPB) unit
 - Implement breakpoints and code patches
- Data Watch point and Trace (DWT) unit
 - Implement watch points, trigger resources and system profiling
- Instrumentation Trace Macrocell (ITM)
 - Application-driven trace source that supports printf style debugging

6.3 Functional Description

There are three debug pins and four trace pins available on the device. Operation of these pins are described in the following section.

6.3.1 Debug Pins

The following pins are the debug connections for the device:

- Serial Wire Clock input (SWCLK): This pin is enabled after reset and has a built-in pull down.
- Serial Wire Data Input/Output (SWDIO): This pin is enabled after reset and has a built-in pull-up.
- Serial Wire Viewer (SWV): This pin is disabled after reset.

The debug pins can be enabled and disabled through GPIO_ROUTE, see Section 28.3.4.1 (p. 471). Please remember that upon disabling, debug contact with the device is lost. Also note that, because the debug pins have pull-down and pull-up enabled by default, leaving them enabled might increase the current consumption with up to 200 µA if left connected to supply or ground.

6.3.2 Debug and EM2/EM3


Leaving the debugger connected when issuing a WFI or WFE to enter EM2 or EM3 will make the system enter a special EM2. This mode differs from regular EM2 and EM3 in that the high frequency clocks are still enabled, and certain core functionality is still powered in order to maintain debug-functionality. Because of this, the current consumption in this mode is closer to EM1 and it is therefore important to disconnect the debugger before doing current consumption measurements.

6.4 Debug Lock and Device Erase



The debug access to the Cortex-M3 is locked by clearing the Debug Lock Word (DLW) and resetting the device, see Section 7.3.2 (p. 32).

When debug access is locked, the debug interface remains accessible but the connection to the Cortex-M3 core and the whole bus-system is blocked as shown in Figure 6.2 (p. 27). This mechanism is controlled by the Authentication Access Port (AAP) as illustrated by Figure 6.1 (p. 26). The AAP is only accessible from a debugger and not from the core.

Figure 6.1. AAP - Authentication Access Port

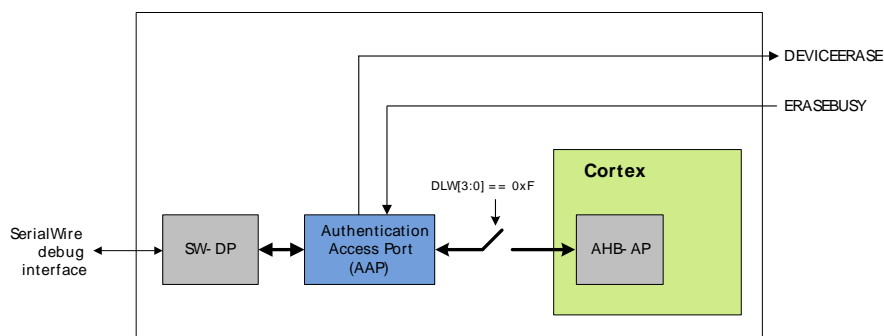

The debugger can access the AAP-registers, and only these registers just after reset, for the time of the AAP-window outlined in Figure 6.2 (p. 27). If the device is locked, access to the core and bus-system is blocked even after code execution starts, and the debugger can only access the AAP-registers. If the device is not locked, the AAP is no longer accessible after code execution starts, and the debugger can access the core and bus-system normally. The AAP window can be extended by issuing the bit pattern on SWDIO/SWCLK as shown in Figure 6.3 (p. 27). This pattern should be applied just before reset is deasserted, and will give the debugger more time to access the AAP.

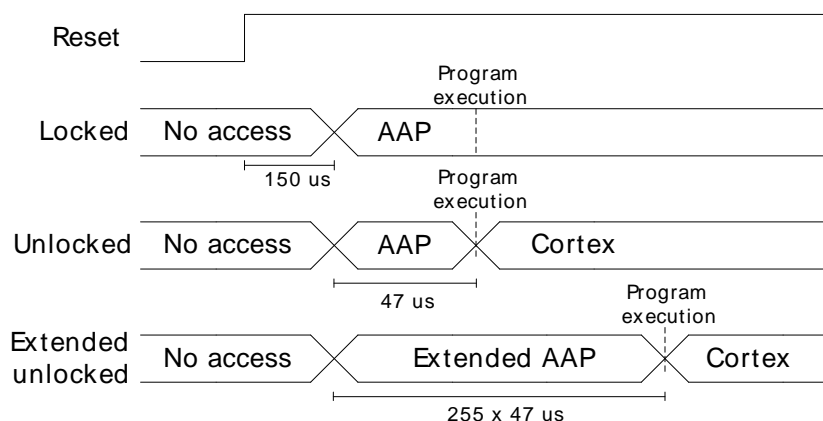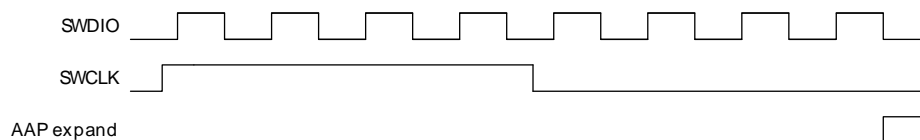Figure 6.2. Device Unlock**Figure 6.3. AAP Expansion**

If the device is locked, it can be unlocked by writing a valid key to the AAP_CMDKEY register and then setting the DEVICEERASE bit of the AAP_CMD register via the debug interface. The commands are not executed before AAP_CMDKEY is invalidated, so this register should be cleared to start the erase operation. This operation erases the main block of flash, all lock bits are reset and debug access through the AHB-AP is enabled. The operation takes 40 ms to complete. Note that the SRAM contents will also be deleted during a device erase, while the UD-page is not erased.

Even if the device is not locked, the device can be erased through the AAP, using the above procedure during the AAP window. This can be useful if the device has been programmed with code that, e.g., disables the debug interface pins on start-up, or does something else that prevents communication with a debugger.

If the device is locked, the debugger may read the status from the AAP_STATUS register. When the ERASEBUSY bit is set low after DEVICEERASE of the AAP_CMD register is set, the debugger may set the SYSRESETREQ bit in the AAP_CMD register. After reset, the debugger may resume a normal debug session through the AHB-AP. If the device is not locked, the device erase starts when the AAP window closes, so it is not possible to poll the status.

6.5 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|------------|------|-----------------------------|
| 0x000 | AAP_CMD | W1 | Command Register |
| 0x004 | AAP_CMDKEY | W1 | Command Key Register |
| 0x008 | AAP_STATUS | R | Status Register |
| 0x0FC | AAP_IDR | R | AAP Identification Register |

6.6 Register Description

6.6.1 AAP_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | SYSRESETREQ | 0 | W1 | System Reset Request A system reset request is generated when set to 1. This register is write enabled from the AAP_CMDKEY register. |
| 0 | DEVICEERASE | 0 | W1 | Erase the Flash Main Block, SRAM and Lock Bits When set, all data and program code in the main block is erased, the SRAM is cleared and then the Lock Bit (LB) page is erased. This also includes the Debug Lock Word (DLW), causing debug access to be enabled after the next reset. The information block User Data page (UD) is left unchanged, but the User data page Lock Word (ULW) is erased. This register is write enabled from the AAP_CMDKEY register. |

6.6.2 AAP_CMDKEY - Command Key Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | W1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | WRITEKEY | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|------------|--------|-------------------------|
| 31:0 | WRITEKEY | 0x00000000 | W1 | CMD Key Register |

| Bit | Name | Reset | Access | Description |
|--|------|---------|--------|-------------------------|
| The key value must be written to this register to write enable the AAP_CMD register. After AAP_CMD is written, this register should be cleared to execute the command. | | | | |
| Value | | Mode | | Description |
| 0xCFACC118 | | WRITEEN | | Enable write to AAP_CMD |

6.6.3 AAP_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----------|----|---|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | R | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | ERASEBUSY | | | | | | | | | | | |


| Bit | Name | Reset | Access | Description |
|---|-----------|---|--------|------------------------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | ERASEBUSY | 0 | R | Device Erase Command Status |
| This bit is set when a device erase is executing. | | | | |

6.6.4 AAP_IDR - AAP Identification Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x0FC | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x16E60001 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | ID | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|------|------------|--------|------------------------------------|
| 31:0 | ID | 0x16E60001 | R | AAP Identification Register |
| Access port identification register in compliance with the ARM ADI v5 specification (JEDEC Manufacturer ID) . | | | | |

7 MSC - Memory System Controller



```

01000101011011100110010101110010
01100111011110010010000001001101
01101001011000110111001001101111
00100000011100100111010101101100
01100101011100110010000001110100
01101000011001010010000001110111
01101111011100100110110001100100
00100000011011110110011000100000
01101100011011110111011100101101
01100101011011100110010101110010
01100111011110010010000001101101
01101001011000110111001001101111
01100011011011110110111001110100
01110010011011110110110001101100
01100101011100100010000001100100
01100101011100110110100101100111
01101110001000010100010101101110

```

Quick Facts

What?

The user can perform Flash memory read, read configuration and write operations through the Memory System Controller (MSC) .

Why?

The MSC allows the application code, user data and flash lock bits to be stored in non-volatile Flash memory. Certain memory system functions, such as program memory wait-states and bus faults are also configured from the MSC peripheral register interface, giving the developer the ability to dynamically customize the memory system performance, security level, energy consumption and error handling capabilities to the requirements at hand.

How?

The MSC integrates a low-energy Flash IP with a charge pump, enabling minimum energy consumption while eliminating the need for external programming voltage to erase the memory. An easy to use write and erase interface is supported by an internal, fixed-frequency oscillator and autonomous flash timing and control reduces software complexity while not using other timer resources.

Application code may dynamically scale between high energy optimization and high code execution performance through advanced read modes.

A highly efficient low energy instruction cache reduces the number of flash reads significantly, thus saving energy. Performance is also improved when wait-states are used, since many of the wait-states are eliminated. Built-in performance counters can be used to measure the efficiency of the instruction cache.

7.1 Introduction

The Memory System Controller (MSC) is the program memory unit of the EFM32TG microcontroller. The flash memory is readable and writable from both the Cortex-M3 and DMA. The flash memory is divided into two blocks; the main block and the information block. Program code is normally written to the main block. Additionally, the information block is available for special user data and flash lock bits. There is also a read-only page in the information block containing system and device calibration data. Read and write operations are supported in the energy modes EM0 and EM1.

7.2 Features

- AHB read interface
 - Scalable access performance to optimize the Cortex-M3 code interface
 - Zero wait-state access up to 16 MHz and one wait-state for 16 MHz and above
 - Advanced energy optimization functionality
 - Conditional branch target prefetch suppression
 - Cortex-M3 disfolding of if-then (IT) blocks
 - Instruction Cache
 - DMA read support in EM0 and EM1
- Command and status interface
 - Flash write and erase
 - Accessible from Cortex-M3 in EM0
 - DMA write support in EM0 and EM1
 - Core clock independent Flash timing
 - Internal oscillator and internal timers for precise and autonomous Flash timing
 - General purpose timers are not occupied during Flash erase and write operations
 - Configurable interrupt erase abort
 - Improved interrupt predictability
 - Memory and bus fault control
- Security features
 - Lockable debug access
 - Page lock bits
 - User data lock bits
- End-of-write and end-of-erase interrupts

7.3 Functional Description

The size of the main block is device dependent. The largest size available is 32 kB (64 pages). The information block has 512 bytes available for user data. The information block also contains chip configuration data located in a reserved area. The main block is mapped to address 0x00000000 and the information block is mapped to address 0x0FE00000. Table 7.1 (p. 32) outlines how the Flash is mapped in the memory space. All Flash memory is organized into 512 byte pages.

Table 7.1. MSC Flash Memory Mapping

| Block | Page | Base address | Write/Erase by | Software readable | Purpose/Name | Size |
|-------------------|------|--------------|---|-------------------|------------------------------|--------------------|
| Main ¹ | 0 | 0x00000000 | Software, debug | Yes | User code and data | 8 KB - 32 kB |
| | . | | Software, debug | Yes | | |
| | 63 | 0x00007E00 | Software, debug | Yes | | |
| Reserved | - | 0x00008000 | - | - | Reserved for flash expansion | ~24 MB |
| Information | 0 | 0x0FE00000 | Software, debug | Yes | User Data (UD) | 512 B |
| | - | 0x0FE00200 | - | - | Reserved | |
| | 1 | 0x0FE04000 | Write: Software, debug Erase: Debug only | Yes | Lock Bits (LB) | 512 B |
| | - | 0x0FE04200 | - | - | Reserved | |
| | 2 | 0x0FE08000 | - | Yes | Device Information (DI) | 512 B |
| | - | 0x0FE08200 | - | - | Reserved | |
| Reserved | - | 0x0FE10000 | - | - | Reserved for flash expansion | Rest of code space |

¹Block/page erased by a device erase

7.3.1 User Data (UD) Page Description

This is the user data page in the information block. The page can be erased and written by software. The page is erased by the ERASEPAGE command of the MSC_WRITECMD register. Note that the page is not erased by a device erase operation. The device erase operation is described in Section 6.4 (p. 26) .

7.3.2 Lock Bits (LB) Page Description

This page contains the following information:

- Debug Lock Word (DLW)
- User data page Lock Word (ULW)
- Main block Page Lock Words (PLWs)

The words in this page are organized as shown in Table 7.2 (p. 32) :

Table 7.2. Lock Bits Page Structure

| | |
|-----|--------|
| 127 | DLW |
| 126 | ULW |
| ... | ... |
| 0 | PLW[0] |

Word 127 is the debug lock word (DLW). The four LSBs of this word are the debug lock bits. If these bits are 0xF, then debug access is enabled. If the bits are not 0xF, then debug access to the core is locked. See Section 6.4 (p. 26) for details on how to unlock the debug access.

Word 126 is the user page lock word (ULW). Bit 0 of this word is the User Data Page lock bit. Bit 1 in this word locks the Lock Bits Page.

There are 32 page lock bits per page lock word (PLW). Bit 0 refers to the first page and bit 31 refers to the last page within a PLW. Thus, PLW[0] contains lock bits for page 0-31 in the main block. A page is locked when the bit is 0. A locked page cannot be erased or written.

The lock bits can be reset by a device erase operation initiated from the Authentication Access Port (AAP) registers. The AAP is described in more detail in Section 6.4 (p. 26) . Note that the AAP is only accessible from the debug interface, and cannot be accessed from the Cortex-M3 core.

7.3.3 Device Information (DI) Page

This read-only page holds the calibration data for the oscillator and other analog peripherals from the production test as well as a unique device ID. The page is further described in Section 5.6 (p. 23) .

7.3.4 Post-reset Behavior

Calibration values are automatically written to registers by the MSC before application code startup. The values are also available to read from the DI page for later reference by software. Other information such as the device ID and production date is also stored in the DI page and is readable from software.

7.3.4.1 One Wait-state Access

After reset, the HFCORECLK is normally 14 MHz from the HFRCO and the MODE field of the MSC_READCTRL register is set to WS1 (one wait-state). The reset value must be WS1 as an uncalibrated HFRCO may produce a frequency higher than 16 MHz. Software must not select a zero wait-state mode unless the clock is guaranteed to be 16 MHz or below, otherwise the resulting behavior is undefined. If a HFCORECLK frequency above 16 MHz is to be set by software, the MODE field of the MSC_READCTRL register must be set to WS1 or WS1SCBTP before the core clock is switched to the higher frequency clock source.

When changing to a lower frequency, the MODE field of the MSC_READCTRL register can be set to WS0 or WS0SCBTP, but only after the frequency transition is completed. If the HFRCO is used, wait until the oscillator is stable on the new frequency. Otherwise, the behavior is unpredictable.

7.3.4.2 Zero Wait-state Access

At 16 MHz and below, read operations from flash may be performed without any wait-states. Zero wait-state access greatly improves code execution performance at frequencies from 16 MHz and below. By default, the Cortex-M3 uses speculative prefetching and If-Then block folding to maximize code execution performance at the cost of additional flash accesses and energy consumption.

7.3.4.3 Suppressed Conditional Branch Target Prefetch (SCBTP)

MSC offers a special instruction fetch mode which optimizes energy consumption by cancelling Cortex-M3 conditional branch target prefetches. Normally, the Cortex-M3 core prefetches both the next sequential instruction and the instruction at the branch target address when a conditional branch instruction reaches the pipeline decode stage. This prefetch scheme improves performance while one extra instruction is fetched from memory at each conditional branch, regardless of whether the branch is taken or not. To optimize for low energy, the MSC can be configured to cancel these speculative branch target prefetches. With this configuration, energy consumption is more optimal, as the branch target instruction fetch is delayed until the branch condition is evaluated.

The performance penalty with this mode enabled is source code dependent, but is normally less than 1% for core frequencies from 16 MHz and below. To enable the mode at frequencies from 16 MHz and below write WS0SCBTP to the MODE field of the MSC_READCTRL register. For frequencies above 16 MHz, use the WS1SCBTP mode. An increased performance penalty per clock cycle must be expected compared to WS0SCBTP mode. The performance penalty in WS1SCBTP mode depends greatly on the density and organization of conditional branch instructions in the code.

7.3.4.4 Cortex-M3 If-Then Block Folding


The Cortex-M3 offers a mechanism known as if-then block folding. This is a form of speculative prefetching where small if-then blocks are collapsed in the prefetch buffer if the condition evaluates to false. The instructions in the block then appear to execute in zero cycles. With this scheme, performance is optimized at the cost of higher energy consumption as the processor fetches more instructions from memory than it actually executes. To disable the mode, write a 1 to the DISFOLD bit in the NVIC Auxiliary Control Register; see the Cortex-M3 Technical Reference Manual for details. Normally, it is expected that this feature is most efficient at core frequencies above 16 MHz. Folding is enabled by default.

7.3.4.5 Instruction Cache

The MSC includes an instruction cache. The instruction cache for the internal flash memory is enabled by default, but can be disabled by setting IFCDIS in MSC_READCTRL. When enabled, the instruction cache typically reduces the number of flash reads significantly, thus saving energy. In most cases a cache hit-rate of more than 70 % is achievable. When a 32-bit instruction fetch hits in the cache the data is returned to the processor in one clock cycle. Thus, performance is also improved when wait-states are used (i.e. running at frequencies above 16 MHz).

The instruction cache is connected directly to the Cortex-M3 and functions as a memory access filter between the processor and the memory system, as illustrated in Figure 7.1 (p. 34). The cache consists of an access filter, lookup logic, a 128x32 SRAM (512 bytes) and two performance counters. The access filter checks that the address for the access is of an instruction in the code space (instructions in RAM outside the code space are not cached). If the address matches, the cache lookup logic and SRAM is enabled. Otherwise, the cache is bypassed and the access is forwarded to the memory system. The cache is then updated when the memory access completes. The access filter also disables cache updates for interrupt context accesses if caching in interrupt context is disabled. The performance counters, when enabled, keep track of the number of cache hits and misses. The cache consists of 16 8-word cachelines organized as 4 sets with 4 ways. The cachelines are filled up continuously one word at a time as the individual words are requested by the processor. Thus, not all words of a cacheline might be valid at a given time.

Figure 7.1. Instruction Cache

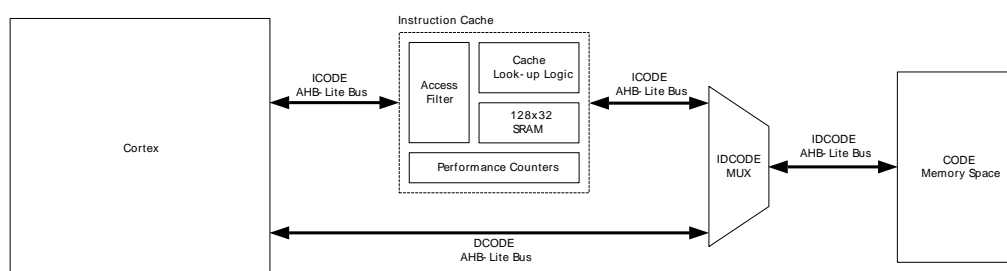

By default, the instruction cache is automatically invalidated when the contents of the flash is changed (i.e. written or erased). In many cases, however, the application only makes changes to data in the flash, not code. In this case, the automatic invalidate feature can be disabled by setting AIDIS in MSC_READCTRL. The cache can (independent of the AIDIS setting) be manually invalidated by writing 1 to INVCACHE in MSC_CMD.

In general it is highly recommended to keep the cache enabled all the time. However, for some sections of code with very low cache hit-rate more energy-efficient execution can be achieved by disabling the cache temporarily. To measure the hit-rate of a code-section, the built-in performance counters can be used. Before the section, start the performance counters by writing 1 to STARTPC in MSC_CMD. This starts the performance counters, counting from 0. At the end of the section, stop the performance counters by writing 1 to STOPPC in MSC_CMD. The number of cache hits and cache misses for that section can then be read from MSC_CACHEHITS and MSC_CACHEMISSES respectively. The

total number of 32-bit instruction fetches will be `MSC_CACHEHITS + MSC_CACHEMISSES`. Thus, the cache hit-ratio can be calculated as `MSC_CACHEHITS / (MSC_CACHEHITS + MSC_CACHEMISSES)`. When `MSC_CACHEHITS` overflows the `CHOF` interrupt flag is set. When `MSC_CACHEMISSES` overflows the `CMOF` interrupt flag is set. These flags must be cleared explicitly by software. The range of the performance counters can thus be extended by increasing a counter in the `MSC` interrupt routine. The performance counters only count when a cache lookup is performed. If the lookup fails, `MSC_CACHEMISSES` is increased. If the lookup is successful, `MSC_CACHEHITS` is increased. For example, a cache lookup is not performed if the cache is disabled or the code is executed from RAM outside the code space. When caching of vector fetches and instructions in interrupt routines is disabled (`ICCDIS` in `MSC_READCTRL` is set), the performance counters do not count when these types of fetches occur (i.e. while in interrupt context).

By default, interrupt vector fetches and instructions in interrupt routines are also cached. Some applications may get better cache utilization by not caching instructions in interrupt context. This is done by setting `ICCDIS` in `MSC_READCTRL`. You should only set this bit based on the results from a cache hit ratio measurement. In general, it is recommended to keep the `ICCDIS` bit cleared. Note that lookups in the cache are still performed, regardless of the `ICCDIS` setting - but instructions are not cached when cache misses occur inside the interrupt routine. So, for example, if a cached function is called from the interrupt routine, the instructions for that function will be taken from the cache.

The cache content is not retained in `EM2`, `EM3` and `EM4`. The cache is therefore invalidated regardless of the setting of `AIDIS` in `MSC_READCTRL` when entering these energy modes. Applications that switch frequently between `EM0` and `EM2/3` and execute the very same non-looping code almost every time will most likely benefit from putting this code in RAM. The interrupt vectors can also be put in RAM to reduce current consumption even further.

7.3.5 Erase and Write Operations

The `AUXHFRCO` is used for timing during flash write and erase operations. To achieve correct timing, the `MSC_TIMEBASE` register has to be configured according to the settings in `CMU_AUXHFRCOCTRL`. `BASE` in `MSC_TIMEBASE` defines how many `AUXCLK` cycles - 1 there is in 1 μ s or 5 μ s, depending on the configuration of `PERIOD`. To ensure that timing of flash write and erase operations is within the specification of the flash, the value written to `BASE` should give at least a 10% margin with respect to the period, i.e. for the 1 μ s `PERIOD`, the number of cycles should at least span 1.1 μ s, and for the 5 μ s period they should span at least 5.5 μ s. For the 1 MHz band, `PERIOD` in `MSC_TIMEBASE` should be set to `5US`, while it should be set to `1US` for all other `AUXHFRCO` bands.

Both page erase and write operations require that the address is written into the `MSC_ADDRB` register. For erase operations, the address may be any within the page to be erased. Load the address by writing 1 to the `LADDRIM` bit in the `MSC_WRITECMD` register. The `LADDRIM` bit only has to be written once when loading the first address. After each word is written the internal address register `ADDR` will be incremented automatically by 4. The `INVADDR` bit of the `MSC_STATUS` register is set if the loaded address is outside the flash and the `LOCKED` bit of the `MSC_STATUS` register is set if the page addressed is locked. Any attempts to command erase of or write to the page are ignored if `INVADDR` or the `LOCKED` bits of the `MSC_STATUS` register are set. To abort an ongoing erase, set the `ERASEABORT` bit in the `MSC_WRITECMD` register.

When a word is written to the `MSC_WDATA` register, the `WDATAREADY` bit of the `MSC_STATUS` register is cleared. When this status bit is set, software or DMA may write the next word.

A single word write is commanded by setting the `WRITEONCE` bit of the `MSC_WRITECMD` register. The operation is complete when the `BUSY` bit of the `MSC_STATUS` register is cleared and control of the flash is handed back to the `AHB` interface, allowing application code to resume execution.

For a DMA write the software must write the first word to the `MSC_WDATA` register and then set the `WRITETRIG` bit of the `MSC_WRITECMD` register. DMA triggers when the `WDATAREADY` bit of the `MSC_STATUS` register is set.

It is possible to write words twice between each erase by keeping at 1 the bits that are not to be changed. Let us take as an example writing two 16 bit values, 0xAAAA and 0x5555. To safely write them in the same flash word this method can be used:

- Write 0xFFFFAAAA (word in flash becomes 0xFFFFAAAA)
- Write 0x5555FFFF (word in flash becomes 0x5555AAAA)

Note

During a write or erase, flash read accesses will be stalled, effectively halting code execution from flash. Code execution continues upon write/erase completion. Code residing in RAM may be executed during a write/erase operation.

Note

The MSC_WDATA and MSC_ADDRB registers are not retained when entering EM2 or lower energy modes.

7.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|-------------------|------|----------------------------------|
| 0x000 | MSC_CTRL | RW | Memory System Control Register |
| 0x004 | MSC_READCTRL | RW | Read Control Register |
| 0x008 | MSC_WRITECTRL | RW | Write Control Register |
| 0x00C | MSC_WRITECMD | W1 | Write Command Register |
| 0x010 | MSC_ADDRB | RW | Page Erase/Write Address Buffer |
| 0x018 | MSC_WDATA | RW | Write Data Register |
| 0x01C | MSC_STATUS | R | Status Register |
| 0x02C | MSC_IF | R | Interrupt Flag Register |
| 0x030 | MSC_IFS | W1 | Interrupt Flag Set Register |
| 0x034 | MSC_IFC | W1 | Interrupt Flag Clear Register |
| 0x038 | MSC_IEN | RW | Interrupt Enable Register |
| 0x03C | MSC_LOCK | RW | Configuration Lock Register |
| 0x040 | MSC_CMD | W1 | Command Register |
| 0x044 | MSC_CACHEHITS | R | Cache Hits Performance Counter |
| 0x048 | MSC_CACHEMISSIONS | R | Cache Misses Performance Counter |
| 0x050 | MSC_TIMEBASE | RW | Flash Write and Erase Timebase |

7.5 Register Description

7.5.1 MSC_CTRL - Memory System Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|----------|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | BUSFAULT |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|--|----------|---|--------|---|-------|------|-------------|---|----------|---|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 0 | BUSFAULT | 1 | RW | Bus Fault Response Enable When this bit is set, the memory system generates bus error response. | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>GENERATE</td><td>A bus fault is generated on access to unmapped code and system space.</td></tr><tr><td>1</td><td>IGNORE</td><td>Accesses to unmapped address space is ignored.</td></tr></table> | | | | | Value | Mode | Description | 0 | GENERATE | A bus fault is generated on access to unmapped code and system space. | 1 | IGNORE | Accesses to unmapped address space is ignored. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | GENERATE | A bus fault is generated on access to unmapped code and system space. | | | | | | | | | | | |
| 1 | IGNORE | Accesses to unmapped address space is ignored. | | | | | | | | | | | |

7.5.2 MSC_READCTRL - Read Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|---|--------|---|----|--|
| 5 | ICCDIS | 0 | RW | Interrupt Context Cache Disable |
| Set this bit to automatically disable caching of vector fetches and instruction fetches in interrupt context. Cache lookup will still be performed in interrupt context. When set, the performance counters will not count when these types of fetches occur. | | | | |

| | | | | |
|--|-------|---|----|-------------------------------------|
| 4 | AIDIS | 0 | RW | Automatic Invalidate Disable |
| When this bit is set the cache is not automatically invalidated when a write or page erase is performed. | | | | |

| | | | | |
|--|--------|---|----|-------------------------------------|
| 3 | IFCDIS | 0 | RW | Internal Flash Cache Disable |
| Disable instruction cache for internal flash memory. | | | | |

| | | | | |
|--|------|-----|----|------------------|
| 2:0 | MODE | 0x1 | RW | Read Mode |
| If software wants to set a core clock frequency above 16 MHz, this register must be set to WS1 or WS1SCBTP before the core clock is switched to the higher frequency. When changing to a lower frequency, this register can be set to WS0 or WS0SCBTP after the frequency transition has been completed. After reset, the core clock is 14 MHz from the HFRCO but the MODE field of MSC_READCTRL register is set to WS1. This is because the HFRCO may produce a frequency above 16 MHz before it is calibrated. If the HFRCO is used as clock source, wait until the oscillator is stable on the new frequency to avoid unpredictable behavior. | | | | |

| Value | Mode | Description |
|-------|----------|---|
| 0 | WS0 | Zero wait-states inserted in fetch or read transfers. |
| 1 | WS1 | One wait-state inserted for each fetch or read transfer. This mode is required for a core frequency above 16 MHz. |
| 2 | WS0SCBTP | Zero wait-states inserted with the Suppressed Conditional Branch Target Prefetch (SCBTP) function enabled. SCBTP saves energy by delaying the Cortex' conditional branch target prefetches until the conditional branch instruction is in the execute stage. When the instruction reaches this stage, the evaluation of the branch condition is completed and the core does not perform a speculative prefetch of both the branch target address and the next sequential address. With the SCBTP function enabled, one instruction fetch is saved for each branch not taken, with a negligible performance penalty. |
| 3 | WS1SCBTP | One wait-state access with SCBTP enabled. |

7.5.3 MSC_WRITECTRL - Write Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|---------------|------|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | IRQERASEABORT | WREN |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|---|---------------|---|----|--------------------------------------|
| 1 | IRQERASEABORT | 0 | RW | Abort Page Erase on Interrupt |
|---|---------------|---|----|--------------------------------------|

| Bit | Name | Reset | Access | Description |
|-----|--|-------|--------|--------------------------------------|
| | When this bit is set to 1, any Cortex interrupt aborts any current page erase operation. Executing that interrupt vector from Flash will halt the CPU. | | | |
| 0 | WREN | 0 | RW | Enable Write/Erase Controller |
| | When this bit is set, the MSC write and erase functionality is enabled. | | | |

7.5.4 MSC_WRITECMD - Write Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|---|---|--------|------------------------------------|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | ERASEABORT | 0 | W1 | Abort erase sequence |
| | Writing to this bit will abort an ongoing erase sequence. | | | |
| 4 | WRITETRIG | 0 | W1 | Word Write Sequence Trigger |
| | Functions like MSC_CMD_WRITEONCE, but will set MSC_STATUS_WORDTIMEOUT if no new data is written to MSC_WDATA within the 30 μ s timeout. | | | |
| 3 | WRITEONCE | 0 | W1 | Word Write-Once Trigger |
| | Start write of the first word written to MSC_WDATA, then add 4 to ADDR and write the next word if available within a 30 μ s timeout. When ADDR is incremented past the page boundary, ADDR is set to the base of the page. | | | |
| 2 | WRITEEND | 0 | W1 | End Write Mode |
| | Write 1 to end write mode when using the WRITETRIG command. | | | |
| 1 | ERASEPAGE | 0 | W1 | Erase Page |
| | Erase any user defined page selected by the MSC_ADDRB register. The WREN bit in the MSC_WRITECTRL register must be set in order to use this command. | | | |
| 0 | LADDRIM | 0 | W1 | Load MSC_ADDRB into ADDR |
| | Load the internal write address register ADDR from the MSC_ADDRB register. The internal address register ADDR is incremented automatically by 4 after each word is written. When ADDR is incremented past the page boundary, ADDR is set to the base of the page. | | | |

7.5.5 MSC_ADDRB - Page Erase/Write Address Buffer

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | ADDRB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|-------|------------|--------|---|
| 31:0 | ADDRB | 0x00000000 | RW | Page Erase or Write Address Buffer |
| This register holds the page address for the erase or write operation. This register is loaded into the internal MSC_ADDR register when the LADDRIM field in MSC_WRITECMD is set. The MSC_ADDR register is not readable. This register is not retained when entering EM2 or lower energy modes. | | | | |

7.5.6 MSC_WDATA - Write Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | WDATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|-------|------------|--------|-------------------|
| 31:0 | WDATA | 0x00000000 | RW | Write Data |
| The data to be written to the address in MSC_ADDR. This register must be written when the WDATABREADY bit of MSC_STATUS is set, otherwise the data is ignored. This register is not retained when entering EM2 or lower energy modes. | | | | |

7.5.7 MSC_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|--------------|---|--------|--|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | PCRUNNING | 0 | R | Performance Counters Running |
| This bit is set while the performance counters are running. When one performance counter reaches the maximum value, this bit is cleared. | | | | |
| 5 | ERASEABORTED | 0 | R | The Current Flash Erase Operation Aborted |
| When set, the current erase operation was aborted by interrupt. | | | | |
| 4 | WORDTIMEOUT | 0 | R | Flash Write Word Timeout |
| When this bit is set, MSC_WDATA was not written within the timeout. The flash write operation timed out and access to the flash is returned to the AHB interface. This bit is cleared when the ERASEPAGE, WRITETRIG or WRITEONCE commands in MSC_WRITECMD are triggered. | | | | |
| 3 | WDATABREADY | 1 | R | WDATA Write Ready |

| Bit | Name | Reset | Access | Description |
|-----|---|-------|--------|---|
| | When this bit is set, the content of MSC_WDATA is read by MSC Flash Write Controller and the register may be updated with the next 32-bit word to be written to flash. This bit is cleared when writing to MSC_WDATA. | | | |
| 2 | INVADDR | 0 | R | Invalid Write Address or Erase Page Set when software attempts to load an invalid (unmapped) address into ADDR. |
| 1 | LOCKED | 0 | R | Access Locked When set, the last erase or write is aborted due to erase/write access constraints. |
| 0 | BUSY | 0 | R | Erase/Write Busy When set, an erase or write operation is in progress and new commands are ignored. |

7.5.8 MSC_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|-------|-------|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | CMOF | CHOF |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | WRITE | ERASE |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | CMOF | 0 | R | Cache Misses Overflow Interrupt Flag Set when MSC_CACHEMISSES overflows. |
| 2 | CHOF | 0 | R | Cache Hits Overflow Interrupt Flag Set when MSC_CACHEHITS overflows. |
| 1 | WRITE | 0 | R | Write Done Interrupt Read Flag Set when a write is done. |
| 0 | ERASE | 0 | R | Erase Done Interrupt Read Flag Set when erase is done. |

7.5.9 MSC_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|-------|-------|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | CMOF | CHOF |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | WRITE | ERASE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | CMOF | 0 | W1 | Cache Misses Overflow Interrupt Set Set the CMOF flag and generate interrupt. |
| 2 | CHOF | 0 | W1 | Cache Hits Overflow Interrupt Set |

| Bit | Name | Reset | Access | Description |
|-----|--|-------|--------|---------------------------------|
| | Set the CHOF flag and generate interrupt. | | | |
| 1 | WRITE | 0 | W1 | Write Done Interrupt Set |
| | Set the write done bit and generate interrupt. | | | |
| 0 | ERASE | 0 | W1 | Erase Done Interrupt Set |
| | Set the erase done bit and generate interrupt. | | | |

7.5.10 MSC_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|--------------------------------|---|--------|--|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | CMOF | 0 | W1 | Cache Misses Overflow Interrupt Clear |
| | Clear the CMOF interrupt flag. | | | |
| 2 | CHOF | 0 | W1 | Cache Hits Overflow Interrupt Clear |
| | Clear the CHOF interrupt flag. | | | |
| 1 | WRITE | 0 | W1 | Write Done Interrupt Clear |
| | Clear the write done bit. | | | |
| 0 | ERASE | 0 | W1 | Erase Done Interrupt Clear |
| | Clear the erase done bit. | | | |

7.5.11 MSC_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|---|---|--------|---|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | CMOF | 0 | RW | Cache Misses Overflow Interrupt Enable |
| | Enable the cache misses performance counter overflow interrupt. | | | |
| 2 | CHOF | 0 | RW | Cache Hits Overflow Interrupt Enable |
| | Enable the cache hits performance counter overflow interrupt. | | | |
| 1 | WRITE | 0 | RW | Write Done Interrupt Enable |
| | Enable the write done interrupt. | | | |

| Bit | Name | Reset | Access | Description |
|-----|-------|-------|--------|--|
| 0 | ERASE | 0 | RW | Erase Done Interrupt Enable Enable the erase done interrupt. |

7.5.12 MSC_LOCK - Configuration Lock Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | LOCKKEY | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----------------|----------|---|-----------------------------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | LOCKKEY | 0x0000 | RW | Configuration Lock Write any other value than the unlock code to lock access to MSC_CTRL, MSC_READCTRL, MSC_WRITECTRL and MSC_TIMEBASE. Write the unlock code to enable access. When reading the register, bit 0 is set when the lock is enabled. |
| Mode | | Value | Description | |
| Read Operation | | | | |
| UNLOCKED | | 0 | MSC registers are unlocked. | |
| LOCKED | | 1 | MSC registers are locked. | |
| Write Operation | | | | |
| LOCK | | 0 | Lock MSC registers. | |
| UNLOCK | | 0x1B71 | Unlock MSC registers. | |

7.5.13 MSC_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|--------|---------|----------|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | STOPPC | STARTPC | INVCACHE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | STOPPC | 0 | W1 | Stop Performance Counters Use this command bit to stop the performance counters. |
| 1 | STARTPC | 0 | W1 | Start Performance Counters Use this command bit to start the performance counters. The performance counters always start counting from 0. |
| 0 | INVCACHE | 0 | W1 | Invalidate Instruction Cache Use this register to invalidate the instruction cache. |

7.5.14 MSC_CACHEHITS - Cache Hits Performance Counter

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x044 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | 0x00000 | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | R | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | CACHEHITS | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|-----------|---|--------|---|
| 31:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 19:0 | CACHEHITS | 0x00000 | R | Cache hits since last performance counter start command. Use to measure cache performance for a particular code section. |

7.5.15 MSC_CACHEMISSES - Cache Misses Performance Counter

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|-------------|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x048 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | 0x00000 | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | R | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | CACHEMISSES | | | | | | | | | | | | | | | | | | | |



| Bit | Name | Reset | Access | Description |
|-------|-------------|---|--------|---|
| 31:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 19:0 | CACHEMISSES | 0x00000 | R | Cache misses since last performance counter start command. Use to measure cache performance for a particular code section. |

7.5.16 MSC_TIMEBASE - Flash Write and Erase Timebase

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|----|---|---|---|---|------|---|---|---|---|---|--|
| 0x050 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | 0x10 | | | | | | |
| Access | | | | | | | | | | | | | | | | RW | | | | | | | | | | | RW | | | | | | |
| Name | | | | | | | | | | | | | | | | PERIOD | | | | | | | | | | | BASE | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 16 | PERIOD | 0 | RW | Sets the timebase period Decides whether TIMEBASE specifies the number of AUX cycles in 1 us or 5 us. 5 us should only be used with 1 MHz AUXHFRCO band. |
| Value | | Mode | | Description |
| 0 | | 1US | | TIMEBASE period is 1 us. |
| 1 | | 5US | | TIMEBASE period is 5 us. |
| 15:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5:0 | BASE | 0x10 | RW | Timebase used by MSC to time flash writes and erases Should be set to the number of full AUX clock cycles in the period given by MSC_TIMEBASE_PERIOD. I.e. 1.1 us or 5.5. us with PERIOD cleared or set, respectively. The resetvalue of the timebase matches a 14 MHz AUXHFRCO, which is the default frequency of the AUXHFRCO. |

8 DMA - DMA Controller

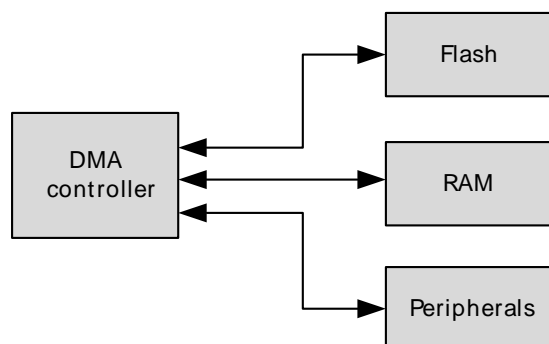

Quick Facts

What?

The DMA controller can move data without CPU intervention, effectively reducing the energy consumption for a data transfer.

Why?

The DMA can perform data transfers more energy efficiently than the CPU and allows autonomous operation in low energy modes. The LEUART can for instance provide full UART communication in EM2, consuming only a few μA by using the DMA to move data between the LEUART and RAM.

How?

The DMA controller has multiple highly configurable, prioritized DMA channels. Advanced transfer modes such as ping-pong and scatter-gather make it possible to tailor the controller to the specific needs of an application.

8.1 Introduction

The Direct Memory Access (DMA) controller performs memory operations independently of the CPU. This has the benefit of reducing the energy consumption and the workload of the CPU, and enables the system to stay in low energy modes for example when moving data from the USART to RAM. The DMA controller uses the PL230 μDMA controller licensed from ARM¹. Each of the PL230s channels on the EFM32 can be connected to any of the EFM32 peripherals.

8.2 Features

- The DMA controller is accessible as a memory mapped peripheral
- Possible data transfers include
 - RAM/Flash to peripheral
 - RAM to Flash
 - Peripheral to RAM
 - RAM/Flash to RAM
- The DMA controller has 8 independent channels
- Each channel has one (primary) or two (primary and alternate) descriptors
- The configuration for each channel includes
 - Transfer mode
 - Priority
 - Word-count
 - Word-size (8, 16, 32 bit)
- The transfer modes include
 - Basic (using the primary or alternate DMA descriptor)


¹ARM PL230 homepage [<http://infocenter.arm.com/help/index.jsp?topic=/com.arm.doc.ddi0417a/index.html>]

- Ping-pong (switching between the primary or alternate DMA descriptors, for continuous data flow to/from peripherals)
- Scatter-gather (using the primary descriptor to configure the alternate descriptor)
- Each channel has a programmable transfer length
- Channels 0 and 1 support looped transfers
- Channel 0 supports 2D copy
- A DMA channel can be triggered by any of several sources:
 - Communication modules (USART, LEUART)
 - Timers (TIMER)
 - Analog modules (DAC, ACMP, ADC)
 - Software
- Programmable mapping between channel number and peripherals - any DMA channel can be triggered by any of the available sources
- Interrupts upon transfer completion
- Data transfer to/from LEUART in EM2 is supported by the DMA, providing extremely low energy consumption while performing UART communications

8.3 Block Diagram

An overview of the DMA and the modules it interacts with is shown in Figure 8.1 (p. 47) .

Figure 8.1. DMA Block Diagram

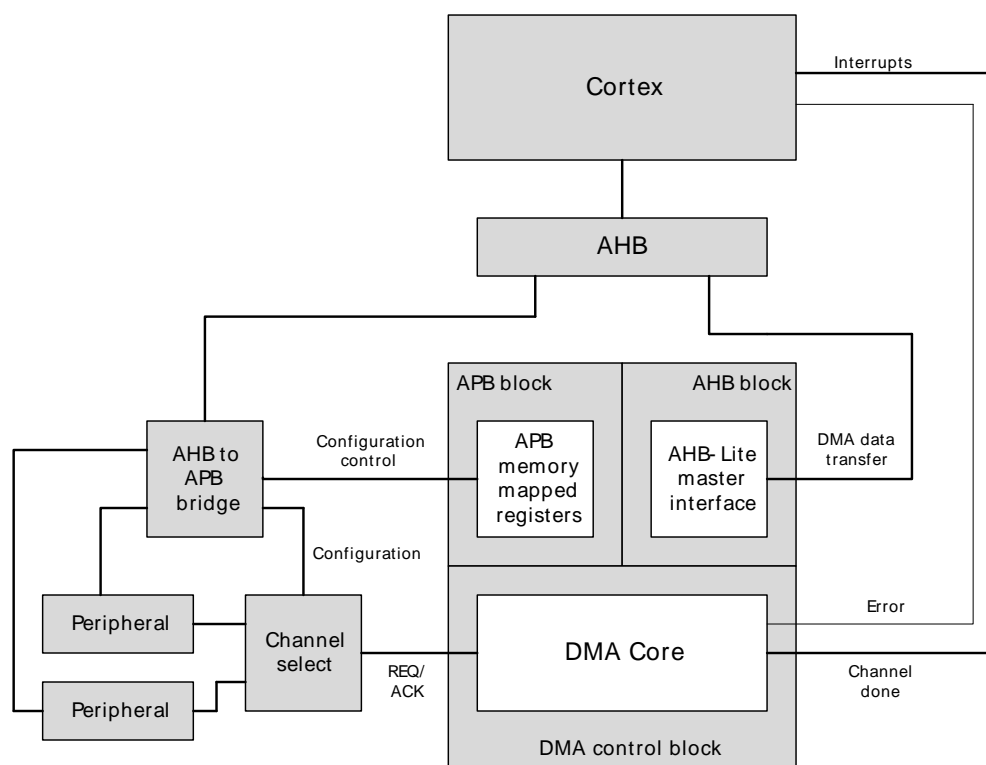

The DMA Controller consists of four main parts:

- An APB block allowing software to configure the DMA controller
- An AHB block allowing the DMA to read and write the DMA descriptors and the source and destination data for the DMA transfers
- A DMA control block controlling the operation of the DMA, including request/acknowledge signals for the connected peripherals

- A channel select block routing the right peripheral request to each DMA channel

8.4 Functional Description

The DMA Controller is highly flexible. It is capable of transferring data between peripherals and memory without involvement from the processor core. This can be used to increase system performance by off-loading the processor from copying large amounts of data or avoiding frequent interrupts to service peripherals needing more data or having available data. It can also be used to reduce the system energy consumption by making the DMA work autonomously with the LEUART for data transfer in EM2 without having to wake up the processor core from sleep.

The DMA Controller contains 8 independent channels. Each of these channels can be connected to any of the available peripheral trigger sources by writing to the configuration registers, see Section 8.4.1 (p. 48) . In addition, each channel can be triggered by software (for large memory transfers or for debugging purposes).

What the DMA Controller should do (when one of its channels is triggered) is configured through channel descriptors residing in system memory. Before enabling a channel, the software must therefore take care to write this configuration to memory. When a channel is triggered, the DMA Controller will first read the channel descriptor from system memory, and then it will proceed to perform the memory transfers as specified by the descriptor. The descriptor contains the memory address to read from, the memory address to write to, the number of bytes to be transferred, etc. The channel descriptor is described in detail in Section 8.4.3 (p. 58) .

In addition to the basic transfer mode, the DMA Controller also supports two advanced transfer modes; ping-pong and scatter-gather. Ping-pong transfers are ideally suited for streaming data for high-speed peripheral communication as the DMA will be ready to retrieve the next incoming data bytes immediately while the processor core is still processing the previous ones (and similarly for outgoing communication). Scatter-gather involves executing a series of tasks from memory and allows sophisticated schemes to be implemented by software.

Using different priority levels for the channels and setting the number of bytes after which the DMA Controller re-arbitrates, it is possible to ensure that timing-critical transfers are serviced on time.

8.4.1 Channel Select Configuration

The channel select block allows selecting which peripheral's request lines (dma_req, dma_sreq) to connect to each DMA channel.

This configuration is done by software through the control registers DMA_CH0_CTRL-DMA_CH7_CTRL, with SOURCESEL and SIGSEL components. SOURCESEL selects which peripheral to listen to and SIGSEL picks which output signals to use from the selected peripheral.

All peripherals are connected to dma_req. When this signal is triggered, the DMA performs a number of transfers as specified by the channel descriptor (2^R). The USARTs are additionally connected to the dma_sreq line. When only dma_sreq is asserted but not dma_req, then the DMA will perform exactly one transfer only (given that dma_sreq is enabled by software).

8.4.2 DMA control

8.4.2.1 DMA arbitration rate

You can configure when the controller arbitrates during a DMA transfer. This enables you to reduce the latency to service a higher priority channel.

The controller provides four bits that configure how many AHB bus transfers occur before it re-arbitrates. These bits are known as the R_power bits because the value you enter, R, is raised to the power of two

and this determines the arbitration rate. For example, if $R = 4$ then the arbitration rate is 2^4 , that is, the controller arbitrates every 16 DMA transfers.

Table 8.1 (p. 49) lists the arbitration rates.

Table 8.1. AHB bus transfer arbitration interval

| R_power | Arbitrate after x DMA transfers |
|---------------|---------------------------------|
| b0000 | $x = 1$ |
| b0001 | $x = 2$ |
| b0010 | $x = 4$ |
| b0011 | $x = 8$ |
| b0100 | $x = 16$ |
| b0101 | $x = 32$ |
| b0110 | $x = 64$ |
| b0111 | $x = 128$ |
| b1000 | $x = 256$ |
| b1001 | $x = 512$ |
| b1010 - b1111 | $x = 1024$ |

Note

You must take care not to assign a low-priority channel with a large R_power because this prevents the controller from servicing high-priority requests, until it re-arbitrates.

The number of dma transfers N that need to be done is specified by the user. When $N > 2^R$ and is not an integer multiple of 2^R then the controller always performs sequences of 2^R transfers until $N < 2^R$ remain to be transferred. The controller performs the remaining N transfers at the end of the DMA cycle.

You store the value of the R_power bits in the channel control data structure. See Section 8.4.3.3 (p. 61) for more information about the location of the R_power bits in the data structure.

8.4.2.2 Priority

When the controller arbitrates, it determines the next channel to service by using the following information:

- the channel number
- the priority level, default or high, that is assigned to the channel.

You can configure each channel to use either the default priority level or a high priority level by setting the DMA_CHPRIS register.

Channel number zero has the highest priority and as the channel number increases, the priority of a channel decreases. Table 8.2 (p. 49) lists the DMA channel priority levels in descending order of priority.


Table 8.2. DMA channel priority

| Channel number | Priority level setting | Descending order of channel priority |
|----------------|------------------------|--------------------------------------|
| 0 | High | Highest-priority DMA channel |
| 1 | High | - |
| 2 | High | - |

| Channel number | Priority level setting | Descending order of channel priority |
|----------------|------------------------|--------------------------------------|
| 3 | High | - |
| 4 | High | - |
| 5 | High | - |
| 6 | High | - |
| 7 | High | - |
| 0 | Default | - |
| 1 | Default | - |
| 2 | Default | - |
| 3 | Default | - |
| 4 | Default | - |
| 5 | Default | - |
| 6 | Default | - |
| 7 | Default | Lowest-priority DMA channel |

After a DMA transfer completes, the controller polls all the DMA channels that are available. Figure 8.2 (p. 50) shows the process it uses to determine which DMA transfer to perform next.

Figure 8.2. Polling flowchart

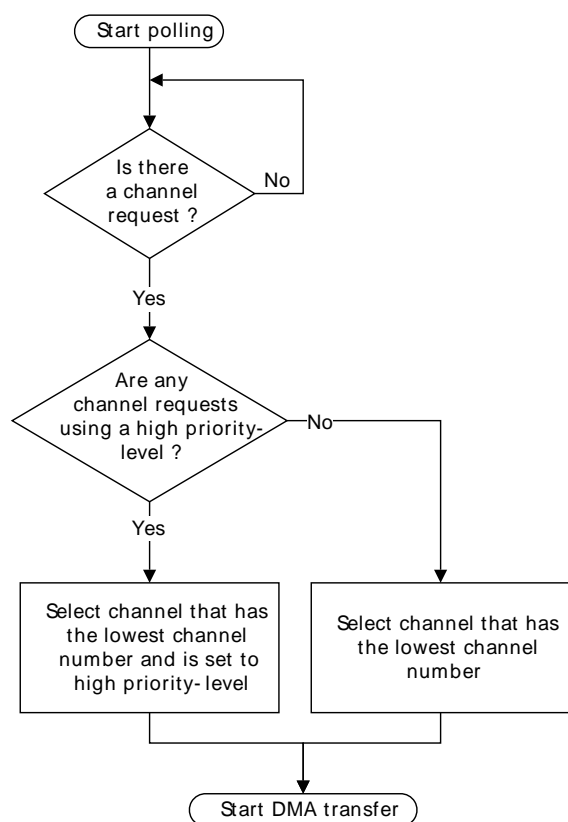

8.4.2.3 DMA cycle types

The `cycle_ctrl` bits control how the controller performs a DMA cycle. You can set the `cycle_ctrl` bits as Table 8.3 (p. 51) lists.

Table 8.3. DMA cycle types

| cycle_ctrl | Description |
|------------|--|
| b000 | Channel control data structure is invalid |
| b001 | Basic DMA transfer |
| b010 | Auto-request |
| b011 | Ping-pong |
| b100 | Memory scatter-gather using the primary data structure |
| b101 | Memory scatter-gather using the alternate data structure |
| b110 | Peripheral scatter-gather using the primary data structure |
| b111 | Peripheral scatter-gather using the alternate data structure |

Note

The cycle_ctrl bits are located in the channel_cfg memory location that Section 8.4.3.3 (p. 61) describes.

For all cycle types, the controller arbitrates after 2^R DMA transfers. If you set a low-priority channel with a large 2^R value then it prevents all other channels from performing a DMA transfer, until the low-priority DMA transfer completes. Therefore, you must take care when setting the R_power, that you do not significantly increase the latency for high-priority channels.

8.4.2.3.1 Invalid

After the controller completes a DMA cycle it sets the cycle type to invalid, to prevent it from repeating the same DMA cycle.

8.4.2.3.2 Basic

In this mode, you configure the controller to use either the primary or the alternate data structure. After you enable the channel C and the controller receives a request for this channel, then the flow for this DMA cycle is as follows:

1. The controller performs 2^R transfers. If the number of transfers remaining becomes zero, then the flow continues at step 3 (p. 51) .
2. The controller arbitrates:
 - if a higher-priority channel is requesting service then the controller services that channel
 - if the peripheral or software signals a request to the controller then it continues at step 1 (p. 51) .
3. The controller sets dma_done[C] HIGH for one HFCORECLK cycle. This indicates to the host processor that the DMA cycle is complete.

8.4.2.3.3 Auto-request

When the controller operates in this mode, it is only necessary for it to receive a single request to enable it to complete the entire DMA cycle. This enables a large data transfer to occur, without significantly increasing the latency for servicing higher priority requests, or requiring multiple requests from the processor or peripheral.

You can configure the controller to use either the primary or the alternate data structure. After you enable the channel C and the controller receives a request for this channel, then the flow for this DMA cycle is as follows:

1. The controller performs 2^R transfers for channel C. If the number of transfers remaining is zero the flow continues at step 3 (p. 52) .


2. The controller arbitrates. When channel C has the highest priority then the DMA cycle continues at step 1 (p. 51) .
3. The controller sets `dma_done[C]` HIGH for one `HFCORECLK` cycle. This indicates to the host processor that the DMA cycle is complete.

8.4.2.3.4 Ping-pong

In ping-pong mode, the controller performs a DMA cycle using one of the data structures (primary or alternate) and it then performs a DMA cycle using the other data structure. The controller continues to switch from primary to alternate to primary... until it reads a data structure that is invalid, or until the host processor disables the channel.

Figure 8.3 (p. 52) shows an example of a ping-pong DMA transaction.

Figure 8.3. Ping-pong example

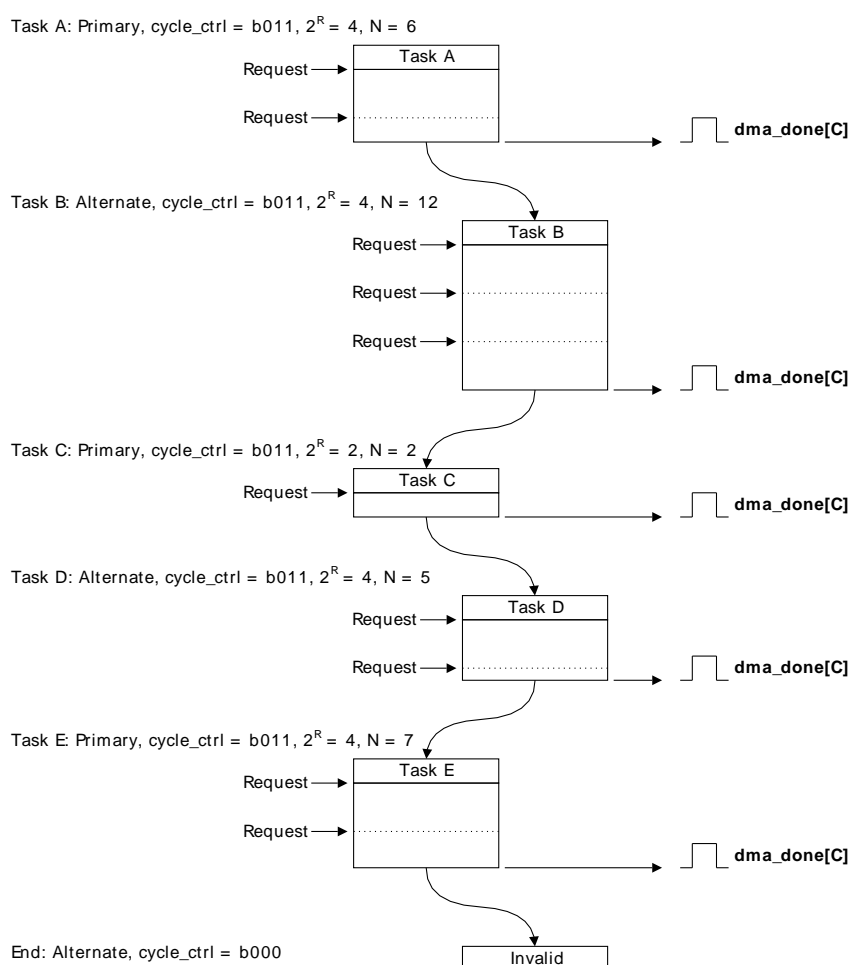

In Figure 8.3 (p. 52) :

- Task A
1. The host processor configures the primary data structure for task A.
 2. The host processor configures the alternate data structure for task B. This enables the controller to immediately switch to task B after task A completes, provided that a higher priority channel does not require servicing.
 3. The controller receives a request and performs four DMA transfers.
 4. The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.

5. The controller performs the remaining two DMA transfers.
6. The controller sets `dma_done[C]` HIGH for one `HFCORECLK` cycle and enters the arbitration process.

After task A completes, the host processor can configure the primary data structure for task C. This enables the controller to immediately switch to task C after task B completes, provided that a higher priority channel does not require servicing.

After the controller receives a new request for the channel and it has the highest priority then task B commences:

- Task B
7. The controller performs four DMA transfers.
 8. The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
 9. The controller performs four DMA transfers.
 10. The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
 11. The controller performs the remaining four DMA transfers.
 12. The controller sets `dma_done[C]` HIGH for one `HFCORECLK` cycle and enters the arbitration process.

After task B completes, the host processor can configure the alternate data structure for task D.

After the controller receives a new request for the channel and it has the highest priority then task C commences:

- Task C
13. The controller performs two DMA transfers.
 14. The controller sets `dma_done[C]` HIGH for one `HFCORECLK` cycle and enters the arbitration process.

After task C completes, the host processor can configure the primary data structure for task E.

After the controller receives a new request for the channel and it has the highest priority then task D commences:

- Task D
15. The controller performs four DMA transfers.
 16. The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
 17. The controller performs the remaining DMA transfer.
 18. The controller sets `dma_done[C]` HIGH for one `HFCORECLK` cycle and enters the arbitration process.

After the controller receives a new request for the channel and it has the highest priority then task E commences:

- Task E
19. The controller performs four DMA transfers.
 20. The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
 21. The controller performs the remaining three DMA transfers.
 22. The controller sets `dma_done[C]` HIGH for one `HFCORECLK` cycle and enters the arbitration process.

If the controller receives a new request for the channel and it has the highest priority then it attempts to start the next task. However, because the host processor has not configured the alternate data structure,

and on completion of task D the controller set the cycle_ctrl bits to b000, then the ping-pong DMA transaction completes.

Note

You can also terminate the ping-pong DMA cycle in Figure 8.3 (p. 52) , if you configure task E to be a basic DMA cycle by setting the cycle_ctrl field to 3'b001.

8.4.2.3.5 Memory scatter-gather

In memory scatter-gather mode the controller receives an initial request and then performs four DMA transfers using the primary data structure. After this transfer completes, it starts a DMA cycle using the alternate data structure. After this cycle completes, the controller performs another four DMA transfers using the primary data structure. The controller continues to switch from primary to alternate to primary... until either:

- the host processor configures the alternate data structure for a basic cycle
- it reads an invalid data structure.

Note

After the controller completes the N primary transfers it invalidates the primary data structure by setting the cycle_ctrl field to b000.

The controller only asserts dma_done[C] when the scatter-gather transaction completes using an auto-request cycle.

In scatter-gather mode, the controller uses the primary data structure to program the alternate data structure. Table 8.4 (p. 54) lists the fields of the channel_cfg memory location for the primary data structure, that you must program with constant values and those that can be user defined.

Table 8.4. channel_cfg for a primary data structure, in memory scatter-gather mode

| Bit | Field | Value | Description |
|------------------------|---------------|----------------|---|
| Constant-value fields: | | | |
| [31:30] | dst_inc | b10 | Configures the controller to use word increments for the address |
| [29:28] | dst_size | b10 | Configures the controller to use word transfers |
| [27:26] | src_inc | b10 | Configures the controller to use word increments for the address |
| [25:24] | src_size | b10 | Configures the controller to use word transfers |
| [17:14] | R_power | b0010 | Configures the controller to perform four DMA transfers |
| [3] | next_useburst | 0 | For a memory scatter-gather DMA cycle, this bit must be set to zero |
| [2:0] | cycle_ctrl | b100 | Configures the controller to perform a memory scatter-gather DMA cycle |
| User defined values: | | | |
| [23:21] | dst_prot_ctrl | - | Configures the state of HPROT when the controller writes the destination data |
| [20:18] | src_prot_ctrl | - | Configures the state of HPROT when the controller reads the source data |
| [13:4] | n_minus_1 | N ¹ | Configures the controller to perform N DMA transfers, where N is a multiple of four |

¹Because the R_power field is set to four, you must set N to be a multiple of four. The value given by N/4 is the number of times that you must configure the alternate data structure.

See Section 8.4.3.3 (p. 61) for more information.


Figure 8.4 (p. 55) shows a memory scatter-gather example.

Figure 8.4. Memory scatter-gather example

Initialization: 1. Configure primary to enable the copy A, B, C, and D operations: cycle_ctrl = b100, $2^R = 4$, N = 16.
 2. Write the primary source data to memory, using the structure shown in the following table.

| | src_data_end_ptr | dst_data_end_ptr | channel_cfg | Unused |
|-----------------|------------------|------------------|--------------------------------------|------------|
| Data for Task A | 0x0A000000 | 0x0AE00000 | cycle_ctrl = b101, $2^R = 4$, N = 3 | 0xFFFFFFFF |
| Data for Task B | 0x0B000000 | 0x0BE00000 | cycle_ctrl = b101, $2^R = 2$, N = 8 | 0xFFFFFFFF |
| Data for Task C | 0x0C000000 | 0x0CE00000 | cycle_ctrl = b101, $2^R = 8$, N = 5 | 0xFFFFFFFF |
| Data for Task D | 0x0D000000 | 0x0DE00000 | cycle_ctrl = b010, $2^R = 4$, N = 4 | 0xFFFFFFFF |

Memory scatter-gather transaction:

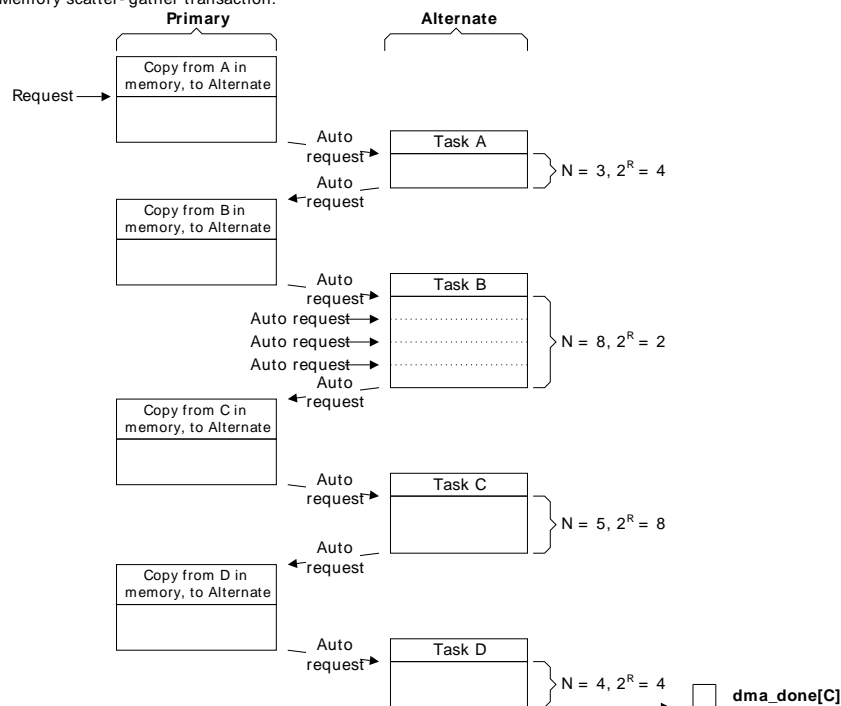

In Figure 8.4 (p. 55) :

Initialization

1. The host processor configures the primary data structure to operate in memory scatter-gather mode by setting cycle_ctrl to b100. Because a data structure for a single channel consists of four words then you must set 2^R to 4. In this example, there are four tasks and therefore N is set to 16.
2. The host processor writes the data structure for tasks A, B, C, and D to the memory locations that the primary src_data_end_ptr specifies.
3. The host processor enables the channel.

The memory scatter-gather transaction commences when the controller receives a request on dma_req[] or a manual request from the host processor. The transaction continues as follows:

Primary, copy A

1. After receiving a request, the controller performs four DMA transfers. These transfers write the alternate data structure for task A.

Task A

2. The controller generates an auto-request for the channel and then arbitrates.
3. The controller performs task A. After it completes the task, it generates an auto-request for the channel and then arbitrates.

Primary, copy B

4. The controller performs four DMA transfers. These transfers write the alternate data structure for task B.

Task B

5. The controller generates an auto-request for the channel and then arbitrates.
6. The controller performs task B. After it completes the task, it generates an auto-request for the channel and then arbitrates.

Primary, copy C

7. The controller performs four DMA transfers. These transfers write the alternate data structure for task C.

| | |
|-----------------|--|
| Task C | 8. The controller generates an auto-request for the channel and then arbitrates. 9. The controller performs task C. After it completes the task, it generates an auto-request for the channel and then arbitrates. |
| Primary, copy D | 10. The controller performs four DMA transfers. These transfers write the alternate data structure for task D. 11. The controller sets the cycle_ctrl bits of the primary data structure to b000, to indicate that this data structure is now invalid. |
| Task D | 12. The controller generates an auto-request for the channel and then arbitrates. 13. The controller performs task D using an auto-request cycle. 14. The controller sets dma_done[C] HIGH for one HFCORECLK cycle and enters the arbitration process. |

8.4.2.3.6 Peripheral scatter-gather

In peripheral scatter-gather mode the controller receives an initial request from a peripheral and then it performs four DMA transfers using the primary data structure. It then immediately starts a DMA cycle using the alternate data structure, without re-arbitrating.

Note

These are the only circumstances, where the controller does not enter the arbitration process after completing a transfer using the primary data structure.

After this cycle completes, the controller re-arbitrates and if the controller receives a request from the peripheral that has the highest priority then it performs another four DMA transfers using the primary data structure. It then immediately starts a DMA cycle using the alternate data structure, without re-arbitrating. The controller continues to switch from primary to alternate to primary... until either:

- the host processor configures the alternate data structure for a basic cycle
- it reads an invalid data structure.

Note

After the controller completes the N primary transfers it invalidates the primary data structure by setting the cycle_ctrl field to b000.

The controller asserts dma_done[C] when the scatter-gather transaction completes using a basic cycle.

In scatter-gather mode, the controller uses the primary data structure to program the alternate data structure. Table 8.5 (p. 56) lists the fields of the channel_cfg memory location for the primary data structure, that you must program with constant values and those that can be user defined.

Table 8.5. channel_cfg for a primary data structure, in peripheral scatter-gather mode

| Bit | Field | Value | Description |
|------------------------|---------------|-------|---|
| Constant-value fields: | | | |
| [31:30] | dst_inc | b10 | Configures the controller to use word increments for the address |
| [29:28] | dst_size | b10 | Configures the controller to use word transfers |
| [27:26] | src_inc | b10 | Configures the controller to use word increments for the address |
| [25:24] | src_size | b10 | Configures the controller to use word transfers |
| [17:14] | R_power | b0010 | Configures the controller to perform four DMA transfers |
| [2:0] | cycle_ctrl | b110 | Configures the controller to perform a peripheral scatter-gather DMA cycle |
| User defined values: | | | |
| [23:21] | dst_prot_ctrl | - | Configures the state of HPROT when the controller writes the destination data |

| Bit | Field | Value | Description |
|---------|---------------|-------|--|
| [20:18] | src_prot_ctrl | - | Configures the state of HPROT when the controller reads the source data |
| [13:4] | n_minus_1 | N^1 | Configures the controller to perform N DMA transfers, where N is a multiple of four |
| [3] | next_useburst | - | When set to 1, the controller sets the chnl_useburst_set [C] bit to 1 after the alternate transfer completes |

¹Because the R_power field is set to four, you must set N to be a multiple of four. The value given by N/4 is the number of times that you must configure the alternate data structure.

See Section 8.4.3.3 (p. 61) for more information.


Figure 8.5 (p. 57) shows a peripheral scatter-gather example.

Figure 8.5. Peripheral scatter-gather example

Initialization: 1. Configure primary to enable the copy A, B, C, and D operations: cycle_ctrl = b1110, $2^R = 4$, $N = 16$.
2. Write the primary source data in memory, using the structure shown in the following table.

| | src_data_end_ptr | dst_data_end_ptr | channel_cfg | Unused |
|-----------------|------------------|------------------|--|------------|
| Data for Task A | 0x0A000000 | 0x0AE00000 | cycle_ctrl = b111, $2^R = 4$, $N = 3$ | 0xFFFFFFFF |
| Data for Task B | 0x0B000000 | 0x0BE00000 | cycle_ctrl = b111, $2^R = 2$, $N = 8$ | 0xFFFFFFFF |
| Data for Task C | 0x0C000000 | 0x0CE00000 | cycle_ctrl = b111, $2^R = 8$, $N = 5$ | 0xFFFFFFFF |
| Data for Task D | 0x0D000000 | 0x0DE00000 | cycle_ctrl = b001, $2^R = 4$, $N = 4$ | 0xFFFFFFFF |

Peripheral scatter-gather transaction:

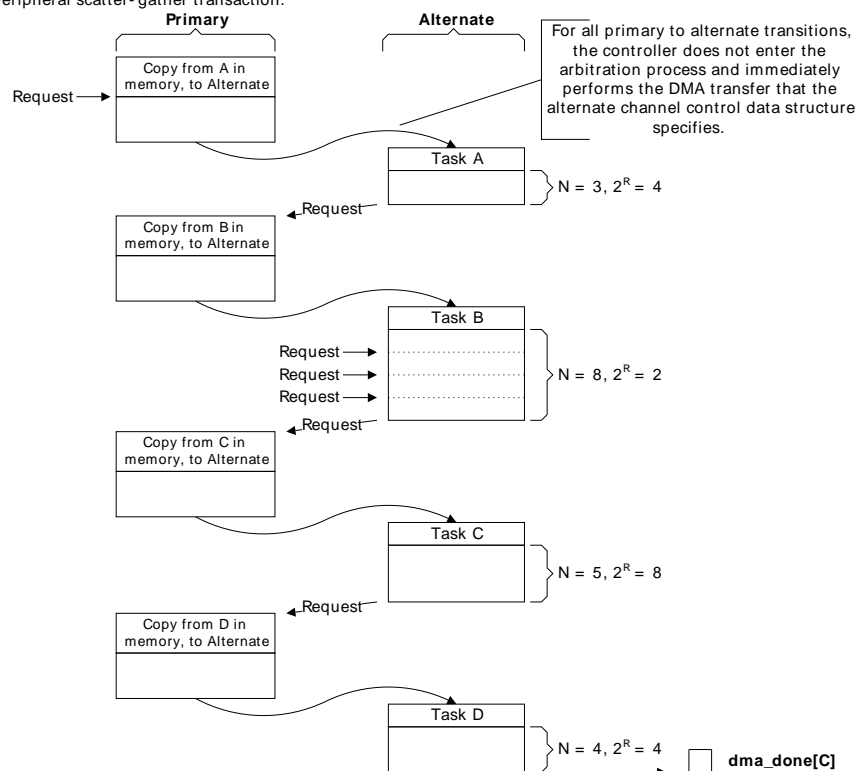

In Figure 8.5 (p. 57) :

Initialization

1. The host processor configures the primary data structure to operate in peripheral scatter-gather mode by setting cycle_ctrl to b1110. Because a data structure for a single channel consists of four words then you must set 2^R to 4. In this example, there are four tasks and therefore N is set to 16.
2. The host processor writes the data structure for tasks A, B, C, and D to the memory locations that the primary src_data_end_ptr specifies.
3. The host processor enables the channel.

The peripheral scatter-gather transaction commences when the controller receives a request on dma_req[]. The transaction continues as follows:

- | | |
|-----------------|--|
| Primary, copy A | 1. After receiving a request, the controller performs four DMA transfers. These transfers write the alternate data structure for task A. |
| Task A | 2. The controller performs task A. 3. After the controller completes the task it enters the arbitration process. |

After the peripheral issues a new request and it has the highest priority then the process continues with:

- | | |
|-----------------|--|
| Primary, copy B | 4. The controller performs four DMA transfers. These transfers write the alternate data structure for task B. |
| Task B | 5. The controller performs task B. To enable the controller to complete the task, the peripheral must issue a further three requests. 6. After the controller completes the task it enters the arbitration process. |

After the peripheral issues a new request and it has the highest priority then the process continues with:

- | | |
|-----------------|---|
| Primary, copy C | 7. The controller performs four DMA transfers. These transfers write the alternate data structure for task C. |
| Task C | 8. The controller performs task C. 9. After the controller completes the task it enters the arbitration process. |

After the peripheral issues a new request and it has the highest priority then the process continues with:

- | | |
|-----------------|---|
| Primary, copy D | 10. The controller performs four DMA transfers. These transfers write the alternate data structure for task D. 11. The controller sets the cycle_ctrl bits of the primary data structure to b000, to indicate that this data structure is now invalid. |
| Task D | 12. The controller performs task D using a basic cycle. 13. The controller sets dma_done[C] HIGH for one HFCORECLK cycle and enters the arbitration process. |

8.4.2.4 Error signaling

If the controller detects an ERROR response on the AHB-Lite master interface, it:

- disables the channel that corresponds to the ERROR
- sets dma_err HIGH.

After the host processor detects that dma_err is HIGH, it must check which channel was active when the ERROR occurred. It can do this by:

1. Reading the DMA_CHENS register to create a list of disabled channels.

When a channel asserts dma_done[] then the controller disables the channel. The program running on the host processor must always keep a record of which channels have recently asserted their dma_done[] outputs.

2. It must compare the disabled channels list from step 1 (p. 58), with the record of the channels that have recently set their dma_done[] outputs. The channel with no record of dma_done[C] being set is the channel that the ERROR occurred on.


8.4.3 Channel control data structure

You must provide an area of system memory to contain the channel control data structure. This system memory must:

- provide a contiguous area of system memory that the controller and host processor can access
- have a base address that is an integer multiple of the total size of the channel control data structure.

Figure 8.6 (p. 59) shows the memory that the controller requires for the channel control data structure, when all 8 channels and the optional alternate data structure are in use.

Figure 8.6. Memory map for 8 channels, including the alternate data structure

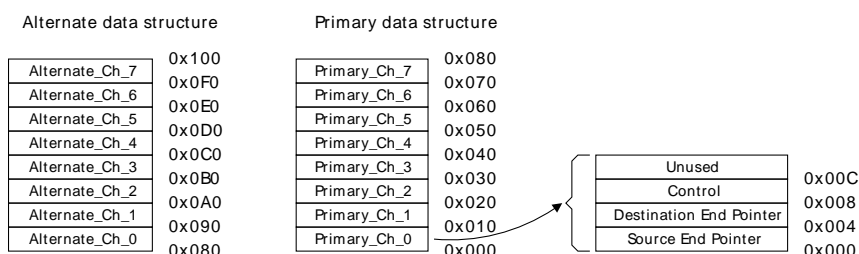

This structure in Figure 8.6 (p. 59) uses 256 bytes of system memory. The controller uses the lower 8 address bits to enable it to access all of the elements in the structure and therefore the base address must be at 0xXXXXXX00.

You can configure the base address for the primary data structure by writing the appropriate value in the DMA_CTRLBASE register.

You do not need to set aside the full 256 bytes if all dma channels are not used or if all alternate descriptors are not used. If, for example, only 4 channels are used and they only need the primary descriptors, then only 64 bytes need to be set aside.

Table 8.6 (p. 59) lists the address bits that the controller uses when it accesses the elements of the channel control data structure.

Table 8.6. Address bit settings for the channel control data structure

| Address bits | | | | |
|--------------|------|------|------|------------------|
| [7] | [6] | [5] | [4] | [3:0] |
| A | C[2] | C[1] | C[0] | 0x0, 0x4, or 0x8 |

Where:


| | |
|--------------|--|
| A | Selects one of the channel control data structures: A = 0 Selects the primary data structure. A = 1 Selects the alternate data structure. |
| C[2:0] | Selects the DMA channel. |
| Address[3:0] | Selects one of the control elements: 0x0 Selects the source data end pointer. 0x4 Selects the destination data end pointer. 0x8 Selects the control data configuration. 0xC The controller does not access this address location. If required, you can enable the host processor to use this memory location as system memory. |

Note

It is not necessary for you to calculate the base address of the alternate data structure because the DMA_ALTCTRLBASE register provides this information.

Figure 8.7 (p. 60) shows a detailed memory map of the descriptor structure.

Figure 8.7. Detailed memory map for the 8 channels, including the alternate data structure

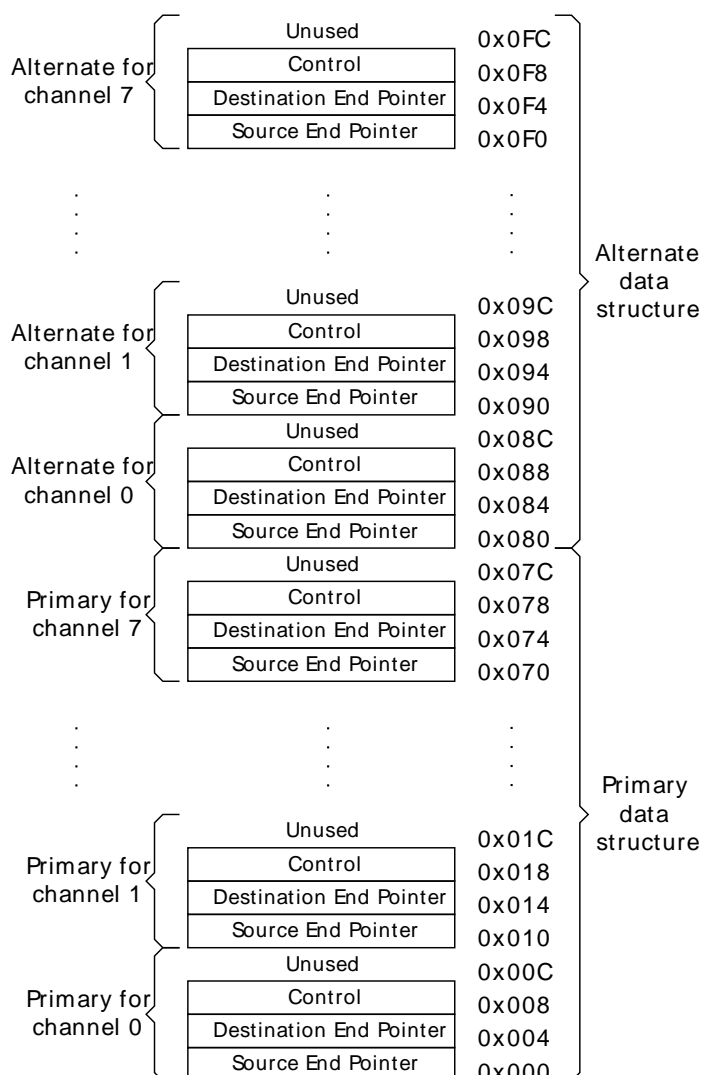

The controller uses the system memory to enable it to access two pointers and the control information that it requires for each channel. The following subsections will describe these 32-bit memory locations and how the controller calculates the DMA transfer address.

8.4.3.1 Source data end pointer

The `src_data_end_ptr` memory location contains a pointer to the end address of the source data. Figure 8.7 (p. 60) lists the bit assignments for this memory location.

Table 8.7. `src_data_end_ptr` bit assignments

| Bit | Name | Description |
|--------|-------------------------------|---|
| [31:0] | <code>src_data_end_ptr</code> | Pointer to the end address of the source data |

Before the controller can perform a DMA transfer, you must program this memory location with the end address of the source data. The controller reads this memory location when it starts a 2^R DMA transfer.

Note

The controller does not write to this memory location.

| Bit | Name | Description |
|---------|---------------|---|
| | | b11 = no increment. Address remains set to the value that the dst_data_end_ptr memory location contains. |
| [29:28] | dst_size | Destination data size. |
| | | Note You must set dst_size to contain the same value that src_size contains. |
| [27:26] | src_inc | Set the bits to control the source address increment. The address increment depends on the source data width as follows: Source data width = byte b00 = byte. b01 = halfword. b10 = word. b11 = no increment. Address remains set to the value that the src_data_end_ptr memory location contains. Source data width = halfword b00 = reserved. b01 = halfword. b10 = word. b11 = no increment. Address remains set to the value that the src_data_end_ptr memory location contains. Source data width = word b00 = reserved. b01 = reserved. b10 = word. b11 = no increment. Address remains set to the value that the src_data_end_ptr memory location contains. |
| [25:24] | src_size | Set the bits to match the size of the source data: b00 = byte b01 = halfword b10 = word b11 = reserved. |
| [23:21] | dst_prot_ctrl | Set the bits to control the state of HPROT when the controller writes the destination data. Bit [23] This bit has no effect on the DMA. Bit [22] This bit has no effect on the DMA. Bit [21] Controls the state of HPROT as follows: 0 = HPROT is LOW and the access is non-privileged. 1 = HPROT is HIGH and the access is privileged. |
| [20:18] | src_prot_ctrl | Set the bits to control the state of HPROT when the controller reads the source data. Bit [20] This bit has no effect on the DMA. Bit [19] This bit has no effect on the DMA. Bit [18] Controls the state of HPROT as follows: 0 = HPROT is LOW and the access is non-privileged. 1 = HPROT is HIGH and the access is privileged. |
| [17:14] | R_power | Set these bits to control how many DMA transfers can occur before the controller re-arbitrates. The possible arbitration rate settings are: b0000 Arbitrates after each DMA transfer. b0001 Arbitrates after 2 DMA transfers. b0010 Arbitrates after 4 DMA transfers. b0011 Arbitrates after 8 DMA transfers. b0100 Arbitrates after 16 DMA transfers. b0101 Arbitrates after 32 DMA transfers. b0110 Arbitrates after 64 DMA transfers. b0111 Arbitrates after 128 DMA transfers. |

| Bit | Name | Description |
|--------|---------------|---|
| | | b1000 Arbitrates after 256 DMA transfers. b1001 Arbitrates after 512 DMA transfers. b1010 - b1111 Arbitrates after 1024 DMA transfers. This means that no arbitration occurs during the DMA transfer because the maximum transfer size is 1024. |
| [13:4] | n_minus_1 | <p>Prior to the DMA cycle commencing, these bits represent the total number of DMA transfers that the DMA cycle contains. You must set these bits according to the size of DMA cycle that you require.</p> <p>The 10-bit value indicates the number of DMA transfers, minus one. The possible values are:</p> <p>b000000000 = 1 DMA transfer</p> <p>b000000001 = 2 DMA transfers</p> <p>b000000010 = 3 DMA transfers</p> <p>b000000011 = 4 DMA transfers</p> <p>b000000100 = 5 DMA transfers</p> <p>.</p> <p>.</p> <p>.</p> <p>b111111111 = 1024 DMA transfers.</p> <p>The controller updates this field immediately prior to it entering the arbitration process. This enables the controller to store the number of outstanding DMA transfers that are necessary to complete the DMA cycle.</p> |
| [3] | next_useburst | <p>Controls if the chnl_useburst_set [C] bit is set to a 1, when the controller is performing a peripheral scatter-gather and is completing a DMA cycle that uses the alternate data structure.</p> <div style="background-color: #f0f0f0; padding: 10px; margin: 10px 0;"> <p>Note</p> <p>Immediately prior to completion of the DMA cycle that the alternate data structure specifies, the controller sets the chnl_useburst_set [C] bit to 0 if the number of remaining transfers is less than 2^R. The setting of the next_useburst bit controls if the controller performs an additional modification of the chnl_useburst_set [C] bit.</p> </div> <p>In peripheral scatter-gather DMA cycle then after the DMA cycle that uses the alternate data structure completes, either:</p> <p>0 = the controller does not change the value of the chnl_useburst_set [C] bit. If the chnl_useburst_set [C] bit is 0 then for all the remaining DMA cycles in the peripheral scatter-gather transaction, the controller responds to requests on dma_req[] and dma_sreq[], when it performs a DMA cycle that uses an alternate data structure.</p> <p>1 = the controller sets the chnl_useburst_set [C] bit to a 1. Therefore, for the remaining DMA cycles in the peripheral scatter-gather transaction, the controller only responds to requests on dma_req[], when it performs a DMA cycle that uses an alternate data structure.</p> |
| [2:0] | cycle_ctrl | <p>The operating mode of the DMA cycle. The modes are:</p> <p>b000 Stop. Indicates that the data structure is invalid.</p> <p>b001 Basic. The controller must receive a new request, prior to it entering the arbitration process, to enable the DMA cycle to complete.</p> <p>b010 Auto-request. The controller automatically inserts a request for the appropriate channel during the arbitration process. This means that the initial request is sufficient to enable the DMA cycle to complete.</p> <p>b011 Ping-pong. The controller performs a DMA cycle using one of the data structures. After the DMA cycle completes, it performs a DMA cycle using the other data structure. After the DMA cycle completes and provided that the host processor has updated the original data structure, it performs a DMA cycle using the original data structure. The controller continues to perform DMA cycles until it either reads an invalid data structure or the host processor changes the cycle_ctrl bits to b001 or b010. See Section 8.4.2.3.4 (p. 52) .</p> <p>b100 Memory scatter/gather. See Section 8.4.2.3.5 (p. 54) .</p> <p>When the controller operates in memory scatter-gather mode, you must only use this value in the primary data structure.</p> <p>b101 Memory scatter/gather. See Section 8.4.2.3.5 (p. 54) .</p> <p>When the controller operates in memory scatter-gather mode, you must only use this value in the alternate data structure.</p> <p>b110 Peripheral scatter/gather. See Section 8.4.2.3.6 (p. 56) .</p> |

| Bit | Name | Description |
|------|----------------------------|---|
| | | When the controller operates in peripheral scatter-gather mode, you must only use this value in the primary data structure. |
| b111 | Peripheral scatter/gather. | See Section 8.4.2.3.6 (p. 56) . |
| | | When the controller operates in peripheral scatter-gather mode, you must only use this value in the alternate data structure. |

At the start of a DMA cycle, or 2^R DMA transfer, the controller fetches the channel_cfg from system memory. After it performs 2^R , or N, transfers it stores the updated channel_cfg in system memory.

The controller does not support a dst_size value that is different to the src_size value. If it detects a mismatch in these values, it uses the src_size value for source and destination and when it next updates the n_minus_1 field, it also sets the dst_size field to the same as the src_size field.

After the controller completes the N transfers it sets the cycle_ctrl field to b000, to indicate that the channel_cfg data is invalid. This prevents it from repeating the same DMA transfer.

8.4.3.4 Address calculation

To calculate the source address of a DMA transfer, the controller performs a left shift operation on the n_minus_1 value by a shift amount that src_inc specifies, and then subtracts the resulting value from the source data end pointer. Similarly, to calculate the destination address of a DMA transfer, it performs a left shift operation on the n_minus_1 value by a shift amount that dst_inc specifies, and then subtracts the resulting value from the destination end pointer.

Depending on the value of src_inc and dst_inc, the source address and destination address can be calculated using the equations:

| | |
|---------------------------------|--|
| src_inc = b00 and dst_inc = b00 | <ul style="list-style-type: none"> source address = src_data_end_ptr - n_minus_1 destination address = dst_data_end_ptr - n_minus_1. |
| src_inc = b01 and dst_inc = b01 | <ul style="list-style-type: none"> source address = src_data_end_ptr - (n_minus_1 << 1) destination address = dst_data_end_ptr - (n_minus_1 << 1). |
| src_inc = b10 and dst_inc = b10 | <ul style="list-style-type: none"> source address = src_data_end_ptr - (n_minus_1 << 2) destination address = dst_data_end_ptr - (n_minus_1 << 2). |
| src_inc = b11 and dst_inc = b11 | <ul style="list-style-type: none"> source address = src_data_end_ptr destination address = dst_data_end_ptr. |

Table 8.10 (p. 64) lists the destination addresses for a DMA cycle of six words.

Table 8.10. DMA cycle of six words using a word increment

| | | | | |
|---|-------------|-------|-------------------------|---------|
| Initial values of channel_cfg, prior to the DMA cycle | | | | |
| src_size = b10, dst_inc = b10, n_minus_1 = b101, cycle_ctrl = 1 | | | | |
| DMA transfers | End Pointer | Count | Difference ¹ | Address |
| | 0x2AC | 5 | 0x14 | 0x298 |
| | 0x2AC | 4 | 0x10 | 0x29C |
| | 0x2AC | 3 | 0xC | 0x2A0 |
| | 0x2AC | 2 | 0x8 | 0x2A4 |
| | 0x2AC | 1 | 0x4 | 0x2A8 |
| | 0x2AC | 0 | 0x0 | 0x2AC |
| Final values of channel_cfg, after the DMA cycle | | | | |
| src_size = b10, dst_inc = b10, n_minus_1 = 0, cycle_ctrl = 0 | | | | |

¹This value is the result of count being shifted left by the value of dst_inc.

Table 8.11 (p. 65) lists the destination addresses for a DMA transfer of 12 bytes using a halfword increment.

Table 8.11. DMA cycle of 12 bytes using a halfword increment

| | | | | |
|---|-------------|-------|-------------------------|---------|
| Initial values of channel_cfg, prior to the DMA cycle | | | | |
| src_size = b00, dst_inc = b01, n_minus_1 = b1011, cycle_ctrl = 1, R_power = b11 | | | | |
| DMA transfers | End Pointer | Count | Difference ¹ | Address |
| | 0x5E7 | 11 | 0x16 | 0x5D1 |
| | 0x5E7 | 10 | 0x14 | 0x5D3 |
| | 0x5E7 | 9 | 0x12 | 0x5D5 |
| | 0x5E7 | 8 | 0x10 | 0x5D7 |
| | 0x5E7 | 7 | 0xE | 0x5D9 |
| | 0x5E7 | 6 | 0xC | 0x5DB |
| | 0x5E7 | 5 | 0xA | 0x5DD |
| | 0x5E7 | 4 | 0x8 | 0x5DF |
| Values of channel_cfg after 2 ^R DMA transfers | | | | |
| src_size = b00, dst_inc = b01, n_minus_1 = b011, cycle_ctrl = 1, R_power = b11 | | | | |
| DMA transfers | End Pointer | Count | Difference | Address |
| | 0x5E7 | 3 | 0x6 | 0x5E1 |
| | 0x5E7 | 2 | 0x4 | 0x5E3 |
| | 0x5E7 | 1 | 0x2 | 0x5E5 |
| | 0x5E7 | 0 | 0x0 | 0x5E7 |
| Final values of channel_cfg, after the DMA cycle | | | | |
| src_size = b00, dst_inc = b01, n_minus_1 = 0, cycle_ctrl = 0 ² , R_power = b11 | | | | |

¹This value is the result of count being shifted left by the value of dst_inc.

²After the controller completes the DMA cycle it invalidates the channel_cfg memory location by clearing the cycle_ctrl field.

8.4.4 Interaction with the EMU

The DMA interacts with the Energy Management Unit (EMU) to allow transfers from , e.g., the LEUART to occur in EM2. The EMU can wake up the DMA sufficiently long to allow data transfers to occur. See section "DMA Support" in the LEUART documentation.

8.4.5 Interrupts

The PL230 dma_done[n:0] signals (one for each channel) as well as the dma_err signal, are available as interrupts to the Cortex-M3 core. They are combined into one interrupt vector, DMA_INT. If the interrupt for the DMA is enabled in the ARM Cortex-M3 core, an interrupt will be made if one or more of the interrupt flags in DMA_IF and their corresponding bits in DMA_IEN are set.

8.5 Examples

A basic example of how to program the DMA for transferring 42 bytes from the USART1 to memory location 0x20003420. Assumes that the channel 0 is currently disabled, and that the DMA_ALTCTRLBASE register has already been configured.

Example 8.1. DMA Transfer

1. Configure the channel select for using USART1 with DMA channel 0
 - a. Write SOURCESEL=0b001101 and SIGSEL=XX to DMA_CHCTRL0
2. Configure the primary channel descriptor for DMA channel 0
 - a. Write XX (read address of USART1) to src_data_end_ptr
 - b. Write 0x20003420 + 40 to dst_data_end_ptr
 - c. Write these values to channel_cfg for channel 0:
 - i. dst_inc=b01 (destination halfword address increment)
 - ii. dst_size=b01 (halfword transfer size)
 - iii. src_inc=b11 (no address increment for source)
 - iv. src_size=01 (halfword transfer size)
 - v. dst_prot_ctrl=000 (no cache/buffer/privilege)
 - vi. src_prot_ctrl=000 (no cache/buffer/privilege)
 - vii. R_power=b0000 (arbitrate after each DMA transfer)
 - viii. in_minus_1=d20 (transfer 21 halfwords)
 - ix. next_useburst=b0 (not applicable)
 - x. cycle_ctrl=b001 (basic operating mode)
3. Enable the DMA
 - a. Write EN=1 to DMA_CONFIG
4. Disable the single requests for channel 0 (i.e., do not react to data available, wait for buffer full)
 - a. Write DMA_CHUSEBURSTS[0]=1
5. Enable buffer-full requests for channel 0
 - a. Write DMA_CHREQMASKC[0]=1
6. Use the primary data structure for channel 0
 - a. Write DMA_CHALTC[0]=1
7. Enable channel 0
 - a. Write DMA_CHENS[0]=1

8.6 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|------------------|------|--|
| 0x000 | DMA_STATUS | R | DMA Status Registers |
| 0x004 | DMA_CONFIG | W | DMA Configuration Register |
| 0x008 | DMA_CTRLBASE | RW | Channel Control Data Base Pointer Register |
| 0x00C | DMA_ALTCTRLBASE | R | Channel Alternate Control Data Base Pointer Register |
| 0x010 | DMA_CHWAITSTATUS | R | Channel Wait on Request Status Register |
| 0x014 | DMA_CHSWREQ | W1 | Channel Software Request Register |
| 0x018 | DMA_CHUSEBURSTS | RW1H | Channel Useburst Set Register |
| 0x01C | DMA_CHUSEBURSTC | W1 | Channel Useburst Clear Register |
| 0x020 | DMA_CHREQMASKS | RW1 | Channel Request Mask Set Register |
| 0x024 | DMA_CHREQMASKC | W1 | Channel Request Mask Clear Register |
| 0x028 | DMA_CHENS | RW1 | Channel Enable Set Register |
| 0x02C | DMA_CHENC | W1 | Channel Enable Clear Register |
| 0x030 | DMA_CHALTS | RW1 | Channel Alternate Set Register |
| 0x034 | DMA_CHALTC | W1 | Channel Alternate Clear Register |
| 0x038 | DMA_CHPRIS | RW1 | Channel Priority Set Register |
| 0x03C | DMA_CHPRIC | W1 | Channel Priority Clear Register |
| 0x04C | DMA_ERRORC | RW | Bus Error Clear Register |
| 0xE10 | DMA_CHREQSTATUS | R | Channel Request Status |
| 0xE18 | DMA_CHSREQSTATUS | R | Channel Single Request Status |
| 0x1000 | DMA_IF | R | Interrupt Flag Register |
| 0x1004 | DMA_IFS | W1 | Interrupt Flag Set Register |
| 0x1008 | DMA_IFC | W1 | Interrupt Flag Clear Register |
| 0x100C | DMA_IEN | RW | Interrupt Enable register |
| 0x1100 | DMA_CH0_CTRL | RW | Channel Control Register |
| 0x1104 | DMA_CH1_CTRL | RW | Channel Control Register |
| 0x1108 | DMA_CH2_CTRL | RW | Channel Control Register |
| 0x110C | DMA_CH3_CTRL | RW | Channel Control Register |
| 0x1110 | DMA_CH4_CTRL | RW | Channel Control Register |
| 0x1114 | DMA_CH5_CTRL | RW | Channel Control Register |
| 0x1118 | DMA_CH6_CTRL | RW | Channel Control Register |
| 0x111C | DMA_CH7_CTRL | RW | Channel Control Register |

8.7 Register Description

8.7.1 DMA_STATUS - DMA Status Registers

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|-------|----|----|----|----|----|----|----|----|----|---|---|-------|---|---|---|---|---|---|---|----|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | 0x07 | | | | | | | | | | | | 0x0 | | | | | | | | 0 |
| Access | | | | | | | | | | | | | R | | | | | | | | | | | | R | | | | | | | | R |
| Name | | | | | | | | | | | | | CHNUM | | | | | | | | | | | | STATE | | | | | | | | EN |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:21 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 20:16 | CHNUM | 0x07 | R | Channel Number Number of available DMA channels minus one. |
| 15:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:4 | STATE | 0x0 | R | Control Current State State can be one of the following. Higher values (11-15) are undefined. |
| Value | | Mode | | Description |
| 0 | | IDLE | | Idle |
| 1 | | RDCHCTRLDATA | | Reading channel controller data |
| 2 | | RDSRCENDPTR | | Reading source data end pointer |
| 3 | | RDDSTENDPTR | | Reading destination data end pointer |
| 4 | | RDSRCDATA | | Reading source data |
| 5 | | WRDSTDATA | | Writing destination data |
| 6 | | WAITREQCLR | | Waiting for DMA request to clear |
| 7 | | WRCHCTRLDATA | | Writing channel controller data |
| 8 | | STALLED | | Stalled |
| 9 | | DONE | | Done |
| 10 | | PERSCATTRANS | | Peripheral scatter-gather transition |
| 3:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | EN | 0 | R | DMA Enable Status When this bit is 1, the DMA is enabled. |

8.7.2 DMA_CONFIG - DMA Configuration Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|----|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | | | | | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W | | | | | W | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CHPROT | | | | | EN | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-----------------------------------|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | CHPROT | 0 | W | Channel Protection Control |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|-------------------|
| Control whether accesses done by the DMA controller are privileged or not. When CHPROT = 1 then HPROT is HIGH and the access is privileged. When CHPROT = 0 then HPROT is LOW and the access is non-privileged. | | | | |
| 4:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | EN | 0 | W | Enable DMA |
| Set this bit to enable the DMA controller. | | | | |

8.7.3 DMA_CTRLBASE - Channel Control Data Base Pointer Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | CTRLBASE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|----------|------------|--------|--|
| 31:0 | CTRLBASE | 0x00000000 | RW | Channel Control Data Base Pointer |
| The base pointer for a location in system memory that holds the channel control data structure. This register must be written to point to a location in system memory with the channel control data structure before the DMA can be used. Note that ctrl_base_ptr[8:0] must be 0. | | | | |

8.7.4 DMA_ALTCTRLBASE - Channel Alternate Control Data Base Pointer Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000080 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | ALCTRLBASE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|-------------|------------|--------|--|
| 31:0 | ALTCTRLBASE | 0x00000080 | R | Channel Alternate Control Data Base Pointer |
| The base address of the alternate data structure. This register will read as DMA_CTRLBASE + 0x80. | | | | |

8.7.5 DMA_CHWAITSTATUS - Channel Wait on Request Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|---------------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7WAITSTATUS | 1 | R | Channel 7 Wait on Request Status Status for wait on request for channel 7. |
| 6 | CH6WAITSTATUS | 1 | R | Channel 6 Wait on Request Status Status for wait on request for channel 6. |
| 5 | CH5WAITSTATUS | 1 | R | Channel 5 Wait on Request Status Status for wait on request for channel 5. |
| 4 | CH4WAITSTATUS | 1 | R | Channel 4 Wait on Request Status Status for wait on request for channel 4. |
| 3 | CH3WAITSTATUS | 1 | R | Channel 3 Wait on Request Status Status for wait on request for channel 3. |
| 2 | CH2WAITSTATUS | 1 | R | Channel 2 Wait on Request Status Status for wait on request for channel 2. |
| 1 | CH1WAITSTATUS | 1 | R | Channel 1 Wait on Request Status Status for wait on request for channel 1. |
| 0 | CH0WAITSTATUS | 1 | R | Channel 0 Wait on Request Status Status for wait on request for channel 0. |

8.7.6 DMA_CHSWREQ - Channel Software Request Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|----------|----------|----------|----------|----------|----------|----------|----------|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7SWREQ | CH6SWREQ | CH5SWREQ | CH4SWREQ | CH3SWREQ | CH2SWREQ | CH1SWREQ | CH0SWREQ |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7SWREQ | 0 | W1 | Channel 7 Software Request Write 1 to this bit to generate a DMA request for this channel. |
| 6 | CH6SWREQ | 0 | W1 | Channel 6 Software Request Write 1 to this bit to generate a DMA request for this channel. |

| Bit | Name | Reset | Access | Description |
|-----|----------|-------|--------|--|
| 5 | CH5SWREQ | 0 | W1 | Channel 5 Software Request Write 1 to this bit to generate a DMA request for this channel. |
| 4 | CH4SWREQ | 0 | W1 | Channel 4 Software Request Write 1 to this bit to generate a DMA request for this channel. |
| 3 | CH3SWREQ | 0 | W1 | Channel 3 Software Request Write 1 to this bit to generate a DMA request for this channel. |
| 2 | CH2SWREQ | 0 | W1 | Channel 2 Software Request Write 1 to this bit to generate a DMA request for this channel. |
| 1 | CH1SWREQ | 0 | W1 | Channel 1 Software Request Write 1 to this bit to generate a DMA request for this channel. |
| 0 | CH0SWREQ | 0 | W1 | Channel 0 Software Request Write 1 to this bit to generate a DMA request for this channel. |

8.7.7 DMA_CHUSEBURSTS - Channel Useburst Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|------|------|------|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW1H | RW1H | RW1H | RW1H | RW1H | RW1H | RW1H | RW1H | RW1H | RW1H | RW1H |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7USEBURSTS | CH6USEBURSTS | CH5USEBURSTS | CH4USEBURSTS | CH3USEBURSTS | CH2USEBURSTS | CH1USEBURSTS | CH0USEBURSTS | | | |

| Bit | Name | Reset | Access | Description |
|------|--------------------------------|---|--------|------------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7USEBURSTS | 0 | RW1H | Channel 7 Useburst Set |
| | See description for channel 0. | | | |
| 6 | CH6USEBURSTS | 0 | RW1H | Channel 6 Useburst Set |
| | See description for channel 0. | | | |
| 5 | CH5USEBURSTS | 0 | RW1H | Channel 5 Useburst Set |
| | See description for channel 0. | | | |
| 4 | CH4USEBURSTS | 0 | RW1H | Channel 4 Useburst Set |
| | See description for channel 0. | | | |
| 3 | CH3USEBURSTS | 0 | RW1H | Channel 3 Useburst Set |
| | See description for channel 0. | | | |
| 2 | CH2USEBURSTS | 0 | RW1H | Channel 2 Useburst Set |
| | See description for channel 0. | | | |
| 1 | CH1USEBURSTS | 0 | RW1H | Channel 1 Useburst Set |
| | See description for channel 0. | | | |
| 0 | CH0USEBURSTS | 0 | RW1H | Channel 0 Useburst Set |

Write to 1 to enable the useburst setting for this channel. Reading returns the useburst status. After the penultimate 2^NR transfer completes, if the number of remaining transfers, N, is less than 2^NR then the controller resets the `chnl_useburst_set` bit to 0. This enables you to complete the remaining transfers using `dma_req[]` or `dma_sreq[]`. In peripheral scatter-gather mode, if the `next_useburst` bit is set in `channel_cfg` then the controller sets the `chnl_useburst_set[C]` bit to a 1, when it completes the DMA cycle that uses the alternate data structure.

| Bit | Name | Reset | Access | Description |
|-----|-------|----------------|--------|--|
| | Value | Mode | | Description |
| | 0 | SINGLEANDBURST | | Channel responds to both single and burst requests |
| | 1 | BURSTONLY | | Channel responds to burst requests only |

8.7.8 DMA_CHUSEBURSTC - Channel Useburst Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7USEBURSTC | CH6USEBURSTC | CH5USEBURSTC | CH4USEBURSTC | CH3USEBURSTC | CH2USEBURSTC | CH1USEBURSTC | CH0USEBURSTC |

| Bit | Name | Reset | Access | Description |
|------|--------------|---|--------|---|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7USEBURSTC | 0 | W1 | Channel 7 Useburst Clear Write to 1 to disable useburst setting for this channel. |
| 6 | CH6USEBURSTC | 0 | W1 | Channel 6 Useburst Clear Write to 1 to disable useburst setting for this channel. |
| 5 | CH5USEBURSTC | 0 | W1 | Channel 5 Useburst Clear Write to 1 to disable useburst setting for this channel. |
| 4 | CH4USEBURSTC | 0 | W1 | Channel 4 Useburst Clear Write to 1 to disable useburst setting for this channel. |
| 3 | CH3USEBURSTC | 0 | W1 | Channel 3 Useburst Clear Write to 1 to disable useburst setting for this channel. |
| 2 | CH2USEBURSTC | 0 | W1 | Channel 2 Useburst Clear Write to 1 to disable useburst setting for this channel. |
| 1 | CH1USEBURSTC | 0 | W1 | Channel 1 Useburst Clear Write to 1 to disable useburst setting for this channel. |
| 0 | CH0USEBURSTC | 0 | W1 | Channel 0 Useburst Clear Write to 1 to disable useburst setting for this channel. |

8.7.9 DMA_CHREQMASKS - Channel Request Mask Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7REQMASKS | CH6REQMASKS | CH5REQMASKS | CH4REQMASKS | CH3REQMASKS | CH2REQMASKS | CH1REQMASKS | CH0REQMASKS |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7REQMASKS | 0 | RW1 | Channel 7 Request Mask Set Write to 1 to disable peripheral requests for this channel. |
| 6 | CH6REQMASKS | 0 | RW1 | Channel 6 Request Mask Set Write to 1 to disable peripheral requests for this channel. |
| 5 | CH5REQMASKS | 0 | RW1 | Channel 5 Request Mask Set Write to 1 to disable peripheral requests for this channel. |
| 4 | CH4REQMASKS | 0 | RW1 | Channel 4 Request Mask Set Write to 1 to disable peripheral requests for this channel. |
| 3 | CH3REQMASKS | 0 | RW1 | Channel 3 Request Mask Set Write to 1 to disable peripheral requests for this channel. |
| 2 | CH2REQMASKS | 0 | RW1 | Channel 2 Request Mask Set Write to 1 to disable peripheral requests for this channel. |
| 1 | CH1REQMASKS | 0 | RW1 | Channel 1 Request Mask Set Write to 1 to disable peripheral requests for this channel. |
| 0 | CH0REQMASKS | 0 | RW1 | Channel 0 Request Mask Set Write to 1 to disable peripheral requests for this channel. |

8.7.10 DMA_CHREQMASKC - Channel Request Mask Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|---|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7REQMASKC | 0 | W1 | Channel 7 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |
| 6 | CH6REQMASKC | 0 | W1 | Channel 6 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |
| 5 | CH5REQMASKC | 0 | W1 | Channel 5 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |
| 4 | CH4REQMASKC | 0 | W1 | Channel 4 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |
| 3 | CH3REQMASKC | 0 | W1 | Channel 3 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |
| 2 | CH2REQMASKC | 0 | W1 | Channel 2 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |
| 1 | CH1REQMASKC | 0 | W1 | Channel 1 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |

| Bit | Name | Reset | Access | Description |
|-----|-------------|-------|--------|---|
| 0 | CH0REQMASKC | 0 | W1 | Channel 0 Request Mask Clear Write to 1 to enable peripheral requests for this channel. |

8.7.11 DMA_CHENS - Channel Enable Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|--------|--------|--------|--------|--------|--------|--------|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7ENS | CH6ENS | CH5ENS | CH4ENS | CH3ENS | CH2ENS | CH1ENS | CH0ENS |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7ENS | 0 | RW1 | Channel 7 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |
| 6 | CH6ENS | 0 | RW1 | Channel 6 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |
| 5 | CH5ENS | 0 | RW1 | Channel 5 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |
| 4 | CH4ENS | 0 | RW1 | Channel 4 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |
| 3 | CH3ENS | 0 | RW1 | Channel 3 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |
| 2 | CH2ENS | 0 | RW1 | Channel 2 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |
| 1 | CH1ENS | 0 | RW1 | Channel 1 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |
| 0 | CH0ENS | 0 | RW1 | Channel 0 Enable Set Write to 1 to enable this channel. Reading returns the enable status of the channel. |

8.7.12 DMA_CHENC - Channel Enable Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|--------|--------|--------|--------|--------|--------|--------|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7ENC | CH6ENC | CH5ENC | CH4ENC | CH3ENC | CH2ENC | CH1ENC | CH0ENC |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|-----|--------|-------|--------|--|
| 7 | CH7ENC | 0 | W1 | Channel 7 Enable Clear Write to 1 to disable this channel. See also description for channel 0. |
| 6 | CH6ENC | 0 | W1 | Channel 6 Enable Clear Write to 1 to disable this channel. See also description for channel 0. |
| 5 | CH5ENC | 0 | W1 | Channel 5 Enable Clear Write to 1 to disable this channel. See also description for channel 0. |
| 4 | CH4ENC | 0 | W1 | Channel 4 Enable Clear Write to 1 to disable this channel. See also description for channel 0. |
| 3 | CH3ENC | 0 | W1 | Channel 3 Enable Clear Write to 1 to disable this channel. See also description for channel 0. |
| 2 | CH2ENC | 0 | W1 | Channel 2 Enable Clear Write to 1 to disable this channel. See also description for channel 0. |
| 1 | CH1ENC | 0 | W1 | Channel 1 Enable Clear Write to 1 to disable this channel. See also description for channel 0. |
| 0 | CH0ENC | 0 | W1 | Channel 0 Enable Clear Write to 1 to disable this channel. Note that the controller disables a channel, by setting the appropriate bit, when either it completes the DMA cycle, or it reads a channel_cfg memory location which has cycle_ctrl = b000, or an ERROR occurs on the AHB-Lite bus. A read from this field returns the value of CH0ENS from the DMA_CHENS register. |

8.7.13 DMA_CHALTS - Channel Alternate Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---------|---------|---------|---------|---------|---------|---------|---------|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7ALTS | CH6ALTS | CH5ALTS | CH4ALTS | CH3ALTS | CH2ALTS | CH1ALTS | CH0ALTS |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7ALTS | 0 | RW1 | Channel 7 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |
| 6 | CH6ALTS | 0 | RW1 | Channel 6 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |
| 5 | CH5ALTS | 0 | RW1 | Channel 5 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |
| 4 | CH4ALTS | 0 | RW1 | Channel 4 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |
| 3 | CH3ALTS | 0 | RW1 | Channel 3 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |
| 2 | CH2ALTS | 0 | RW1 | Channel 2 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |
| 1 | CH1ALTS | 0 | RW1 | Channel 1 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|--|
| 0 | CH0ALTS | 0 | RW1 | Channel 0 Alternate Structure Set Write to 1 to select the alternate structure for this channel. |

8.7.14 DMA_CHALTC - Channel Alternate Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---------|---------|---------|---------|---------|---------|---------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7ALTC | CH6ALTC | CH5ALTC | CH4ALTC | CH3ALTC | CH2ALTC | CH1ALTC | CH0ALTC | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7ALTC | 0 | W1 | Channel 7 Alternate Clear Write to 1 to select the primary structure for this channel. |
| 6 | CH6ALTC | 0 | W1 | Channel 6 Alternate Clear Write to 1 to select the primary structure for this channel. |
| 5 | CH5ALTC | 0 | W1 | Channel 5 Alternate Clear Write to 1 to select the primary structure for this channel. |
| 4 | CH4ALTC | 0 | W1 | Channel 4 Alternate Clear Write to 1 to select the primary structure for this channel. |
| 3 | CH3ALTC | 0 | W1 | Channel 3 Alternate Clear Write to 1 to select the primary structure for this channel. |
| 2 | CH2ALTC | 0 | W1 | Channel 2 Alternate Clear Write to 1 to select the primary structure for this channel. |
| 1 | CH1ALTC | 0 | W1 | Channel 1 Alternate Clear Write to 1 to select the primary structure for this channel. |
| 0 | CH0ALTC | 0 | W1 | Channel 0 Alternate Clear Write to 1 to select the primary structure for this channel. |

8.7.15 DMA_CHPRIS - Channel Priority Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---------|---------|---------|---------|---------|---------|---------|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | RW1 | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7PRIS | CH6PRIS | CH5PRIS | CH4PRIS | CH3PRIS | CH2PRIS | CH1PRIS | CH0PRIS | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|---|
| 7 | CH7PRIS | 0 | RW1 | Channel 7 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |
| 6 | CH6PRIS | 0 | RW1 | Channel 6 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |
| 5 | CH5PRIS | 0 | RW1 | Channel 5 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |
| 4 | CH4PRIS | 0 | RW1 | Channel 4 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |
| 3 | CH3PRIS | 0 | RW1 | Channel 3 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |
| 2 | CH2PRIS | 0 | RW1 | Channel 2 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |
| 1 | CH1PRIS | 0 | RW1 | Channel 1 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |
| 0 | CH0PRIS | 0 | RW1 | Channel 0 High Priority Set Write to 1 to obtain high priority for this channel. Reading returns the channel priority status. |

8.7.16 DMA_CHPRIC - Channel Priority Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7PRIC | 0 | W1 | Channel 7 High Priority Clear Write to 1 to clear high priority for this channel. |
| 6 | CH6PRIC | 0 | W1 | Channel 6 High Priority Clear Write to 1 to clear high priority for this channel. |
| 5 | CH5PRIC | 0 | W1 | Channel 5 High Priority Clear Write to 1 to clear high priority for this channel. |
| 4 | CH4PRIC | 0 | W1 | Channel 4 High Priority Clear Write to 1 to clear high priority for this channel. |
| 3 | CH3PRIC | 0 | W1 | Channel 3 High Priority Clear Write to 1 to clear high priority for this channel. |
| 2 | CH2PRIC | 0 | W1 | Channel 2 High Priority Clear Write to 1 to clear high priority for this channel. |
| 1 | CH1PRIC | 0 | W1 | Channel 1 High Priority Clear Write to 1 to clear high priority for this channel. |
| 0 | CH0PRIC | 0 | W1 | Channel 0 High Priority Clear |

| Bit | Name | Reset | Access | Description |
|---|------|-------|--------|-------------|
| Write to 1 to clear high priority for this channel. | | | | |

8.7.17 DMA_ERRORC - Bus Error Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--------|
| 0x04C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | ERRORC |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|------------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | ERRORC | 0 | RW | Bus Error Clear |
| This bit is set high if an AHB bus error has occurred. Writing a 1 to this bit will clear the bit. If the error is deasserted at the same time as an error occurs on the bus, the error condition takes precedence and ERRORC remains asserted. | | | | |

8.7.18 DMA_CHREQSTATUS - Channel Request Status

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---|---|---|---|---|---|---|---|---|
| 0xE10 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7REQSTATUS | CH6REQSTATUS | CH5REQSTATUS | CH4REQSTATUS | CH3REQSTATUS | CH2REQSTATUS | CH1REQSTATUS | CH0REQSTATUS | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|--------------|---|--------|---------------------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7REQSTATUS | 0 | R | Channel 7 Request Status |
| When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | | |
| 6 | CH6REQSTATUS | 0 | R | Channel 6 Request Status |
| When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | | |
| 5 | CH5REQSTATUS | 0 | R | Channel 5 Request Status |
| When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | | |
| 4 | CH4REQSTATUS | 0 | R | Channel 4 Request Status |
| When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | | |
| 3 | CH3REQSTATUS | 0 | R | Channel 3 Request Status |

| Bit | Name | Reset | Access | Description |
|-----|--|-------|--------|---------------------------------|
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | |
| 2 | CH2REQSTATUS | 0 | R | Channel 2 Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | |
| 1 | CH1REQSTATUS | 0 | R | Channel 1 Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | |
| 0 | CH0REQSTATUS | 0 | R | Channel 0 Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using 2 ^R DMA transfers. | | | |

8.7.19 DMA_CHSREQSTATUS - Channel Single Request Status

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---------------|---|---|---|---------------|---|---|---|---------------|---|---|---|---------------|---|---|---|---------------|---|---|---|---------------|---|---|---|---------------|---|---|---|---------------|---|---|--|
| 0xE18 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH7SREQSTATUS | | | | CH6SREQSTATUS | | | | CH5SREQSTATUS | | | | CH4SREQSTATUS | | | | CH3SREQSTATUS | | | | CH2SREQSTATUS | | | | CH1SREQSTATUS | | | | CH0SREQSTATUS | | | |

| Bit | Name | Reset | Access | Description |
|------|--|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7SREQSTATUS | 0 | R | Channel 7 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |
| 6 | CH6SREQSTATUS | 0 | R | Channel 6 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |
| 5 | CH5SREQSTATUS | 0 | R | Channel 5 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |
| 4 | CH4SREQSTATUS | 0 | R | Channel 4 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |
| 3 | CH3SREQSTATUS | 0 | R | Channel 3 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |
| 2 | CH2SREQSTATUS | 0 | R | Channel 2 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |
| 1 | CH1SREQSTATUS | 0 | R | Channel 1 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |
| 0 | CH0SREQSTATUS | 0 | R | Channel 0 Single Request Status |
| | When this bit is 1, it indicates that the peripheral connected as the input to this DMA channel is requesting the controller to service the DMA channel. The controller services the request by performing the DMA cycle using single DMA transfers. | | | |

8.7.20 DMA_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---------|---------|---------|---------|---------|---------|---------|---------|---|---|
| 0x1000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | 0 | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | R | | | | | | | | | | | | | | | | | | | | | | | | | R | R | R | R | R | R | R | R | R | R |
| Name | ERR | | | | | | | | | | | | | | | | | | | | | | | | | CH7DONE | CH6DONE | CH5DONE | CH4DONE | CH3DONE | CH2DONE | CH1DONE | CH0DONE | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31 | ERR | 0 | R | DMA Error Interrupt Flag This flag is set when an error has occurred on the AHB bus. |
| 30:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7DONE | 0 | R | DMA Channel 7 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |
| 6 | CH6DONE | 0 | R | DMA Channel 6 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |
| 5 | CH5DONE | 0 | R | DMA Channel 5 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |
| 4 | CH4DONE | 0 | R | DMA Channel 4 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |
| 3 | CH3DONE | 0 | R | DMA Channel 3 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |
| 2 | CH2DONE | 0 | R | DMA Channel 2 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |
| 1 | CH1DONE | 0 | R | DMA Channel 1 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |
| 0 | CH0DONE | 0 | R | DMA Channel 0 Complete Interrupt Flag Set when the DMA channel has completed its transfer. If the channel is disabled, the flag is set when there is a request for the channel. |

8.7.21 DMA_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---------|---------|---------|---------|---------|---------|---------|---------|----|----|
| 0x1004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | 0 | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Access | W1 | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | ERR | | | | | | | | | | | | | | | | | | | | | | | | | CH7DONE | CH6DONE | CH5DONE | CH4DONE | CH3DONE | CH2DONE | CH1DONE | CH0DONE | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31 | ERR | 0 | W1 | DMA Error Interrupt Flag Set Set to 1 to set DMA error interrupt flag. |
| 30:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7DONE | 0 | W1 | DMA Channel 7 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|--|
| 6 | CH6DONE | 0 | W1 | DMA Channel 6 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |
| 5 | CH5DONE | 0 | W1 | DMA Channel 5 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |
| 4 | CH4DONE | 0 | W1 | DMA Channel 4 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |
| 3 | CH3DONE | 0 | W1 | DMA Channel 3 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |
| 2 | CH2DONE | 0 | W1 | DMA Channel 2 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |
| 1 | CH1DONE | 0 | W1 | DMA Channel 1 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |
| 0 | CH0DONE | 0 | W1 | DMA Channel 0 Complete Interrupt Flag Set Write to 1 to set the corresponding DMA channel complete interrupt flag. |

8.7.22 DMA_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---------|---------|---------|---------|---------|---------|---------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0x1008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | |
| Reset | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Access | W1 | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | ERR | | | | | | | | | | | | | | | | | | | | | | | | | | | CH7DONE | CH6DONE | CH5DONE | CH4DONE | CH3DONE | CH2DONE | CH1DONE | CH0DONE | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31 | ERR | 0 | W1 | DMA Error Interrupt Flag Clear Set to 1 to clear DMA error interrupt flag. Note that if an error happened, the Bus Error Clear Register must be used to clear the DMA. |
| 30:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7DONE | 0 | W1 | DMA Channel 7 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |
| 6 | CH6DONE | 0 | W1 | DMA Channel 6 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |
| 5 | CH5DONE | 0 | W1 | DMA Channel 5 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |
| 4 | CH4DONE | 0 | W1 | DMA Channel 4 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |
| 3 | CH3DONE | 0 | W1 | DMA Channel 3 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |
| 2 | CH2DONE | 0 | W1 | DMA Channel 2 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |
| 1 | CH1DONE | 0 | W1 | DMA Channel 1 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |
| 0 | CH0DONE | 0 | W1 | DMA Channel 0 Complete Interrupt Flag Clear Write to 1 to clear the corresponding DMA channel complete interrupt flag. |

8.7.23 DMA_IEN - Interrupt Enable register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---------|---------|---------|---------|---------|---------|---------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0x100C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | |
| Reset | 0 | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW |
| Name | ERR | | | | | | | | | | | | | | | | | | | | | | | | | CH7DONE | CH6DONE | CH5DONE | CH4DONE | CH3DONE | CH2DONE | CH1DONE | CH0DONE | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31 | ERR | 0 | RW | DMA Error Interrupt Flag Enable Set this bit to enable interrupt on AHB bus error. |
| 30:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7DONE | 0 | RW | DMA Channel 7 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |
| 6 | CH6DONE | 0 | RW | DMA Channel 6 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |
| 5 | CH5DONE | 0 | RW | DMA Channel 5 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |
| 4 | CH4DONE | 0 | RW | DMA Channel 4 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |
| 3 | CH3DONE | 0 | RW | DMA Channel 3 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |
| 2 | CH2DONE | 0 | RW | DMA Channel 2 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |
| 1 | CH1DONE | 0 | RW | DMA Channel 1 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |
| 0 | CH0DONE | 0 | RW | DMA Channel 0 Complete Interrupt Enable Write to 1 to enable complete interrupt on this DMA channel. Clear to disable the interrupt. |

8.7.24 DMA_CHx_CTRL - Channel Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|---|---|---|---|--------|---|---|---|---|---|
| 0x1100 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | 0x00 | | | | | | | | | | | | | | | 0x0 | | | | | |
| Access | | | | | | | | | | | | RW | | | | | | | | | | | | | | | RW | | | | | |
| Name | | | | | | | | | | | | SOURCESEL | | | | | | | | | | | | | | | SIGSEL | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|-----------|---|--------|---|
| 31:22 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 21:16 | SOURCESEL | 0x00 | RW | Source Select Select input source to DMA channel. |

| Bit | Name | Reset | Access | Description |
|-----|----------|---------|--------|---|
| | Value | Mode | | Description |
| | 0b000000 | NONE | | No source selected |
| | 0b001000 | ADC0 | | Analog to Digital Converter 0 |
| | 0b001010 | DAC0 | | Digital to Analog Converter 0 |
| | 0b001100 | USART0 | | Universal Synchronous/Asynchronous Receiver/Transmitter 0 |
| | 0b001101 | USART1 | | Universal Synchronous/Asynchronous Receiver/Transmitter 1 |
| | 0b010000 | LEUART0 | | Low Energy UART 0 |
| | 0b010100 | I2C0 | | I2C 0 |
| | 0b011000 | TIMER0 | | Timer 0 |
| | 0b011001 | TIMER1 | | Timer 1 |
| | 0b110000 | MSC | | |
| | 0b110001 | AES | | Advanced Encryption Standard Accelerator |
| | 0b110010 | LESENSE | | Low Energy Sensor Interface |

15:4 *Reserved* To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)



3:0 **SIGSEL** 0x0 RW **Signal Select**

Select input signal to DMA channel.

| Value | Mode | Description |
|--------------------------------|--------------------|---------------------------------------|
| SOURCESEL = 0b000000 (NONE) | | |
| 0bxxxx | OFF | Channel input selection is turned off |
| SOURCESEL = 0b001000 (ADC0) | | |
| 0b0000 | ADC0SINGLE | ADC0SINGLE |
| 0b0001 | ADC0SCAN | ADC0SCAN |
| SOURCESEL = 0b001010 (DAC0) | | |
| 0b0000 | DAC0CH0 | DAC0CH0 |
| 0b0001 | DAC0CH1 | DAC0CH1 |
| SOURCESEL = 0b001100 (USART0) | | |
| 0b0000 | USART0RXDATAV | USART0RXDATAV REQ/SREQ |
| 0b0001 | USART0TXBL | USART0TXBL REQ/SREQ |
| 0b0010 | USART0TXEMPTY | USART0TXEMPTY |
| SOURCESEL = 0b001101 (USART1) | | |
| 0b0000 | USART1RXDATAV | USART1RXDATAV REQ/SREQ |
| 0b0001 | USART1TXBL | USART1TXBL REQ/SREQ |
| 0b0010 | USART1TXEMPTY | USART1TXEMPTY |
| 0b0011 | USART1RXDATAVRIGHT | USART1RXDATAVRIGHT REQ/SREQ |
| 0b0100 | USART1TXBLRIGHT | USART1TXBLRIGHT REQ/SREQ |
| SOURCESEL = 0b010000 (LEUART0) | | |
| 0b0000 | LEUART0RXDATAV | LEUART0RXDATAV |
| 0b0001 | LEUART0TXBL | LEUART0TXBL |
| 0b0010 | LEUART0TXEMPTY | LEUART0TXEMPTY |
| SOURCESEL = 0b010100 (I2C0) | | |
| 0b0000 | I2C0RXDATAV | I2C0RXDATAV |
| 0b0001 | I2C0TXBL | I2C0TXBL |
| SOURCESEL = 0b011000 (TIMER0) | | |
| 0b0000 | TIMER0UFOF | TIMER0UFOF |
| 0b0001 | TIMER0CC0 | TIMER0CC0 |
| 0b0010 | TIMER0CC1 | TIMER0CC1 |
| 0b0011 | TIMER0CC2 | TIMER0CC2 |
| SOURCESEL = 0b011001 (TIMER1) | | |
| 0b0000 | TIMER1UFOF | TIMER1UFOF |
| 0b0001 | TIMER1CC0 | TIMER1CC0 |
| 0b0010 | TIMER1CC1 | TIMER1CC1 |

| Bit | Name | Reset | Access | Description |
|-----|--------------------------------|-----------------|--------|--------------------------|
| | Value | Mode | | Description |
| | 0b0011 | TIMER1CC2 | | TIMER1CC2 |
| | SOURCESEL = 0b110000 (MSC) | | | |
| | 0b0000 | MSCWDATA | | MSCWDATA |
| | SOURCESEL = 0b110001 (AES) | | | |
| | 0b0000 | AESDATAWR | | AESDATAWR |
| | 0b0001 | AESXORDATAWR | | AESXORDATAWR |
| | 0b0010 | AESDATARD | | AESDATARD |
| | 0b0011 | AESKEYWR | | AESKEYWR |
| | SOURCESEL = 0b110010 (LESENSE) | | | |
| | 0b0000 | LESENSEBUFDATAV | | LESENSEBUFDATAV REQ/SREQ |

9 RMU - Reset Management Unit

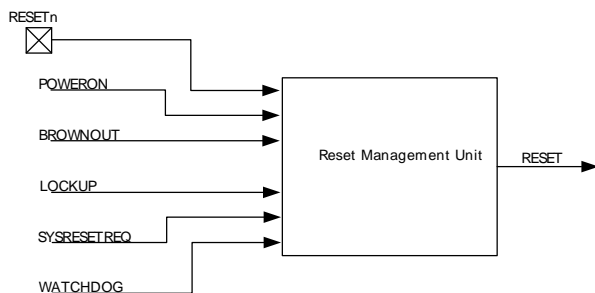

Quick Facts

What?

The RMU ensures correct reset operation. It is responsible for connecting the different reset sources to the reset lines of the EFM32TG.

Why?

A correct reset sequence is needed to ensure safe and synchronous startup of the EFM32TG. In the case of error situations such as power supply glitches or software crash, the RMU provides proper reset and startup of the EFM32TG.

How?

The Power-on Reset and Brown-out Detector of the EFM32TG provides power line monitoring with exceptionally low power consumption. The cause of the reset may be read from a register, thus providing software with information about the cause of the reset.

9.1 Introduction

The RMU is responsible for handling the reset functionality of the EFM32TG.

9.2 Features

- Reset sources
 - Power-on Reset (POR)
 - Brown-out Detection (BOD) on the following power domains:
 - Regulated domain
 - Unregulated domain
 - Analog Power Domain 0 (AVDD0)
 - Analog Power Domain 1 (AVDD1)
 - RESETn pin reset
 - Watchdog reset
 - EM4 wakeup reset from pin
 - Software triggered reset (SYSRESETREQ)
 - Core LOCKUP condition
- EM4 Detection
- A software readable register indicates the cause of the last reset


9.3 Functional Description

The RMU monitors each of the reset sources of the EFM32TG. If one or more reset sources go active, the RMU applies reset to the EFM32TG. When the reset sources go inactive the EFM32TG starts up. At startup the EFM32TG loads the stack pointer and program entry point from memory, and starts execution.

As seen in Figure 9.1 (p. 86) the Power-on Reset, Brown-out Detectors, Watchdog timeout and RESETn pin all reset the whole system including the Debug Interface. A Core Lockup condition or a System reset request from software resets the whole system except the Debug Interface.

Whenever a reset source is active, the corresponding bit in the RMU_RSTCAUSE register is set. At startup the program code may investigate this register in order to determine the cause of the reset. The register must be cleared by software.

Figure 9.1. RMU Reset Input Sources and Connections.

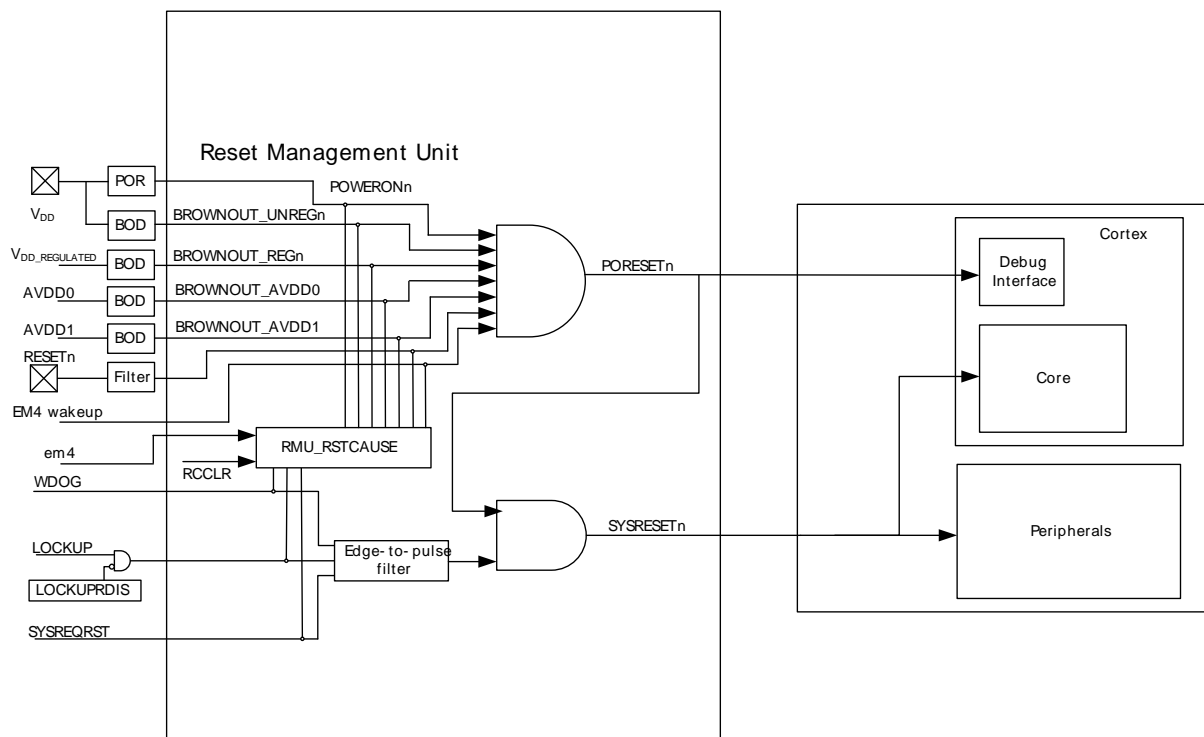

9.3.1 RMU_RSTCAUSE Register

The RMU_RSTCAUSE register indicates the reason for the last reset. The register should be cleared after the value has been read at startup. Otherwise the register may indicate multiple causes for the reset at next startup.

The following procedure must be done to clear RMU_RSTCAUSE:

1. Write a 1 to RCCLR in RMU_CMD
2. Write a 1 to bit 0 in EMU_AUXCTRL
3. Write a 0 to bit 0 in EMU_AUXCTRL

RMU_RSTCAUSE should be interpreted according to Table 9.1 (p. 87). X bits are don't care. Notice that it is possible to have multiple reset causes. For example, an external reset and a watchdog reset may happen simultaneously.

Table 9.1. RMU Reset Cause Register Interpretation


| Register Value | Cause |
|-----------------|---|
| 0bXXX XXXX XXX1 | A Power-on Reset has been performed. X bits are don't care. |
| 0bXXX 0XXX XX10 | A Brown-out has been detected on the unregulated power. |
| 0bXXX XXX0 0100 | A Brown-out has been detected on the regulated power. |
| 0bXXX XXXX 1X00 | An external reset has been applied. |
| 0bXXX XXX1 XX00 | A watchdog reset has occurred. |
| 0bXXX XX10 0000 | A lockup reset has occurred. |
| 0b000 01X0 0000 | A system request reset has occurred. |
| 0b000 1XX0 0XX0 | The system has woken up from EM4. |
| 0b001 1XX0 0XX0 | The system has woken up from EM4 on an EM4 wakeup reset request from pin. |
| 0b010 0000 0000 | A Brown-out has been detected on Analog Power Domain 0 (AVDD0). |
| 0b100 0000 0000 | A Brown-out has been detected on Analog Power Domain 1 (AVDD1). |

Note

When exiting EM4 with external reset, both the BODREGRST and BODUNREGRST in RSTCAUSE might be set (i.e. are invalid)


9.3.2 Power-On Reset (POR)

The POR ensures that the EFM32TG does not start up before the supply voltage V_{DD} has reached the threshold voltage V_{PORthr} (see Device Datasheet Electrical Characteristics for details). Before the threshold voltage is reached, the EFM32TG is kept in reset state. The operation of the POR is illustrated in Figure 9.2 (p. 87), with the active low $POWERONn$ reset signal. The reason for the “unknown” region is that the corresponding supply voltage is too low for any reliable operation.

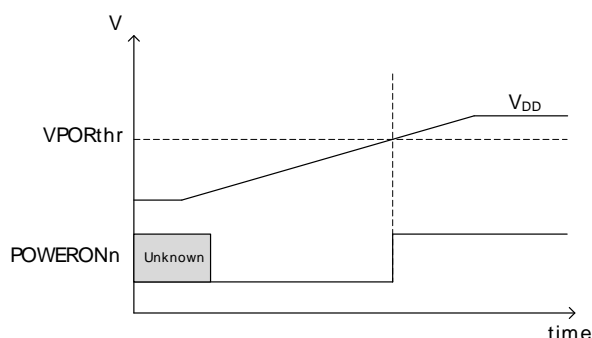Figure 9.2. RMU Power-on Reset Operation

9.3.3 Brown-Out Detector Reset (BOD)

The EFM32TG has 4 brownout detectors, one for the unregulated 3.0 V power, one for the regulated internal power, one for Analog Power Domain 0 (AVDD0), and one for Analog Power Domain 1 (AVDD1). The BODs are constantly monitoring the voltages. Whenever the unregulated or regulated power drops below the V_{BODthr} value (see Electrical Characteristics for details), or if the AVDD0 or AVDD1 drops below the voltage at the decouple pin (DEC), the corresponding active low $BROWNOUTn$ line is held low. The BODs also include hysteresis, which prevents instability in the corresponding $BROWNOUTn$ line when the supply is crossing the V_{BODthr} limit or the AVDD bods drops below decouple pin (DEC). The operation of the BOD is illustrated in Figure 9.3 (p. 88). The “unknown” regions are handled by the POR module.

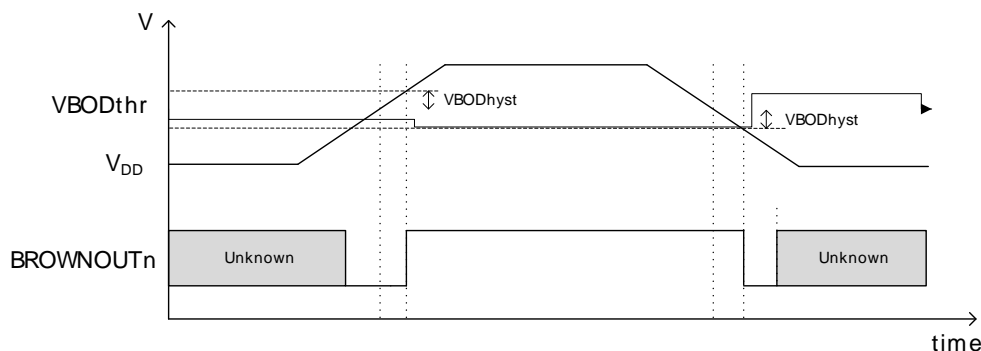Figure 9.3. RMU Brown-out Detector Operation

9.3.4 RESETn pin Reset

Forcing the RESETn pin low generates a reset of the EFM32TG. The RESETn pin includes an on-chip pull-up resistor, and can therefore be left unconnected if no external reset source is needed. Also connected to the RESETn line is a filter which prevents glitches from resetting the EFM32TG.

9.3.5 Watchdog Reset

The Watchdog circuit is a timer which (when enabled) must be cleared by software regularly. If software does not clear it, a Watchdog reset is activated. This functionality provides recovery from a software stalemate. Refer to the Watchdog section for specifications and description.

9.3.6 Lockup Reset

A Cortex-M3 lockup is the result of the core being locked up because of an unrecoverable exception following the activation of the processor's built-in system state protection hardware.

For more information about the Cortex-M3 lockup conditions see the ARMv7-M Architecture Reference Manual. The Lockup reset does not reset the Debug Interface. Set the LOCKUPRDIS bit in the RMU_CTRL register in order to disable this reset source.

9.3.7 System Reset Request

Software may initiate a reset (e.g. if it finds itself in a non-recoverable state). By asserting the SYSRESETREQ in the Application Interrupt and Reset Control Register (write 0x05FA 0004), a reset is issued. The SYSRESETREQ does not reset the Debug Interface.

9.3.8 EM4 Reset

Whenever EM4 is entered, the EM4RST bit is set. This bit enables the user to identify that the device has been in EM4. Upon wake-up this bit should be cleared by software.

9.3.9 EM4 Wakeup Reset

Whenever the system is woken up from EM4 on a pin wake-up request, the EM4WURST bit is set. This bit enables the user to identify that the device was woken up from EM4 using a pin wake-up request. Upon wake-up this bit should be cleared by software.

9.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|--------------|------|----------------------|
| 0x000 | RMU_CTRL | RW | Control Register |
| 0x004 | RMU_RSTCAUSE | R | Reset Cause Register |
| 0x008 | RMU_CMD | W1 | Command Register |

9.5 Register Description

9.5.1 RMU_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|------------|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LOCKUPRDIS |

| Bit | Name | Reset | Access | Description |
|------|------------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | LOCKUPRDIS | 0 | RW | Lockup Reset Disable Set this bit to disable the LOCKUP signal (from the Cortex) from resetting the device. |

9.5.2 RMU_RSTCAUSE - Reset Cause Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|---|----------|---|----------|---|--------|---|-----------|---|-----------|---|---------|---|--------|---|-----------|---|-------------|---|-------|---|---|---|---|---|---|---|---|---|---|--|---|--|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | |
| Name | | | | | | | | | | | | | | | | | | | | | | BODAVDD1 | | BODAVDD0 | | EM4WURST | | EM4RST | | SYSREQRST | | LOCKUPRST | | WDOGRST | | EXTRST | | BODREGRST | | BODUNREGRST | | PORST | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | BODAVDD1 | 0 | R | AVDD1 Bod Reset Set if analog power domain 1 brown out detector reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 9 | BODAVDD0 | 0 | R | AVDD0 Bod Reset Set if analog power domain 0 brown out detector reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 8 | EM4WURST | 0 | R | EM4 Wake-up Reset Set if the system has been woken up from EM4 from a reset request from pin. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |


| Bit | Name | Reset | Access | Description |
|-----|-------------|-------|--------|--|
| 7 | EM4RST | 0 | R | EM4 Reset Set if the system has been in EM4. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 6 | SYSREQRST | 0 | R | System Request Reset Set if a system request reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 5 | LOCKUPRST | 0 | R | LOCKUP Reset Set if a LOCKUP reset has been requested. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 4 | WDOGRST | 0 | R | Watchdog Reset Set if a watchdog reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 3 | EXTRST | 0 | R | External Pin Reset Set if an external pin reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 2 | BODREGRST | 0 | R | Brown Out Detector Regulated Domain Reset Set if a regulated domain brown out detector reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 1 | BODUNREGRST | 0 | R | Brown Out Detector Unregulated Domain Reset Set if a unregulated domain brown out detector reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |
| 0 | PORST | 0 | R | Power On Reset Set if a power on reset has been performed. Must be cleared by software. Please see Table 9.1 (p. 87) for details on how to interpret this bit. |

9.5.3 RMU_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-------|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RCCLR |

| Bit | Name | Reset | Access | Description |
|------|-----------------|--|--------|--|
| 31:1 | <i>Reserved</i> | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | |
| 0 | RCCLR | 0 | W1 | Reset Cause Clear Set this bit to clear the LOCKUPRST and SYSREQRST bits in the RMU_RSTCAUSE register. Use the HRCCLR bit in the EMU_AUXCTRL register to clear the remaining bits. |

10 EMU - Energy Management Unit

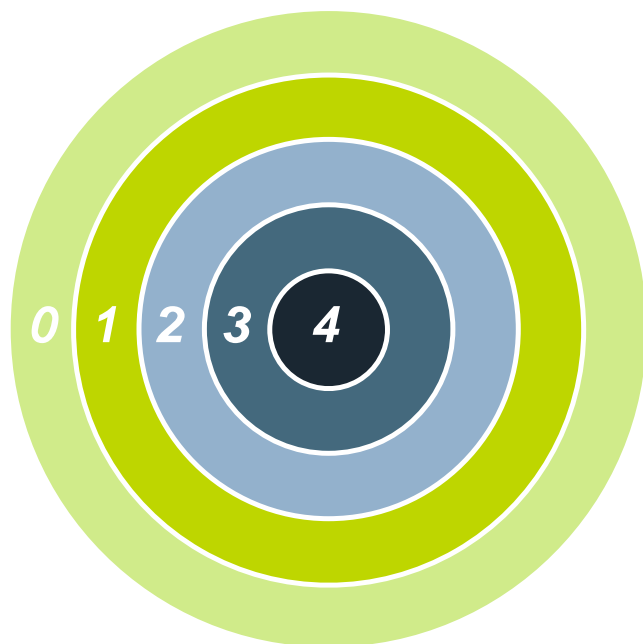

Quick Facts

What?

The EMU (Energy Management Unit) handles the different low energy modes in the EFM32TG microcontrollers.

Why?

The need for performance and peripheral functions varies over time in most applications. By efficiently scaling the available resources in real-time to match the demands of the application, the energy consumption can be kept at a minimum.

How?

With a broad selection of energy modes, a high number of low-energy peripherals available even in EM2, and short wake-up time (2 μ s from EM2 and EM3), applications can dynamically minimize energy consumption during program execution.

10.1 Introduction

The Energy Management Unit (EMU) manages all the low energy modes (EM) in EFM32TG microcontrollers. Each energy mode manages if the CPU and the various peripherals are available. The energy modes range from EM0 to EM4, where EM0, also called run mode, enables the CPU and all peripherals. The lowest recoverable energy mode, EM3, disables the CPU and most peripherals while maintaining wake-up and RAM functionality. EM4 disables everything except the POR, pin reset and optionally GPIO state retention and EM4 reset wakeup request.

The various energy modes differ in:

- Energy consumption
- CPU activity
- Reaction time
- Wake-up triggers
- Active peripherals
- Available clock sources

Low energy modes EM1 to EM4 are enabled through the application software. In EM1-EM3, a range of wake-up triggers return the microcontroller back to EM0. EM4 can only return to EM0 by power on reset, external pin reset or EM4 GPIO wakeup request.


10.2 Features

- Energy Mode control from software
- Flexible wakeup from low energy modes
- Low wakeup time

10.3 Functional Description

The Energy Management Unit (EMU) is responsible for managing the wide range of energy modes available in EFM32TG. An overview of the EMU module is shown in Figure 10.1 (p. 92).

Figure 10.1. EMU Overview

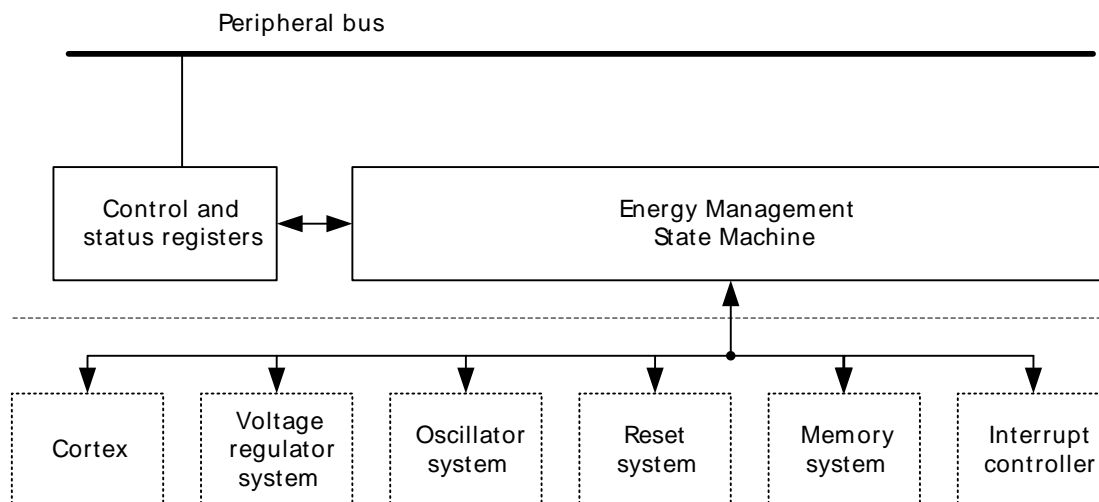

The EMU is available as a peripheral on the peripheral bus. The energy management state machine is triggered from the Cortex-M3 and controls the internal voltage regulators, oscillators, memories and interrupt systems in the low energy modes. Events from the interrupt or reset systems can in turn cause the energy management state machine to return to its active state. This is further described in the following sections.

10.3.1 Energy Modes

There are five main energy modes available in EFM32TG, called Energy Mode 0 (EM0) through Energy Mode 4 (EM4). EM0, also called the active mode, is the energy mode in which any peripheral function can be enabled and the Cortex-M3 core is executing instructions. EM1 through EM4, also called low energy modes, provide a selection of reduced peripheral functionality that also lead to reduced energy consumption, as described below.


Figure 10.2 (p. 93) shows the transitions between different energy modes. After reset the EMU will always start in EM0. A transition from EM0 to another energy mode is always initiated by software. EM0 is the highest activity mode, in which all functionality is available. EM0 is therefore also the mode with highest energy consumption.

The low energy modes EM1 through EM4 result in less functionality being available, and therefore also reduced energy consumption. The Cortex-M3 is not executing instructions in any low energy mode. Each low energy mode provides different energy consumptions associated with it, for example because a different set of peripherals are enabled or because these peripherals are configured differently.

A transition from EM0 to a low energy mode can only be triggered by software.

A transition from EM1 – EM3 to EM0 can be triggered by an enabled interrupt or event. In addition, a chip reset will return the device to EM0. A transition from EM4 can only be triggered by a pin reset, power-on reset, or EM4 GPIO wakeup request.

Figure 10.2. EMU Energy Mode Transitions

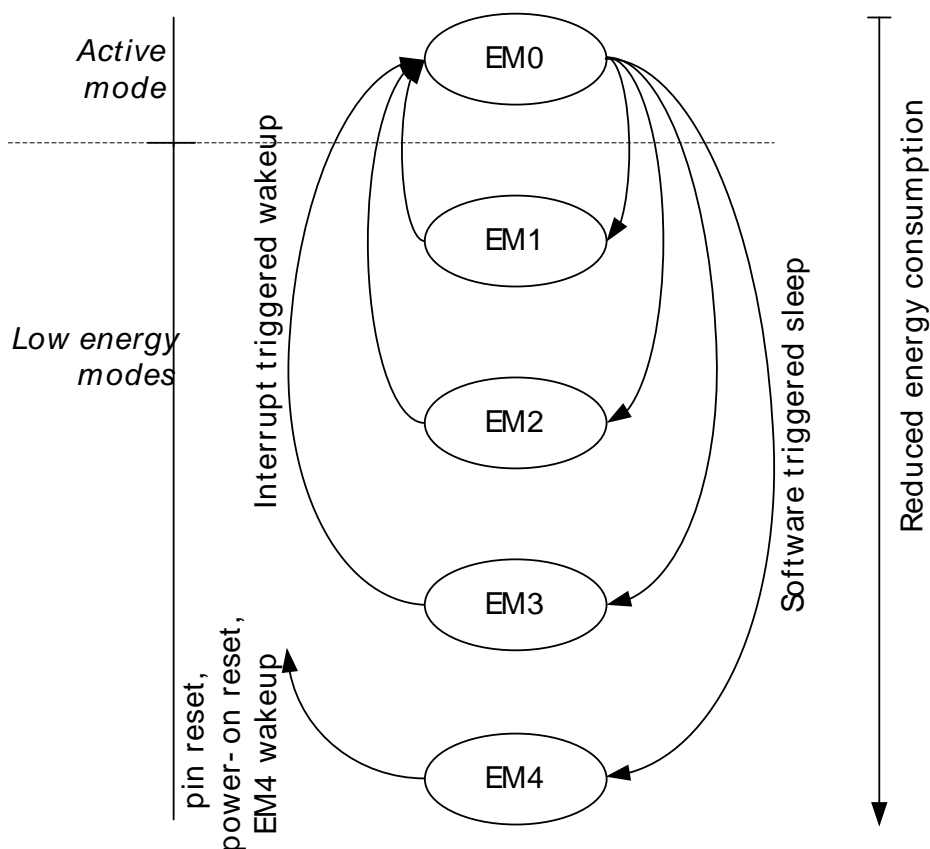

No direct transitions between EM1, EM2 or EM3 are available, as can also be seen from Figure 10.2 (p. 93). Instead, a wakeup will transition back to EM0, in which software can enter any other low energy mode. An overview of the supported energy modes and the functionality available in each mode is shown in Table 10.1 (p. 94). Most peripheral functionality indicated as "On" in a particular energy mode can also be turned off from software in order to save further energy.

Table 10.1. EMU Energy Mode Overview

| | EM0 ¹ | EM1 ² | EM2 ² | EM3 ² | EM4 ² |
|--|------------------|------------------|------------------|------------------|------------------|
| Wakeup time to EM0 | - | - | 2 µs | 2 µs | 160 µs |
| MCU clock tree | On | - | - | - | - |
| High frequency peripheral clock trees | On | On | - | - | - |
| Core voltage regulator | On | On | - | - | - |
| High frequency oscillator | On | On | - | - | - |
| I ² C full functionality | On | On | - | - | - |
| Low frequency peripheral clock trees | On | On | On | - | - |
| Low frequency oscillator | On | On | On | - | - |
| Real Time Counter | On | On | On | On ³ | - |
| LCD | On | On | On | - | - |
| LEUART | On | On | On | - | - |
| LETIMER | On | On | On | On ³ | - |
| LESENSE | On | On | On | On ³ | - |
| PCNT | On | On | On | On | - |
| ACMP | On | On | On | On | - |
| I ² C receive address recognition | On | On | On | On | - |
| Watchdog | On | On | On | On ³ | - |
| Pin interrupts | On | On | On | On | - |
| RAM voltage regulator/RAM retention | On | On | On | On | - |
| Brown Out Reset | On | On | On | On | - |
| Power On Reset | On | On | On | On | On |
| Pin Reset | On | On | On | On | On |
| GPIO state retention | On | On | On | On | On |
| EM4 Reset Wakeup Request | - | - | - | - | On |

¹Energy Mode 0/Active Mode²Energy Mode 1/2/3/4³When the 1 kHz ULFRCO is selected

The different Energy Modes are summarized in the following sections.

10.3.1.1 EM0

- The high frequency oscillator is active
- High frequency clock trees are active
- All peripheral functionality is available

10.3.1.2 EM1

- The high frequency oscillator is active
- MCU clock tree is inactive
- High frequency peripheral clock trees are active
- All peripheral functionality is available

10.3.1.3 EM2

- The high frequency oscillator is inactive
- The high frequency peripheral and MCU clock trees are inactive
- The low frequency oscillator and clock trees are active
- Low frequency peripheral functionality is available
- Wakeup through peripheral interrupt or asynchronous pin interrupt
- RAM and register values are preserved
- DAC and OPAMPs are available

10.3.1.4 EM3

- Both high and low frequency oscillators and clock trees are inactive
- Wakeup through asynchronous pin interrupts, I²C address recognition or ACMP edge interrupt
- Watchdog and some low frequency peripherals available when ULFRCO (1 kHz clock) has been selected
- All other peripheral functionality is disabled
- RAM and register values are preserved
- DAC and OPAMPs are available

10.3.1.5 EM4

- All oscillators and regulators are inactive
- RAM and register values are not preserved
- Optional GPIO state retention
- Wakeup from external pin reset or pins that support EM4 wakeup

10.3.2 Entering a Low Energy Mode

A low energy mode is entered by first configuring the desired Energy Mode through the EMU_CTRL register and the SLEEPDEEP bit in the Cortex-M3 System Control Register, see Table 10.2 (p. 95). A Wait For Interrupt (WFI) or Wait For Event (WFE) instruction from the Cortex-M3 triggers the transition into a low energy mode.

The transition into a low energy mode can optionally be delayed until the lowest priority Interrupt Service Routine (ISR) is exited, if the SLEEPONEXIT bit in the Cortex-M3 System Control Register is set.

Entering the lowest energy mode, EM4, is done by writing a sequence to the EM4CTRL bitfield in the EMU_CTRL register. Writing a zero to the EM4CTRL bitfield will restart the power sequence. EM2BLOCK prevents the EMU to enter EM2 or lower, and it will instead enter EM1.

EM3 is equal to EM2, except that the LFACLK/LFBCLK are disabled in EM3. The LFACLK/LFBCLK must be disabled by the user before entering low energy mode.

The EMVREG bit in EMU_CTRL can be used to prevent the voltage regulator from being turned off in low energy modes. The device will then essentially stay in EM1 when entering a low energy mode.

Table 10.2. EMU Entering a Low Energy Mode

| Low Energy Mode | EM4CTRL | EMVREG | EM2BLOCK | SLEEPDEEP | Cortex-M3 Instruction |
|-----------------|---|--------|----------|-----------|-----------------------|
| EM1 | 0 | x | x | 0 | WFI or WFE |
| EM2 | 0 | 0 | 0 | 1 | WFI or WFE |
| EM4 | Write sequence: 2, 3, 2, 3, 2, 3, 2, 3, 2 | x | x | x | x |

('x' means don't care)

10.3.3 Leaving a Low Energy Mode

In each low energy mode a selection of peripheral units are available, and software can either enable or disable the functionality. Enabled interrupts that can cause wakeup from a low energy mode are shown in Table 10.3 (p. 96). The wakeup triggers always return the EFM32 to EM0. Additionally, any reset source will return to EM0.

Table 10.3. EMU Wakeup Triggers from Low Energy Modes

| Peripheral | Wakeup Trigger | EM0 ¹ | EM1 ² | EM2 ² | EM3 ² | EM4 ² |
|------------------------------|-----------------------------|------------------|------------------|------------------|------------------|------------------|
| RTC | Any enabled interrupt | - | Yes | Yes | Yes ³ | - |
| USART | Receive / transmit | - | Yes | - | - | - |
| LEUART | Receive / transmit | - | Yes | Yes | - | - |
| LESENSE | Any enabled interrupt | - | Yes | Yes | Yes ³ | - |
| I ² C | Any enabled interrupt | - | Yes | - | - | - |
| I ² C | Receive address recognition | - | Yes | Yes | Yes | - |
| TIMER | Any enabled interrupt | - | Yes | - | - | - |
| LETIMER | Any enabled interrupt | - | Yes | Yes | Yes ³ | - |
| CMU | Any enabled interrupt | - | Yes | - | - | - |
| DMA | Any enabled interrupt | - | Yes | - | - | - |
| MSC | Any enabled interrupt | - | Yes | - | - | - |
| DAC | Any enabled interrupt | - | Yes | - | - | - |
| ADC | Any enabled interrupt | - | Yes | - | - | - |
| AES | Any enabled interrupt | - | Yes | - | - | - |
| PCNT | Any enabled interrupt | - | Yes | Yes | Yes ⁴ | - |
| LCD | Any enabled interrupt | - | Yes | Yes | - | - |
| ACMP | Any enabled edge interrupt | - | Yes | Yes | Yes | - |
| VCMP | Any enabled edge interrupt | - | Yes | Yes | Yes | - |
| Pin interrupts | Asynchronous | - | Yes | Yes | Yes | - |
| Pin | Reset | - | Yes | Yes | Yes | Yes |
| EM4 wakeup on supported pins | Asynchronous | - | - | - | - | Yes |
| Power | Cycle Off/On | | Yes | Yes | Yes | Yes |

¹Energy Mode 0/Active Mode

²Energy mode 1/2/3/4

³When the 1 kHz ULFRCO is selected

⁴When using an external clock

10.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|-------------|------|-----------------------------|
| 0x000 | EMU_CTRL | RW | Control Register |
| 0x008 | EMU_LOCK | RW | Configuration Lock Register |
| 0x024 | EMU_AUXCTRL | RW | Auxiliary Control Register |

10.5 Register Description

10.5.1 EMU_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---------|----------|--------|---|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | EM4CTRL | EM2BLOCK | EMVREG | |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|-------|----------|---|--------|--|-------|------|-------------|---|---------|--|---|------|---|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 3:2 | EM4CTRL | 0x0 | RW | Energy Mode 4 Control This register is used to enter Energy Mode 4, in which the device only wakes up from an external pin reset or from a power cycle. Energy Mode 4 is entered when the EM4 sequence is written to this bitfield. | | | | | | | | | |
| 1 | EM2BLOCK | 0 | RW | Energy Mode 2 Block This bit is used to prevent the MCU to enter Energy Mode 2 or lower. | | | | | | | | | |
| 0 | EMVREG | 0 | RW | Energy Mode Voltage Regulator Control Control the voltage regulator in low energy modes 2 and 3. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>REDUCED</td><td>Reduced voltage regulator drive strength in EM2 and EM3.</td></tr><tr><td>1</td><td>FULL</td><td>Full voltage regulator drive strength in EM2 and EM3.</td></tr></table> | Value | Mode | Description | 0 | REDUCED | Reduced voltage regulator drive strength in EM2 and EM3. | 1 | FULL | Full voltage regulator drive strength in EM2 and EM3. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | REDUCED | Reduced voltage regulator drive strength in EM2 and EM3. | | | | | | | | | | | |
| 1 | FULL | Full voltage regulator drive strength in EM2 and EM3. | | | | | | | | | | | |

10.5.2 EMU_LOCK - Configuration Lock Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | LOCKKEY | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |



| Bit | Name | Reset | Access | Description |
|--|---------|--------|-----------------------------|-------------------------------|
| 15:0 | LOCKKEY | 0x0000 | RW | Configuration Lock Key |
| Write any other value than the unlock code to lock all EMU registers, except the interrupt registers, from editing. Write the unlock code to unlock. When reading the register, bit 0 is set when the lock is enabled. | | | | |
| Mode | | Value | Description | |
| Read Operation | | | | |
| UNLOCKED | | 0 | EMU registers are unlocked. | |
| LOCKED | | 1 | EMU registers are locked. | |
| Write Operation | | | | |
| LOCK | | 0 | Lock EMU registers. | |
| UNLOCK | | 0xADE8 | Unlock EMU registers. | |

10.5.3 EMU_AUXCTRL - Auxiliary Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|--------|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | HRCCLR |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|-------------------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | HRCCLR | 0 | RW | Hard Reset Cause Clear |
| Write to 1 and then 0 to clear the POR, BOD and WDOG reset cause register bits. See also the Reset Management Unit (RMU). | | | | |

11 CMU - Clock Management Unit

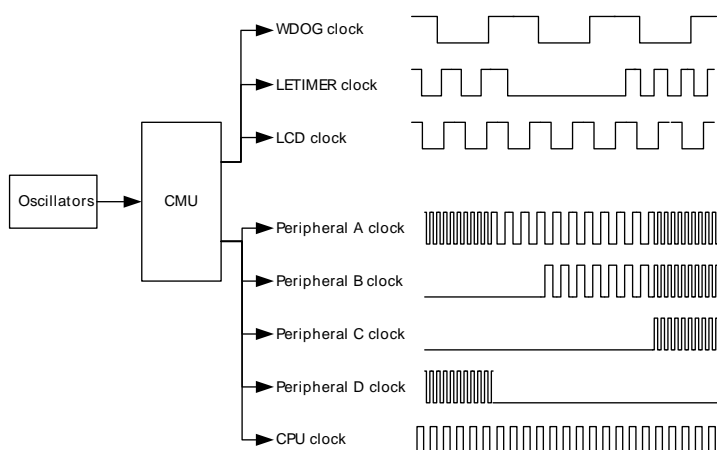

Quick Facts

What?

The CMU controls oscillators and clocks. EFM32TG supports five different oscillators with minimized power consumption and short start-up time. An additional separate RC oscillator is used for flash programming and debug trace. The CMU also has HW support for calibration of RC oscillators.

Why?

Oscillators and clocks contribute significantly to the power consumption of the MCU. With the low power oscillators combined with the flexible clock control scheme, it is possible to minimize the energy consumption in any given application.

How?

The CMU can configure different clock sources, enable/disable clocks to peripherals on an individual basis and set the prescaler for the different clocks. The short oscillator start-up times makes duty-cycling between active mode and the different low energy modes (EM2-EM4) very efficient. The calibration feature ensures high accuracy RC oscillators. Several interrupts are available to avoid CPU polling of flags.

11.1 Introduction

The Clock Management Unit (CMU) is responsible for controlling the oscillators and clocks on-board the EFM32TG. The CMU provides the capability to turn on and off the clock on an individual basis to all peripheral modules in addition to enable/disable and configure the available oscillators. The high degree of flexibility enables software to minimize energy consumption in any specific application by not wasting power on peripherals and oscillators that are inactive.

11.2 Features


- Multiple clock sources available:
 - 1-28 MHz High Frequency RC Oscillator (HFRCO)
 - 4-32 MHz High Frequency Crystal Oscillator (HFXO)
 - 32.768 Hz Low Frequency RC Oscillator (LFRCO)
 - 32.768 Hz Low Frequency Crystal Oscillator (LFXO)
 - 1 kHz Ultra Low Frequency RC Oscillator (ULFRCO)
- Low power oscillators
- Low start-up times
- Separate prescaler for High Frequency Core Clocks (HFCORECLK) and Peripheral Clocks (HFPERCLK)
- Individual clock prescaler selection for each Low Energy Peripheral

- Clock Gating on an individual basis to core modules and all peripherals
- Selectable clocks can be output on two pins for use externally.
- Auxiliary 1-28 MHz RC oscillator (AUXHFRCO) for flash programming, debug trace, and LESENSE timing.

11.3 Functional Description

An overview of the CMU is shown in Figure 11.1 (p. 101) . The number of peripheral modules that are connected to the different clocks varies from device to device.

Figure 11.1. CMU Overview

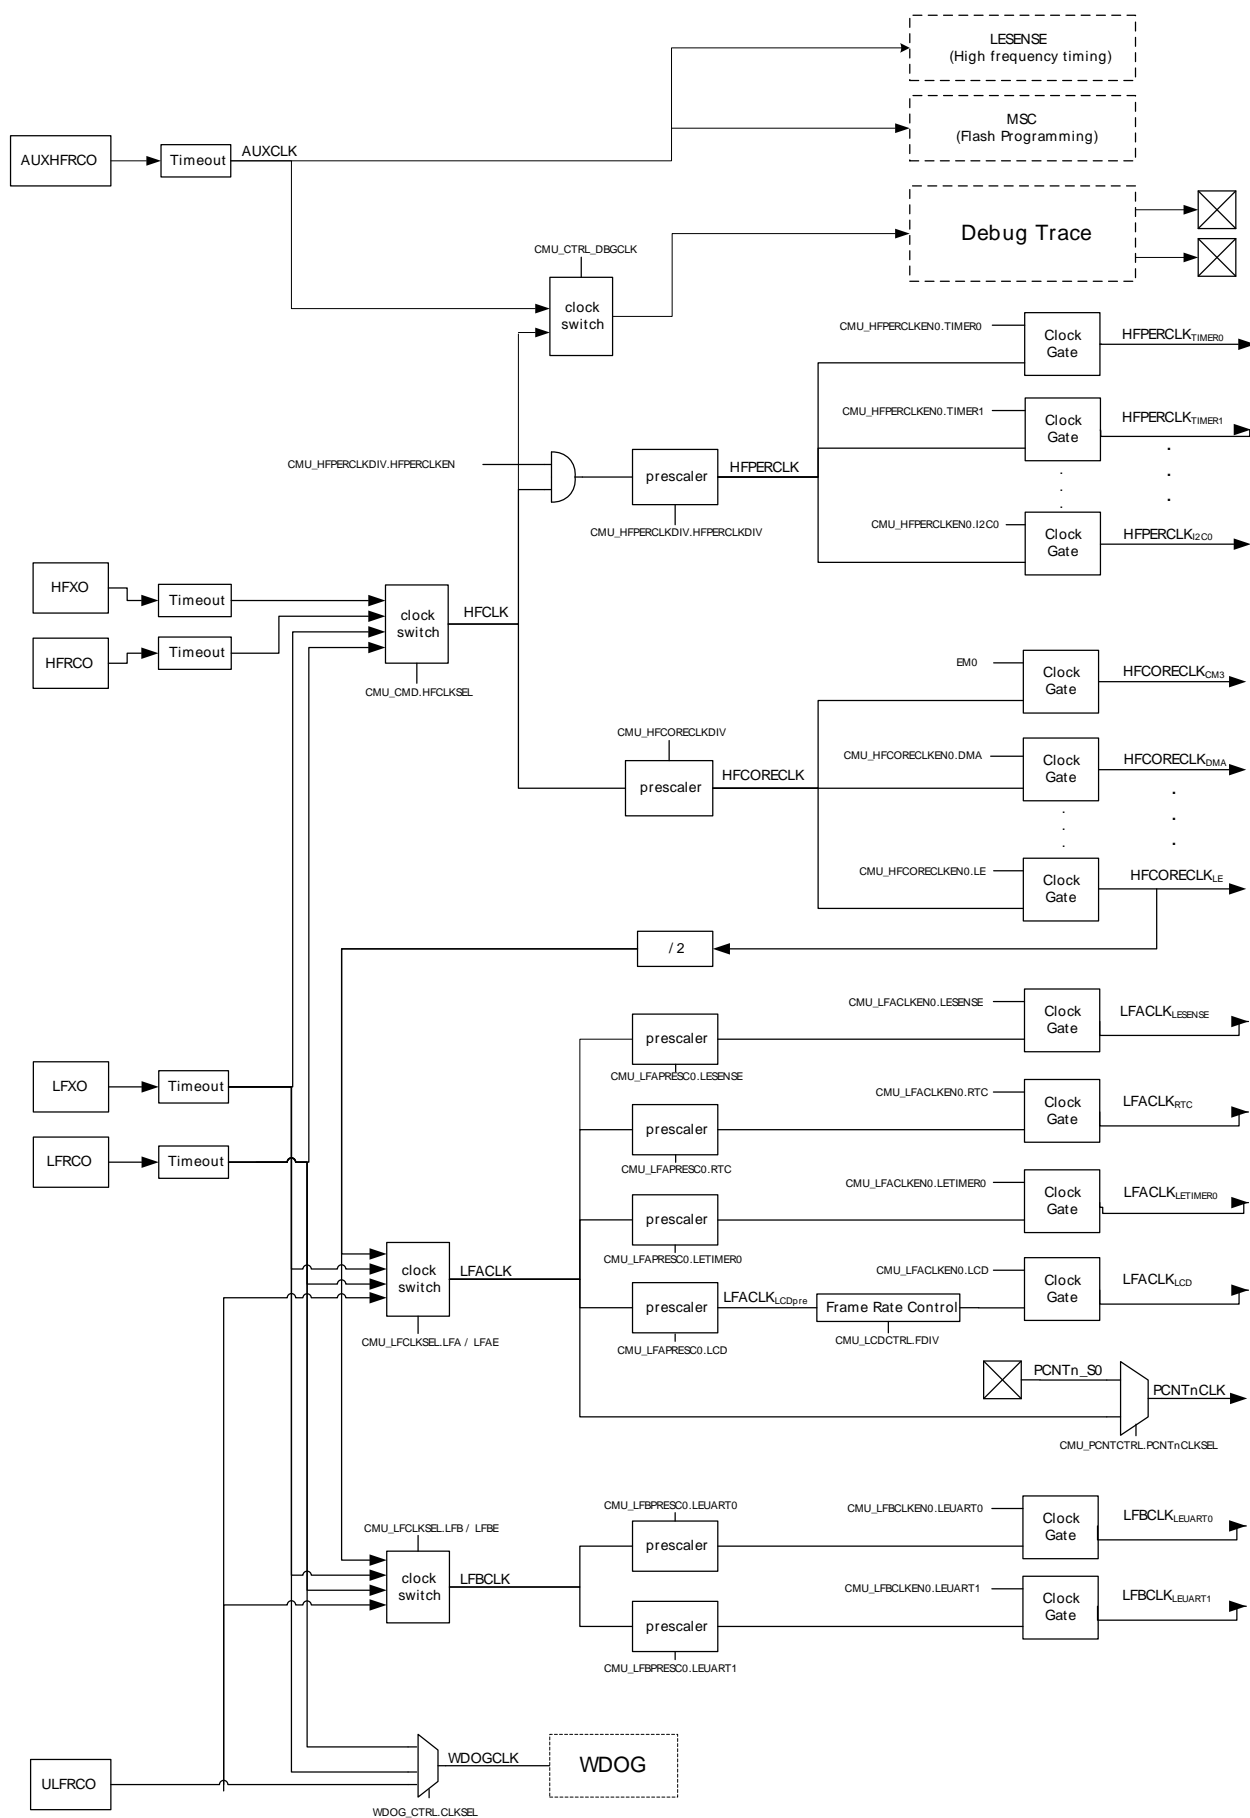

11.3.1 System Clocks

11.3.1.1 HFCLK - High Frequency Clock

HFCLK is the selected High Frequency Clock. This clock is used by the CMU and drives the two prescalers that generate HFCORECLK and HFPERCLK. The HFCLK can be driven by a high-frequency oscillator (HFRCO or HFXO) or one of the low-frequency oscillators (LFRCO or LFXO). By default the HFRCO is selected. In most applications, one of the high frequency oscillators will be the preferred choice. To change the selected HFCLK write to HFCLKSEL in CMU_CMD. The HFCLK is running in EM0 and EM1.

11.3.1.2 HFCORECLK - High Frequency Core Clock

HFCORECLK is a prescaled version of HFCLK. This clock drives the Core Modules, which consists of the CPU and modules that are tightly coupled to the CPU, e.g. MSC, DMA etc. This also includes the interface to the Low Energy Peripherals. Some of the modules that are driven by this clock can be clock gated completely when not in use. This is done by clearing the clock enable bit for the specific module in CMU_HFCORECLKEN0. The frequency of HFCORECLK is set using the CMU_HFCORECLKDIV register. The setting can be changed dynamically and the new setting takes effect immediately.

Note

Note that if HFPERCLK runs faster than HFCORECLK, the number of clock cycles for each bus-access to peripheral modules will increase with the ratio between the clocks. Please refer to Section 5.2.3.2 (p. 19) for more details.

11.3.1.3 HFPERCLK - High Frequency Peripheral Clock

Like HFCORECLK, HFPERCLK can also be a prescaled version of HFCLK. This clock drives the High-Frequency Peripherals. All the peripherals that are driven by this clock can be clock gated completely when not in use. This is done by clearing the clock enable bit for the specific peripheral in CMU_HFPERCLKEN0. The frequency of HFPERCLK is set using the CMU_HFPERCLKDIV register. The setting can be changed dynamically and the new setting takes effect immediately.

Note

Note that if HFPERCLK runs faster than HFCORECLK, the number of clock cycles for each bus-access to peripheral modules will increase with the ratio between the clocks. E.g. if a bus-access normally takes three cycles, it will take 9 cycles if HFPERCLK runs three times as fast as the HFCORECLK.

11.3.1.4 LFACLK - Low Frequency A Clock

LFACLK is the selected clock for the Low Energy A Peripherals. There are four selectable sources for LFACLK: LFRCO, LFXO, HFCORECLK/2 and ULFRCO. In addition, the LFACLK can be disabled. From reset, the LFACLK source is set to LFRCO. However, note that the LFRCO is disabled from reset. The selection is configured using the LFA field in CMU_LFCLKSEL. The HFCORECLK/2 setting allows the Low Energy A Peripherals to be used as high-frequency peripherals.

Note

If HFCORECLK/2 is selected as LFACLK, the clock will stop in EM2/3.

Each Low Energy Peripheral that is clocked by LFACLK has its own prescaler setting and enable bit. The prescaler settings are configured using CMU_LFAPRESC0 and the clock enable bits can be found in CMU_LFACLKEN0. Notice that the LCD has an additional high resolution prescaler for Frame Rate Control, configured by FDIV in CMU_LCDCTRL. When operating in oversampling mode, the pulse counters are clocked by LFACLK. This is configured for each pulse counter (n) individually by setting PCNTnCLKSEL in CMU_PCNTCTRL.

11.3.1.5 LFBCLK - Low Frequency B Clock

LFBCLK is the selected clock for the Low Energy B Peripherals. There are four selectable sources for LFBCLK: LFRCO, LFXO, HFCORECLK/2 and ULFRCO. In addition, the LFBCLK can be disabled. From reset, the LFBCLK source is set to LFRCO. However, note that the LFRCO is disabled from reset. The selection is configured using the LFB field in CMU_LFCLKSEL. The HFCORECLK/2 setting allows the Low Energy B Peripherals to be used as high-frequency peripherals.

Note

If HFCORECLK/2 is selected as LFBCLK, the clock will stop in EM2/3.

Each Low Energy Peripheral that is clocked by LFBCLK has its own prescaler setting and enable bit. The prescaler settings are configured using CMU_LFBPRESC0 and the clock enable bits can be found in CMU_LFBCLKEN0.

11.3.1.6 PCNTnCLK - Pulse Counter n Clock

Each available pulse counter is driven by its own clock, PCNTnCLK where n is the pulse counter instance number. Each pulse counter can be configured to use an external pin (PCNTn_S0) or LFBCLK as PCNTnCLK.

11.3.1.7 WDOGCLK - Watchdog Timer Clock

The Watchdog Timer (WDOG) can be configured to use one of three different clock sources: LFRCO, LFXO or ULFRCO. ULFRCO (Ultra Low Frequency RC Oscillator) is a separate 1 kHz RC oscillator that also runs in EM3.

11.3.1.8 AUXCLK - Auxiliary Clock

AUXCLK is a 1-28 MHz clock driven by a separate RC oscillator, AUXHFRCO. This clock is used for flash programming, and Serial Wire Output (SWO), and LESENSE operation. During flash programming, or if needed by LESENSE, this clock will be active. If the AUXHFRCO has not been enabled explicitly by software, the MSC or LESENSE module will automatically start and stop it. The AUXHFRCO is enabled by writing a 1 to AUXHFRCOEN in CMU_OSCENCMD. This explicit enabling is required when SWO is used.

11.3.2 Oscillator Selection

11.3.2.1 Start-up Time

The different oscillators have different start-up times. For the RC oscillators, the start-up time is fixed, but both the LFXO and the HFXO have configurable start-up time. At the end of the start-up time a ready flag is set to indicate that the start-up time has exceeded and that the clock is available. The low start-up time values can be used for an external clock source of already high quality, while the higher start-up times should be used when the clock signal is coming directly from a crystal. The start-up time for HFXO and LFXO can be set by configuring the HFXOTIMEOUT and LFXOTIMEOUT bitfields, respectively. Both bitfields are located in CMU_CTRL. For HFXO it is also possible to enable a glitch detection filter by setting HFXOGLITCHDETEN in CMU_CTRL. The glitch detector will reset the start-up counter if a glitch is detected, making the start-up process start over again.

There are individual bits for each oscillator indicating the status of the oscillator:

- **ENABLED** - Indicates that the oscillator is enabled
- **READY** - Start-up time is exceeded
- **SELECTED** - Start-up time is exceeded and oscillator is chosen as clock source

These status bits are located in the CMU_STATUS register.

11.3.2.2 Switching Clock Source

The HFRCO oscillator is a low energy oscillator with extremely short wake-up time. Therefore, this oscillator is always chosen by hardware as the clock source for HFCLK when the device starts up (e.g. after reset and after waking up from EM2 and EM3). After reset, the HFRCO frequency is 14 MHz.

Software can switch between the different clock sources at run-time. E.g., when the HFRCO is the clock source, software can switch to HFXO by writing the field HFCLKSEL in the CMU_CMD command register. See Figure 11.2 (p. 104) for a description of the sequence of events for this specific operation.

Note

It is important first to enable the HFXO since switching to a disabled oscillator will effectively stop HFCLK and only a reset can recover the system.

During the start-up period HFCLK will stop since the oscillator driving it is not ready. This effectively stalls the Core Modules and the High-Frequency Peripherals. It is possible to avoid this by first enabling the HFXO and then wait for the oscillator to become ready before switching the clock source. This way, the system continues to run on the HFRCO until the HFXO has timed out and provides a reliable clock. This sequence of events is shown in Figure 11.3 (p. 105) .

A separate flag is set when the oscillator is ready. This flag can also be configured to generate an interrupt.

Figure 11.2. CMU Switching from HFRCO to HFXO before HFXO is ready

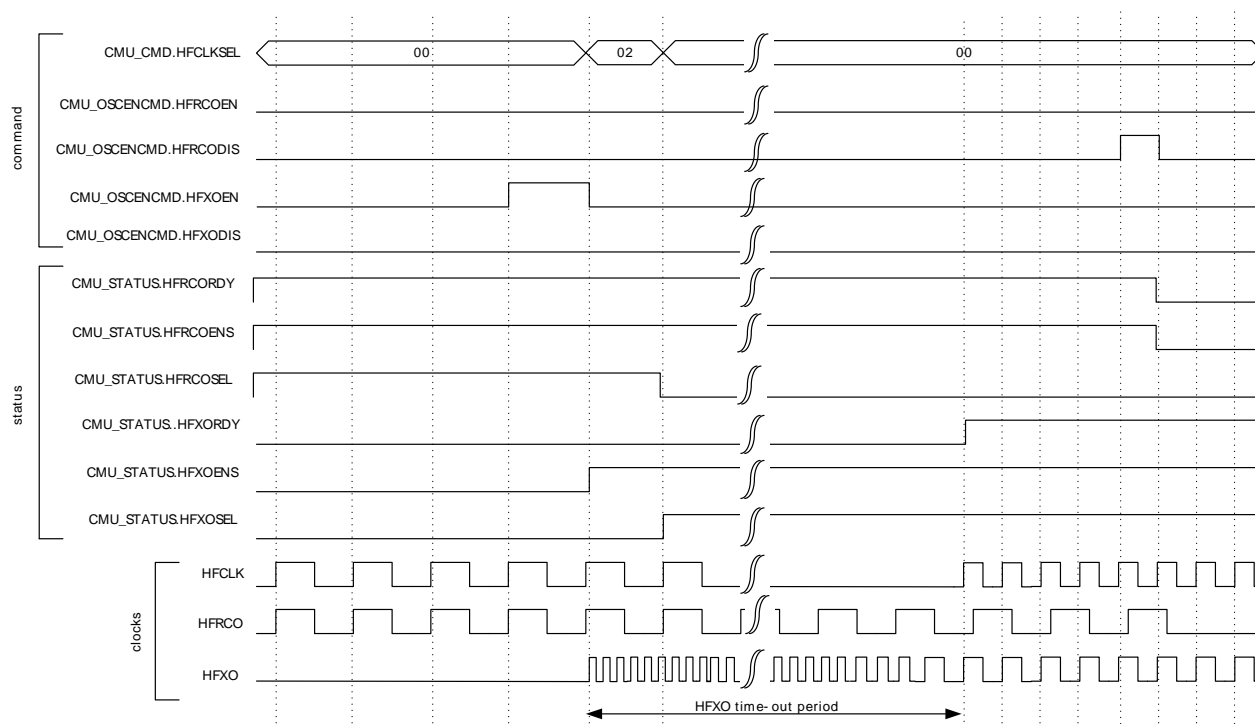
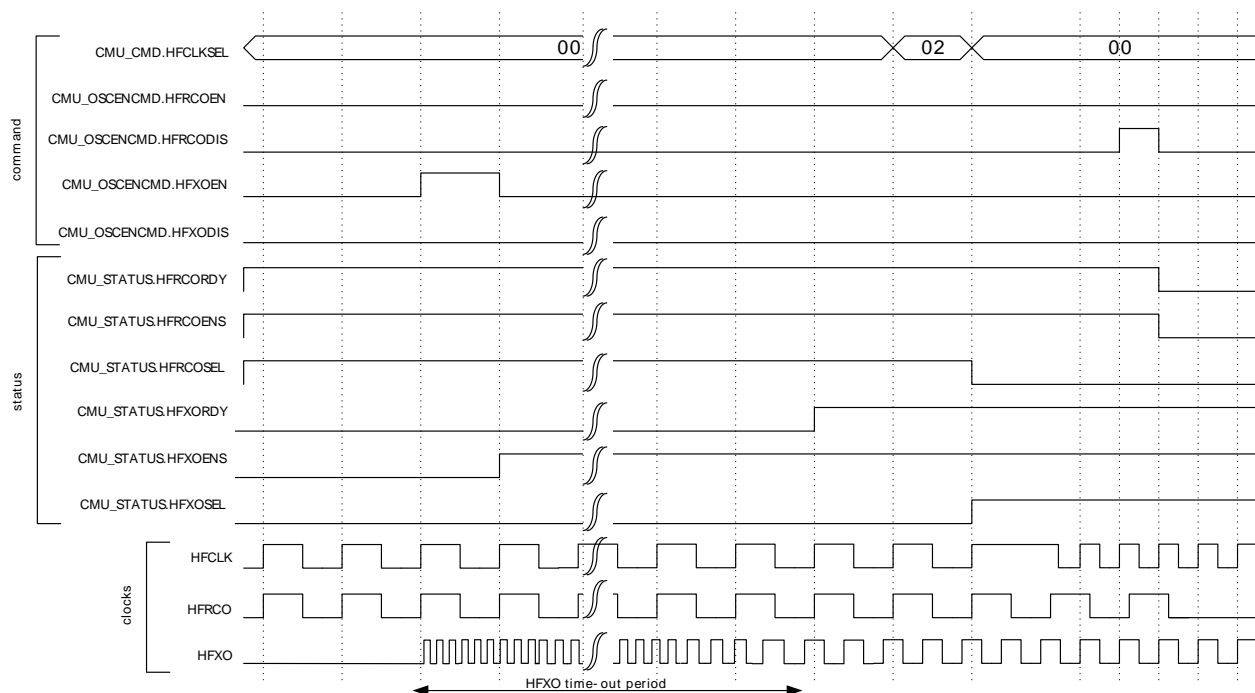


Figure 11.3. CMU Switching from HFRCO to HFXO after HFXO is ready

Switching clock source for LFACLK and LFBCLK is done by setting the LFA and LFB fields in CMU_LFCLKSEL. To ensure no stalls in the Low Energy Peripherals, the clock source should be ready before switching to it.

Note

To save energy, remember to turn off all oscillators not in use.

11.3.3 Oscillator Configuration


11.3.3.1 HFXO and LFXO

The crystal oscillators are by default configured to ensure safe startup and operation of the most common crystals. In order to optimize startup margin, startup time and power consumption for a given crystal, it is possible to adjust the gain in the oscillator. HFXO gain can be increased by setting HFXOBOOST field in CMU_CTRL, LFXO gain can be increased by setting LFXOBOOST field in CMU_CTRL. It is important that the boost settings, along with the crystal load capacitors are matched to the crystals in use. Correct values for these parameters can be found using the energyAware Designer.

The HFXO crystal is connected to the HFXTAL_N/HFXTAL_P pins as shown in Figure 11.4 (p. 105)

Figure 11.4. HFXO Pin Connection

Similarly, the LFXO crystal is connected to the LFXTAL_N/LFXTAL_P pins as shown in Figure 11.5 (p. 106)

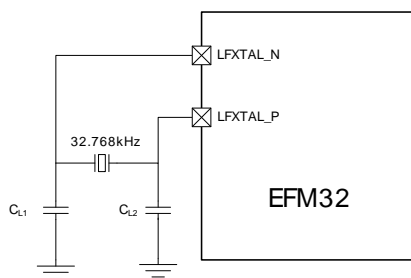Figure 11.5. LFXO Pin Connection

It is possible to connect an external clock source to HFXTAL_N/LFXTAL_N pin of the HFXO or LFXO oscillator. By configuring the HFXOMODE/LFXOMODE fields in CMU_CTRL, the HFXO/LFXO can be bypassed.

11.3.3.2 HFRCO, LFRCO and AUXHFRCO


It is possible to calibrate the HFRCO, LFRCO and AUXHFRCO to achieve higher accuracy (see the device datasheets for details on accuracy). The frequency is adjusted by changing the TUNING fields in CMU_HFRCOCTRL/CMU_LFRCOCTRL/CMU_AUXHFRCOCTRL. Changing to a higher value will result in a higher frequency. Please refer to the datasheet for stepsize details.

The HFRCO and AUXHFRCO can be set to one of several different frequency bands from 1 MHz to 28 MHz by setting the BAND field in CMU_HFRCOCTRL and CMU_AUXHFRCOCTRL. The HFRCO and AUXHFRCO frequency bands are calibrated during production test, and the production tested calibration values can be read from the Device Information (DI) page. The DI page contains a separate tuning value for each frequency band. During reset, HFRCO and AUXHFRCO tuning values are set to the production calibrated values for the 14 MHz band, which is the default frequency band. When changing to a different HFRCO or AUXHFRCO band, make sure to also update the tuning value.

The LFRCO and is also calibrated in production and its TUNING value is set to the correct value during reset.

The CMU has built-in HW support to efficiently calibrate the RC oscillators at run-time, see Figure 11.6 (p. 107). The concept is to select a reference and compare the RC frequency with the reference frequency. When the calibration circuit is started, one down-counter running on a selectable clock (DOWNSEL in CMU_CALCTRL) and one up-counter running on a selectable clock (UPSEL in CMU_CALCTRL) are started simultaneously. The top value for the down-counter must be written to CMU_CALCNT before calibration is started. The smallest value that can be written to the CMU_CALCNT is 1. The down-counter counts for CMU_CALCNT+1 cycles. When the down-counter has reached 0, the up-counter is sampled and the CALRDY interrupt flag is set. If CONT in CMU_CALCTRL is cleared, the counters are stopped at this point. If continuous mode is selected by setting CONT in CMU_CALCTRL the down-counter reloads the top value and continues counting and the up-counter restarts from 0. Software can then read out the sampled up-counter value from CMU_CALCNT. Then it is easy to find the ratio between the reference and the oscillator subject to the calibration. Overflows of the up-counter will not occur. If the up-counter reaches its top value before the down counter reaches 0, the top counter stays at its top value. Calibration can be stopped by writing CALSTOP in CMU_CMD. With this HW support, it is simple to write efficient calibration algorithms in software.

Figure 11.6. HW-support for RC Oscillator Calibration

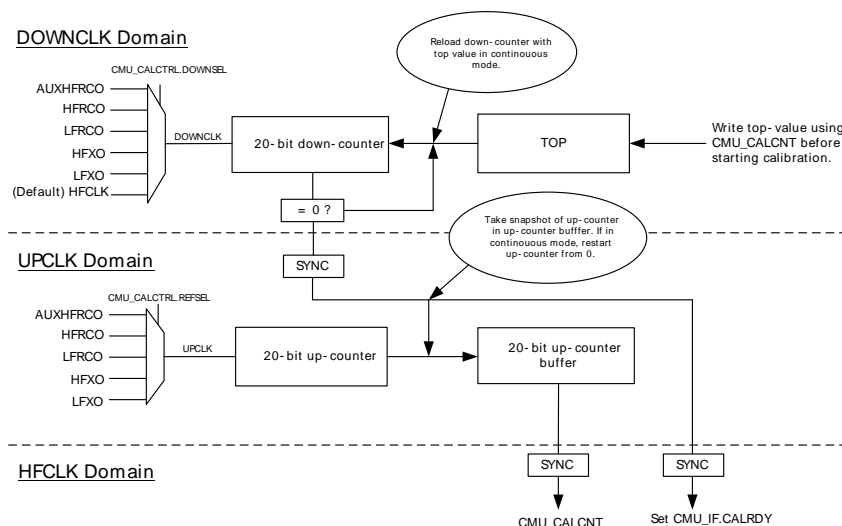

The counter operation for single and continuous mode are shown in Figure 11.7 (p. 107) and Figure 11.8 (p. 107) respectively.

Figure 11.7. Single Calibration (CONT=0)


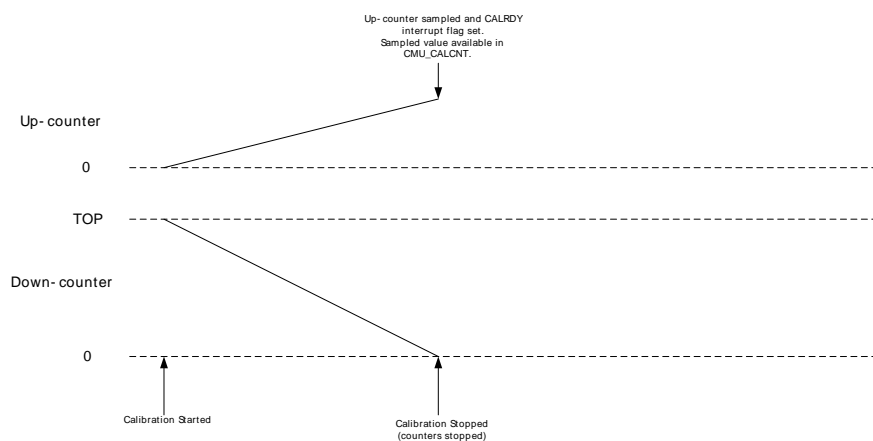


Figure 11.8. Continuous Calibration (CONT=1)

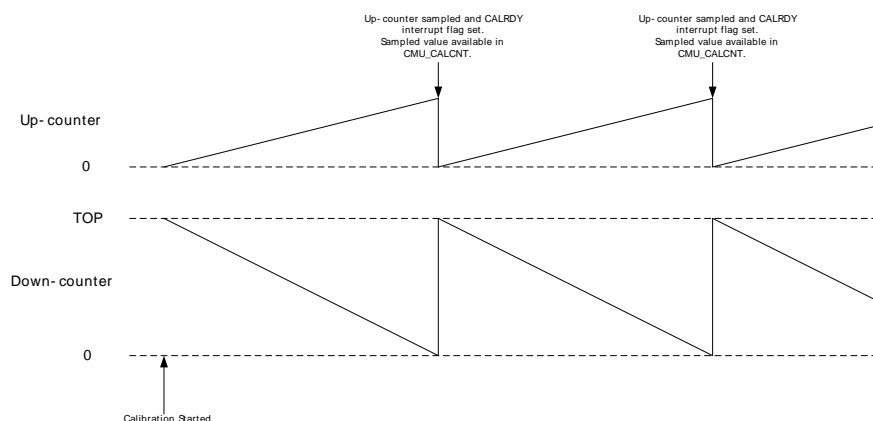

11.3.4 Output Clock on a Pin

It is possible to configure the CMU to output clocks on two pins. This clock selection is done using CLKOUTSEL0 and CLKOUTSEL1 fields in CMU_CTRL. The output pins must be configured in the CMU_ROUTE register.

- LFRCO, LFXO, HFCLK or the qualified clock from any of the oscillators can be output on one pin (CMU_OUT1). A qualified clock will not have any glitches or skewed duty-cycle during startup. For LFXO and HFXO you need to configure LFXOTIMEOUT and HFXOTIMEOUT in CMU_CTRL correctly to guarantee a qualified clock.
- HFRCO, HFXO, HFCLK/2, HFCLK/4, HFCLK/8, HFCLK/16, ULFRCO or AUXHFRCO can be output on another pin (CMU_OUT0)

Note that HFXO and HFRCO clock outputs to pin can be unstable after startup and should not be output on a pin before HFXORDY/HFRCORDY is set high in CMU_STATUS.

11.3.5 Protection

It is possible to lock the control- and command registers to prevent unintended software writes to critical clock settings. This is controlled by the CMU_LOCK register.

11.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|------------------|------|---|
| 0x000 | CMU_CTRL | RW | CMU Control Register |
| 0x004 | CMU_HFCORECLKDIV | RW | High Frequency Core Clock Division Register |
| 0x008 | CMU_HFPERCLKDIV | RW | High Frequency Peripheral Clock Division Register |
| 0x00C | CMU_HFRCOCTRL | RW | HFRCO Control Register |
| 0x010 | CMU_LFRCOCTRL | RW | LFRCO Control Register |
| 0x014 | CMU_AUXHFRCOCTRL | RW | AUXHFRCO Control Register |
| 0x018 | CMU_CALCTRL | RW | Calibration Control Register |
| 0x01C | CMU_CALCNT | RWH | Calibration Counter Register |
| 0x020 | CMU_OSCENCMD | W1 | Oscillator Enable/Disable Command Register |
| 0x024 | CMU_CMD | W1 | Command Register |
| 0x028 | CMU_LFCLKSEL | RW | Low Frequency Clock Select Register |
| 0x02C | CMU_STATUS | R | Status Register |
| 0x030 | CMU_IF | R | Interrupt Flag Register |
| 0x034 | CMU_IFS | W1 | Interrupt Flag Set Register |
| 0x038 | CMU_IFC | W1 | Interrupt Flag Clear Register |
| 0x03C | CMU_IEN | RW | Interrupt Enable Register |
| 0x040 | CMU_HFCORECLKEN0 | RW | High Frequency Core Clock Enable Register 0 |
| 0x044 | CMU_HFPERCLKEN0 | RW | High Frequency Peripheral Clock Enable Register 0 |
| 0x050 | CMU_SYNCBUSY | R | Synchronization Busy Register |
| 0x054 | CMU_FREEZE | RW | Freeze Register |
| 0x058 | CMU_LFACLKEN0 | RW | Low Frequency A Clock Enable Register 0 (Async Reg) |
| 0x060 | CMU_LFBCLKEN0 | RW | Low Frequency B Clock Enable Register 0 (Async Reg) |
| 0x068 | CMU_LFAPRESC0 | RW | Low Frequency A Prescaler Register 0 (Async Reg) |
| 0x070 | CMU_LFBPRESC0 | RW | Low Frequency B Prescaler Register 0 (Async Reg) |
| 0x078 | CMU_PCNTCTRL | RW | PCNT Control Register |
| 0x07C | CMU_LCDCTRL | RW | LCD Control Register |
| 0x080 | CMU_ROUTE | RW | I/O Routing Register |
| 0x084 | CMU_LOCK | RW | Configuration Lock Register |

11.5 Register Description

11.5.1 CMU_CTRL - CMU Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|--------|----|----|----|------------|----|----|------------|----|----|-------------|----|----|------------|----|----|----|-----------|----------|---|---|-------------|---|---|---|---|---|-----------------|-----|--|------------|----|--|--|-----|--|-----------|----|-----|----------|--|--|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | |
| Reset | | | | 0 | | | | 0x0 | | | 0x0 | | | 0x3 | | | 0 | | | | 1 | 0x0 | | | 0x3 | | | | | | 0 | 0x1 | | | | | | 0x3 | | | | 0x0 | | | |
| Access | | | | RW | | | | RW | | | RW | | | RW | | | RW | | | | RW | RW | | | RW | | | | | | RW | RW | | | RW | | | | | | RW | RW | | | |
| Name | | | | DBGCLK | | | | CLKOUTSEL1 | | | CLKOUTSEL0 | | | LFXOTIMEOUT | | | LFXOBUFCUR | | | | LFXOBOOST | LFXOMODE | | | HFXOTIMEOUT | | | | | | HFXOGLITCHDETEN | | | HFXOBUFCUR | | | | | | HFXOBOOST | | | HFXOMODE | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:29 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|---|--------|----------|--------------------------------------|--------------------|
| 28 | DBGCLK | 0 | RW | Debug Clock |
| Select clock used for the debug system. | | | | |
| | Value | Mode | Description | |
| | 0 | AUXHFRCO | AUXHFRCO is the debug clock. | |
| | 1 | HFCLK | The system clock is the debug clock. | |

| | | | | |
|-------|----------|---|--|--|
| 27:26 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
|-------|----------|---|--|--|

| | | | | |
|--|------------|-----------|-----------------------------------|------------------------------|
| 25:23 | CLKOUTSEL1 | 0x0 | RW | Clock Output Select 1 |
| Controls the clock output multiplexer. To actually output on the pin, set CLKOUT1PEN in CMU_ROUTE. | | | | |
| | Value | Mode | Description | |
| | 0 | LFRCO | LFRCO (directly from oscillator). | |
| | 1 | LFXO | LFXO (directly from oscillator). | |
| | 2 | HFCLK | HFCLK. | |
| | 3 | LFXOQ | LFXO (qualified). | |
| | 4 | HFXOQ | HFXO (qualified). | |
| | 5 | LFRCOQ | LFRCO (qualified). | |
| | 6 | HFRCOQ | HFRCO (qualified). | |
| | 7 | AUXHFRCOQ | AUXHFRCO (qualified). | |

| | | | | |
|--|------------|----------|--------------------------------------|------------------------------|
| 22:20 | CLKOUTSEL0 | 0x0 | RW | Clock Output Select 0 |
| Controls the clock output multiplexer. To actually output on the pin, set CLKOUT0PEN in CMU_ROUTE. | | | | |
| | Value | Mode | Description | |
| | 0 | HFRCO | HFRCO (directly from oscillator). | |
| | 1 | HFXO | HFXO (directly from oscillator). | |
| | 2 | HFCLK2 | HFCLK/2. | |
| | 3 | HFCLK4 | HFCLK/4. | |
| | 4 | HFCLK8 | HFCLK/8. | |
| | 5 | HFCLK16 | HFCLK/16. | |
| | 6 | ULFRCO | ULFRCO (directly from oscillator). | |
| | 7 | AUXHFRCO | AUXHFRCO (directly from oscillator). | |

| | | | | |
|---|-------------|----------|--------------------------------|---------------------|
| 19:18 | LFXOTIMEOUT | 0x3 | RW | LFXO Timeout |
| Configures the start-up delay for LFXO. | | | | |
| | Value | Mode | Description | |
| | 0 | 8CYCLES | Timeout period of 8 cycles. | |
| | 1 | 1KCYCLES | Timeout period of 1024 cycles. | |

| Bit | Name | Reset | Access | Description |
|-------|-----------------|---|--------|--|
| | Value | Mode | | Description |
| | 2 | 16KCYCLES | | Timeout period of 16384 cycles. |
| | 3 | 32KCYCLES | | Timeout period of 32768 cycles. |
| 17 | LFXOBUFCUR | 0 | RW | LFXO Boost Buffer Current This value has been updated to the correct level during calibration and should not be changed. |
| 16:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 13 | LFXOBOOST | 1 | RW | LFXO Start-up Boost Current Adjusts start-up boost current for LFXO. |
| | Value | Mode | | Description |
| | 0 | 70PCENT | | 70 %. |
| | 1 | 100PCENT | | 100 %. |
| 12:11 | LFXOMODE | 0x0 | RW | LFXO Mode Set this to configure the external source for the LFXO. The oscillator setting takes effect when 1 is written to LFXOEN in CMU_OSCENCMD. The oscillator setting is reset to default when 1 is written to LFXODIS in CMU_OSCENCMD. |
| | Value | Mode | | Description |
| | 0 | XTAL | | 32.768 kHz crystal oscillator. |
| | 1 | BUFEXTCLK | | An AC coupled buffer is coupled in series with LFXTAL_N pin, suitable for external sinus wave (32.768 kHz). |
| | 2 | DIGEXTCLK | | Digital external clock on LFXTAL_N pin. Oscillator is effectively bypassed. |
| 10:9 | HFXOTIMEOUT | 0x3 | RW | HFXO Timeout Configures the start-up delay for HFXO. |
| | Value | Mode | | Description |
| | 0 | 8CYCLES | | Timeout period of 8 cycles. |
| | 1 | 256CYCLES | | Timeout period of 256 cycles. |
| | 2 | 1KCYCLES | | Timeout period of 1024 cycles. |
| | 3 | 16KCYCLES | | Timeout period of 16384 cycles. |
| 8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | HFXOGLITCHDETEN | 0 | RW | HFXO Glitch Detector Enable This bit enables the glitch detector which is active as long as the start-up ripple-counter is counting. A detected glitch will reset the ripple-counter effectively increasing the start-up time. Once the ripple-counter has timed-out, glitches will not be detected. |
| 6:5 | HFXOBUFCUR | 0x1 | RW | HFXO Boost Buffer Current This value has been set during calibration and should not be changed. |
| 4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:2 | HFXOBOOST | 0x3 | RW | HFXO Start-up Boost Current Used to adjust start-up boost current for HFXO. |
| | Value | Mode | | Description |
| | 0 | 50PCENT | | 50 %. |
| | 1 | 70PCENT | | 70 %. |
| | 2 | 80PCENT | | 80 %. |
| | 3 | 100PCENT | | 100 % (default). |
| 1:0 | HFXOMODE | 0x0 | RW | HFXO Mode Set this to configure the external source for the HFXO. The oscillator setting takes effect when 1 is written to HFXOEN in CMU_OSCENCMD. The oscillator setting is reset to default when 1 is written to HFXODIS in CMU_OSCENCMD. |
| | Value | Mode | | Description |
| | 0 | XTAL | | 4-32 MHz crystal oscillator. |
| | 1 | BUFEXTCLK | | An AC coupled buffer is coupled in series with HFXTAL_N, suitable for external sine wave (4-32 MHz). The sine wave should have a minimum of 200 mV peak to peak. |
| | 2 | DIGEXTCLK | | Digital external clock on HFXTAL_N pin. Oscillator is effectively bypassed. |

11.5.2 CMU_HFCORECLKDIV - High Frequency Core Clock Division Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--------------|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | HFCORECLKDIV |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

3:0 HFCORECLKDIV 0x0 RW **HFCORECLK Divider**

Specifies the clock divider for HFCORECLK.

| Value | Mode | Description |
|-------|----------|------------------------|
| 0 | HFCLK | HFCORECLK = HFCLK. |
| 1 | HFCLK2 | HFCORECLK = HFCLK/2. |
| 2 | HFCLK4 | HFCORECLK = HFCLK/4. |
| 3 | HFCLK8 | HFCORECLK = HFCLK/8. |
| 4 | HFCLK16 | HFCORECLK = HFCLK/16. |
| 5 | HFCLK32 | HFCORECLK = HFCLK/32. |
| 6 | HFCLK64 | HFCORECLK = HFCLK/64. |
| 7 | HFCLK128 | HFCORECLK = HFCLK/128. |
| 8 | HFCLK256 | HFCORECLK = HFCLK/256. |
| 9 | HFCLK512 | HFCORECLK = HFCLK/512. |

11.5.3 CMU_HFPERCLKDIV - High Frequency Peripheral Clock Division Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|------------|---|---|---|---|-------------|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | 1 | | | | | 0x0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | RW | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | HFPERCLKEN | | | | | HFPERCLKDIV | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

8 HFPERCLKEN 1 RW **HFPERCLK Enable**

Set to enable the HFPERCLK.

| | | | | |
|-----|----------|---|--|--|
| 7:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
|-----|----------|---|--|--|

3:0 HFPERCLKDIV 0x0 RW **HFPERCLK Divider**

Specifies the clock divider for the HFPERCLK.

| Bit | Name | Reset | Access | Description |
|-----|----------|-------|--------|-----------------------|
| | Value | Mode | | Description |
| 0 | HFCLK | | | HFPERCLK = HFCLK. |
| 1 | HFCLK2 | | | HFPERCLK = HFCLK/2. |
| 2 | HFCLK4 | | | HFPERCLK = HFCLK/4. |
| 3 | HFCLK8 | | | HFPERCLK = HFCLK/8. |
| 4 | HFCLK16 | | | HFPERCLK = HFCLK/16. |
| 5 | HFCLK32 | | | HFPERCLK = HFCLK/32. |
| 6 | HFCLK64 | | | HFPERCLK = HFCLK/64. |
| 7 | HFCLK128 | | | HFPERCLK = HFCLK/128. |
| 8 | HFCLK256 | | | HFPERCLK = HFCLK/256. |
| 9 | HFCLK512 | | | HFPERCLK = HFCLK/512. |

11.5.4 CMU_HFRCTRL - HFRCO Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|------|---|---|---|--------|---|---|---|---|---|---|--|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | 0x00 | | | | | 0x3 | | | | 0x80 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | RW | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | SUDELAY | | | | | BAND | | | | TUNING | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 16:12 | SUDELAY | 0x00 | RW | HFRCO Start-up Delay Always write this field to 0. |
| 11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10:8 | BAND | 0x3 | RW | HFRCO Band Select Write this field to set the frequency band in which the HFRCO is to operate. When changing this setting there will be no glitches on the HFRCO output, hence it is safe to change this setting even while the system is running on the HFRCO. To ensure an accurate frequency, the HFTUNING value should also be written when changing the frequency band. The calibrated tuning value for the different bands can be read from the Device Information page. |
| | Value | Mode | | Description |
| | 0 | 1MHZ | | 1 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. |
| | 1 | 7MHZ | | 7 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. |
| | 2 | 11MHZ | | 11 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. |
| | 3 | 14MHZ | | 14 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. |
| | 4 | 21MHZ | | 21 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. |
| | 5 | 28MHZ | | 28 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. |
| 7:0 | TUNING | 0x80 | RW | HFRCO Tuning Value Writing this field adjusts the HFRCO frequency (the higher value, the higher frequency). This field is updated with the production calibrated value for the 14 MHz band during reset, and the reset value might therefore vary between devices. |

11.5.5 CMU_LFRCOCTRL - LFRCO Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x40 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | TUNING | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6:0 | TUNING | 0x40 | RW | LFRCO Tuning Value Writing this field adjusts the LFRCO frequency (the higher value, the higher frequency). This field is updated with the production calibrated value during reset, and the reset value might therefore vary between devices. |

11.5.6 CMU_AUXHFRCOCTRL - AUXHFRCO Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|----|--------|---|---|---|---|---|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | 0x0 | | 0x80 | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | RW | | RW | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | BAND | | TUNING | | | | | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | |
|---|----------|---|--------|--|-------|------|-------------|---|-------|---|---|-------|---|---|------|--|---|------|--|---|-------|---|---|-------|---|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 10:8 | BAND | 0x0 | RW | AUXHFRCO Band Select Write this field to set the frequency band in which the AUXHFRCO is to operate. When changing this setting there will be no glitches on the AUXHFRCO output, hence it is safe to change this setting even while the system is using the AUXHFRCO. To ensure an accurate frequency, the AUXTUNING value should also be written when changing the frequency band. The calibrated tuning value for the different bands can be read from the Device Information page. Flash erase and write use this clock. If it is changed to another value than the default, MSC_TIMEBASE must also be configured to ensure correct flash erase and write operation. | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>14MHZ</td><td>14 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band.</td></tr><tr><td>1</td><td>11MHZ</td><td>11 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band.</td></tr><tr><td>2</td><td>7MHZ</td><td>7 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band.</td></tr><tr><td>3</td><td>1MHZ</td><td>1 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band.</td></tr><tr><td>6</td><td>28MHZ</td><td>28 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band.</td></tr><tr><td>7</td><td>21MHZ</td><td>21 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band.</td></tr></table> | | | | | Value | Mode | Description | 0 | 14MHZ | 14 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | 1 | 11MHZ | 11 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | 2 | 7MHZ | 7 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | 3 | 1MHZ | 1 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | 6 | 28MHZ | 28 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | 7 | 21MHZ | 21 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 14MHZ | 14 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11MHZ | 11 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7MHZ | 7 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 1MHZ | 1 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 28MHZ | 28 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | 21MHZ | 21 MHz band. NOTE: Also set the TUNING value (bits 7:0) when changing band. | | | | | | | | | | | | | | | | | | | | | | | |
| 7:0 | TUNING | 0x80 | RW | AUXHFRCO Tuning Value Writing this field adjusts the AUXHFRCO frequency (the higher value, the higher frequency). This field is updated with the production calibrated value during reset, and the reset value might therefore vary between devices. | | | | | | | | | | | | | | | | | | | | | |

11.5.7 CMU_CALCTRL - Calibration Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|------|---|-----|---------|--|--|-----|-------|--|--|--|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | 0 | 0x0 | | | | 0x0 | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | RW | | | | RW | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | CONT | | | DOWNSEL | | | | UPSEL | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|-----------------------------------|--|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | CONT | 0 | RW | Continuous Calibration Set this bit to enable continuous calibration. |
| 5:3 | DOWNSEL | 0x0 | RW | Calibration Down-counter Select Selects clock source for the calibration down-counter. |
| | Value | Mode | Description | |
| | 0 | HFCLK | Select HFCLK for down-counter. | |
| | 1 | HFXO | Select HFXO for down-counter. | |
| | 2 | LFXO | Select LFXO for down-counter. | |
| | 3 | HFRCO | Select HFRCO for down-counter. | |
| | 4 | LFRCO | Select LFRCO for down-counter. | |
| | 5 | AUXHFRCO | Select AUXHFRCO for down-counter. | |
| 2:0 | UPSEL | 0x0 | RW | Calibration Up-counter Select Selects clock source for the calibration up-counter. |
| | Value | Mode | Description | |
| | 0 | HFXO | Select HFXO as up-counter. | |
| | 1 | LFXO | Select LFXO as up-counter. | |
| | 2 | HFRCO | Select HFRCO as up-counter. | |
| | 3 | LFRCO | Select LFRCO as up-counter. | |
| | 4 | AUXHFRCO | Select AUXHFRCO as up-counter. | |

11.5.8 CMU_CALCNT - Calibration Counter Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | 0x00000 | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | RWH | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | CALCNT | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|------|--------|---------|--------|--|
| 19:0 | CALCNT | 0x00000 | RWH | Calibration Counter Write top value before calibration. Read calibration result from this register when Calibration Ready flag has been set. |

11.5.9 CMU_OSCENCMD - Oscillator Enable/Disable Command Register

[illegible]

| Bit | Name | Reset | Access | Description |
|-------|-------------|---|--------|--|
| 31:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 9 | LFXODIS | 0 | W1 | LFXO Disable Disables the LFXO. LFXOEN has higher priority if written simultaneously. |
| 8 | LFXOEN | 0 | W1 | LFXO Enable Enables the LFXO. |
| 7 | LFRCODIS | 0 | W1 | LFRCO Disable Disables the LFRCO. LFRCOEN has higher priority if written simultaneously. |
| 6 | LFRCOEN | 0 | W1 | LFRCO Enable Enables the LFRCO. |
| 5 | AUXHFRCODIS | 0 | W1 | AUXHFRCO Disable Disables the AUXHFRCO. AUXHFRCOEN has higher priority if written simultaneously. WARNING: Do not disable this clock during a flash erase/write operation. |
| 4 | AUXHFRCOEN | 0 | W1 | AUXHFRCO Enable Enables the AUXHFRCO. |
| 3 | HFXODIS | 0 | W1 | HFXO Disable Disables the HFXO. HFXOEN has higher priority if written simultaneously. WARNING: Do not disable the HFRXO if this oscillator is selected as the source for HFCLK. |
| 2 | HFXOEN | 0 | W1 | HFXO Enable Enables the HFXO. |
| 1 | HFRCODIS | 0 | W1 | HFRCO Disable Disables the HFRCO. HFRCOEN has higher priority if written simultaneously. WARNING: Do not disable the HFRCO if this oscillator is selected as the source for HFCLK. |
| 0 | HFRCOEN | 0 | W1 | HFRCO Enable Enables the HFRCO. |

11.5.10 CMU_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---------|----------|----------|-----|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0x0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | CALSTOP | CALSTART | HFCLKSEL | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | |
|---|----------|---|--------|---|-------|------|-------------|---|-------|------------------------|---|------|-----------------------|---|-------|------------------------|---|------|-----------------------|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | |
| 4 | CALSTOP | 0 | W1 | Calibration Stop Stops the calibration counters. | | | | | | | | | | | | | | | |
| 3 | CALSTART | 0 | W1 | Calibration Start Starts the calibration, effectively loading the CMU_CALCNT into the down-counter and start decrementing. | | | | | | | | | | | | | | | |
| 2:0 | HFCLKSEL | 0x0 | W1 | HFCLK Select Selects the clock source for HFCLK. Note that selecting an oscillator that is disabled will cause the system clock to stop. Check the status register and confirm that oscillator is ready before switching. | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>1</td><td>HFRCO</td><td>Select HFRCO as HFCLK.</td></tr><tr><td>2</td><td>HFXO</td><td>Select HFXO as HFCLK.</td></tr><tr><td>3</td><td>LFRCO</td><td>Select LFRCO as HFCLK.</td></tr><tr><td>4</td><td>LFXO</td><td>Select LFXO as HFCLK.</td></tr></table> | | | | | Value | Mode | Description | 1 | HFRCO | Select HFRCO as HFCLK. | 2 | HFXO | Select HFXO as HFCLK. | 3 | LFRCO | Select LFRCO as HFCLK. | 4 | LFXO | Select LFXO as HFCLK. |
| Value | Mode | Description | | | | | | | | | | | | | | | | | |
| 1 | HFRCO | Select HFRCO as HFCLK. | | | | | | | | | | | | | | | | | |
| 2 | HFXO | Select HFXO as HFCLK. | | | | | | | | | | | | | | | | | |
| 3 | LFRCO | Select LFRCO as HFCLK. | | | | | | | | | | | | | | | | | |
| 4 | LFXO | Select LFXO as HFCLK. | | | | | | | | | | | | | | | | | |

11.5.11 CMU_LFCLKSEL - Low Frequency Clock Select Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|------|----|----|----|----|----|----|----|----|----|---|---|---|------|---|---|---|---|---|---|--|--|--|--|--|--|-----|-----|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | |
| Reset | | | | | | | | | | | | | 0 | | | | | | | | | | | | | 0 | | | | | | | | | | | | | 0x1 | 0x1 |
| Access | | | | | | | | | | | | | RW | | | | | | | | | | | | | RW | | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | LFBE | | | | | | | | | | | | | LFAE | | | | | | | | | | | | | LFB | LFA |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|--|----------|---|--------|--|-------|------|-------------|---|----------|---|---|--------|--|
| 31:21 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 20 | LFBE | 0 | RW | Clock Select for LFB Extended This bit redefines the meaning of the LFB field. | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>DISABLED</td><td>LFBCLK is disabled (when LFB = DISABLED).</td></tr><tr><td>1</td><td>ULFRCO</td><td>ULFRCO selected as LFBCLK (when LFB = DISABLED).</td></tr></table> | | | | | Value | Mode | Description | 0 | DISABLED | LFBCLK is disabled (when LFB = DISABLED). | 1 | ULFRCO | ULFRCO selected as LFBCLK (when LFB = DISABLED). |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | DISABLED | LFBCLK is disabled (when LFB = DISABLED). | | | | | | | | | | | |
| 1 | ULFRCO | ULFRCO selected as LFBCLK (when LFB = DISABLED). | | | | | | | | | | | |
| 19:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 16 | LFAE | 0 | RW | Clock Select for LFA Extended This bit redefines the meaning of the LFA field. | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>DISABLED</td><td>LFACLK is disabled (when LFA = DISABLED).</td></tr></table> | | | | | Value | Mode | Description | 0 | DISABLED | LFACLK is disabled (when LFA = DISABLED). | | | |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | DISABLED | LFACLK is disabled (when LFA = DISABLED). | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|--------------------------------------|---|-----------------|--|
| | Value | Mode | | Description |
| 1 | ULFRCO | | | ULFRCO selected as LFACLK (when LFA = DISABLED). |
| 15:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:2 | LFB | 0x1 | RW | Clock Select for LFB |
| | Selects the clock source for LFBCLK. | | | |
| | LFB | LFBE | Mode | Description |
| | 0 | 0 | Disabled | LFBCLK is disabled |
| | 1 | 0 | LFRCO | LFRCO selected as LFBCLK |
| | 2 | 0 | LFXO | LFXO selected as LFBCLK |
| | 3 | 0 | HFCORECLKLEDIV2 | HFCORECLK _{LE} divided by two is selected as LFBCLK |
| | 0 | 1 | ULFRCO | ULFRCO selected as LFBCLK |
| 1:0 | LFA | 0x1 | RW | Clock Select for LFA |
| | Selects the clock source for LFACLK. | | | |
| | LFA | LFAE | Mode | Description |
| | 0 | 0 | Disabled | LFACLK is disabled |
| | 1 | 0 | LFRCO | LFRCO selected as LFACLK |
| | 2 | 0 | LFXO | LFXO selected as LFACLK |
| | 3 | 0 | HFCORECLKLEDIV2 | HFCORECLK _{LE} divided by two is selected as LFACLK |
| | 0 | 1 | ULFRCO | ULFRCO selected as LFACLK |

11.5.12 CMU_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 1 | R | 0 | R | 0 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 | R | 1 |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:15 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 14 | CALBSY | 0 | R | Calibration Busy Calibration is on-going. |
| 13 | LFXOSEL | 0 | R | LFXO Selected LFXO is selected as HFCLK clock source. |
| 12 | LFRCOSEL | 0 | R | LFRCO Selected LFRCO is selected as HFCLK clock source. |
| 11 | HFXOSEL | 0 | R | HFXO Selected HFXO is selected as HFCLK clock source. |
| 10 | HFRCOSEL | 1 | R | HFRCO Selected HFRCO is selected as HFCLK clock source. |
| 9 | LFXORDY | 0 | R | LFXO Ready LFXO is enabled and start-up time has exceeded. |

| Bit | Name | Reset | Access | Description |
|-----|--|-------|--------|-------------------------------|
| 8 | LFXOENS LFXO is enabled. | 0 | R | LFXO Enable Status |
| 7 | LFRCORDY LFRCO is enabled and start-up time has exceeded. | 0 | R | LFRCO Ready |
| 6 | LFRCOENS LFRCO is enabled. | 0 | R | LFRCO Enable Status |
| 5 | AUXHFRCORDY AUXHFRCO is enabled and start-up time has exceeded. | 0 | R | AUXHFRCO Ready |
| 4 | AUXHFRCOENS AUXHFRCO is enabled. | 0 | R | AUXHFRCO Enable Status |
| 3 | HFXORDY HFXO is enabled and start-up time has exceeded. | 0 | R | HFXO Ready |
| 2 | HFXOENS HFXO is enabled. | 0 | R | HFXO Enable Status |
| 1 | HFRCORDY HFRCO is enabled and start-up time has exceeded. | 1 | R | HFRCO Ready |
| 0 | HFRCOENS HFRCO is enabled. | 1 | R | HFRCO Enable Status |

11.5.13 CMU_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------|--------|-------------|---------|----------|---------|----------|---|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | R | R | R | R | R | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CALOF | CALRDY | AUXHFRCORDY | LFXORDY | LFRCORDY | HFXORDY | HFRCORDY | |

| Bit | Name | Reset | Access | Description |
|------|---|--|--------|--|
| 31:7 | <i>Reserved</i> | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | |
| 6 | CALOF Set when calibration overflow has occurred | 0 | R | Calibration Overflow Interrupt Flag |
| 5 | CALRDY Set when calibration is completed. | 0 | R | Calibration Ready Interrupt Flag |
| 4 | AUXHFRCORDY Set when AUXHFRCO is ready (start-up time exceeded). | 0 | R | AUXHFRCO Ready Interrupt Flag |
| 3 | LFXORDY Set when LFXO is ready (start-up time exceeded). | 0 | R | LFXO Ready Interrupt Flag |
| 2 | LFRCORDY Set when LFRCO is ready (start-up time exceeded). | 0 | R | LFRCO Ready Interrupt Flag |
| 1 | HFXORDY Set when HFXO is ready (start-up time exceeded). | 0 | R | HFXO Ready Interrupt Flag |
| 0 | HFRCORDY | 1 | R | HFRCO Ready Interrupt Flag |

| Bit | Name | Reset | Access | Description |
|-----|------|-------|--------|---|
| | | | | Set when HFRCO is ready (start-up time exceeded). |

11.5.14 CMU_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|-------------|---------|---|---|---|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | CALOF | CALRDY | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | AUXHFRCORDY | LFXORDY | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | LFRCORDY | HFXORDY | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | HFRCORDY | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|---|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | CALOF | 0 | W1 | Calibration Overflow Interrupt Flag Set Write to 1 to set the Calibration Overflow Interrupt Flag. |
| 5 | CALRDY | 0 | W1 | Calibration Ready Interrupt Flag Set Write to 1 to set the Calibration Ready(completed) Interrupt Flag. |
| 4 | AUXHFRCORDY | 0 | W1 | AUXHFRCO Ready Interrupt Flag Set Write to 1 to set the AUXHFRCO Ready Interrupt Flag. |
| 3 | LFXORDY | 0 | W1 | LFXO Ready Interrupt Flag Set Write to 1 to set the LFXO Ready Interrupt Flag. |
| 2 | LFRCORDY | 0 | W1 | LFRCO Ready Interrupt Flag Set Write to 1 to set the LFRCO Ready Interrupt Flag. |
| 1 | HFXORDY | 0 | W1 | HFXO Ready Interrupt Flag Set Write to 1 to set the HFXO Ready Interrupt Flag. |
| 0 | HFRCORDY | 0 | W1 | HFRCO Ready Interrupt Flag Set Write to 1 to set the HFRCO Ready Interrupt Flag. |

11.5.15 CMU_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|-------|--------|-------------|---------|----------|---------|----------|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | CALOF | CALRDY | AUXHFRCORDY | LFXORDY | LFRCORDY | HFXORDY | HFRCORDY |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|-----|-------------|-------|--------|--|
| 6 | CALOF | 0 | W1 | Calibration Overflow Interrupt Flag Clear Write to 1 to clear the Calibration Overflow Interrupt Flag. |
| 5 | CALRDY | 0 | W1 | Calibration Ready Interrupt Flag Clear Write to 1 to clear the Calibration Ready Interrupt Flag. |
| 4 | AUXHFRCORDY | 0 | W1 | AUXHFRCO Ready Interrupt Flag Clear Write to 1 to clear the AUXHFRCO Ready Interrupt Flag. |
| 3 | LFXORDY | 0 | W1 | LFXO Ready Interrupt Flag Clear Write to 1 to clear the LFXO Ready Interrupt Flag. |
| 2 | LFRCORDY | 0 | W1 | LFRCO Ready Interrupt Flag Clear Write to 1 to clear the LFRCO Ready Interrupt Flag. |
| 1 | HFXORDY | 0 | W1 | HFXO Ready Interrupt Flag Clear Write to 1 to clear the HFXO Ready Interrupt Flag. |
| 0 | HFRCORDY | 0 | W1 | HFRCO Ready Interrupt Flag Clear Write to 1 to clear the HFRCO Ready Interrupt Flag. |

11.5.16 CMU_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|---|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | CALOF | 0 | RW | Calibration Overflow Interrupt Enable Set to enable the Calibration Overflow Interrupt. |
| 5 | CALRDY | 0 | RW | Calibration Ready Interrupt Enable Set to enable the Calibration Ready Interrupt. |
| 4 | AUXHFRCORDY | 0 | RW | AUXHFRCO Ready Interrupt Enable Set to enable the AUXHFRCO Ready Interrupt. |
| 3 | LFXORDY | 0 | RW | LFXO Ready Interrupt Enable Set to enable the LFXO Ready Interrupt. |
| 2 | LFRCORDY | 0 | RW | LFRCO Ready Interrupt Enable Set to enable the LFRCO Ready Interrupt. |
| 1 | HFXORDY | 0 | RW | HFXO Ready Interrupt Enable Set to enable the HFXO Ready Interrupt. |
| 0 | HFRCORDY | 0 | RW | HFRCO Ready Interrupt Enable Set to enable the HFRCO Ready Interrupt. |

11.5.17 CMU_HFCORECLKEN0 - High Frequency Core Clock Enable Register 0

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--|----|--|-----|--|-----|--|---|--|----|--|----|--|----|--|----|--|---|--|----|--|----|--|----|--|----|--|---|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | | 0 | | 0 | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | | RW | | RW | | 0 | | RW | | RW | | RW | | RW | | 0 | | RW | | RW | | RW | | RW | | 0 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LE | | DMA | | AES | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | LE | 0 | RW | Low Energy Peripheral Interface Clock Enable Set to enable the clock for LE. Interface used for bus access to Low Energy peripherals. |
| 1 | DMA | 0 | RW | Direct Memory Access Controller Clock Enable Set to enable the clock for DMA. |
| 0 | AES | 0 | RW | Advanced Encryption Standard Accelerator Clock Enable Set to enable the clock for AES. |

11.5.18 CMU_HFPERCLKEN0 - High Frequency Peripheral Clock Enable Register 0

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|------|------|-----|------|------|--------|--------|--------|--------|-------|-------|----|----|----|----|
| 0x044 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | I2C0 | DAC0 | ADC0 | PRS | VCMP | GPIO | TIMER1 | TIMER0 | USART1 | USART0 | ACMP1 | ACMP0 | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 11 | I2C0 | 0 | RW | I2C 0 Clock Enable Set to enable the clock for I2C0. |
| 10 | DAC0 | 0 | RW | Digital to Analog Converter 0 Clock Enable Set to enable the clock for DAC0. |
| 9 | ADC0 | 0 | RW | Analog to Digital Converter 0 Clock Enable Set to enable the clock for ADC0. |
| 8 | PRS | 0 | RW | Peripheral Reflex System Clock Enable Set to enable the clock for PRS. |
| 7 | VCMP | 0 | RW | Voltage Comparator Clock Enable Set to enable the clock for VCMP. |
| 6 | GPIO | 0 | RW | General purpose Input/Output Clock Enable Set to enable the clock for GPIO. |

| Bit | Name | Reset | Access | Description |
|-----|--------|-------|--------|--|
| 5 | TIMER1 | 0 | RW | Timer 1 Clock Enable Set to enable the clock for TIMER1. |
| 4 | TIMER0 | 0 | RW | Timer 0 Clock Enable Set to enable the clock for TIMER0. |
| 3 | USART1 | 0 | RW | Universal Synchronous/Asynchronous Receiver/Transmitter 1 Clock Enable Set to enable the clock for USART1. |
| 2 | USART0 | 0 | RW | Universal Synchronous/Asynchronous Receiver/Transmitter 0 Clock Enable Set to enable the clock for USART0. |
| 1 | ACMP1 | 0 | RW | Analog Comparator 1 Clock Enable Set to enable the clock for ACMP1. |
| 0 | ACMP0 | 0 | RW | Analog Comparator 0 Clock Enable Set to enable the clock for ACMP0. |

11.5.19 CMU_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|-----------|---|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 0x050 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LFBPRESC0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | |
|-------|--|---|--------|---|-------|-------------|---|--|---|--|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 6 | LFBPRESC0 | 0 | R | Low Frequency B Prescaler 0 Busy Used to check the synchronization status of CMU_LFBPRESC0. <table><tr><th>Value</th><th>Description</th></tr><tr><td>1</td><td>CMU_LFBPRESC0 is busy synchronizing new value.</td></tr></table> | Value | Description | 1 | CMU_LFBPRESC0 is busy synchronizing new value. | | |
| Value | Description | | | | | | | | | |
| 1 | CMU_LFBPRESC0 is busy synchronizing new value. | | | | | | | | | |
| 5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 4 | LFBCLKEN0 | 0 | R | Low Frequency B Clock Enable 0 Busy Used to check the synchronization status of CMU_LFBCLKEN0. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>CMU_LFBCLKEN0 is ready for update.</td></tr><tr><td>1</td><td>CMU_LFBCLKEN0 is busy synchronizing new value.</td></tr></table> | Value | Description | 0 | CMU_LFBCLKEN0 is ready for update. | 1 | CMU_LFBCLKEN0 is busy synchronizing new value. |
| Value | Description | | | | | | | | | |
| 0 | CMU_LFBCLKEN0 is ready for update. | | | | | | | | | |
| 1 | CMU_LFBCLKEN0 is busy synchronizing new value. | | | | | | | | | |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 2 | LFAPRESC0 | 0 | R | Low Frequency A Prescaler 0 Busy Used to check the synchronization status of CMU_LFAPRESC0. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>CMU_LFAPRESC0 is ready for update.</td></tr><tr><td>1</td><td>CMU_LFAPRESC0 is busy synchronizing new value.</td></tr></table> | Value | Description | 0 | CMU_LFAPRESC0 is ready for update. | 1 | CMU_LFAPRESC0 is busy synchronizing new value. |
| Value | Description | | | | | | | | | |
| 0 | CMU_LFAPRESC0 is ready for update. | | | | | | | | | |
| 1 | CMU_LFAPRESC0 is busy synchronizing new value. | | | | | | | | | |
| 1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 0 | LFACLKEN0 | 0 | R | Low Frequency A Clock Enable 0 Busy Used to check the synchronization status of CMU_LFACLKEN0. | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|-------|--|--------|-------------|
| | Value | Description | | |
| | 0 | CMU_LFACLKEN0 is ready for update. | | |
| | 1 | CMU_LFACLKEN0 is busy synchronizing new value. | | |

11.5.20 CMU_FREEZE - Freeze Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x054 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|--|-----------|---|----|-------------------------------|
| 0 | REGFREEZE | 0 | RW | Register Update Freeze |
| When set, the update of the Low Frequency clock control registers is postponed until this bit is cleared. Use this bit to update several registers simultaneously. | | | | |

| | | |
|-------|--------|---|
| Value | Mode | Description |
| 0 | UPDATE | Each write access to a Low Frequency clock control register is updated into the Low Frequency domain as soon as possible. |
| 1 | FREEZE | The LE Clock Control registers are not updated with the new written value. |

11.5.21 CMU_LFACLKEN0 - Low Frequency A Clock Enable Register 0 (Async Reg)

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x058 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|---------------------------------------|----------|---|----|---|
| 3 | LCD | 0 | RW | Liquid Crystal Display Controller Clock Enable |
| Set to enable the clock for LCD. | | | | |
| 2 | LETIMER0 | 0 | RW | Low Energy Timer 0 Clock Enable |
| Set to enable the clock for LETIMER0. | | | | |
| 1 | RTC | 0 | RW | Real-Time Counter Clock Enable |
| Set to enable the clock for RTC. | | | | |
| 0 | LESENSE | 0 | RW | Low Energy Sensor Interface Clock Enable |
| Set to enable the clock for LESENSE. | | | | |

11.5.22 CMU_LFBCLKEN0 - Low Frequency B Clock Enable Register 0 (Async Reg)

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|---------|
| 0x060 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LEUART0 |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | LEUART0 | 0 | RW | Low Energy UART 0 Clock Enable Set to enable the clock for LEUART0. |

11.5.23 CMU_LFAPRESC0 - Low Frequency A Prescaler Register 0 (Async Reg)

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|----|----------|----|---|---|-----|---|---|---|---|---|---------|---|
| 0x068 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | 0x0 | | 0x0 | | | | 0x0 | | | | | | 0x0 | |
| Access | | | | | | | | | | | | | | | | | | | RW | | RW | | | | RW | | | | | | RW | |
| Name | | | | | | | | | | | | | | | | | | | LCD | | LETIMER0 | | | | RTC | | | | | | LESENSE | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

13:12 LCD 0x0 RW **Liquid Crystal Display Controller Prescaler**

Configure Liquid Crystal Display Controller prescaler

| Value | Mode | Description |
|-------|--------|------------------------------------|
| 0 | DIV16 | LFACLK _{LCD} = LFACLK/16 |
| 1 | DIV32 | LFACLK _{LCD} = LFACLK/32 |
| 2 | DIV64 | LFACLK _{LCD} = LFACLK/64 |
| 3 | DIV128 | LFACLK _{LCD} = LFACLK/128 |

11:8 LETIMER0 0x0 RW **Low Energy Timer 0 Prescaler**

Configure Low Energy Timer 0 prescaler

| Value | Mode | Description |
|-------|--------|---|
| 0 | DIV1 | LFACLK _{LETIMER0} = LFACLK |
| 1 | DIV2 | LFACLK _{LETIMER0} = LFACLK/2 |
| 2 | DIV4 | LFACLK _{LETIMER0} = LFACLK/4 |
| 3 | DIV8 | LFACLK _{LETIMER0} = LFACLK/8 |
| 4 | DIV16 | LFACLK _{LETIMER0} = LFACLK/16 |
| 5 | DIV32 | LFACLK _{LETIMER0} = LFACLK/32 |
| 6 | DIV64 | LFACLK _{LETIMER0} = LFACLK/64 |
| 7 | DIV128 | LFACLK _{LETIMER0} = LFACLK/128 |
| 8 | DIV256 | LFACLK _{LETIMER0} = LFACLK/256 |
| 9 | DIV512 | LFACLK _{LETIMER0} = LFACLK/512 |

| Bit | Name | Reset | Access | Description |
|-----|----------|-------|--------|---|
| | Value | Mode | | Description |
| 10 | DIV1024 | | | LFACLK _{LETIMER0} = LFACLK/1024 |
| 11 | DIV2048 | | | LFACLK _{LETIMER0} = LFACLK/2048 |
| 12 | DIV4096 | | | LFACLK _{LETIMER0} = LFACLK/4096 |
| 13 | DIV8192 | | | LFACLK _{LETIMER0} = LFACLK/8192 |
| 14 | DIV16384 | | | LFACLK _{LETIMER0} = LFACLK/16384 |
| 15 | DIV32768 | | | LFACLK _{LETIMER0} = LFACLK/32768 |

7:4 RTC 0x0 RW **Real-Time Counter Prescaler**

Configure Real-Time Counter prescaler

| | | |
|-------|----------|--------------------------------------|
| Value | Mode | Description |
| 0 | DIV1 | LFACLK _{RTC} = LFACLK |
| 1 | DIV2 | LFACLK _{RTC} = LFACLK/2 |
| 2 | DIV4 | LFACLK _{RTC} = LFACLK/4 |
| 3 | DIV8 | LFACLK _{RTC} = LFACLK/8 |
| 4 | DIV16 | LFACLK _{RTC} = LFACLK/16 |
| 5 | DIV32 | LFACLK _{RTC} = LFACLK/32 |
| 6 | DIV64 | LFACLK _{RTC} = LFACLK/64 |
| 7 | DIV128 | LFACLK _{RTC} = LFACLK/128 |
| 8 | DIV256 | LFACLK _{RTC} = LFACLK/256 |
| 9 | DIV512 | LFACLK _{RTC} = LFACLK/512 |
| 10 | DIV1024 | LFACLK _{RTC} = LFACLK/1024 |
| 11 | DIV2048 | LFACLK _{RTC} = LFACLK/2048 |
| 12 | DIV4096 | LFACLK _{RTC} = LFACLK/4096 |
| 13 | DIV8192 | LFACLK _{RTC} = LFACLK/8192 |
| 14 | DIV16384 | LFACLK _{RTC} = LFACLK/16384 |
| 15 | DIV32768 | LFACLK _{RTC} = LFACLK/32768 |

3:2 *Reserved* To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)

1:0 LESENSE 0x0 RW **Low Energy Sensor Interface Prescaler**

Configure Low Energy Sensor Interface prescaler

| | | |
|-------|------|--------------------------------------|
| Value | Mode | Description |
| 0 | DIV1 | LFACLK _{LESENSE} = LFACLK |
| 1 | DIV2 | LFACLK _{LESENSE} = LFACLK/2 |
| 2 | DIV4 | LFACLK _{LESENSE} = LFACLK/4 |
| 3 | DIV8 | LFACLK _{LESENSE} = LFACLK/8 |

11.5.24 CMU_LFBPRESC0 - Low Frequency B Prescaler Register 0 (Async Reg)

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---------|
| 0x070 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | LEUART0 |

| Bit | Name | Reset | Access | Description |
|------|-----------------|---|--------|-------------|
| 31:2 | <i>Reserved</i> | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

1:0 LEUART0 0x0 RW **Low Energy UART 0 Prescaler**

Configure Low Energy UART 0 prescaler

| Bit | Name | Reset | Access | Description |
|-----|-------|-------|--------|------------------------------------|
| | Value | Mode | | Description |
| 0 | DIV1 | | | LFCLK _{LEUART0} = LFCLK |
| 1 | DIV2 | | | LFCLK _{LEUART0} = LFCLK/2 |
| 2 | DIV4 | | | LFCLK _{LEUART0} = LFCLK/4 |
| 3 | DIV8 | | | LFCLK _{LEUART0} = LFCLK/8 |

11.5.25 CMU_PCNTCTRL - PCNT Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|-------------|------------|
| 0x078 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PCNT0CLKSEL | PCNT0CLKEN |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|--|-------------|---------|----|--|
| 1 | PCNT0CLKSEL | 0 | RW | PCNT0 Clock Select |
| This bit controls which clock that is used for the PCNT. | | | | |
| | Value | Mode | | Description |
| | 0 | LFACLK | | LFACLK is clocking PCNT0. |
| | 1 | PCNT0S0 | | External pin PCNT0_S0 is clocking PCNT0. |

| | | | | |
|--|------------|--------------------|----|---------------------------|
| 0 | PCNT0CLKEN | 0 | RW | PCNT0 Clock Enable |
| This bit enables/disables the clock to the PCNT. | | | | |
| | Value | Description | | |
| | 0 | PCNT0 is disabled. | | |
| | 1 | PCNT0 is enabled. | | |

11.5.26 CMU_LCDCTRL - LCD Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|----------|-----|------|---|---|---|
| 0x07C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x2 | | 0 | 0x0 | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | RW | RW | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | VBFDIV | | VBOOSTEN | | FDIV | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|---|--------|------|----|--|
| 6:4 | VBFDIV | 0x2 | RW | Voltage Boost Frequency Division |
| These bits control the voltage boost update frequency division. | | | | |
| | Value | Mode | | Description |
| | 0 | DIV1 | | Voltage Boost update Frequency = LFACLK. |
| | 1 | DIV2 | | Voltage Boost update Frequency = LFACLK/2. |

| Bit | Name | Reset | Access | Description |
|-----|----------|-------|--------|--|
| | Value | Mode | | Description |
| 2 | DIV4 | | | Voltage Boost update Frequency = LFACLK/4. |
| 3 | DIV8 | | | Voltage Boost update Frequency = LFACLK/8. |
| 4 | DIV16 | | | Voltage Boost update Frequency = LFACLK/16. |
| 5 | DIV32 | | | Voltage Boost update Frequency = LFACLK/32. |
| 6 | DIV64 | | | Voltage Boost update Frequency = LFACLK/64. |
| 7 | DIV128 | | | Voltage Boost update Frequency = LFACLK/128. |
| 3 | VBOOSTEN | 0 | RW | Voltage Boost Enable This bit enables/disables the VBOOST function. |
| 2:0 | FDIV | 0x0 | RW | Frame Rate Control These bits controls the framerate according to this formula: $LFACLK_{LCD} = LFACLK_{LCDpre} / (1 + FDIV)$. Do not change this value while the LCD bit in CMU_LFACLKEN0 is set to 1. |

11.5.27 CMU_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x080 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Bit | Name | Reset | Access | Description | | | | | | | | | | | | |
|-------|------------|---|--------|---|-------|------|-------------|---|------|------------|---|------|------------|---|------|------------|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | |
| 4:2 | LOCATION | 0x0 | RW | I/O Location Decides the location of the CMU I/O pins. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr><tr><td>2</td><td>LOC2</td><td>Location 2</td></tr></table> | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 | 2 | LOC2 | Location 2 |
| Value | Mode | Description | | | | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | | | | |
| 2 | LOC2 | Location 2 | | | | | | | | | | | | | | |
| 1 | CLKOUT1PEN | 0 | RW | CLKOUT1 Pin Enable When set, the CLKOUT1 pin is enabled. | | | | | | | | | | | | |
| 0 | CLKOUT0PEN | 0 | RW | CLKOUT0 Pin Enable When set, the CLKOUT0 pin is enabled. | | | | | | | | | | | | |

11.5.28 CMU_LOCK - Configuration Lock Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x084 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | LOCKKEY | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----------------|----------|---|-----------------------------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | LOCKKEY | 0x0000 | RW | Configuration Lock Key Write any other value than the unlock code to lock CMU_CTRL, CMU_HFCORECLKDIV, CMU_HFPERCLKDIV, CMU_HFRCOCTRL, CMU_LFRCOCTRL, CMU_AUXHFRCOCTRL, CMU_OSCENCMD, CMU_CMD, CMU_LFCLKSEL, CMU_HFCORECLKEN0, CMU_HFPERCLKEN0, CMU_LFACLKEN0, CMU_LFBCLKEN0, CMU_LFAPRESC0, CMU_LFBPRESC0, and CMU_PCNTCTRL from editing. Write the unlock code to unlock. When reading the register, bit 0 is set when the lock is enabled. |
| Mode | | Value | Description | |
| Read Operation | | | | |
| UNLOCKED | | 0 | CMU registers are unlocked. | |
| LOCKED | | 1 | CMU registers are locked. | |
| Write Operation | | | | |
| LOCK | | 0 | Lock CMU registers. | |
| UNLOCK | | 0x580E | Unlock CMU registers. | |

12 WDOG - Watchdog Timer

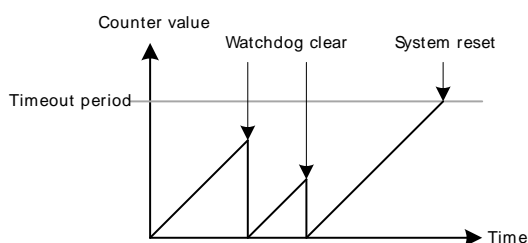

Quick Facts

What?

The WDOG (Watchdog Timer) resets the system in case of a fault condition, and can be enabled in all energy modes as long as the low frequency clock source is available.

Why?

If a software failure or external event renders the MCU unresponsive, a Watchdog timeout will reset the system to a known, safe state.

How?

An enabled Watchdog Timer implements a configurable timeout period. If the CPU fails to re-start the Watchdog Timer before it times out, a full system reset will be triggered. The Watchdog consumes insignificant power, and allows the device to remain safely in low energy modes for up to 256 seconds at a time.

12.1 Introduction

The purpose of the watchdog timer is to generate a reset in case of a system failure, to increase application reliability. The failure may e.g. be caused by an external event, such as an ESD pulse, or by a software failure.

12.2 Features

- Clock input from selectable oscillators
 - Internal 32.768 Hz RC oscillator
 - Internal 1 kHz RC oscillator
 - External 32.768 Hz XTAL oscillator
- Configurable timeout period from 9 to 256k watchdog clock cycles
- Individual selection to keep running or freeze when entering EM2 or EM3
- Selection to keep running or freeze when entering debug mode
- Selection to block the CPU from entering Energy Mode 4
- Selection to block the CMU from disabling the selected watchdog clock

12.3 Functional Description

The watchdog is enabled by setting the EN bit in WDOG_CTRL. When enabled, the watchdog counts up to the period value configured through the PERSEL field in WDOG_CTRL. If the watchdog timer is not cleared to 0 (by writing a 1 to the CLEAR bit in WDOG_CMD) before the period is reached, the chip is reset. If a timely clear command is issued, the timer starts counting up from 0 again. The watchdog can optionally be locked by writing the LOCK bit in WDOG_CTRL. Once locked, it cannot be disabled or reconfigured by software.

The watchdog counter is reset when EN is reset.

12.3.1 Clock Source

Three clock sources are available for use with the watchdog, through the CLKSEL field in WDOG_CTRL. The corresponding clocks must be enabled in the CMU. The SWOSCBLOCK bit in WDOG_CTRL can be written to prevent accidental disabling of the selected clocks. Also, setting this bit will automatically start the selected oscillator source when the watchdog is enabled. The PERSEL field in WDOG_CTRL is used to divide the selected watchdog clock, and the timeout for the watchdog timer can be calculated like this:

WDOG Timeout Equation

$$T_{\text{TIMEOUT}} = (2^{3+\text{PERSEL}} + 1)/f, \quad (12.1)$$

where f is the frequency of the selected clock.

It is recommended to clear the watchdog first, if PERSEL is changed while the watchdog is enabled.

To use this module, the LE interface clock must be enabled in CMU_HFCORECLKEN0, in addition to the module clock.

12.3.2 Debug Functionality

The watchdog timer can either keep running or be frozen when the device is halted by a debugger. This configuration is done through the DEBUGRUN bit in WDOG_CTRL. When code execution is resumed, the watchdog will continue counting where it left off.

12.3.3 Energy Mode Handling

The watchdog timer can be configured to either keep on running or freeze when entering EM2 or EM3. The configuration is done individually for each energy mode in the EM2RUN and EM3RUN bits in WDOG_CTRL. When the watchdog has been frozen and is re-entering an energy mode where it is running, the watchdog timer will continue counting where it left off. For the watchdog there is no difference between EM0 and EM1. The watchdog does not run in EM4, and if EM4BLOCK in WDOG_CTRL is set, the CPU is prevented from entering EM4.

Note

If the WDOG is clocked by the LFXO or LFRCO, writing the SWOSCBLOCK bit will effectively prevent the CPU from entering EM3. When running from the ULFRCO, writing the SWOSCBLOCK bit will prevent the CPU from entering EM4.

12.3.4 Register access

Since this module is a Low Energy Peripheral, and runs off a clock which is asynchronous to the HFCORECLK, special considerations must be taken when accessing registers. Please refer to Section 5.3 (p. 20) for a description on how to perform register accesses to Low Energy Peripherals. note that clearing the EN bit in WDOG_CTRL will reset the WDOG module, which will halt any ongoing register synchronization.

Note

Never write to the WDOG registers when it is disabled, except to enable it by setting the EN bitfield in WDOG_CTRL. Make sure that the enable is registered (i.e. WDOG_SYNCBUSY_CTRL goes low), before writing other registers.

12.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|---------------|------|-------------------------------|
| 0x000 | WDOG_CTRL | RW | Control Register |
| 0x004 | WDOG_CMD | W1 | Command Register |
| 0x008 | WDOG_SYNCBUSY | R | Synchronization Busy Register |

12.5 Register Description

12.5.1 WDOG_CTRL - Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|--------|---|---|---|---|---|------------|----|----------|----|------|----|--------|----|--------|----|----------|--|----|--|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | 0x0 | | | | 0xF | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | RW | | | | RW | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | | | | |
| Name | | | | | | | | | | | | | | | | | | | CLKSEL | | | | PERSEL | | | | | | SWOSCBLOCK | | EM4BLOCK | | LOCK | | EM3RUN | | EM2RUN | | DEBUGRUN | | EN | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|--------|---|-------|-------------|-------------|--|--------|---|---|---|-------|---|------|--|---|--|---|--|---|---|---|---|---|---|----|---|----|--|----|--|----|--|----|---|----|---|
| 31:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13:12 | CLKSEL | 0x0 | RW | Watchdog Clock Select Selects the WDOG oscillator, i.e. the clock on which the watchdog will run. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>ULFRCO</td><td>ULFRCO</td></tr><tr><td>1</td><td>LFRCO</td><td>LFRCO</td></tr><tr><td>2</td><td>LFXO</td><td>LFXO</td></tr></table> | | | | | Value | Mode | Description | 0 | ULFRCO | ULFRCO | 1 | LFRCO | LFRCO | 2 | LFXO | LFXO | | | | | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | ULFRCO | ULFRCO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | LFRCO | LFRCO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | LFXO | LFXO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11:8 | PERSEL | 0xF | RW | Watchdog Timeout Period Select Select watchdog timeout period. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Timeout period of 9 watchdog clock cycles.</td></tr><tr><td>1</td><td>Timeout period of 17 watchdog clock cycles.</td></tr><tr><td>2</td><td>Timeout period of 33 watchdog clock cycles.</td></tr><tr><td>3</td><td>Timeout period of 65 watchdog clock cycles.</td></tr><tr><td>4</td><td>Timeout period of 129 watchdog clock cycles.</td></tr><tr><td>5</td><td>Timeout period of 257 watchdog clock cycles.</td></tr><tr><td>6</td><td>Timeout period of 513 watchdog clock cycles.</td></tr><tr><td>7</td><td>Timeout period of 1k watchdog clock cycles.</td></tr><tr><td>8</td><td>Timeout period of 2k watchdog clock cycles.</td></tr><tr><td>9</td><td>Timeout period of 4k watchdog clock cycles.</td></tr><tr><td>10</td><td>Timeout period of 8k watchdog clock cycles.</td></tr><tr><td>11</td><td>Timeout period of 16k watchdog clock cycles.</td></tr><tr><td>12</td><td>Timeout period of 32k watchdog clock cycles.</td></tr><tr><td>13</td><td>Timeout period of 64k watchdog clock cycles.</td></tr><tr><td>14</td><td>Timeout period of 128k watchdog clock cycles.</td></tr><tr><td>15</td><td>Timeout period of 256k watchdog clock cycles.</td></tr></table> | | | | | Value | Description | 0 | Timeout period of 9 watchdog clock cycles. | 1 | Timeout period of 17 watchdog clock cycles. | 2 | Timeout period of 33 watchdog clock cycles. | 3 | Timeout period of 65 watchdog clock cycles. | 4 | Timeout period of 129 watchdog clock cycles. | 5 | Timeout period of 257 watchdog clock cycles. | 6 | Timeout period of 513 watchdog clock cycles. | 7 | Timeout period of 1k watchdog clock cycles. | 8 | Timeout period of 2k watchdog clock cycles. | 9 | Timeout period of 4k watchdog clock cycles. | 10 | Timeout period of 8k watchdog clock cycles. | 11 | Timeout period of 16k watchdog clock cycles. | 12 | Timeout period of 32k watchdog clock cycles. | 13 | Timeout period of 64k watchdog clock cycles. | 14 | Timeout period of 128k watchdog clock cycles. | 15 | Timeout period of 256k watchdog clock cycles. |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | Timeout period of 9 watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Timeout period of 17 watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Timeout period of 33 watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Timeout period of 65 watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Timeout period of 129 watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Timeout period of 257 watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Timeout period of 513 watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Timeout period of 1k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Timeout period of 2k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Timeout period of 4k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | Timeout period of 8k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Timeout period of 16k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Timeout period of 32k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Timeout period of 64k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | Timeout period of 128k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | Timeout period of 256k watchdog clock cycles. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | |
|-------|---|---|--------|---|-------|-------------|---|---|---|--|
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 6 | SWOSCBLOCK | 0 | RW | Software Oscillator Disable Block Set to disallow disabling of the selected WDOG oscillator. Writing this bit to 1 will turn on the selected WDOG oscillator if it is not already running. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Software is allowed to disable the selected WDOG oscillator. See CMU for detailed description. Note that also CMU registers are lockable.</td></tr><tr><td>1</td><td>Software is not allowed to disable the selected WDOG oscillator.</td></tr></table> | Value | Description | 0 | Software is allowed to disable the selected WDOG oscillator. See CMU for detailed description. Note that also CMU registers are lockable. | 1 | Software is not allowed to disable the selected WDOG oscillator. |
| Value | Description | | | | | | | | | |
| 0 | Software is allowed to disable the selected WDOG oscillator. See CMU for detailed description. Note that also CMU registers are lockable. | | | | | | | | | |
| 1 | Software is not allowed to disable the selected WDOG oscillator. | | | | | | | | | |
| 5 | EM4BLOCK | 0 | RW | Energy Mode 4 Block Set to prevent the EMU from entering EM4. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>EM4 can be entered. See EMU for detailed description.</td></tr><tr><td>1</td><td>EM4 cannot be entered.</td></tr></table> | Value | Description | 0 | EM4 can be entered. See EMU for detailed description. | 1 | EM4 cannot be entered. |
| Value | Description | | | | | | | | | |
| 0 | EM4 can be entered. See EMU for detailed description. | | | | | | | | | |
| 1 | EM4 cannot be entered. | | | | | | | | | |
| 4 | LOCK | 0 | RW | Configuration lock Set to lock the watchdog configuration. This bit can only be cleared by reset. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Watchdog configuration can be changed.</td></tr><tr><td>1</td><td>Watchdog configuration cannot be changed.</td></tr></table> | Value | Description | 0 | Watchdog configuration can be changed. | 1 | Watchdog configuration cannot be changed. |
| Value | Description | | | | | | | | | |
| 0 | Watchdog configuration can be changed. | | | | | | | | | |
| 1 | Watchdog configuration cannot be changed. | | | | | | | | | |
| 3 | EM3RUN | 0 | RW | Energy Mode 3 Run Enable Set to keep watchdog running in EM3. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Watchdog timer is frozen in EM3.</td></tr><tr><td>1</td><td>Watchdog timer is running in EM3.</td></tr></table> | Value | Description | 0 | Watchdog timer is frozen in EM3. | 1 | Watchdog timer is running in EM3. |
| Value | Description | | | | | | | | | |
| 0 | Watchdog timer is frozen in EM3. | | | | | | | | | |
| 1 | Watchdog timer is running in EM3. | | | | | | | | | |
| 2 | EM2RUN | 0 | RW | Energy Mode 2 Run Enable Set to keep watchdog running in EM2. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Watchdog timer is frozen in EM2.</td></tr><tr><td>1</td><td>Watchdog timer is running in EM2.</td></tr></table> | Value | Description | 0 | Watchdog timer is frozen in EM2. | 1 | Watchdog timer is running in EM2. |
| Value | Description | | | | | | | | | |
| 0 | Watchdog timer is frozen in EM2. | | | | | | | | | |
| 1 | Watchdog timer is running in EM2. | | | | | | | | | |
| 1 | DEBUGRUN | 0 | RW | Debug Mode Run Enable Set to keep watchdog running in debug mode. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Watchdog timer is frozen in debug mode.</td></tr><tr><td>1</td><td>Watchdog timer is running in debug mode.</td></tr></table> | Value | Description | 0 | Watchdog timer is frozen in debug mode. | 1 | Watchdog timer is running in debug mode. |
| Value | Description | | | | | | | | | |
| 0 | Watchdog timer is frozen in debug mode. | | | | | | | | | |
| 1 | Watchdog timer is running in debug mode. | | | | | | | | | |
| 0 | EN | 0 | RW | Watchdog Timer Enable Set to enabled watchdog timer. | | | | | | |

12.5.2 WDOG_CMD - Command Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Bit | Name | Reset | Access | Description | | | | | | | | | |
|--|-----------|---|--------|--|-------|------|-------------|---|-----------|------------------------------|---|---------|---------------------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 0 | CLEAR | 0 | W1 | Watchdog Timer Clear Clear watchdog timer. The bit must be written 4 watchdog cycles before the timeout. | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>UNCHANGED</td><td>Watchdog timer is unchanged.</td></tr><tr><td>1</td><td>CLEARED</td><td>Watchdog timer is cleared to 0.</td></tr></table> | | | | | Value | Mode | Description | 0 | UNCHANGED | Watchdog timer is unchanged. | 1 | CLEARED | Watchdog timer is cleared to 0. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | UNCHANGED | Watchdog timer is unchanged. | | | | | | | | | | | |
| 1 | CLEARED | Watchdog timer is cleared to 0. | | | | | | | | | | | |

12.5.3 WDOG_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|-----|---|------|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | CMD | | CTRL |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | CMD | 0 | R | CMD Register Busy Set when the value written to CMD is being synchronized. |
| 0 | CTRL | 0 | R | CTRL Register Busy Set when the value written to CTRL is being synchronized. |

13 PRS - Peripheral Reflex System

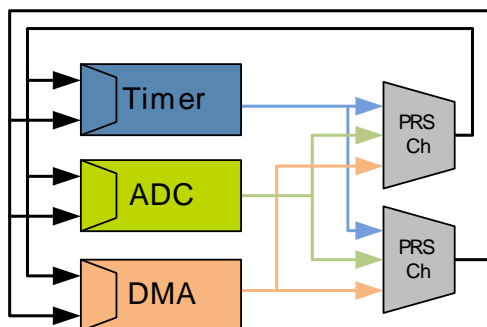

Quick Facts

What?

The PRS (Peripheral Reflex System) allows configurable, fast and autonomous communication between the peripherals.

Why?

Events and signals from one peripheral can be used as input signals or triggers by other peripherals and ensure timing-critical operation and reduced software overhead.

How?

Without CPU intervention the peripherals can send reflex signals (both pulses and level) to each other in single- or chained steps. The peripherals can be set up to perform actions based on the incoming reflex signals. This results in improved system performance and reduced energy consumption.

13.1 Introduction

The Peripheral Reflex System (PRS) system is a network which allows the different peripheral modules to communicate directly with each other without involving the CPU. Peripheral modules which send out reflex signals are called producers. The PRS routes these reflex signals to consumer peripherals which apply actions depending on the reflex signals received. The format for the reflex signals is not given, but edge triggers and other functionality can be applied by the PRS.

13.2 Features

- 8 configurable interconnect channels
 - Each channel can be connected to any producing peripheral
 - Consumers can choose which channel to listen to
 - Selectable edge detector (rising, falling and both edges)
- Software controlled channel output
 - Configurable level
 - Triggered pulses

13.3 Functional Description

An overview of the PRS module is shown in Figure 13.1 (p. 136). The PRS contains 8 interconnect channels, and each of these can select between all the output reflex signals offered by the producers. The consumers can then choose which PRS channel to listen to and perform actions based on the reflex signals routed through that channel. The reflex signals can be both pulse signals and level signals. Synchronous PRS pulses are one HFPERCLK cycle long, and can either be sent out by a producer (e.g., ADC conversion complete) or be generated from the edge detector in the PRS channel. Level signals can have an arbitrary waveform (e.g., Timer PWM output).

13.3.1 Asynchronous Mode

Many reflex signals can operate in two modes, synchronous or asynchronous. A synchronous reflex is clocked on HUPERCLK, and can be used as an input to all reflex consumers, but since they require HUPERCLK, they will not work in EM2/EM3.

Asynchronous reflexes are not clocked on HUPERCLK, and can be used even in EM2/EM3. There is a limitation to reflexes operating in asynchronous mode though: they can only be used by a subset of the reflex consumers, the ones marked with async support in Table 13.2 (p. 138). Peripherals that can produce asynchronous reflexes are marked with async support in Table 13.1 (p. 137). To use these reflexes asynchronously, set ASYNC in the CHCTRL register for the PRS channel selecting the reflex signal.

Note

If a peripheral channel with ASYNC set is used in a consumer not supporting asynchronous reflexes, the behaviour is undefined.


13.3.2 Channel Functions

Different functions can be applied to a reflex signal within the PRS. Each channel includes an edge detector to enable generation of pulse signals from level signals. It is also possible to generate output reflex signals by configuring the SWPULSE and SWLEVEL bits. SWLEVEL is a programmable level for each channel and holds the value it is programmed to. The SWPULSE will give out a one-cycle high pulse if it is written to 1, otherwise a 0 is asserted. The SWLEVEL and SWPULSE signals are then XOR'ed with the selected input from the producers to form the output signal sent to the consumers listening to the channel.

Note

The edge detector controlled by EDSEL should only be used when working with synchronous reflexes, i.e., ASYNC in CHCTRL is cleared.

Figure 13.1. PRS Overview

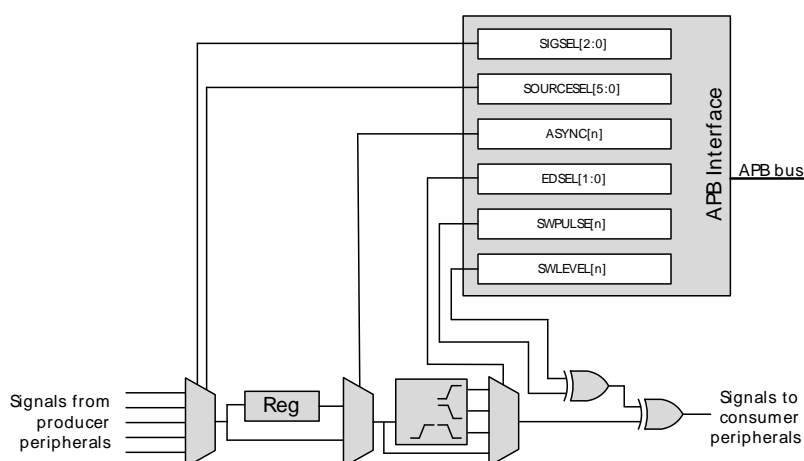

13.3.3 Producers

Each PRS channel can choose between signals from several producers, which is configured in SOURCESEL in PRS_CHx_CTRL. Each of these producers outputs one or more signals which can be selected by setting the SIGSEL field in PRS_CHx_CTRL. Setting the SOURCESEL bits to 0 (Off) leads to a constant 0 output from the input mux. An overview of the available producers is given in Table 13.1 (p. 137).

Table 13.1. Reflex Producers

| Module | Reflex Output | Output Format | Async Support |
|---------|---------------------------|---------------|---------------|
| ACMP | Comparator Output | Level | Yes |
| ADC | Single Conversion Done | Pulse | |
| | Scan Conversion Done | Pulse | |
| DAC | Channel 0 Conversion Done | Pulse | |
| | Channel 1 Conversion Done | Pulse | |
| GPIO | Pin 0 Input | Level | Yes |
| | Pin 1 Input | Level | Yes |
| | Pin 2 Input | Level | Yes |
| | Pin 3 Input | Level | Yes |
| | Pin 4 Input | Level | Yes |
| | Pin 5 Input | Level | Yes |
| | Pin 6 Input | Level | Yes |
| | Pin 7 Input | Level | Yes |
| | Pin 8 Input | Level | Yes |
| | Pin 9 Input | Level | Yes |
| | Pin 10 Input | Level | Yes |
| | Pin 11 Input | Level | Yes |
| | Pin 12 Input | Level | Yes |
| | Pin 13 Input | Level | Yes |
| | Pin 14 Input | Level | Yes |
| | Pin 15 Input | Level | Yes |
| RTC | Overflow | Pulse | Yes |
| | Compare Match 0 | Pulse | Yes |
| | Compare Match 1 | Pulse | Yes |
| TIMER | Underflow | Pulse | |
| | Overflow | Pulse | |
| | CC0 Output | Level | |
| | CC1 Output | Level | |
| | CC2 Output | Level | |
| LETIMER | CH0 | Level | Yes |
| | CH1 | Level | Yes |
| USART | TX Complete | Pulse | |
| | RX Data Received | Pulse | |

| Module | Reflex Output | Output Format | Async Support |
|---------|---------------------|---------------|---------------|
| | IrDA Decoder Output | Level | |
| VCMP | Comparator Output | Level | Yes |
| LESENSE | SCANRES register | Level | Yes |
| | Decoder Output | Level/Pulse | Yes |

13.3.4 Consumers

Consumer peripherals (listed in Table 13.2 (p. 138)) can be set to listen to a PRS channel and perform an action based on the signal received on that channel. Most consumers expect pulse input, while some can handle level inputs as well.

Table 13.2. Reflex Consumers

| Module | Reflex Input | Input Format | Async Support |
|-----------|----------------------------------|--------------|---------------|
| ADC | Single Mode Trigger | Pulse | |
| | Scan Mode Trigger | Pulse | |
| DAC | Channel 0 Trigger | Pulse | |
| | Channel 1 Trigger | Pulse | |
| CC1 Input | Pulse/Level | | |
| CC2 Input | Pulse/Level | | |
| USART | TX/RX Enable | Pulse | |
| | IrDA Encoder Input (USART0 only) | Pulse | |
| | RX Input | Pulse/Level | Yes |
| LEUART | RX Input | Pulse/Level | Yes |
| PCNT | S0 input | Level | Yes |
| | S1 input | Level | Yes |
| LESENSE | Start scan | Pulse/Level | Yes |
| | Decoder Bit 0 | Level | Yes |
| | Decoder Bit 1 | Level | Yes |
| | Decoder Bit 2 | Level | Yes |
| | Decoder Bit 3 | Level | Yes |

Note

It is possible to output prs channel 0 - channel 3 onto the GPIO by setting CH0PEN, CH1PEN, CH2PEN, or CH3PEN in the PRS_ROUTE register.

13.3.5 Example


The example below (illustrated in Figure 13.2 (p. 139)) shows how to set up ADC0 to start single conversions every time TIMER0 overflows (one HFPERCLK cycle high pulse), using PRS channel 5:

- Set SOURCESEL in PRS_CH5_CTRL to 0b011100 to select TIMER0 as input to PRS channel 5.
- Set SIGSEL in PRS_CH5_CTRL to 0b001 to select the overflow signal (from TIMER0).

- Configure ADC0 with the desired conversion set-up.
- Set SINGLEPRSEN in ADC0_SINGLECTRL to 1 to enable single conversions to be started by a high PRS input signal.
- Set SINGLEPRSSEL in ADC0_SINGLECTRL to 0x5 to select PRS channel 5 as input to start the single conversion.
- Start TIMER0 with the desired TOP value, an overflow PRS signal is output automatically on overflow.

Note that the ADC results needs to be fetched either by the CPU or DMA.

Figure 13.2. TIMER0 overflow starting ADC0 single conversions through PRS channel 5.

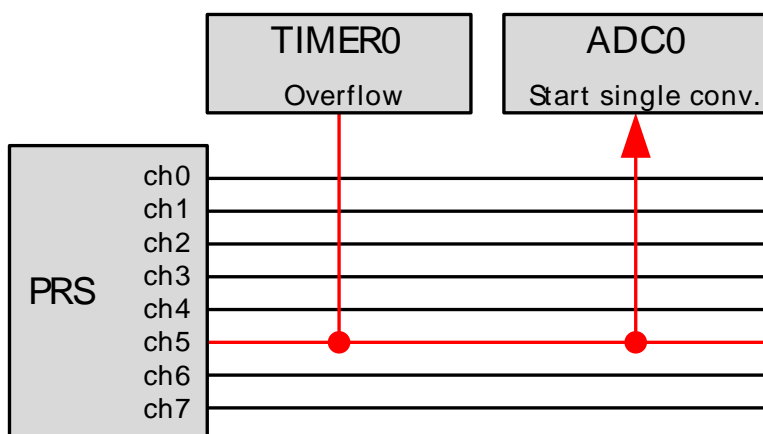

13.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|--------------|------|--------------------------|
| 0x000 | PRS_SWPULSE | W1 | Software Pulse Register |
| 0x004 | PRS_SWLEVEL | RW | Software Level Register |
| 0x008 | PRS_ROUTE | RW | I/O Routing Register |
| 0x010 | PRS_CH0_CTRL | RW | Channel Control Register |
| 0x014 | PRS_CH1_CTRL | RW | Channel Control Register |
| 0x018 | PRS_CH2_CTRL | RW | Channel Control Register |
| 0x01C | PRS_CH3_CTRL | RW | Channel Control Register |
| 0x020 | PRS_CH4_CTRL | RW | Channel Control Register |
| 0x024 | PRS_CH5_CTRL | RW | Channel Control Register |
| 0x028 | PRS_CH6_CTRL | RW | Channel Control Register |
| 0x02C | PRS_CH7_CTRL | RW | Channel Control Register |

13.5 Register Description

13.5.1 PRS_SWPULSE - Software Pulse Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7PULSE | 0 | W1 | Channel 7 Pulse Generation See bit 0. |
| 6 | CH6PULSE | 0 | W1 | Channel 6 Pulse Generation See bit 0. |
| 5 | CH5PULSE | 0 | W1 | Channel 5 Pulse Generation See bit 0. |
| 4 | CH4PULSE | 0 | W1 | Channel 4 Pulse Generation See bit 0. |
| 3 | CH3PULSE | 0 | W1 | Channel 3 Pulse Generation See bit 0. |
| 2 | CH2PULSE | 0 | W1 | Channel 2 Pulse Generation See bit 0. |
| 1 | CH1PULSE | 0 | W1 | Channel 1 Pulse Generation See bit 0. |
| 0 | CH0PULSE | 0 | W1 | Channel 0 Pulse Generation Write to 1 to generate one HFPERCLK cycle high pulse. This pulse is XOR'ed with the corresponding bit in the SWLEVEL register and the selected PRS input signal to generate the channel output. |

13.5.2 PRS_SWLEVEL - Software Level Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|---|---|--------|--------------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CH7LEVEL See bit 0. | 0 | RW | Channel 7 Software Level |
| 6 | CH6LEVEL See bit 0. | 0 | RW | Channel 6 Software Level |
| 5 | CH5LEVEL See bit 0. | 0 | RW | Channel 5 Software Level |
| 4 | CH4LEVEL See bit 0. | 0 | RW | Channel 4 Software Level |
| 3 | CH3LEVEL See bit 0. | 0 | RW | Channel 3 Software Level |
| 2 | CH2LEVEL See bit 0. | 0 | RW | Channel 2 Software Level |
| 1 | CH1LEVEL See bit 0. | 0 | RW | Channel 1 Software Level |
| 0 | CH0LEVEL The value in this register is XOR'ed with the corresponding bit in the SWPULSE register and the selected PRS input signal to generate the channel output. | 0 | RW | Channel 0 Software Level |

13.5.3 PRS_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|---|---|---|---|---|--------|--------|--------|--------|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | RW | RW | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | LOCATION | | | | | | CH3PEN | CH2PEN | CH1PEN | CH0PEN |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|---|----------|---|--------|--|-------|------|-------------|---|------|------------|---|------|------------|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 10:8 | LOCATION | 0x0 | RW | I/O Location Decides the location of the PRS I/O pins. | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr></table> | | | | | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|--|
| 7:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | CH3PEN | 0 | RW | CH3 Pin Enable When set, GPIO output from PRS channel 3 is enabled |
| 2 | CH2PEN | 0 | RW | CH2 Pin Enable When set, GPIO output from PRS channel 2 is enabled |
| 1 | CH1PEN | 0 | RW | CH1 Pin Enable When set, GPIO output from PRS channel 1 is enabled |
| 0 | CH0PEN | 0 | RW | CH0 Pin Enable When set, GPIO output from PRS channel 0 is enabled |

13.5.4 PRS_CHx_CTRL - Channel Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|-------|----|----|----|-------|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|--------|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | 0 | | | | 0x0 | | | | 0x00 | | | | | | | | | | | | | | | | | | | 0x0 | |
| Access | | | | RW | | | | RW | | | | RW | | | | | | | | | | | | | | | | | | | RW | |
| Name | | | | ASYNC | | | | EDSEL | | | | SOURCESEL | | | | | | | | | | | | | | | | | | | SIGSEL | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|-----------|--|
| 31:29 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 28 | ASYNC | 0 | RW | Asynchronous reflex Set to disable synchronization of this reflex signal |
| 27:26 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 25:24 | EDSEL | 0x0 | RW | Edge Detect Select Select edge detection. |
| | | Value | Mode | Description |
| | | 0 | OFF | Signal is left as it is |
| | | 1 | POSEDGE | A one HFPERCLK cycle pulse is generated for every positive edge of the incoming signal |
| | | 2 | NEGEDGE | A one HFPERCLK clock cycle pulse is generated for every negative edge of the incoming signal |
| | | 3 | BOTHEDGES | A one HFPERCLK clock cycle pulse is generated for every edge of the incoming signal |
| 23:22 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|-------|-----------|----------|--------|---|
| 21:16 | SOURCESEL | 0x00 | RW | Source Select Select input source to PRS channel. |
| | | Value | Mode | Description |
| | | 0b000000 | NONE | No source selected |
| | | 0b000001 | VCMP | Voltage Comparator |
| | | 0b000010 | ACMP0 | Analog Comparator 0 |
| | | 0b000011 | ACMP1 | Analog Comparator 1 |
| | | 0b000110 | DAC0 | Digital to Analog Converter 0 |
| | | 0b001000 | ADC0 | Analog to Digital Converter 0 |
| | | 0b010000 | USART0 | Universal Synchronous/Asynchronous Receiver/Transmitter 0 |
| | | 0b010001 | USART1 | Universal Synchronous/Asynchronous Receiver/Transmitter 1 |
| | | 0b011100 | TIMER0 | Timer 0 |
| | | 0b011101 | TIMER1 | Timer 1 |

| Bit | Name | Reset | Access | Description |
|-----|----------|----------|--------|------------------------------|
| | Value | Mode | | Description |
| | 0b101000 | RTC | | Real-Time Counter |
| | 0b110000 | GPIOL | | General purpose Input/Output |
| | 0b110001 | GPIOH | | General purpose Input/Output |
| | 0b110100 | LETIMER0 | | Low Energy Timer 0 |
| | 0b111001 | LESENSEL | | Low Energy Sensor Interface |
| | 0b111010 | LESENSEH | | Low Energy Sensor Interface |
| | 0b111011 | LESENSED | | Low Energy Sensor Interface |

15:3 *Reserved* To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)



2:0 **SIGSEL** 0x0 RW **Signal Select**

Select signal input to PRS channel.

| | | |
|----------------------------------|---------------|---------------------------------------|
| Value | Mode | Description |
| SOURCESEL = 0b000000 (NONE) | | |
| 0bxxx | OFF | Channel input selection is turned off |
| SOURCESEL = 0b000001 (VCMP) | | |
| 0b000 | VCMP0OUT | Voltage comparator output VCMP0OUT |
| SOURCESEL = 0b000010 (ACMP0) | | |
| 0b000 | ACMP0OUT | Analog comparator output ACMP0OUT |
| SOURCESEL = 0b000011 (ACMP1) | | |
| 0b000 | ACMP1OUT | Analog comparator output ACMP1OUT |
| SOURCESEL = 0b000110 (DAC0) | | |
| 0b000 | DAC0CH0 | DAC ch0 conversion done DAC0CH0 |
| 0b001 | DAC0CH1 | DAC ch1 conversion done DAC0CH1 |
| SOURCESEL = 0b001000 (ADC0) | | |
| 0b000 | ADC0SINGLE | ADC single conversion done ADC0SINGLE |
| 0b001 | ADC0SCAN | ADC scan conversion done ADC0SCAN |
| SOURCESEL = 0b010000 (USART0) | | |
| 0b000 | USART0IRTX | USART 0 IRDA out USART0IRTX |
| 0b001 | USART0TXC | USART 0 TX complete USART0TXC |
| 0b010 | USART0RXDATAV | USART 0 RX Data Valid USART0RXDATAV |
| SOURCESEL = 0b010001 (USART1) | | |
| 0b001 | USART1TXC | USART 1 TX complete USART1TXC |
| 0b010 | USART1RXDATAV | USART 1 RX Data Valid USART1RXDATAV |
| SOURCESEL = 0b011100 (TIMER0) | | |
| 0b000 | TIMER0UF | Timer 0 Underflow TIMER0UF |
| 0b001 | TIMER0OF | Timer 0 Overflow TIMER0OF |
| 0b010 | TIMER0CC0 | Timer 0 Compare/Capture 0 TIMER0CC0 |
| 0b011 | TIMER0CC1 | Timer 0 Compare/Capture 1 TIMER0CC1 |
| 0b100 | TIMER0CC2 | Timer 0 Compare/Capture 2 TIMER0CC2 |
| SOURCESEL = 0b011101 (TIMER1) | | |
| 0b000 | TIMER1UF | Timer 1 Underflow TIMER1UF |
| 0b001 | TIMER1OF | Timer 1 Overflow TIMER1OF |
| 0b010 | TIMER1CC0 | Timer 1 Compare/Capture 0 TIMER1CC0 |
| 0b011 | TIMER1CC1 | Timer 1 Compare/Capture 1 TIMER1CC1 |
| 0b100 | TIMER1CC2 | Timer 1 Compare/Capture 2 TIMER1CC2 |
| SOURCESEL = 0b101000 (RTC) | | |
| 0b000 | RTCOF | RTC Overflow RTCOF |
| 0b001 | RTCCOMP0 | RTC Compare 0 RTCCOMP0 |
| 0b010 | RTCCOMP1 | RTC Compare 1 RTCCOMP1 |

| Bit | Name | Reset | Access | Description |
|-----|---------------------------------|------------------|--------|---|
| | Value | Mode | | Description |
| | SOURCESEL = 0b110000 (GPIO) | | | |
| | 0b000 | GPIOPIN0 | | GPIO pin 0 GPIOPIN0 |
| | 0b001 | GPIOPIN1 | | GPIO pin 1 GPIOPIN1 |
| | 0b010 | GPIOPIN2 | | GPIO pin 2 GPIOPIN2 |
| | 0b011 | GPIOPIN3 | | GPIO pin 3 GPIOPIN3 |
| | 0b100 | GPIOPIN4 | | GPIO pin 4 GPIOPIN4 |
| | 0b101 | GPIOPIN5 | | GPIO pin 5 GPIOPIN5 |
| | 0b110 | GPIOPIN6 | | GPIO pin 6 GPIOPIN6 |
| | 0b111 | GPIOPIN7 | | GPIO pin 7 GPIOPIN7 |
| | SOURCESEL = 0b110001 (GPIO) | | | |
| | 0b000 | GPIOPIN8 | | GPIO pin 8 GPIOPIN8 |
| | 0b001 | GPIOPIN9 | | GPIO pin 9 GPIOPIN9 |
| | 0b010 | GPIOPIN10 | | GPIO pin 10 GPIOPIN10 |
| | 0b011 | GPIOPIN11 | | GPIO pin 11 GPIOPIN11 |
| | 0b100 | GPIOPIN12 | | GPIO pin 12 GPIOPIN12 |
| | 0b101 | GPIOPIN13 | | GPIO pin 13 GPIOPIN13 |
| | 0b110 | GPIOPIN14 | | GPIO pin 14 GPIOPIN14 |
| | 0b111 | GPIOPIN15 | | GPIO pin 15 GPIOPIN15 |
| | SOURCESEL = 0b110100 (LETIMER0) | | | |
| | 0b000 | LETIMER0CH0 | | LETIMER CH0 Out LETIMER0CH0 |
| | 0b001 | LETIMER0CH1 | | LETIMER CH1 Out LETIMER0CH1 |
| | SOURCESEL = 0b111001 (LESENSE) | | | |
| | 0b000 | LESENSESCANRES0 | | LESENSE SCANRES register, bit 0 LESENSESCANRES0 |
| | 0b001 | LESENSESCANRES1 | | LESENSE SCANRES register, bit 1 LESENSESCANRES1 |
| | 0b010 | LESENSESCANRES2 | | LESENSE SCANRES register, bit 2 LESENSESCANRES2 |
| | 0b011 | LESENSESCANRES3 | | LESENSE SCANRES register, bit 3 LESENSESCANRES3 |
| | 0b100 | LESENSESCANRES4 | | LESENSE SCANRES register, bit 4 LESENSESCANRES4 |
| | 0b101 | LESENSESCANRES5 | | LESENSE SCANRES register, bit 5 LESENSESCANRES5 |
| | 0b110 | LESENSESCANRES6 | | LESENSE SCANRES register, bit 6 LESENSESCANRES6 |
| | 0b111 | LESENSESCANRES7 | | LESENSE SCANRES register, bit 7 LESENSESCANRES7 |
| | SOURCESEL = 0b111010 (LESENSE) | | | |
| | 0b000 | LESENSESCANRES8 | | LESENSE SCANRES register, bit 8 LESENSESCANRES8 |
| | 0b001 | LESENSESCANRES9 | | LESENSE SCANRES register, bit 9 LESENSESCANRES9 |
| | 0b010 | LESENSESCANRES10 | | LESENSE SCANRES register, bit 10 LESENSESCANRES10 |
| | 0b011 | LESENSESCANRES11 | | LESENSE SCANRES register, bit 11 LESENSESCANRES11 |
| | 0b100 | LESENSESCANRES12 | | LESENSE SCANRES register, bit 12 LESENSESCANRES12 |
| | 0b101 | LESENSESCANRES13 | | LESENSE SCANRES register, bit 13 LESENSESCANRES13 |
| | 0b110 | LESENSESCANRES14 | | LESENSE SCANRES register, bit 14 LESENSESCANRES14 |
| | 0b111 | LESENSESCANRES15 | | LESENSE SCANRES register, bit 15 LESENSESCANRES15 |
| | SOURCESEL = 0b111011 (LESENSE) | | | |
| | 0b000 | LESENSEDEC0 | | LESENSE Decoder PRS out 0 LESENSEDEC0 |
| | 0b001 | LESENSEDEC1 | | LESENSE Decoder PRS out 1 LESENSEDEC1 |
| | 0b010 | LESENSEDEC2 | | LESENSE Decoder PRS out 2 LESENSEDEC2 |

14 I²C - Inter-Integrated Circuit Interface

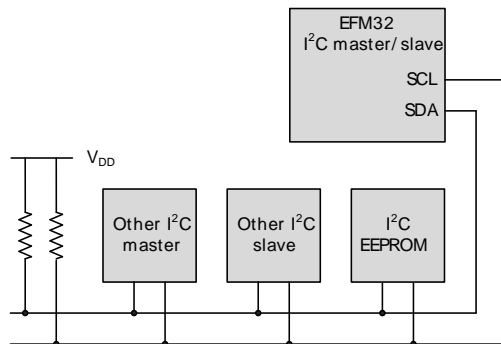

Quick Facts

What?

The I²C interface allows communication on I²C-buses with the lowest energy consumption possible.

Why?

I²C is a popular serial bus that enables communication with a number of external devices using only two I/O pins.

How?

With the help of DMA, the I²C interface allows I²C communication with minimal CPU intervention. Address recognition is available in all energy modes (except EM4), allowing the MCU to wait for data on the I²C-bus with sub-μA current consumption.

14.1 Introduction

The I²C module provides an interface between the MCU and a serial I²C-bus. It is capable of acting as both master and slave, and supports multi-master buses. Standard-mode, fast-mode and fast-mode plus speeds are supported, allowing transmission rates all the way from 10 kbit/s up to 1 Mbit/s. Slave arbitration and timeouts are also provided to allow implementation of an SMBus compliant system. The interface provided to software by the I²C module allows both fine-grained control of the transmission process and close to automatic transfers. Automatic recognition of slave addresses is provided in all energy modes (except EM4).


14.2 Features

- True multi-master capability
- Support for different bus speeds
 - Standard-mode (Sm) bit rate up to 100 kbit/s
 - Fast-mode (Fm) bit rate up to 400 kbit/s
 - Fast-mode Plus (Fm+) bit rate up to 1 Mbit/s
- Arbitration for both master and slave (allows SMBus ARP)
- Clock synchronization and clock stretching
- Hardware address recognition
 - 7-bit masked address
 - General call address
 - Active in all energy modes (except EM4)
- 10-bit address support
- Error handling
 - Clock low timeout
 - Clock high timeout
 - Arbitration lost
 - Bus error detection
- Double buffered data
- Full DMA support

14.3 Functional Description

An overview of the I²C module is shown in Figure 14.1 (p. 146) .


Figure 14.1. I²C Overview

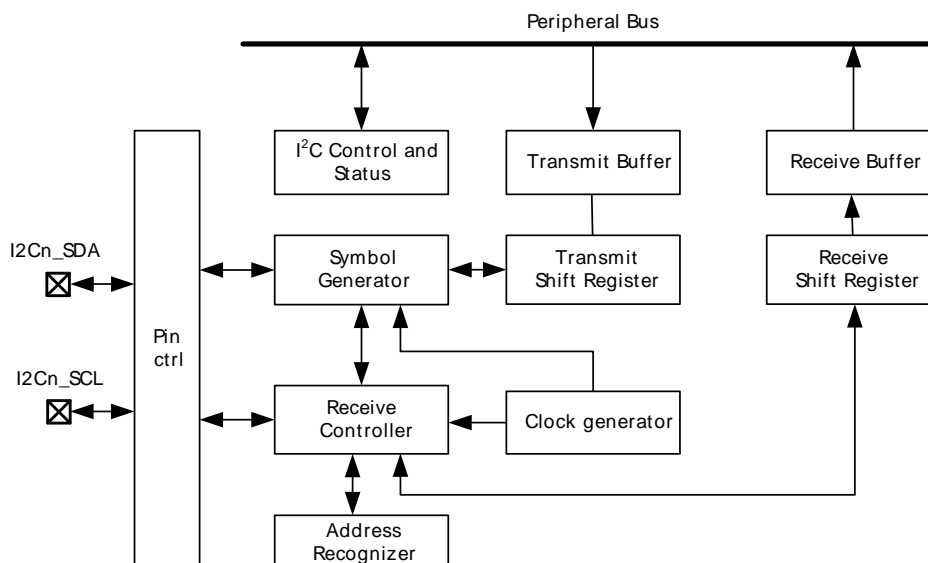

14.3.1 I²C-Bus Overview

The I²C-bus uses two wires for communication; a serial data line (SDA) and a serial clock line (SCL) as shown in Figure 14.2 (p. 146) . As a true multi-master bus it includes collision detection and arbitration to resolve situations where multiple masters transmit data at the same time without data loss.

Figure 14.2. I²C-Bus Example

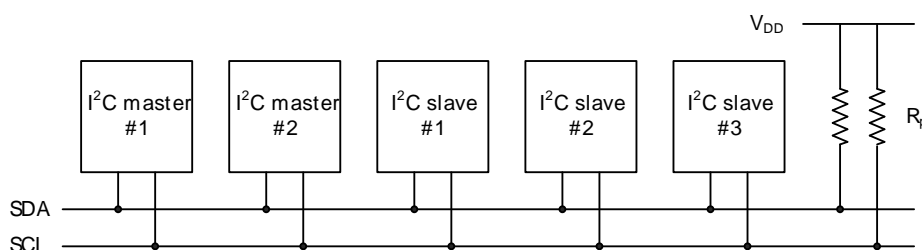

Each device on the bus is addressable by a unique address, and an I²C master can address all the devices on the bus, including other masters.

Both the bus lines are open-drain. The maximum value of the pull-up resistor can be calculated as a function of the maximal rise-time t_r for the given bus speed, and the estimated bus capacitance C_b as shown in Equation 14.1 (p. 146) .

I²C Pull-up Resistor Equation

$$R_p(\max) = (t_r / 0.8473) \times C_b. \quad (14.1)$$

The maximal rise times for 100 kHz, 400 kHz and 1 MHz I²C are 1 μ s, 300 ns and 120 ns respectively.

Note

The GPIO drive strength can be used to control slew rate.


Note

If V_{dd} drops below the voltage on SCL and SDA lines, the MCU could become back powered and pull the SCL and SDA lines low.

14.3.1.1 START and STOP Conditions


START and STOP conditions are used to initiate and stop transactions on the I²C-bus. All transactions on the bus begin with a START condition (S) and end with a STOP condition (P). As shown in Figure 14.3 (p. 147), a START condition is generated by pulling the SDA line low while SCL is high, and a STOP condition is generated by pulling the SDA line high while SCL is high.

Figure 14.3. I²C START and STOP Conditions

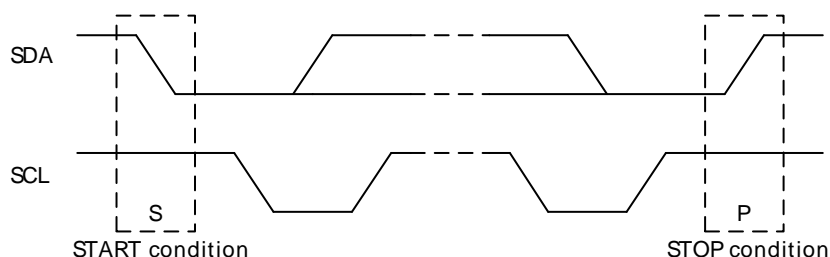

The START and STOP conditions are easily identifiable bus events as they are the only conditions on the bus where a transition is allowed on SDA while SCL is high. During the actual data transmission, SDA is only allowed to change while SCL is low, and must be stable while SCL is high. One bit is transferred per clock pulse on the I²C-bus as shown in Figure 14.2 (p. 146).

Figure 14.4. I²C Bit Transfer on I²C-Bus

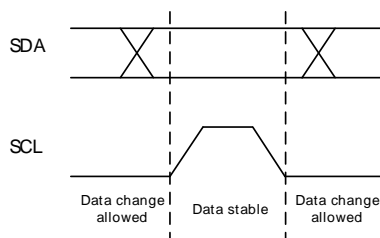**14.3.1.2 Bus Transfer**

When a master wants to initiate a transfer on the bus, it waits until the bus is idle and transmits a START condition on the bus. The master then transmits the address of the slave it wishes to interact with and a single R/W bit telling whether it wishes to read from the slave (R/W bit set to 1) or write to the slave (R/W bit set to 0).

After the 7-bit address and the R/W bit, the master releases the bus, allowing the slave to acknowledge the request. During the next bit-period, the slave pulls SDA low (ACK) if it acknowledges the request, or keeps it high if it does not acknowledge it (NACK).

Following the address acknowledge, either the slave or master transmits data, depending on the value of the R/W bit. After every 8 bits (one byte) transmitted on the SDA line, the transmitter releases the line to allow the receiver to transmit an ACK or a NACK. Both the data and the address are transmitted with the most significant bit first.

The number of bytes in a bus transfer is unrestricted. The master ends the transmission after a (N)ACK by sending a STOP condition on the bus. After a STOP condition, any master wishing to initiate a transfer

on the bus can try to gain control of it. If the current master wishes to make another transfer immediately after the current, it can start a new transfer directly by transmitting a repeated START condition (Sr) instead of a STOP followed by a START.

Examples of I²C transfers are shown in Figure 14.5 (p. 148), Figure 14.6 (p. 148), and Figure 14.7 (p. 148). The identifiers used are:

- ADDR - Address
- DATA - Data
- S - Start bit
- Sr - Repeated start bit
- P - Stop bit
- W/R - Read(1)/Write(0)
- A - ACK
- N - NACK

Figure 14.5. I²C Single Byte Write to Slave




Figure 14.6. I²C Double Byte Read from Slave





Figure 14.7. I²C Single Byte Write, then Repeated Start and Single Byte Read



14.3.1.3 Addresses

I²C supports both 7-bit and 10-bit addresses. When using 7-bit addresses, the first byte transmitted after the START-condition contains the address of the slave that the master wants to contact. In the 7-bit address space, several addresses are reserved. These addresses are summarized in Table 14.1 (p. 148), and include a General Call address which can be used to broadcast a message to all slaves on the I²C-bus.

Table 14.1. I²C Reserved I²C Addresses

| I ² C Address | R/W | Description |
|--------------------------|-----|-------------------------------------|
| 0000-000 | 0 | General Call address |
| 0000-000 | 1 | START byte |
| 0000-001 | X | Reserved for the C-Bus format |
| 0000-010 | X | Reserved for a different bus format |
| 0000-011 | X | Reserved for future purposes |
| 0000-1XX | X | Reserved for future purposes |
| 1111-1XX | X | Reserved for future purposes |
| 1111-0XX | X | 10 Bit slave addressing mode |


14.3.1.4 10-bit Addressing

To address a slave using a 10-bit address, two bytes are required to specify the address instead of one. The seven first bits of the first byte must then be 1111 0XX, where XX are the two most significant bits of the 10-bit address. As with 7-bit addresses, the eighth bit of the first byte determines whether the master wishes to read from or write to the slave. The second byte contains the eight least significant bits of the slave address.

When a slave receives a 10-bit address, it must acknowledge both the address bytes if they match the address of the slave.


When performing a master transmitter operation, the master transmits the two address bytes and then the remaining data, as shown in Figure 14.8 (p. 149) .

Figure 14.8. I²C Master Transmitter/Slave Receiver with 10-bit Address



When performing a master receiver operation however, the master first transmits the two address bytes in a master transmitter operation, then sends a repeated START followed by the first address byte and then receives data from the addressed slave. The slave addressed by the 10-bit address in the first two address bytes must remember that it was addressed, and respond with data if the address transmitted after the repeated start matches its own address. An example of this (with one byte transmitted) is shown in Figure 14.9 (p. 149) .

Figure 14.9. I²C Master Receiver/Slave Transmitter with 10-bit Address



14.3.1.5 Arbitration, Clock Synchronization, Clock Stretching

Arbitration and clock synchronization are features aimed at allowing multi-master buses. Arbitration occurs when two devices try to drive the bus at the same time. If one device drives it low, while the other drives it high, the one attempting to drive it high will not be able to do so due to the open-drain bus configuration. Both devices sample the bus, and the one that was unable to drive the bus in the desired direction detects the collision and backs off, letting the other device continue communication on the bus undisturbed.

Clock synchronization is a means of synchronizing the clock outputs from several masters driving the bus at once, and is a requirement for effective arbitration.

Slaves on the bus are allowed to force the clock output on the bus low in order to pause the communication on the bus and give themselves time to process data or perform any real-time tasks they might have. This is called clock stretching.

Arbitration is supported by the I²C module for both masters and slaves. Clock synchronization and clock stretching is also supported.

14.3.2 Enable and Reset

The I²C is enabled by setting the EN bit in the I2Cn_CTRL register. Whenever this bit is cleared, the internal state of the I²C is reset, terminating any ongoing transfers.

Note

When re-enabling the I²C, the ABORT command or the Bus Idle Timeout feature must be applied prior to use even if the BUSY flag is not set.

14.3.3 Safely Disabling and Changing Slave Configuration

The I²C slave is partially asynchronous, and some precautions are necessary to always ensure a safe slave disable or slave configuration change. These measures should be taken, if (while the slave is enabled) the user cannot guarantee that an address match will not occur at the exact time of slave disable or slave configuration change.

Worst case consequences for an address match while disabling slave or changing configuration is that the slave may end up in an undefined state. To reset the slave back to a known state, the EN bit in I2Cn_CTRL must be reset. This should be done regardless of whether the slave is going to be re-enabled or not.

14.3.4 Clock Generation

The SCL signal generated by the I²C master determines the maximum transmission rate on the bus. The clock is generated as a division of the peripheral clock, and is given by Equation 14.2 (p. 150) :

I²C Maximum Transmission Rate

$$f_{SCL} = 1/(T_{low} + T_{high}), \quad (14.2)$$

where

T_{low} and T_{high} is the low and high periods of the clock signal respectively, given below. When the clock is not stretched, the low and high periods of the clock signal are:

I²C High and Low Cycles Equations

$$\begin{aligned} T_{high} &= (N_{high} \times (CLKDIV + 1))/f_{HFPERCLK}, \\ T_{low} &= (N_{low} \times (CLKDIV + 1))/f_{HFPERCLK}. \end{aligned} \quad (14.3)$$

Equation 14.3 (p. 150) and Equation 14.2 (p. 150) does not apply for low clock division factors (0, 1 and 2) because of synchronization. For these clock division factors, the formulas for computing high and low periods of the clock signal are given in Table 14.2 (p. 150) .

Table 14.2. I²C High and Low Periods for Low CLKDIV

| CLKDIV | Standard (4:4) | | Asymmetric (6:3) | | Fast (11:6) | |
|--------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| | T_{low} | T_{high} | T_{low} | T_{high} | T_{low} | T_{high} |
| 0 | $7/f_{HFPERCLK}$ | $7/f_{HFPERCLK}$ | $9/f_{HFPERCLK}$ | $6/f_{HFPERCLK}$ | $14/f_{HFPERCLK}$ | $9/f_{HFPERCLK}$ |
| 1 | $10/f_{HFPERCLK}$ | $10/f_{HFPERCLK}$ | $14/f_{HFPERCLK}$ | $8/f_{HFPERCLK}$ | $24/f_{HFPERCLK}$ | $14/f_{HFPERCLK}$ |
| 2 | $15/f_{HFPERCLK}$ | $15/f_{HFPERCLK}$ | $21/f_{HFPERCLK}$ | $12/f_{HFPERCLK}$ | $36/f_{HFPERCLK}$ | $21/f_{HFPERCLK}$ |

The values of N_{low} and N_{high} and thus the ratio between the high and low parts of the clock signal is controlled by CLHR in the I2Cn_CTRL register. The available modes are summarized in Table 14.3 (p. 151) along with the highest I²C-bus frequencies in the given modes that can be achieved without violating the timing specifications of the I²C-bus. The frequencies are calculated taking the maximum allowed rise and fall times of SDA and SCL into account. Higher frequencies may be achieved in practice. The 3 extra cycles are synchronization, and must be taken into consideration when DIV in the I2Cn_CLKDIV register has a low value. The maximum data hold time is dependent on the DIV and is given by:

Maximum Data Hold Time

$$t_{HD,DAT-max} = (4+DIV)/f_{HFPERCLK}. \quad (14.4)$$

Note

DIV must be set to 1 during slave mode operation.

Table 14.3. I²C Clock Mode

| HFPERCLK frequency (MHz) | Clock Low High Ratio (CLHR) | Sm max frequency (kHz) | Fm max frequency (kHz) | Fm+ max frequency (kHz) |
|--------------------------|-----------------------------|------------------------|------------------------|-------------------------|
| 32 | 0 | 93 | 400 | 1000 |
| | 1 | 82 | 400 | 969 |
| | 2 | 72 | 400 | 842 |
| 28 | 0 | 92 | 400 | 1000 |
| | 1 | 81 | 400 | 848 |
| | 2 | 71 | 400 | 736 |
| 21 | 0 | 93 | 400 | 1000 |
| | 1 | 83 | 400 | 954 |
| | 2 | 72 | 368 | 552 |
| 14 | 0 | 92 | 400 | 999 |
| | 1 | 81 | 400 | 636 |
| | 2 | 68 | 368 | 608 |
| 11 | 0 | 91 | 400 | 785 |
| | 1 | 81 | 333 | 733 |
| | 2 | 71 | 289 | 478 |
| 6.6 | 0 | 91 | 400 | 471 |
| | 1 | 81 | 299 | 439 |
| | 2 | 64 | 286 | 286 |
| 1.2 | 0 | 59 | 85 | 85 |
| | 1 | 54 | 79 | 79 |
| | 2 | 52 | 52 | 52 |

14.3.5 Arbitration

Arbitration is enabled by default, but can be disabled by setting the ARBDIS bit in I2Cn_CTRL. When arbitration is enabled, the value on SDA is sensed every time the I²C module attempts to change its value. If the sensed value is different than the value the I²C module tried to output, it is interpreted as a simultaneous transmission by another device, and that the I²C module has lost arbitration.

Whenever arbitration is lost, the ARBLOST interrupt flag in I2Cn_IF is set, any lines held are released, and the I²C device goes idle. If an I²C master loses arbitration during the transmission of an address, another master may be trying to address it. The master therefore receives the rest of the address, and if the address matches the slave address of the master, the master goes into either slave transmitter or slave receiver mode.

Note

Arbitration can be lost both when operating as a master and when operating as a slave.

14.3.6 Buffers

14.3.6.1 Transmit Buffer and Shift Register

The I²C transmitter is double buffered through the transmit buffer and transmit shift register as shown in Figure 14.1 (p. 146). A byte is loaded into the transmit buffer by writing to I2Cn_TXDATA. When the

transmit shift register is empty and ready for new data, the byte from the transmit buffer is then loaded into the shift register. The byte is then kept in the shift register until it is transmitted. When a byte has been transmitted, a new byte is loaded into the shift register (if available in the transmit buffer). If the transmit buffer is empty, then the shift register also remains empty. The TXC flag in I2Cn_STATUS and the TXC interrupt flags in I2Cn_IF are then set, signaling that the transmit shift register is out of data. TXC is cleared when new data becomes available, but the TXC interrupt flag must be cleared by software.

Whenever a byte is loaded from the transmit buffer to the transmit shift register, the TXBL flag in I2Cn_STATUS and the TXBL interrupt flag in I2Cn_IF are set. This indicates that there is room in the buffer for more data. TXBL is cleared automatically when data is written to the buffer.

If a write is attempted to the transmit buffer while it is not empty, the TXOF interrupt flag in I2Cn_IF is set, indicating the overflow. The data already in the buffer remains preserved, and no new data is written.

The transmit buffer and the transmit shift register can be cleared by setting command bit CLEAR_TX in I2Cn_CMD. This will prevent the I²C module from transmitting the data in the buffer and the shift register, and will make them available for new data. Any byte currently being transmitted will not be aborted. Transmission of this byte will be completed.

14.3.6.2 Receive Buffer and Shift Register

Like the transmitter, the I²C receiver is double buffered. The receiver uses the receive buffer and receive shift register as shown in Figure 14.1 (p. 146). When a byte has been fully received by the receive shift register, it is loaded into the receive buffer if there is room for it. Otherwise, the byte waits in the shift register until space becomes available in the buffer.

When a byte becomes available in the receive buffer, the RXDATAV in I2Cn_STATUS and RXDATAV interrupt flag in I2Cn_IF are set. The data can now be fetched from the buffer using I2Cn_RXDATA. Reading from this register will pull a byte out of the buffer, making room for a new byte and clearing RXDATAV in I2Cn_STATUS and RXDATAV in I2Cn_IF in the process.

If a read from the receive buffer is attempted through I2Cn_RXDATA while the buffer is empty, the RXUF interrupt flag in I2Cn_IF is set, and the data read from the buffer is undefined.

I2Cn_RXDATAP can be used to read data from the receive buffer without removing it from the buffer. The RXUF interrupt flag in I2Cn_IF will never be set as a result of reading from I2Cn_RXDATAP, but the data read through I2Cn_RXDATAP when the receive buffer is empty is still undefined.

Once a transaction is complete (STOP sent or received), the receive buffer needs to be flushed (all received data must be picked up) before starting a new transaction.

14.3.7 Master Operation

A bus transaction is initiated by transmitting a START condition (S) on the bus. This is done by setting the START bit in I2Cn_CMD. The command schedules a START condition, and makes the I²C module generate a start condition whenever the bus becomes free.

The I²C-bus is considered busy whenever another device on the bus transmits a START condition. Until a STOP condition is detected, the bus is owned by the master issuing the START condition. The bus is considered free when a STOP condition is transmitted on the bus. After a STOP is detected, all masters that have data to transmit send a START condition and begin transmitting data. Arbitration ensures that collisions are avoided.

When the START condition has been transmitted, the master must transmit a slave address (ADDR) with an R/W bit on the bus. If this address is available in the transmit buffer, the master transmits it immediately, but if the buffer is empty, the master holds the I²C-bus while waiting for software to write the address to the transmit buffer.

After the address has been transmitted, a sequence of bytes can be read from or written to the slave, depending on the value of the R/W bit (bit 0 in the address byte). If the bit was cleared, the master has entered a master transmitter role, where it now transmits data to the slave. If the bit was set, it has entered a master receiver role, where it now should receive data from the slave. In either case, an unlimited number of bytes can be transferred in one direction during the transmission.


At the end of the transmission, the master either transmits a repeated START condition (Sr) if it wishes to continue with another transfer, or transmits a STOP condition (P) if it wishes to release the bus.

14.3.7.1 Master State Machine

The master state machine is shown in Figure 14.10 (p. 153). A master operation starts in the far left of the state machine, and follows the solid lines through the state machine, ending the operation or continuing with a new operation when arriving at the right side of the state machine.

Branches in the path through the state machine are the results of bus events and choices made by software, either directly or indirectly. The dotted lines show where I²C-specific interrupt flags are set along the path and the full-drawn circles show places where interaction may be required by software to let the transmission proceed.

Figure 14.10. I²C Master State Machine

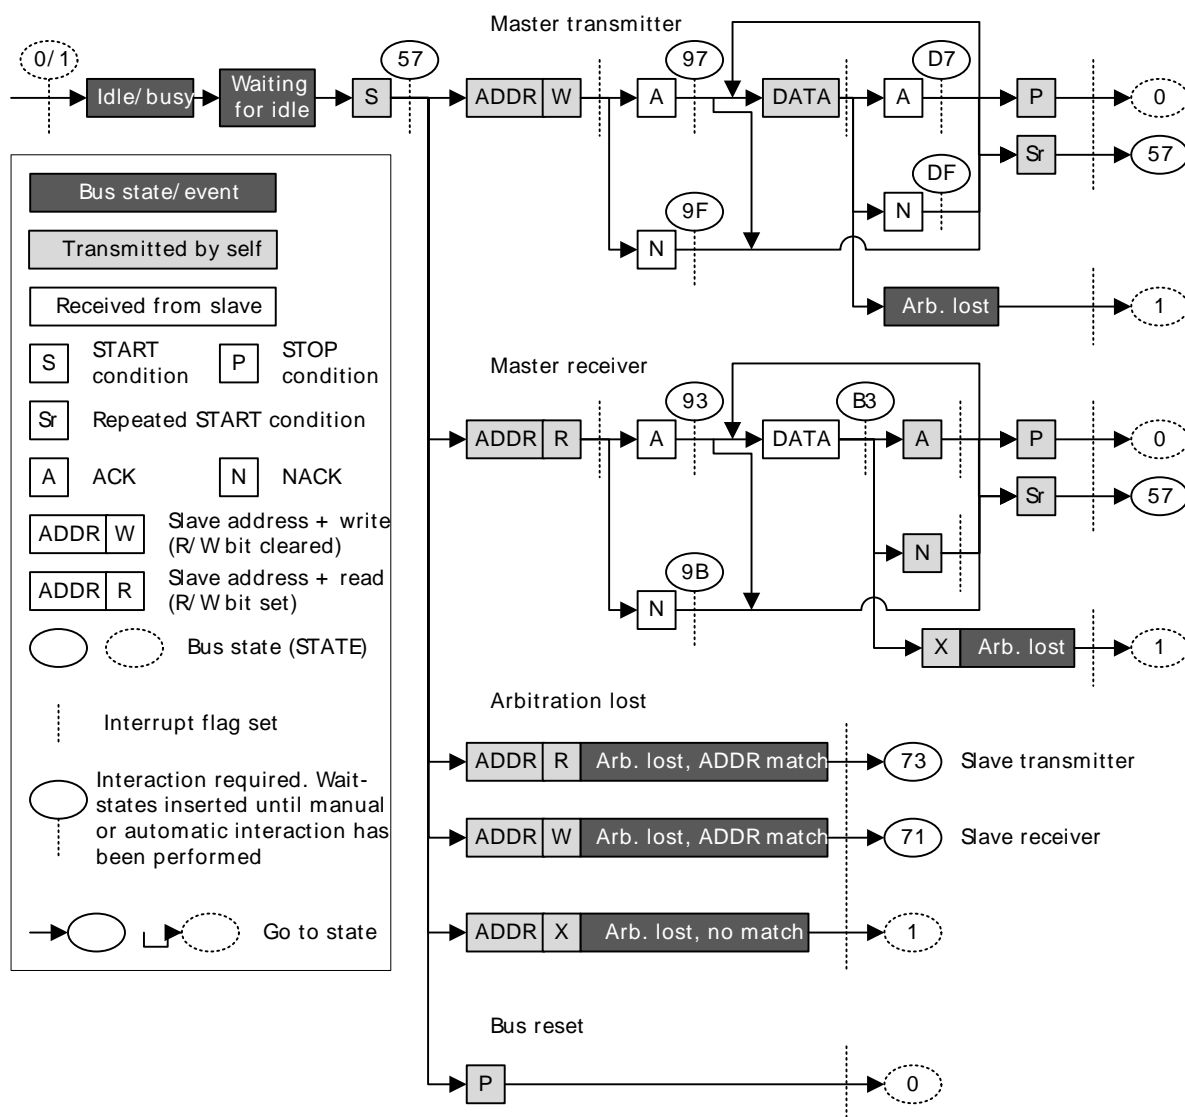

14.3.7.2 Interactions

Whenever the I²C module is waiting for interaction from software, it holds the bus clock SCL low, freezing all bus activities, and the BUSHOLD interrupt flag in I2Cn_IF is set. The action(s) required by software depends on the current state of the I²C module. This state can be read from the I2Cn_STATE register.

As an example, Table 14.5 (p. 156) shows the different states the I²C goes through when operating as a Master Transmitter, i.e. a master that transmits data to a slave. As seen in the table, when a start condition has been transmitted, a requirement is that there is an address and an R/W bit in the transmit buffer. If the transmit buffer is empty, then the BUSHOLD interrupt flag is set, and the bus is held until data becomes available in the buffer. While waiting for the address, I2Cn_STATE has a value 0x57, which can be used to identify exactly what the I²C module is waiting for.

Note

The bus would never stop at state 0x57 if the address was available in the transmit buffer.

The different interactions used by the I²C module are listed in Table 14.4 (p. 154) in prioritized order. If a set of different courses of action are possible from a given state, the course of action using the highest priority interactions, that first has everything it is waiting for is the one that is taken.

Table 14.4. I²C Interactions in Prioritized Order

| Interaction | Priority | Software action | Automatically continues if |
|------------------|----------|--|---|
| STOP* | 1 | Set the STOP command bit in I2Cn_CMD | PSTOP is set (STOP pending) in I2Cn_STATUS |
| ABORT | 2 | Set the ABORT command bit in I2Cn_CMD | Never, the transmission is aborted |
| CONT* | 3 | Set the CONT command bit in I2Cn_CMD | PCONT is set in I2Cn_STATUS (CONT pending) |
| NACK* | 4 | Set the NACK command bit in I2Cn_CMD | PNACK is set in I2Cn_STATUS (NACK pending) |
| ACK* | 5 | Set the ACK command bit in I2Cn_CMD | AUTOACK is set in I2Cn_CTRL or PACK is set in I2Cn_STATUS (ACK pending) |
| ADDR+W -> TXDATA | 6 | Write an address to the transmit buffer with the R/W bit set | Address is available in transmit buffer with R/W bit set |
| ADDR+R -> TXDATA | 7 | Write an address to the transmit buffer with the R/W bit cleared | Address is available in transmit buffer with R/W bit cleared |
| START* | 8 | Set the START command bit in I2Cn_CMD | PSTART is set in I2Cn_STATUS (START pending) |
| TXDATA | 9 | Write data to the transmit buffer | Data is available in transmit buffer |
| RXDATA | 10 | Read data from receive buffer | Space is available in receive buffer |
| None | 11 | No interaction is required | |

The commands marked with a * in Table 14.4 (p. 154) can be issued before an interaction is required. When such a command is issued before it can be used/consumed by the I²C module, the command is

set in a pending state, which can be read from the STATUS register. A pending START command can for instance be identified by PSTART having a high value.

Whenever the I²C module requires an interaction, it checks the pending commands. If one or a combination of these can fulfill an interaction, they are consumed by the module and the transmission continues without setting the BUSHOLD interrupt flag in I2Cn_IF to get an interaction from software. The pending status of a command goes low when it is consumed.

When several interactions are possible from a set of pending commands, the interaction with the highest priority, i.e. the interaction closest to the top of Table 14.4 (p. 154) is applied to the bus.

Pending commands can be cleared by setting the CLEARPC command bit in I2Cn_CMD.

14.3.7.2.1 Automatic ACK Interaction

When receiving addresses and data, an ACK command in I2Cn_CMD is normally required after each received byte. When AUTOACK is set in I2Cn_CTRL, an ACK is always pending, and the ACK-pending bit PACK in I2Cn_STATUS is thus always set, even after an ACK has been consumed. This can be used to reduce the amount of software interaction required during a transfer.

14.3.7.3 Reset State

After a reset, the state of the I²C-bus is unknown. To avoid interrupting transfers on the I²C-bus after a reset of the I²C module or the entire MCU, the I²C-bus is assumed to be busy when coming out of a reset, and the BUSY flag in I2Cn_STATUS is thus set. To be able to carry through master operations on the I²C-bus, the bus must be idle.

The bus goes idle when a STOP condition is detected on the bus, but on buses with little activity, the time before the I²C module detects that the bus is idle can be significant. There are two ways of assuring that the I²C module gets out of the busy state.

- Use the ABORT command in I2Cn_CMD. When the ABORT command is issued, the I²C module is instructed that the bus is idle. The I²C module can then initiate master operations.
- Use the Bus Idle Timeout. When SCL has been high for a long period of time, it is very likely that the bus is idle. Set BITO in I2Cn_CTRL to an appropriate timeout period and set GIBITO in I2Cn_CTRL. If activity has not been detected on the bus within the timeout period, the bus is then automatically assumed idle, and master operations can be initiated.

Note

If operating in slave mode, the above approach is not necessary.

14.3.7.4 Master Transmitter

To transmit data to a slave, the master must operate as a master transmitter. Table 14.5 (p. 156) shows the states the I²C module goes through while acting as a master transmitter. Every state where an interaction is required has the possible interactions listed, along with the result of the interactions. The table also shows which interrupt flags are set in the different states. The interrupt flags enclosed in parenthesis may be set. If the BUSHOLD interrupt in I2Cn_IF is set, the module is waiting for an interaction, and the bus is frozen. The value of I2Cn_STATE will be equal to the values given in the table when the BUSHOLD interrupt flag is set, and can be used to determine which interaction is required to make the transmission continue.

The interrupt flag START in I2Cn_IF is set when the I²C module transmits the START.

A master operation is started by issuing a START command by setting START in I2Cn_CMD. ADDR +W, i.e. the address of the slave to address + the R/W bit is then required by the I²C module. If this is not available in the transmit buffer, then the bus is held and the BUSHOLD interrupt flag is set. The

value of I2Cn_STATE will then be 0x57. As seen in the table, the I²C module also stops in this state if the address is not available after a repeated start condition.

To continue, write a byte to I2Cn_TXDATA with the address of the slave in the 7 most significant bits and the least significant bit cleared (ADDR+W). This address will then be transmitted, and the slave will reply with an ACK or a NACK. If no slave replies to the address, the response will also be NACK. If the address was acknowledged, the master now has four choices. It can send a data byte by placing it in I2Cn_TXDATA (the master should check the TXBL interrupt flag before writing to I2Cn_TXDATA), this byte is then transmitted. The master can also stop the transmission by sending a STOP, it can send a repeated start by sending START, or it can send a STOP and then a START as soon as possible.

If a NACK was received, the master has to issue a CONT command in addition to providing data in order to continue transmission. This is not standard I²C, but is provided for flexibility. The rest of the options are similar to when an ACK was received.

If a new byte was transmitted, an ACK or NACK is received after the transmission of the byte, and the master has the same options as for when the address was sent.

The master may lose arbitration at any time during transmission. In this case, the ARBLOST interrupt flag in I2Cn_IF is set. If the arbitration was lost during the transfer of an address, and SLAVE in I2Cn_CTRL is set, the master then checks which address was transmitted. If it was the address of the master, then the master goes to slave mode.

After a master has transmitted a START and won any arbitration, it owns the bus until it transmits a STOP. After a STOP, the bus is released, and arbitration decides which bus master gains the bus next. The MSTOP interrupt flag in I2Cn_IF is set when a STOP condition is transmitted by the master.

Table 14.5. I²C Master Transmitter

| I2Cn_STATE | Description | I2Cn_IF | Required interaction | Response |
|------------|-----------------------------------|---|----------------------|---|
| 0x57 | Start transmitted | START interrupt flag (BUSHOLD interrupt flag) | ADDR +W -> TXDATA | ADDR+W will be sent |
| | | | STOP | STOP will be sent and bus released. |
| | | | STOP + START | STOP will be sent and bus released. Then a START will be sent when bus becomes idle. |
| 0x57 | Repeated start transmitted | START interrupt flag (BUSHOLD interrupt flag) | ADDR +W -> TXDATA | ADDR+W will be sent |
| | | | STOP | STOP will be sent and bus released. |
| | | | STOP + START | STOP will be sent and bus released. Then a START will be sent when bus becomes idle. |
| - | ADDR+W transmitted | TXBL interrupt flag (TXC interrupt flag) | None | |
| 0x97 | ADDR+W transmitted, ACK received | ACK interrupt flag (BUSHOLD interrupt flag) | TXDATA | DATA will be sent |
| | | | STOP | STOP will be sent. Bus will be released |
| | | | START | Repeated start condition will be sent |
| | | | STOP + START | STOP will be sent and the bus released. Then a START will be sent when the bus becomes idle |
| 0x9F | ADDR+W transmitted, NACK received | NACK (BUSHOLD interrupt flag) | CONT + TXDATA | DATA will be sent |
| | | | STOP | STOP will be sent. Bus will be released |

| I2Cn_STA1 | Description | I2Cn_IF | Required interaction | Response |
|-----------|--------------------------------|---|----------------------|---|
| | | | START | Repeated start condition will be sent |
| | | | STOP + START | STOP will be sent and the bus released. Then a START will be sent when the bus becomes idle |
| - | Data transmitted | TXBL interrupt flag (TXC interrupt flag) | None | |
| 0xD7 | Data transmitted,ACK received | ACK interrupt flag (BUSHOLD interrupt flag) | TXDATA | DATA will be sent |
| | | | STOP | STOP will be sent. Bus will be released |
| | | | START | Repeated start condition will be sent |
| | | | STOP + START | STOP will be sent and the bus released. Then a START will be sent when the bus becomes idle |
| 0xDF | Data transmitted,NACK received | NACK(BUSHOLD interrupt flag) | CONT + TXDATA | DATA will be sent |
| | | | STOP | STOP will be sent. Bus will be released |
| | | | START | Repeated start condition will be sent |
| | | | STOP + START | STOP will be sent and the bus released. Then a START will be sent when the bus becomes idle |
| - | Stop transmitted | MSTOP interrupt flag | None | |
| | | | START | START will be sent when bus becomes idle |
| - | Arbitration lost | ARBLOST interrupt flag | None | |
| | | | START | START will be sent when bus becomes idle |

14.3.7.5 Master Receiver

To receive data from a slave, the master must operate as a master receiver, see Table 14.6 (p. 158). This is done by transmitting ADDR+R as the address byte instead of ADDR+W, which is transmitted to become a master transmitter. The address byte loaded into the data register thus has to contain the 7-bit slave address in the 7 most significant bits of the byte, and have the least significant bit set.

When the address has been transmitted, the master receives an ACK or a NACK. If an ACK is received, the ACK interrupt flag in I2Cn_IF is set, and if space is available in the receive shift register, reception of a byte from the slave begins. If the receive buffer and shift register is full however, the bus is held until data is read from the receive buffer or another interaction is made. Note that the STOP and START interactions have a higher priority than the data-available interaction, so if a STOP or START command is pending, the highest priority interaction will be performed, and data will not be received from the slave.

If a NACK was received, the CONT command in I2Cn_CMD has to be issued in order to continue receiving data, even if there is space available in the receive buffer and/or shift register.

After a data byte has been received the master must ACK or NACK the received byte. If an ACK is pending or AUTOACK in I2Cn_CTRL is set, an ACK is sent automatically and reception continues if space is available in the receive buffer.

If a NACK is sent, the CONT command must be used in order to continue transmission. If an ACK or NACK is issued along with a START or STOP or both, then the ACK/NACK is transmitted and the reception is ended. If START in I2Cn_CMD is set alone, a repeated start condition is transmitted after the ACK/NACK. If STOP in I2Cn_CMD is set, a stop condition is sent regardless of whether START is set. If START is set in this case, it is set as pending.

As when operating as a master transmitter, arbitration can be lost as a master receiver. When this happens the ARBLOST interrupt flag in I2Cn_IF is set, and the master has a possibility of being selected as a slave given the correct conditions.

Table 14.6. I²C Master Receiver

| I2Cn_STA1 | Description | I2Cn_IF | Required interaction | Response |
|-----------|----------------------------------|---|--------------------------|---|
| 0x57 | START transmitted | START interrupt flag (BUSHOLD interrupt flag) | ADDR +R -> TXDATA | ADDR+R will be sent |
| | | | STOP | STOP will be sent and bus released. |
| | | | STOP + START | STOP will be sent and bus released. Then a START will be sent when bus becomes idle. |
| 0x57 | Repeated START transmitted | START interrupt flag(BUSHOLD interrupt flag) | ADDR +R -> TXDATA | ADDR+R will be sent |
| | | | STOP | STOP will be sent and bus released. |
| | | | STOP + START | STOP will be sent and bus released. Then a START will be sent when bus becomes idle. |
| - | ADDR+R transmitted | TXBL interrupt flag (TXC interrupt flag) | None | |
| 0x93 | ADDR+R transmitted, ACK received | ACK interrupt flag(BUSHOLD) | RXDATA | Start receiving |
| | | | STOP | STOP will be sent and the bus released |
| | | | START | Repeated START will be sent |
| | | | STOP + START | STOP will be sent and the bus released. Then a START will be sent when the bus becomes idle |
| 0x9B | ADDR+R transmitted,NACK received | NACK(BUSHOLD) | CONT + RXDATA | Continue, start receiving |
| | | | STOP | STOP will be sent and the bus released |
| | | | START | Repeated START will be sent |
| | | | STOP + START | STOP will be sent and the bus released. Then a START will be sent when the bus becomes idle |
| 0xB3 | Data received | RXDATA interrupt flag(BUSHOLD interrupt flag) | ACK + RXDATA | ACK will be transmitted, reception continues |
| | | | NACK + CONT + RXDATA | NACK will be transmitted, reception continues |
| | | | ACK/ NACK + STOP | ACK/NACK will be sent and the bus will be released. |
| | | | ACK/ NACK + START | ACK/NACK will be sent, and then a repeated start condition. |
| | | | ACK/ NACK + STOP + START | ACK/NACK will be sent and the bus will be released. Then a START will be sent when the bus becomes idle |
| - | Stop received | MSTOP interrupt flag | None | |

| I2Cn_STA1 | Description | I2Cn_IF | Required interaction | Response |
|-----------|------------------|------------------------|----------------------|--|
| | | | START | START will be sent when bus becomes idle |
| - | Arbitration lost | ARBLOST interrupt flag | None | |
| | | | START | START will be sent when bus becomes idle |

14.3.8 Bus States

The I2Cn_STATE register can be used to determine which state the I²C module and the I²C bus are in at a given time. The register consists of the STATE bit-field, which shows which state the I²C module is in at any ongoing transmission, and a set of single-bits, which reveal the transmission mode, whether the bus is busy or idle, and whether the bus is held by this I²C module waiting for a software response.

The possible values of the STATE field are summarized in Table 14.7 (p. 159). When this field is cleared, the I²C module is not a part of any ongoing transmission. The remaining status bits in the I2Cn_STATE register are listed in Table 14.8 (p. 159).

Table 14.7. I²C STATE Values

| Mode | Value | Description |
|---------|-------|---|
| IDLE | 0 | No transmission is being performed by this module. |
| WAIT | 1 | Waiting for idle. Will send a start condition as soon as the bus is idle. |
| START | 2 | Start being transmitted |
| ADDR | 3 | Address being transmitted or has been received |
| ADDRACK | 4 | Address ACK/NACK being transmitted or received |
| DATA | 5 | Data being transmitted or received |
| DATAACK | 6 | Data ACK/NACK being transmitted or received |

Table 14.8. I²C Transmission Status

| Bit | Description |
|-------------|---|
| BUSY | Set whenever there is activity on the bus. Whether or not this module is responsible for the activity cannot be determined by this byte. |
| MASTER | Set when operating as a master. Cleared at all other times. |
| TRANSMITTER | Set when operating as a transmitter; either a master transmitter or a slave transmitter. Cleared at all other times |
| BUSHOLD | Set when the bus is held by this I ² C module because an action is required by software. |
| NACK | Only valid when bus is held and STATE is ADDRACK or DATAACK. In that case it is set if a NACK was received. In all other cases, the bit is cleared. |

Note

I2Cn_STATE reflects the internal state of the I²C module, and therefore only held constant as long as the bus is held, i.e. as long as BUSHOLD in I2Cn_STATUS is set.


14.3.9 Slave Operation

The I²C module operates in master mode by default. To enable slave operation, i.e. to allow the device to be addressed as an I²C slave, the SLAVE bit in I2Cn_CTRL must be set. In this case the slave operates in a mixed mode, both capable of starting transmissions as a master, and being addressed as a slave. When operating in the slave mode, HFPERCLK frequency must be higher than 4.2 MHz for Standard-mode, 11 MHz for Fast-mode, and 24.4 MHz for Fast-mode Plus.

14.3.9.1 Slave State Machine

The slave state machine is shown in Figure 14.11 (p. 160). The dotted lines show where I²C-specific interrupt flags are set. The full-drawn circles show places where interaction may be required by software to let the transmission proceed.

Figure 14.11. I²C Slave State Machine

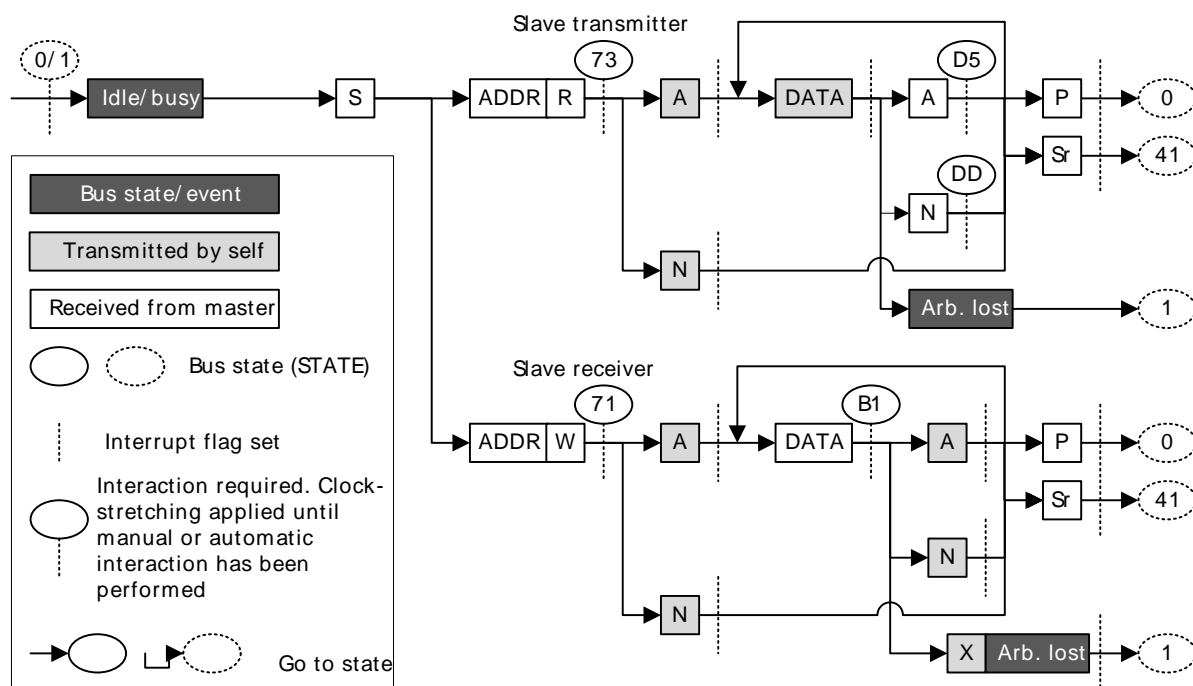

14.3.9.2 Address Recognition

The I²C module provides automatic address recognition for 7-bit addresses. 10-bit address recognition is not fully automatic, but can be assisted by the 7-bit address comparator as shown in Section 14.3.11 (p. 164). Address recognition is supported in all energy modes (except EM4).

The slave address, i.e. the address which the I²C module should be addressed with, is defined in the I2Cn_SADDR register. In addition to the address, a mask must be specified, telling the address comparator which bits of an incoming address to compare with the address defined in I2Cn_SADDR. The mask is defined in I2Cn_SADDRMASK, and for every zero in the mask, the corresponding bit in the slave address is treated as a don't-care.

An incoming address that fails address recognition is automatically replied to with a NACK. Since only the bits defined by the mask are checked, a mask with a value 0x00 will result in all addresses being accepted. A mask with a value 0x7F will only match the exact address defined in I2Cn_SADDR, while a mask 0x70 will match all addresses where the three most significant bits in I2Cn_SADDR and the incoming address are equal.

If GCAMEN in I2Cn_CTRL is set, the general call address is always accepted regardless of the result of the address recognition. The start-byte, i.e. the general call address with the R/W bit set is ignored unless it is included in the defined slave address.

When an address is accepted by the address comparator, the decision of whether to ACK or NACK the address is passed to software.

14.3.9.3 Slave Transmitter

When SLAVE in I2Cn_CTRL is set, the RSTART interrupt flag in I2Cn_IF will be set when repeated START conditions are detected. After a START or repeated START condition, the bus master will transmit an address along with an R/W bit. If there is no room in the receive shift register for the address, the bus will be held by the slave until room is available in the shift register. Transmission then continues and the address is loaded into the shift register. If this address does not pass address recognition, it is automatically NACK'ed by the slave, and the slave goes to an idle state. The address byte is in this case discarded, making the shift register ready for a new address. It is not loaded into the receive buffer.

If the address was accepted and the R/W bit was set (R), indicating that the master wishes to read from the slave, the slave now goes into the slave transmitter mode. Software interaction is now required to decide whether the slave wants to acknowledge the request or not. The accepted address byte is loaded into the receive buffer like a regular data byte. If no valid interaction is pending, the bus is held until the slave responds with a command. The slave can reject the request with a single NACK command.

The slave will in that case go to an idle state, and wait for the next start condition. To continue the transmission, the slave must make sure data is loaded into the transmit buffer and send an ACK. The loaded data will then be transmitted to the master, and an ACK or NACK will be received from the master.

Data transmission can also continue after a NACK if a CONT command is issued along with the NACK. This is not standard I²C however.

If the master responds with an ACK, it may expect another byte of data, and data should be made available in the transmit buffer. If data is not available, the bus is held until data is available.

If the response is a NACK however, this is an indication of that the master has received enough bytes and wishes to end the transmission. The slave now automatically goes idle, unless CONT in I2Cn_CMD is set and data is available for transmission. The latter is not standard I²C.

The master ends the transmission by sending a STOP or a repeated START. The SSTOP interrupt flag in I2Cn_IF is set when the master transmits a STOP condition. If the transmission is ended with a repeated START, then the SSTOP interrupt flag is not set.

Note

The SSTOP interrupt flag in I2Cn_IF will be set regardless of whether the slave is participating in the transmission or not, as long as SLAVE in I2Cn_CTRL is set and a STOP condition is detected

If arbitration is lost at any time during transmission, the ARBLOST interrupt flag in I2Cn_IF is set, the bus is released and the slave goes idle.

See Table 14.9 (p. 162) for more information.

Table 14.9. I²C Slave Transmitter

| I2Cn_STA1 | Description | I2Cn_IF | Required interaction | Response |
|-----------|---------------------------------|--|----------------------|--|
| 0x41 | Repeated START received | RSTART interrupt flag (BUSHOLD interrupt flag) | RXDATA | Receive and compare address |
| 0x75 | ADDR + R received | ADDR interrupt flag | ACK + TXDATA | ACK will be sent, then DATA |
| | | RXDATA interrupt flag | NACK | NACK will be sent, slave goes idle |
| | | (BUSHOLD interrupt flag) | NACK + CONT + TXDATA | NACK will be sent, then DATA. |
| - | Data transmitted | TXBL interrupt flag (TXC interrupt flag) | None | |
| 0xD5 | Data transmitted, ACK received | ACK interrupt flag (BUSHOLD interrupt flag) | TXDATA | DATA will be transmitted |
| 0xDD | Data transmitted, NACK received | NACK interrupt flag | None | The slave goes idle |
| | | (BUSHOLD interrupt flag) | CONT + TXDATA | DATA will be transmitted |
| - | Stop received | SSTOP interrupt flag | None | The slave goes idle |
| | | | START | START will be sent when bus becomes idle |
| - | Arbitration lost | ARBLOST interrupt flag | None | The slave goes idle |
| | | | START | START will be sent when the bus becomes idle |

14.3.9.4 Slave Receiver

A slave receiver operation is started in the same way as a slave transmitter operation, with the exception that the address transmitted by the master has the R/W bit cleared (W), indicating that the master wishes to write to the slave. The slave then goes into slave receiver mode.

To receive data from the master, the slave should respond to the address with an ACK and make sure space is available in the receive buffer. Transmission will then continue, and the slave will receive a byte from the master.

If a NACK is sent without a CONT, the transmission is ended for the slave, and it goes idle. If the slave issues both the NACK and CONT commands and has space available in the receive buffer, it will be open for continuing reception from the master.

When a byte has been received from the master, the slave must ACK or NACK the byte. The responses here are the same as for the reception of the address byte.

The master ends the transmission by sending a STOP or a repeated START. The SSTOP interrupt flag is set when the master transmits a STOP condition. If the transmission is ended with a repeated START, then the SSTOP interrupt flag in I2Cn_IF is not set.

Note

The SSTOP interrupt flag in I2Cn_IF will be set regardless of whether the slave is participating in the transmission or not, as long as SLAVE in I2Cn_CTRL is set and a STOP condition is detected

If arbitration is lost at any time during transmission, the ARBLOST interrupt flag in I2Cn_IF is set, the bus is released and the slave goes idle.

See Table 14.10 (p. 163) for more information.

Table 14.10. I²C - Slave Receiver

| I2Cn_STA1 | Description | I2Cn_IF | Required interaction | Response |
|-----------|-------------------------|---|----------------------|--|
| - | Repeated START received | RSTART interrupt flag (BUSHOLD interrupt flag) | RXDATA | Receive and compare address |
| 0x71 | ADDR + W received | ADDR interrupt flag RXDATA interrupt flag (BUSHOLD interrupt flag) | ACK + RXDATA | ACK will be sent and data will be received |
| | | | NACK | NACK will be sent, slave goes idle |
| | | | NACK + CONT + RXDATA | NACK will be sent and DATA will be received. |
| 0xB1 | Data received | RXDATA interrupt flag (BUSHOLD interrupt flag) | ACK + RXDATA | ACK will be sent and data will be received |
| | | | NACK | NACK will be sent and slave will go idle |
| | | | NACK + CONT + RXDATA | NACK will be sent and data will be received |
| - | Stop received | SSTOP interrupt flag | None | The slave goes idle |
| | | | START | START will be sent when bus becomes idle |
| - | Arbitration lost | ARBLOST interrupt flag | None | The slave goes idle |
| | | | START | START will be sent when the bus becomes idle |

14.3.10 Transfer Automation

The I²C can be set up to complete transfers with a minimal amount of interaction.

14.3.10.1 DMA

DMA can be used to automatically load data into the transmit buffer and load data out from the receive buffer. When using DMA, software is thus relieved of moving data to and from memory after each transferred byte.

14.3.10.2 Automatic ACK

When AUTOACK in I2Cn_CTRL is set, an ACK is sent automatically whenever an ACK interaction is possible and no higher priority interactions are pending.

14.3.10.3 Automatic STOP

A STOP can be generated automatically on two conditions. These apply only to the master transmitter.

If AUTOSN in I2Cn_CTRL is set, the I²C module ends a transmission by transmitting a STOP condition when operating as a master transmitter and a NACK is received.

If AUTOSE in I2Cn_CTRL is set, the I²C module always ends a transmission when there is no more data in the transmit buffer. If data has been transmitted on the bus, the transmission is ended after the (N)ACK has been received by the slave. If a START is sent when no data is available in the transmit buffer and AUTOSE is set, then the STOP condition is sent immediately following the START. Software must thus make sure data is available in the transmit buffer before the START condition has been fully transmitted if data is to be transferred.

14.3.11 Using 10-bit Addresses

When using 10-bit addresses in slave mode, set the I2Cn_SADDR register to 1111 0XX where XX are the two most significant bits of the 10-bit address, and set I2Cn_SADDRMASK to 0xFF. Address matches will now be given on all 10-bit addresses where the two most significant bits are correct.

When receiving an address match, the slave must acknowledge the address and receive the first data byte. This byte contains the second part of the 10-bit address. If it matches the address of the slave, the slave should ACK the byte to continue the transmission, and if it does not match, the slave should NACK it.

When the master is operating as a master transmitter, the data bytes will follow after the second address byte. When the master is operating as a master receiver however, a repeated START condition is sent after the second address byte. The address sent after this repeated START is equal to the first of the address bytes transmitted previously, but now with the R/W byte set, and only the slave that found a match on the entire 10-bit address in the previous message should ACK this address. The repeated start should take the master into a master receiver mode, and after the single address byte sent this time around, the slave begins transmission to the master.

14.3.12 Error Handling

14.3.12.1 ABORT Command

Some bus errors may require software intervention to be resolved. The I²C module provides an ABORT command, which can be set in I2Cn_CMD, to help resolve bus errors.

When the bus for some reason is locked up and the I²C module is in the middle of a transmission it cannot get out of, or for some other reason the I²C wants to abort a transmission, the ABORT command can be used.

Setting the ABORT command will make the I²C module discard any data currently being transmitted or received, release the SDA and SCL lines and go to an idle mode. ABORT effectively makes the I²C module forget about any ongoing transfers.

14.3.12.2 Bus Reset

A bus reset can be performed by setting the START and STOP commands in I2Cn_CMD while the transmit buffer is empty. A START condition will then be transmitted, immediately followed by a STOP condition. A bus reset can also be performed by transmitting a START command with the transmit buffer empty and AUTOSE set.

14.3.12.3 I²C-Bus Errors

An I²C-bus error occurs when a START or STOP condition is misplaced, which happens when the value on SDA changes while SCL is high during bit-transmission on the I²C-bus. If the I²C module is part of the current transmission when a bus error occurs, any data currently being transmitted or received is discarded, SDA and SCL are released, the BUSERR interrupt flag in I2Cn_IF is set to indicate the error, and the module automatically takes a course of action as defined in Table 14.11 (p. 164).

Table 14.11. I²C Bus Error Response

| | Misplaced START | Misplaced STOP |
|-----------------------------|------------------------------------|---------------------------------------|
| In a master/slave operation | Treated as START. Receive address. | Go idle. Perform any pending actions. |

14.3.12.4 Bus Lockup

A lockup occurs when a master or slave on the I²C-bus has locked the SDA or SCL at a low value, preventing other devices from putting high values on the bus, and thus making communication on the bus impossible.

Many slave-only devices operating on an I²C-bus are not capable of driving SCL low, but in the rare case that SCL is stuck LOW, the advice is to apply a hardware reset signal to the slaves on the bus. If this does not work, cycle the power to the devices in order to make them release SCL.

When SDA is stuck low and SCL is free, a master should send 9 clock pulses on SCL while tristating the SDA. This procedure is performed in the GPIO module after clearing the I2C_ROUTE register and disabling the I2C module. The device that held the bus low should release it sometime within those 9 clocks. If not, use the same approach as for when SCL is stuck, resetting and possibly cycling power to the slaves.

Lockup of SDA can be detected by keeping count of the number of continuous arbitration losses during address transmission. If arbitration is also lost during the transmission of a general call address, i.e. during the transmission of the STOP condition, which should never happen during normal operation, this is a good indication of SDA lockup.

Detection of SCL lockups can be done using the timeout functionality defined in Section 14.3.12.6 (p. 165)

14.3.12.5 Bus Idle Timeout

When SCL has been high for a significant amount of time, this is a good indication of that the bus is idle. On an SMBus system, the bus is only allowed to be in this state for a maximum of 50 µs before the bus is considered idle.

The bus idle timeout BITO in I2Cn_CTRL can be used to detect situations where the bus goes idle in the middle of a transmission. The timeout can be configured in BITO, and when the bus has been idle for the given amount of time, the BITO interrupt flag in I2Cn_IF is set. The bus can also be set idle automatically on a bus idle timeout. This is enabled by setting GIBITO in I2Cn_CTRL.

When the bus idle timer times out, it wraps around and continues counting as long as its condition is true. If the bus is not set idle using GIBITO or the ABORT command in I2Cn_CMD, this will result in periodic timeouts.

Note

This timeout will be generated even if SDA is held low.

The bus idle timeout is active as long as the bus is busy, i.e. BUSY in I2Cn_STATUS is set. The timeout can be used to get the I²C module out of the busy-state it enters when reset, see Section 14.3.7.3 (p. 155).

14.3.12.6 Clock Low Timeout

The clock timeout, which can be configured in CLTO in I2Cn_CTRL, starts counting whenever SCL goes low, and times out if SCL does not go high within the configured timeout. A clock low timeout results in CLTOIF in I2Cn_IF being set, allowing software to take action.

When the timer times out, it wraps around and continues counting as long as SCL is low. An SCL lockup will thus result in periodic clock low timeouts as long as SCL is low.

14.3.13 DMA Support

The I²C module has full DMA support. The DMA controller can write to the transmit buffer using the I2Cn_TXDATA register, and it can read from the receive buffer using the RXDATA register. A request for the DMA controller to read from the I²C receive buffer can come from the following source:

- Data available in the receive buffer

A write request can come from one of the following sources:

- Transmit buffer and shift register empty. No data to send
- Transmit buffer empty

14.3.14 Interrupts

The interrupts generated by the I²C module are combined into one interrupt vector, I2C_INT. If I²C interrupts are enabled, an interrupt will be made if one or more of the interrupt flags in I2Cn_IF and their corresponding bits in I2Cn_IEN are set.

14.3.15 Wake-up

The I²C receive section can be active all the way down to energy mode EM3, and can wake up the CPU on address interrupt. All address match modes are supported.

14.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|----------------|------|-----------------------------------|
| 0x000 | I2Cn_CTRL | RW | Control Register |
| 0x004 | I2Cn_CMD | W1 | Command Register |
| 0x008 | I2Cn_STATE | R | State Register |
| 0x00C | I2Cn_STATUS | R | Status Register |
| 0x010 | I2Cn_CLKDIV | RW | Clock Division Register |
| 0x014 | I2Cn_SADDR | RW | Slave Address Register |
| 0x018 | I2Cn_SADDRMASK | RW | Slave Address Mask Register |
| 0x01C | I2Cn_RXDATA | R | Receive Buffer Data Register |
| 0x020 | I2Cn_RXDATAP | R | Receive Buffer Data Peek Register |
| 0x024 | I2Cn_TXDATA | W | Transmit Buffer Data Register |
| 0x028 | I2Cn_IF | R | Interrupt Flag Register |
| 0x02C | I2Cn_IFS | W1 | Interrupt Flag Set Register |
| 0x030 | I2Cn_IFC | W1 | Interrupt Flag Clear Register |
| 0x034 | I2Cn_IEN | RW | Interrupt Enable Register |
| 0x038 | I2Cn_ROUTE | RW | I/O Routing Register |

14.5 Register Description

14.5.1 I2Cn_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|------|----|----|--------|-----|----|----|------|-----|---|---|----|---|------|---|----|---|--------|--------|--------|--------|---------|-------|----|--|----|--|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | 0x0 | | 0 | | 0x0 | | | | 0x0 | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | |
| Access | | | | | | | | | | | | | | | RW | | RW | | | | RW | | | | | RW | | | | RW | | RW | | RW | | RW | | RW | | RW | |
| Name | | | | | | | | | | | | | | | CLTO | | | GIBITO | | | | BITO | | | | | | CLHR | | | | GCAMEN | ARBDIS | AUTOSN | AUTOSE | AUTOACK | SLAVE | EN | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:19 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|-------|------|-----|----|--------------------------|
| 18:16 | CLTO | 0x0 | RW | Clock Low Timeout |
|-------|------|-----|----|--------------------------|

Use to generate a timeout when CLK has been low for the given amount of time. Wraps around and continues counting when the timeout is reached.

| Value | Mode | Description |
|-------|---------|---|
| 0 | OFF | Timeout disabled |
| 1 | 40PCC | Timeout after 40 prescaled clock cycles. In standard mode at 100 kHz, this results in a 50us timeout. |
| 2 | 80PCC | Timeout after 80 prescaled clock cycles. In standard mode at 100 kHz, this results in a 100us timeout. |
| 3 | 160PCC | Timeout after 160 prescaled clock cycles. In standard mode at 100 kHz, this results in a 200us timeout. |
| 4 | 320PPC | Timeout after 320 prescaled clock cycles. In standard mode at 100 kHz, this results in a 400us timeout. |
| 5 | 1024PPC | Timeout after 1024 prescaled clock cycles. In standard mode at 100 kHz, this results in a 1280us timeout. |

| | | | | |
|----|--------|---|----|------------------------------------|
| 15 | GIBITO | 0 | RW | Go Idle on Bus Idle Timeout |
|----|--------|---|----|------------------------------------|

| Bit | Name | Reset | Access | Description |
|---|----------|--|---|--|
| When set, the bus automatically goes idle on a bus idle timeout, allowing new transfers to be initiated. | | | | |
| Value | | Description | | |
| 0 | | A bus idle timeout has no effect on the bus state. | | |
| 1 | | A bus idle timeout tells the I ² C module that the bus is idle, allowing new transfers to be initiated. | | |
| 14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 13:12 | BITO | 0x0 | RW | Bus Idle Timeout |
| Use to generate a timeout when SCL has been high for a given amount time between a START and STOP condition. When in a bus transaction, i.e. the BUSY flag is set, a timer is started whenever SCL goes high. When the timer reaches the value defined by BITO, it sets the BITO interrupt flag. The BITO interrupt flag will then be set periodically as long as SCL remains high. The bus idle timeout is active as long as BUSY is set. It is thus stopped automatically on a timeout if GIBITO is set. It is also stopped a STOP condition is detected and when the ABORT command is issued. The timeout is activated whenever the bus goes BUSY, i.e. a START condition is detected. | | | | |
| Value | | Mode | Description | |
| 0 | | OFF | Timeout disabled | |
| 1 | | 40PCC | Timeout after 40 prescaled clock cycles. In standard mode at 100 kHz, this results in a 50us timeout. | |
| 2 | | 80PCC | Timeout after 80 prescaled clock cycles. In standard mode at 100 kHz, this results in a 100us timeout. | |
| 3 | | 160PCC | Timeout after 160 prescaled clock cycles. In standard mode at 100 kHz, this results in a 200us timeout. | |
| 11:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 9:8 | CLHR | 0x0 | RW | Clock Low High Ratio |
| Determines the ratio between the low and high parts of the clock signal generated on SCL as master. | | | | |
| Value | | Mode | Description | |
| 0 | | STANDARD | The ratio between low period and high period counters (N _{low} :N _{high}) is 4:4 | |
| 1 | | ASYMMETRIC | The ratio between low period and high period counters (N _{low} :N _{high}) is 6:3 | |
| 2 | | FAST | The ratio between low period and high period counters (N _{low} :N _{high}) is 11:6 | |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | GCAMEN | 0 | RW | General Call Address Match Enable |
| Set to enable address match on general call in addition to the programmed slave address. | | | | |
| Value | | Description | | |
| 0 | | General call address will be NACK'ed if it is not included by the slave address and address mask. | | |
| 1 | | When a general call address is received, a software response is required. | | |
| 5 | ARBDIS | 0 | RW | Arbitration Disable |
| A master or slave will not release the bus upon losing arbitration. | | | | |
| Value | | Description | | |
| 0 | | When a device loses arbitration, the ARB interrupt flag is set and the bus is released. | | |
| 1 | | When a device loses arbitration, the ARB interrupt flag is set, but communication proceeds. | | |
| 4 | AUTOSN | 0 | RW | Automatic STOP on NACK |
| Write to 1 to make a master transmitter send a STOP when a NACK is received from a slave. | | | | |
| Value | | Description | | |
| 0 | | Stop is not automatically sent if a NACK is received from a slave. | | |
| 1 | | The master automatically sends a STOP if a NACK is received from a slave. | | |
| 3 | AUTOSE | 0 | RW | Automatic STOP when Empty |
| Write to 1 to make a master transmitter send a STOP when no more data is available for transmission. | | | | |
| Value | | Description | | |
| 0 | | A stop must be sent manually when no more data is to be transmitted. | | |
| 1 | | The master automatically sends a STOP when no more data is available for transmission. | | |
| 2 | AUTOACK | 0 | RW | Automatic Acknowledge |
| Set to enable automatic acknowledges. | | | | |

| Bit | Name | Reset | Access | Description |
|-----|---|--|--------|------------------------------|
| | Value | Description | | |
| | 0 | Software must give one ACK command for each ACK transmitted on the I ² C bus. | | |
| | 1 | Addresses that are not automatically NACK'ed, and all data is automatically acknowledged. | | |
| 1 | SLAVE | 0 | RW | Addressable as Slave |
| | Set this bit to allow the device to be selected as an I ² C slave. | | | |
| | Value | Description | | |
| | 0 | All addresses will be responded to with a NACK | | |
| | 1 | Addresses matching the programmed slave address or the general call address (if enabled) require a response from software. Other addresses are automatically responded to with a NACK. | | |
| 0 | EN | 0 | RW | I²C Enable |
| | Use this bit to enable or disable the I ² C module. | | | |
| | Value | Description | | |
| | 0 | The I ² C module is disabled. And its internal state is cleared | | |
| | 1 | The I ² C module is enabled. | | |

14.5.2 I2Cn_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|--|---|--------|-------------------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CLEARPC | 0 | W1 | Clear Pending Commands |
| | Set to clear pending commands. | | | |
| 6 | CLEARTX | 0 | W1 | Clear TX |
| | Set to clear transmit buffer and shift register. Will not abort ongoing transfer. | | | |
| 5 | ABORT | 0 | W1 | Abort transmission |
| | Abort the current transmission making the bus go idle. When used in combination with STOP, a STOP condition is sent as soon as possible before aborting the transmission. The stop condition is subject to clock synchronization. | | | |
| 4 | CONT | 0 | W1 | Continue transmission |
| | Set to continue transmission after a NACK has been received. | | | |
| 3 | NACK | 0 | W1 | Send NACK |
| | Set to transmit a NACK the next time an acknowledge is required. | | | |
| 2 | ACK | 0 | W1 | Send ACK |
| | Set to transmit an ACK the next time an acknowledge is required. | | | |
| 1 | STOP | 0 | W1 | Send stop condition |
| | Set to send stop condition as soon as possible. | | | |
| 0 | START | 0 | W1 | Send start condition |
| | Set to send start condition as soon as possible. If a transmission is ongoing and not owned, the start condition will be sent as soon as the bus is idle. If the current transmission is owned by this module, a repeated start condition will be sent. Use in combination with a STOP command to automatically send a STOP, then a START when the bus becomes idle. | | | |

14.5.3 I2Cn_STATE - State Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|---|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:5 | STATE | 0x0 | R | Transmission State The state of any current transmission. Cleared if the I ² C module is idle. |
| | Value | Mode | Description | |
| | 0 | IDLE | No transmission is being performed. | |
| | 1 | WAIT | Waiting for idle. Will send a start condition as soon as the bus is idle. | |
| | 2 | START | Start transmitted or received | |
| | 3 | ADDR | Address transmitted or received | |
| | 4 | ADDRACK | Address ack/nack transmitted or received | |
| | 5 | DATA | Data transmitted or received | |
| | 6 | DATAACK | Data ack/nack transmitted or received | |
| 4 | BUSHOLD | 0 | R | Bus Held Set if the bus is currently being held by this I ² C module. |
| 3 | NACKED | 0 | R | Nack Received Set if a NACK was received and STATE is ADDRACK or DATAACK. |
| 2 | TRANSMITTER | 0 | R | Transmitter Set when operating as a master transmitter or a slave transmitter. When cleared, the system may be operating as a master receiver, a slave receiver or the current mode is not known. |
| 1 | MASTER | 0 | R | Master Set when operating as an I ² C master. When cleared, the system may be operating as an I ² C slave. |
| 0 | BUSY | 1 | R | Bus Busy Set when the bus is busy. Whether the I ² C module is in control of the bus or not has no effect on the value of this bit. When the MCU comes out of reset, the state of the bus is not known, and thus BUSY is set. Use the ABORT command or a bus idle timeout to force the I ² C module out of the BUSY state. |

14.5.4 I2Cn_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---------|------|-----|--------|-------|-------|------|-------|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | RXDATAV | TXBL | TXC | PABORT | PCONT | PNACK | PACK | PSTOP | PSTART | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|---|
| 8 | RXDATAV | 0 | R | RX Data Valid Set when data is available in the receive buffer. Cleared when the receive buffer is empty. |
| 7 | TXBL | 1 | R | TX Buffer Level Indicates the level of the transmit buffer. Set when the transmit buffer is empty, and cleared when it is full. |
| 6 | TXC | 0 | R | TX Complete Set when a transmission has completed and no more data is available in the transmit buffer. Cleared when a new transmission starts. |
| 5 | PABORT | 0 | R | Pending abort An abort is pending and will be transmitted as soon as possible. |
| 4 | PCONT | 0 | R | Pending continue A continue is pending and will be transmitted as soon as possible. |
| 3 | PNACK | 0 | R | Pending NACK A not-acknowledge is pending and will be transmitted as soon as possible. |
| 2 | PACK | 0 | R | Pending ACK An acknowledge is pending and will be transmitted as soon as possible. |
| 1 | PSTOP | 0 | R | Pending STOP A stop condition is pending and will be transmitted as soon as possible. |
| 0 | PSTART | 0 | R | Pending START A start condition is pending and will be transmitted as soon as possible. |

14.5.5 I2Cn_CLKDIV - Clock Division Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x000 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | DIV | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | DIV | 0x000 | RW | Clock Divider Specifies the clock divider for the I ² C. Note that DIV must be 1 or higher when slave is enabled. |

14.5.6 I2Cn_SADDR - Slave Address Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|------|---|---|---|---|---|---|---|--|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | ADDR | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:1 | ADDR | 0x00 | RW | Slave address Specifies the slave address of the device. |
| 0 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

14.5.7 I2Cn_SADDRMASK - Slave Address Mask Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|------|---|---|---|---|---|---|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | MASK | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:1 | MASK | 0x00 | RW | Slave Address Mask Specifies the significant bits of the slave address. Setting the mask to 0x00 will match all addresses, while setting it to 0x7F will only match the exact address specified by ADDR. |
| 0 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

14.5.8 I2Cn_RXDATA - Receive Buffer Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | RXDATA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | RXDATA | 0x00 | R | RX Data Use this register to read from the receive buffer. Buffer is emptied on read access. |

14.5.9 I2Cn_RXDATAP - Receive Buffer Data Peek Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---------|---|---|---|---|---|---|---|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | RXDATAP | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|---------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | RXDATAP | 0x00 | R | RX Data Peek |
| Use this register to read from the receive buffer. Buffer is not emptied on read access. | | | | |

14.5.10 I2Cn_TXDATA - Transmit Buffer Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | TXDATA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|----------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | TXDATA | 0x00 | W | TX Data |
| Use this register to write a byte to the transmit buffer. | | | | |

14.5.11 I2Cn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|------|----|------|----|------|---|------|---|---------|---|--------|---|---------|---|-------|---|------|---|-----|---|---------|---|------|---|-----|--|------|--|--------|--|-------|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | | | |
| Name | | | | | | | | | | | | | | | | | SSTOP | | CLTO | | BITO | | RXUF | | TXOF | | BUSHOLD | | BUSERR | | ARBLOST | | MSTOP | | NACK | | ACK | | RXDATAV | | TXBL | | TXC | | ADDR | | RSTART | | START |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|--|
| 31:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 16 | SSTOP | 0 | R | Slave STOP condition Interrupt Flag |
| Set when a STOP condition has been received. Will be set regardless of the EFM32 being involved in the transaction or not. | | | | |
| 15 | CLTO | 0 | R | Clock Low Timeout Interrupt Flag |

| Bit | Name | Reset | Access | Description |
|-----|--|-------|--------|---|
| | Set on each clock low timeout. The timeout value can be set in CLTO bit field in the I2Cn_CTRL register. | | | |
| 14 | BITO | 0 | R | Bus Idle Timeout Interrupt Flag Set on each bus idle timeout. The timeout value can be set in the BITO bit field in the I2Cn_CTRL register. |
| 13 | RXUF | 0 | R | Receive Buffer Underflow Interrupt Flag Set when data is read from the receive buffer through the I2Cn_RXDATA register while the receive buffer is empty. |
| 12 | TXOF | 0 | R | Transmit Buffer Overflow Interrupt Flag Set when data is written to the transmit buffer while the transmit buffer is full. |
| 11 | BUSHOLD | 0 | R | Bus Held Interrupt Flag Set when the bus becomes held by the I ² C module. |
| 10 | BUSERR | 0 | R | Bus Error Interrupt Flag Set when a bus error is detected. The bus error is resolved automatically, but the current transfer is aborted. |
| 9 | ARBLOST | 0 | R | Arbitration Lost Interrupt Flag Set when arbitration is lost. |
| 8 | MSTOP | 0 | R | Master STOP Condition Interrupt Flag Set when a STOP condition has been successfully transmitted. If arbitration is lost during the transmission of the STOP condition, then the MSTOP interrupt flag is not set. |
| 7 | NACK | 0 | R | Not Acknowledge Received Interrupt Flag Set when a NACK has been received. |
| 6 | ACK | 0 | R | Acknowledge Received Interrupt Flag Set when an ACK has been received. |
| 5 | RXDATAV | 0 | R | Receive Data Valid Interrupt Flag Set when data is available in the receive buffer. Cleared automatically when the receive buffer is read. |
| 4 | TXBL | 1 | R | Transmit Buffer Level Interrupt Flag Set when the transmit buffer becomes empty. Cleared automatically when new data is written to the transmit buffer. |
| 3 | TXC | 0 | R | Transfer Completed Interrupt Flag Set when the transmit shift register becomes empty and there is no more data in the transmit buffer. |
| 2 | ADDR | 0 | R | Address Interrupt Flag Set when incoming address is accepted, i.e. own address or general call address is received. |
| 1 | RSTART | 0 | R | Repeated START condition Interrupt Flag Set when a repeated start condition is detected. |
| 0 | START | 0 | R | START condition Interrupt Flag Set when a start condition is successfully transmitted. |

14.5.12 I2Cn_IFS - Interrupt Flag Set Register

[illegible]

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|--|
| 16 | SSTOP | 0 | W1 | Set SSTOP Interrupt Flag Write to 1 to set the SSTOP interrupt flag. |
| 15 | CLTO | 0 | W1 | Set Clock Low Interrupt Flag Write to 1 to set the CLTO interrupt flag. |
| 14 | BITO | 0 | W1 | Set Bus Idle Timeout Interrupt Flag Write to 1 to set the BITO interrupt flag. |
| 13 | RXUF | 0 | W1 | Set Receive Buffer Underflow Interrupt Flag Write to 1 to set the RXUF interrupt flag. |
| 12 | TXOF | 0 | W1 | Set Transmit Buffer Overflow Interrupt Flag Write to 1 to set the TXOF interrupt flag. |
| 11 | BUSHOLD | 0 | W1 | Set Bus Held Interrupt Flag Write to 1 to set the BUSHOLD interrupt flag. |
| 10 | BUSERR | 0 | W1 | Set Bus Error Interrupt Flag Write to 1 to set the BUSERR interrupt flag. |
| 9 | ARBLOST | 0 | W1 | Set Arbitration Lost Interrupt Flag Write to 1 to set the ARBLOST interrupt flag. |
| 8 | MSTOP | 0 | W1 | Set MSTOP Interrupt Flag Write to 1 to set the MSTOP interrupt flag. |
| 7 | NACK | 0 | W1 | Set Not Acknowledge Received Interrupt Flag Write to 1 to set the NACK interrupt flag. |
| 6 | ACK | 0 | W1 | Set Acknowledge Received Interrupt Flag Write to 1 to set the ACK interrupt flag. |
| 5:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | TXC | 0 | W1 | Set Transfer Completed Interrupt Flag Write to 1 to set the TXC interrupt flag. |
| 2 | ADDR | 0 | W1 | Set Address Interrupt Flag Write to 1 to set the ADDR interrupt flag. |
| 1 | RSTART | 0 | W1 | Set Repeated START Interrupt Flag Write to 1 to set the RSTART interrupt flag. |
| 0 | START | 0 | W1 | Set START Interrupt Flag Write to 1 to set the START interrupt flag. |

14.5.13 I2Cn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|------|----|------|----|------|---|------|---|---------|---|--------|---|---------|---|-------|---|------|---|-----|---|----|---|-----|--|------|--|--------|--|-------|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | W1 | 0 | W1 | 0 | W1 | 0 | W1 | 0 | W1 | 0 | W1 | 0 | W1 | 0 | | | W1 | 0 | W1 | 0 | W1 | 0 | W1 | 0 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W1 | | W1 | | W1 | | W1 | | W1 | | W1 | | W1 | | W1 | | W1 | | | | W1 | | W1 | | W1 | | W1 | | | | |
| Name | | | | | | | | | | | | | | | | | SSTOP | | CLTO | | BITO | | RXUF | | TXOF | | BUSHOLD | | BUSERR | | ARBLOST | | MSTOP | | NACK | | ACK | | | | TXC | | ADDR | | RSTART | | START |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-----------------------------------|
| 31:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 16 | SSTOP | 0 | W1 | Clear SSTOP Interrupt Flag |

| Bit | Name | Reset | Access | Description |
|-----|---|---|--------|--|
| | Write to 1 to clear the SSTOP interrupt flag. | | | |
| 15 | CLTO | 0 | W1 | Clear Clock Low Interrupt Flag |
| | Write to 1 to clear the CLTO interrupt flag. | | | |
| 14 | BITO | 0 | W1 | Clear Bus Idle Timeout Interrupt Flag |
| | Write to 1 to clear the BITO interrupt flag. | | | |
| 13 | RXUF | 0 | W1 | Clear Receive Buffer Underflow Interrupt Flag |
| | Write to 1 to clear the RXUF interrupt flag. | | | |
| 12 | TXOF | 0 | W1 | Clear Transmit Buffer Overflow Interrupt Flag |
| | Write to 1 to clear the TXOF interrupt flag. | | | |
| 11 | BUSHOLD | 0 | W1 | Clear Bus Held Interrupt Flag |
| | Write to 1 to clear the BUSHOLD interrupt flag. | | | |
| 10 | BUSERR | 0 | W1 | Clear Bus Error Interrupt Flag |
| | Write to 1 to clear the BUSERR interrupt flag. | | | |
| 9 | ARBLOST | 0 | W1 | Clear Arbitration Lost Interrupt Flag |
| | Write to 1 to clear the ARBLOST interrupt flag. | | | |
| 8 | MSTOP | 0 | W1 | Clear MSTOP Interrupt Flag |
| | Write to 1 to clear the MSTOP interrupt flag. | | | |
| 7 | NACK | 0 | W1 | Clear Not Acknowledge Received Interrupt Flag |
| | Write to 1 to clear the NACK interrupt flag. | | | |
| 6 | ACK | 0 | W1 | Clear Acknowledge Received Interrupt Flag |
| | Write to 1 to clear the ACK interrupt flag. | | | |
| 5:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | TXC | 0 | W1 | Clear Transfer Completed Interrupt Flag |
| | Write to 1 to clear the TXC interrupt flag. | | | |
| 2 | ADDR | 0 | W1 | Clear Address Interrupt Flag |
| | Write to 1 to clear the ADDR interrupt flag. | | | |
| 1 | RSTART | 0 | W1 | Clear Repeated START Interrupt Flag |
| | Write to 1 to clear the RSTART interrupt flag. | | | |
| 0 | START | 0 | W1 | Clear START Interrupt Flag |
| | Write to 1 to clear the START interrupt flag. | | | |

14.5.14 I2Cn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|------|------|------|------|---------|--------|---------|-------|------|-----|---------|------|-----|------|--------|-------|----|----|----|----|----|----|----|----|----|----|----|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW |
| Name | | | | | | | | | | | | | | | | | SSTOP | CLTO | BITO | RXUF | TXOF | BUSHOLD | BUSERR | ARBLOST | MSTOP | NACK | ACK | RXDATAV | TXBL | TXC | ADDR | RSTART | START | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------------------------|---|--------|-------------------------------|
| 31:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 16 | SSTOP | 0 | RW | SSTOP Interrupt Enable |
| | Enable interrupt on SSTOP. | | | |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|---|
| 15 | CLTO | 0 | RW | Clock Low Interrupt Enable Enable interrupt on clock low timeout. |
| 14 | BITO | 0 | RW | Bus Idle Timeout Interrupt Enable Enable interrupt on bus idle timeout. |
| 13 | RXUF | 0 | RW | Receive Buffer Underflow Interrupt Enable Enable interrupt on receive buffer underflow. |
| 12 | TXOF | 0 | RW | Transmit Buffer Overflow Interrupt Enable Enable interrupt on transmit buffer overflow. |
| 11 | BUSHOLD | 0 | RW | Bus Held Interrupt Enable Enable interrupt on bus-held. |
| 10 | BUSERR | 0 | RW | Bus Error Interrupt Enable Enable interrupt on bus error. |
| 9 | ARBLOST | 0 | RW | Arbitration Lost Interrupt Enable Enable interrupt on loss of arbitration. |
| 8 | MSTOP | 0 | RW | MSTOP Interrupt Enable Enable interrupt on MSTOP. |
| 7 | NACK | 0 | RW | Not Acknowledge Received Interrupt Enable Enable interrupt when not-acknowledge is received. |
| 6 | ACK | 0 | RW | Acknowledge Received Interrupt Enable Enable interrupt on acknowledge received. |
| 5 | RXDATAV | 0 | RW | Receive Data Valid Interrupt Enable Enable interrupt on receive buffer full. |
| 4 | TXBL | 0 | RW | Transmit Buffer level Interrupt Enable Enable interrupt on transmit buffer level. |
| 3 | TXC | 0 | RW | Transfer Completed Interrupt Enable Enable interrupt on transfer completed. |
| 2 | ADDR | 0 | RW | Address Interrupt Enable Enable interrupt on recognized address. |
| 1 | RSTART | 0 | RW | Repeated START condition Interrupt Enable Enable interrupt on transmitted or received repeated START condition. |
| 0 | START | 0 | RW | START Condition Interrupt Enable Enable interrupt on transmitted or received START condition. |



14.5.15 I2Cn_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|---|---|---|---|---|---|---|---|---|---|--------|--------|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | LOCATION | | | | | | | | | | | SCLPEN | SDAPEN |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--|-------|------|-------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|
| 10:8 | LOCATION | 0x0 | RW | I/O Location Decides the location of the I ² C I/O pins. <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr><tr><td>2</td><td>LOC2</td><td>Location 2</td></tr><tr><td>3</td><td>LOC3</td><td>Location 3</td></tr><tr><td>4</td><td>LOC4</td><td>Location 4</td></tr><tr><td>5</td><td>LOC5</td><td>Location 5</td></tr><tr><td>6</td><td>LOC6</td><td>Location 6</td></tr></table> | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 | 2 | LOC2 | Location 2 | 3 | LOC3 | Location 3 | 4 | LOC4 | Location 4 | 5 | LOC5 | Location 5 | 6 | LOC6 | Location 6 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | LOC2 | Location 2 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | LOC3 | Location 3 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | LOC4 | Location 4 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | LOC5 | Location 5 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | LOC6 | Location 6 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7:2 | Reserved <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | SCLPEN | 0 | RW | SCL Pin Enable When set, the SCL pin of the I ² C is enabled. | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | SDAPEN | 0 | RW | SDA Pin Enable When set, the SDA pin of the I ² C is enabled. | | | | | | | | | | | | | | | | | | | | | | | | |

15 USART - Universal Synchronous Asynchronous Receiver/Transmitter

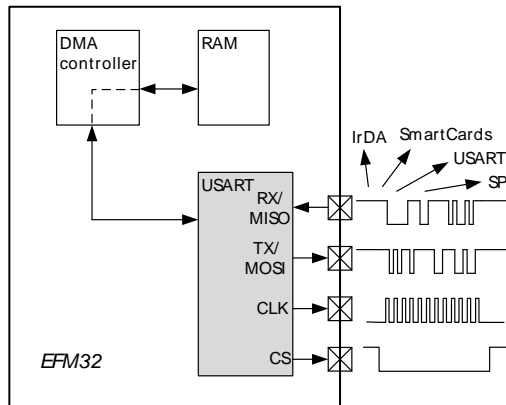

Quick Facts

What?

The USART handles high-speed UART, SPI-bus, SmartCards, and IrDA communication.

Why?

Serial communication is frequently used in embedded systems and the USART allows efficient communication with a wide range of external devices.

How?

The USART has a wide selection of operating modes, frame formats and baud rates. The multi-processor mode allows the USART to remain idle when not addressed. Triple buffering and DMA support makes high data-rates possible with minimal CPU intervention and it is possible to transmit and receive large frames while the MCU remains in EM1.

15.1 Introduction

The Universal Synchronous Asynchronous serial Receiver and Transmitter (USART) is a very flexible serial I/O module. It supports full duplex asynchronous UART communication as well as RS-485, SPI, MicroWire and 3-wire. It can also interface with ISO7816 SmartCards, and IrDA devices.

15.2 Features


- Asynchronous and synchronous (SPI) communication
- Full duplex and half duplex
- Separate TX/RX enable
- Separate receive / transmit 2-level buffers, with additional separate shift registers
- Programmable baud rate, generated as a fractional division from the peripheral clock ($\text{HFPERCLK}_{\text{USARTn}}$)
- Max bit-rate
 - SPI master mode, peripheral clock rate/2
 - SPI slave mode, peripheral clock rate/8
 - UART mode, peripheral clock rate/16, 8, 6, or 4
- Asynchronous mode supports
 - Majority vote baud-reception
 - False start-bit detection
 - Break generation/detection
 - Multi-processor mode
- Synchronous mode supports
 - All 4 SPI clock polarity/phase configurations
 - Master and slave mode
- Data can be transmitted LSB first or MSB first
- Configurable number of data bits, 4-16 (plus the parity bit, if enabled)

- HW parity bit generation and check
- Configurable number of stop bits in asynchronous mode: 0.5, 1, 1.5, 2
- HW collision detection
- Multi-processor mode
- IrDA modulator on USART0
- SmartCard (ISO7816) mode
- I2S mode
- Separate interrupt vectors for receive and transmit interrupts
- Loopback mode
 - Half duplex communication
 - Communication debugging
- PRS RX input

15.3 Functional Description

An overview of the USART module is shown in Figure 15.1 (p. 180) .

Figure 15.1. USART Overview

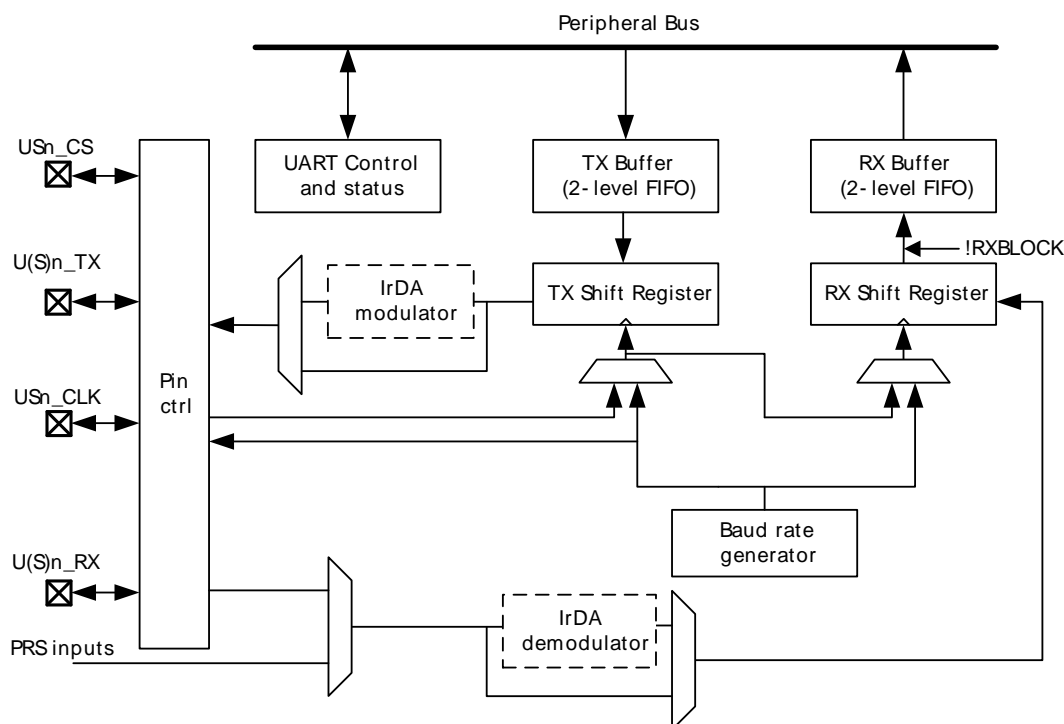

15.3.1 Modes of Operation

The USART operates in either asynchronous or synchronous mode.

In synchronous mode, a separate clock signal is transmitted with the data. This clock signal is generated by the bus master, and both the master and slave sample and transmit data according to this clock. Both master and slave modes are supported by the USART. The synchronous communication mode is compatible with the Serial Peripheral Interface Bus (SPI) standard.

In asynchronous mode, no separate clock signal is transmitted with the data on the bus. The USART receiver thus has to determine where to sample the data on the bus from the actual data. To make this possible, additional synchronization bits are added to the data when operating in asynchronous mode, resulting in a slight overhead.

Asynchronous or synchronous mode can be selected by configuring SYNC in USARTn_CTRL. The options are listed with supported protocols in Table 15.1 (p. 181). Full duplex and half duplex communication is supported in both asynchronous and synchronous mode.

Table 15.1. USART Asynchronous vs. Synchronous Mode

| SYNC | Communication Mode | Supported Protocols |
|------|--------------------|--|
| 0 | Asynchronous | RS-232, RS-485 (w/external driver), IrDA, ISO 7816 |
| 1 | Synchronous | SPI, MicroWire, 3-wire |

Table 15.2 (p. 181) explains the functionality of the different USART pins when the USART operates in different modes. Pin functionality enclosed in square brackets is optional, and depends on additional configuration parameters. LOOPBK and MASTER are discussed in Section 15.3.2.5 (p. 189) and Section 15.3.3.3 (p. 197) respectively.

Table 15.2. USART Pin Usage


| SYNC | LOOPBK | MASTER | Pin functionality | | | |
|------|--------|--------|-------------------|-----------------|-----------|---------------------|
| | | | U(S)n_TX (MOSI) | U(S)n_RX (MISO) | USn_CLK | USn_CS |
| 0 | 0 | x | Data out | Data in | - | [Driver enable] |
| 1 | 1 | x | Data out/in | - | - | [Driver enable] |
| 1 | 0 | 0 | Data in | Data out | Clock in | Slave select |
| 1 | 0 | 1 | Data out | Data in | Clock out | [Auto slave select] |
| 1 | 1 | 0 | Data out/in | - | Clock in | Slave select |
| 1 | 1 | 1 | Data out/in | - | Clock out | [Auto slave select] |

15.3.2 Asynchronous Operation

15.3.2.1 Frame Format

The frame format used in asynchronous mode consists of a set of data bits in addition to bits for synchronization and optionally a parity bit for error checking. A frame starts with one start-bit (S), where the line is driven low for one bit-period. This signals the start of a frame, and is used for synchronization. Following the start bit are 4 to 16 data bits and an optional parity bit. Finally, a number of stop-bits, where the line is driven high, end the frame. An example frame is shown in Figure 15.2 (p. 181).

Figure 15.2. USART Asynchronous Frame Format

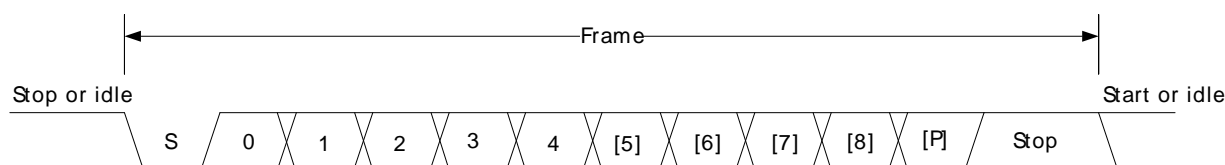

The number of data bits in a frame is set by DATABITS in USARTn_FRAME, see Table 15.3 (p. 182), and the number of stop-bits is set by STOPBITS in USARTn_FRAME, see Table 15.4 (p. 182). Whether or not a parity bit should be included, and whether it should be even or odd is defined by PARITY, also in USARTn_FRAME. For communication to be possible, all parties of an asynchronous transfer must agree on the frame format being used.

Table 15.3. USART Data Bits

| DATA BITS [3:0] | Number of Data bits |
|-----------------|---------------------|
| 0001 | 4 |
| 0010 | 5 |
| 0011 | 6 |
| 0100 | 7 |
| 0101 | 8 (Default) |
| 0110 | 9 |
| 0111 | 10 |
| 1000 | 11 |
| 1001 | 12 |
| 1010 | 13 |
| 1011 | 14 |
| 1100 | 15 |
| 1101 | 16 |

Table 15.4. USART Stop Bits

| STOP BITS [1:0] | Number of Stop bits |
|-----------------|---------------------|
| 00 | 0.5 |
| 01 | 1 (Default) |
| 10 | 1.5 |
| 11 | 2 |

The order in which the data bits are transmitted and received is defined by MSBF in USARTn_CTRL. When MSBF is cleared, data in a frame is sent and received with the least significant bit first. When it is set, the most significant bit comes first.

The frame format used by the transmitter can be inverted by setting TXINV in USARTn_CTRL, and the format expected by the receiver can be inverted by setting RXINV in USARTn_CTRL. These bits affect the entire frame, not only the data bits. An inverted frame has a low idle state, a high start-bit, inverted data and parity bits, and low stop-bits.

15.3.2.1.1 Parity bit Calculation and Handling

When parity bits are enabled, hardware automatically calculates and inserts any parity bits into outgoing frames, and verifies the received parity bits in incoming frames. This is true for both asynchronous and synchronous modes, even though it is mostly used in asynchronous communication. The possible parity modes are defined in Table 15.5 (p. 183). When even parity is chosen, a parity bit is inserted to make the number of high bits (data + parity) even. If odd parity is chosen, the parity bit makes the total number of high bits odd.

Table 15.5. USART Parity Bits

| STOP BITS [1:0] | Description |
|-----------------|-------------------------|
| 00 | No parity bit (Default) |
| 01 | Reserved |
| 10 | Even parity |
| 11 | Odd parity |

15.3.2.2 Clock Generation

The USART clock defines the transmission and reception data rate. When operating in asynchronous mode, the baud rate (bit-rate) is given by Equation 15.1 (p. 183)

USART Baud Rate

$$br = f_{H\text{PERCLK}} / (\text{oversample} \times (1 + \text{USARTn_CLKDIV}/256)) \quad (15.1)$$

where $f_{H\text{PERCLK}}$ is the peripheral clock ($H\text{PERCLK}_{\text{USARTn}}$) frequency and oversample is the oversampling rate as defined by OVS in USARTn_CTRL , see Table 15.6 (p. 183) .

Table 15.6. USART Oversampling

| OVS [1:0] | oversample |
|-----------|------------|
| 00 | 16 |
| 01 | 8 |
| 10 | 6 |
| 11 | 4 |

The USART has a fractional clock divider to allow the USART clock to be controlled more accurately than what is possible with a standard integral divider.

The clock divider used in the USART is a 15-bit value, with a 13-bit integral part and a 2-bit fractional part. The fractional part is configured in the two LSBs of DIV in USART_CLKDIV . The lowest achievable baud rate at 32 MHz is about 244 bauds/sec.

Fractional clock division is implemented by distributing the selected fraction over four baud periods. The fractional part of the divider tells how many of these periods should be extended by one peripheral clock cycle.

Given a desired baud rate br_{desired} , the clock divider USARTn_CLKDIV can be calculated by using Equation 15.2 (p. 183) :

USART Desired Baud Rate

$$\text{USARTn_CLKDIV} = 256 \times (f_{H\text{PERCLK}} / (\text{oversample} \times br_{\text{desired}}) - 1) \quad (15.2)$$

Table 15.7 (p. 184) shows a set of desired baud rates and how accurately the USART is able to generate these baud rates when running at a 4 MHz peripheral clock, using 16x or 8x oversampling.

Table 15.7. USART Baud Rates @ 4MHz Peripheral Clock

| Desired baud rate [baud/s] | USARTn_OVS =00 | | | USARTn_OVS =01 | | |
|----------------------------|-------------------|---------------------------|---------|-------------------|---------------------------|---------|
| | USARTn_CLKDIV/256 | Actual baud rate [baud/s] | Error % | USARTn_CLKDIV/256 | Actual baud rate [baud/s] | Error % |
| 600 | 415,75 | 599,88 | -0,02 | 832,25 | 600,06 | 0,01 |
| 1200 | 207,25 | 1200,48 | 0,04 | 415,75 | 1199,76 | -0,02 |
| 2400 | 103,25 | 2398,082 | -0,08 | 207,25 | 2400,96 | 0,04 |
| 4800 | 51 | 4807,692 | 0,16 | 103,25 | 4796,163 | -0,08 |
| 9600 | 25 | 9615,385 | 0,16 | 51 | 9615,385 | 0,16 |
| 14400 | 16,25 | 14492,75 | 0,64 | 33,75 | 14388,49 | -0,08 |
| 19200 | 12 | 19230,77 | 0,16 | 25 | 19230,77 | 0,16 |
| 28800 | 7,75 | 28571,43 | -0,79 | 16,25 | 28985,51 | 0,64 |
| 38400 | 5,5 | 38461,54 | 0,16 | 12 | 38461,54 | 0,16 |
| 57600 | 3,25 | 58823,53 | 2,12 | 7,75 | 57142,86 | -0,79 |
| 76800 | 2,25 | 76923,08 | 0,16 | 5,5 | 76923,08 | 0,16 |
| 115200 | 1,25 | 111111,1 | -3,55 | 3,25 | 117647,1 | 2,12 |
| 230400 | 0 | 250000 | 8,51 | 1,25 | 222222,2 | -3,55 |

15.3.2.3 Data Transmission

Asynchronous data transmission is initiated by writing data to the transmit buffer using one of the methods described in Section 15.3.2.3.1 (p. 184). When the transmission shift register is empty and ready for new data, a frame from the transmit buffer is loaded into the shift register, and if the transmitter is enabled, transmission begins. When the frame has been transmitted, a new frame is loaded into the shift register if available, and transmission continues. If the transmit buffer is empty, the transmitter goes to an idle state, waiting for a new frame to become available.

Transmission is enabled through the command register USARTn_CMD by setting TXEN, and disabled by setting TXDIS in the same command register. When the transmitter is disabled using TXDIS, any ongoing transmission is aborted, and any frame currently being transmitted is discarded. When disabled, the TX output goes to an idle state, which by default is a high value. Whether or not the transmitter is enabled at a given time can be read from TXENS in USARTn_STATUS.

When the USART transmitter is enabled and there is no data in the transmit shift register or transmit buffer, the TXC flag in USARTn_STATUS and the TXC interrupt flag in USARTn_IF are set, signaling that the transmitter is idle. The TXC status flag is cleared when a new frame becomes available for transmission, but the TXC interrupt flag must be cleared by software.


15.3.2.3.1 Transmit Buffer Operation

The transmit-buffer is a 2-level FIFO buffer. A frame can be loaded into the buffer by writing to USARTn_TXDATA, USARTn_TXDATAx, USARTn_TXDOUBLE or USARTn_TXDOUBLEx. Using USARTn_TXDATA allows 8 bits to be written to the buffer, while using USARTn_TXDOUBLE will write 2 frames of 8 bits to the buffer. If 9-bit frames are used, the 9th bit of the frames will in these cases be set to the value of BIT8DV in USARTn_CTRL.

To set the 9th bit directly and/or use transmission control, USARTn_TXDATAx and USARTn_TXDOUBLEx must be used. USARTn_TXDATAx allows 9 data bits to be written, as well as a set of control bits regarding the transmission of the written frame. Every frame in the buffer is stored with 9 data bits and additional transmission control bits. USARTn_TXDOUBLEx allows two

frames, complete with control bits to be written at once. When data is written to the transmit buffer using USARTn_TXDATA and USARTn_TXDOUBLEX, the 9th bit(s) written to these registers override the value in BIT8DV in USARTn_CTRL, and alone define the 9th bits that are transmitted if 9-bit frames are used. Figure 15.3 (p. 185) shows the basics of the transmit buffer when DATABITS in USARTn_FRAME is configured to less than 10 bits.

Figure 15.3. USART Transmit Buffer Operation

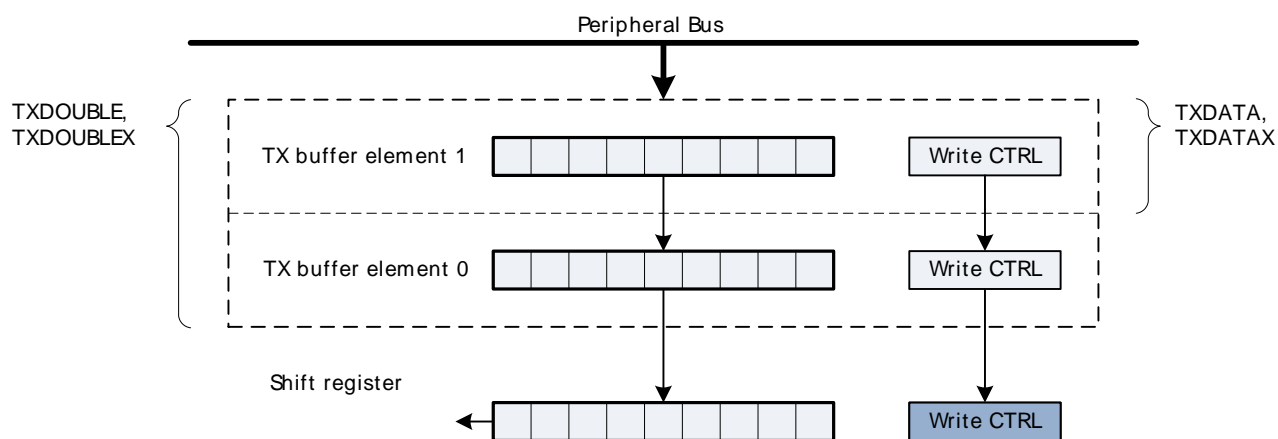

When writing more frames to the transmit buffer than there is free space for, the TXOF interrupt flag in USARTn_IF will be set, indicating the overflow. The data already in the transmit buffer is preserved in this case, and no data is written.

In addition to the interrupt flag TXC in USARTn_IF and status flag TXC in USARTn_STATUS which are set when the transmitter is idle, TXBL in USARTn_STATUS and the TXBL interrupt flag in USARTn_IF are used to indicate the level of the transmit buffer. TXBIL in USARTn_CTRL controls the level at which these bits are set. If TXBIL is cleared, they are set whenever the transmit buffer becomes empty, and if TXBIL is set, they are set whenever the transmit buffer goes from full to half-full or empty. Both the TXBL status flag and the TXBL interrupt flag are cleared automatically when their condition becomes false.

The transmit buffer, including the transmit shift register can be cleared by setting CLEAR_TX in USARTn_CMD. This will prevent the USART from transmitting the data in the buffer and shift register, and will make them available for new data. Any frame currently being transmitted will not be aborted. Transmission of this frame will be completed.

15.3.2.3.2 Frame Transmission Control

The transmission control bits, which can be written using USARTn_TXDATA and USARTn_TXDOUBLEX, affect the transmission of the written frame. The following options are available:

- **Generate break:** By setting TXBREAK, the output will be held low during the stop-bit period to generate a framing error. A receiver that supports break detection detects this state, allowing it to be used e.g. for framing of larger data packets. The line is driven high before the next frame is transmitted so the next start condition can be identified correctly by the recipient. Continuous breaks lasting longer than a USART frame are thus not supported by the USART. GPIO can be used for this.
- **Disable transmitter after transmission:** If TXDISAT is set, the transmitter is disabled after the frame has been fully transmitted.
- **Enable receiver after transmission:** If RXENAT is set, the receiver is enabled after the frame has been fully transmitted. It is enabled in time to detect a start-bit directly after the last stop-bit has been transmitted.
- **Unblock receiver after transmission:** If UBRXAT is set, the receiver is unblocked and RXBLOCK is cleared after the frame has been fully transmitted.

- Tristate transmitter after transmission: If TXTRIAT is set, TXTRI is set after the frame has been fully transmitted, tristating the transmitter output. Tristating of the output can also be performed automatically by setting AUTOTRI. If AUTOTRI is set TXTRI is always read as 0.

Note

When in SmartCard mode with repeat enabled, none of the actions, except generate break, will be performed until the frame is transmitted without failure. Generation of a break in SmartCard mode with repeat enabled will cause the USART to detect a NACK on every frame.

15.3.2.4 Data Reception

Data reception is enabled by setting RXEN in USARTn_CMD. When the receiver is enabled, it actively samples the input looking for a transition from high to low indicating the start baud of a new frame. When a start baud is found, reception of the new frame begins if the receive shift register is empty and ready for new data. When the frame has been received, it is pushed into the receive buffer, making the shift register ready for another frame of data, and the receiver starts looking for another start baud. If the receive buffer is full, the received frame remains in the shift register until more space in the receive buffer is available. If an incoming frame is detected while both the receive buffer and the receive shift register are full, the data in the shift register is overwritten, and the RXOF interrupt flag in USARTn_IF is set to indicate the buffer overflow.

The receiver can be disabled by setting the command bit RXDIS in USARTn_CMD. Any frame currently being received when the receiver is disabled is discarded. Whether or not the receiver is enabled at a given time can be read out from RXENS in USARTn_STATUS.

15.3.2.4.1 Receive Buffer Operation

When data becomes available in the receive buffer, the RXDATAV flag in USARTn_STATUS, and the RXDATAV interrupt flag in USARTn_IF are set, and when the buffer becomes full, RXFULL in USARTn_STATUS and the RXFULL interrupt flag in USARTn_IF are set. The status flags RXDATAV and RXFULL are automatically cleared by hardware when their condition is no longer true. This also goes for the RXDATAV interrupt flag, but the RXFULL interrupt flag must be cleared by software. When the RXFULL flag is set, notifying that the buffer is full, space is still available in the receive shift register for one more frame.


Data can be read from the receive buffer in a number of ways. USARTn_RXDATA gives access to the 8 least significant bits of the received frame, and USARTn_RXDOUBLE makes it possible to read the 8 least significant bits of two frames at once, pulling two frames from the buffer. To get access to the 9th, most significant bit, USARTn_RXDATA9 must be used. This register also contains status information regarding the frame. USARTn_RXDOUBLE9 can be used to get two frames complete with the 9th bits and status bits.

When a frame is read from the receive buffer using USARTn_RXDATA or USARTn_RXDATA9, the frame is pulled out of the buffer, making room for a new frame. USARTn_RXDOUBLE and USARTn_RXDOUBLE9 pull two frames out of the buffer. If an attempt is done to read more frames from the buffer than what is available, the RXUF interrupt flag in USARTn_IF is set to signal the underflow, and the data read from the buffer is undefined.

Frames can be read from the receive buffer without removing the data by using USARTn_RXDATAEXP and USARTn_RXDOUBLEEXP. USARTn_RXDATAEXP gives access the first frame in the buffer with status bits, while USARTn_RXDOUBLEEXP gives access to both frames with status bits. The data read from these registers when the receive buffer is empty is undefined. If the receive buffer contains one valid frame, the first frame in USARTn_RXDOUBLEEXP will be valid. No underflow interrupt is generated by a read using these registers, i.e. RXUF in USARTn_IF is never set as a result of reading from USARTn_RXDATAEXP or USARTn_RXDOUBLEEXP.

The basic operation of the receive buffer when DATABITS in USARTn_FRAME is configured to less than 10 bits is shown in Figure 15.4 (p. 187) .

Figure 15.4. USART Receive Buffer Operation

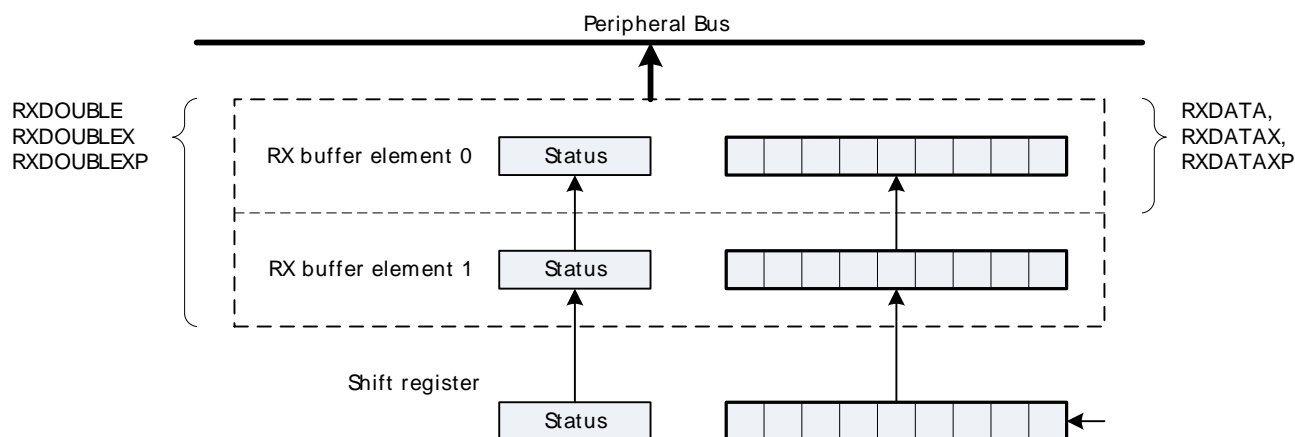

The receive buffer, including the receive shift register can be cleared by setting **CLEARRX** in **USARTn_CMD**. Any frame currently being received will not be discarded.

15.3.2.4.2 Blocking Incoming Data

When using hardware frame recognition, as detailed in Section 15.3.2.8 (p. 193) and Section 15.3.2.9 (p. 194), it is necessary to be able to let the receiver sample incoming frames without passing the frames to software by loading them into the receive buffer. This is accomplished by blocking incoming data.

Incoming data is blocked as long as **RXBLOCK** in **USARTn_STATUS** is set. When blocked, frames received by the receiver will not be loaded into the receive buffer, and software is not notified by the **RXDATAV** flag in **USARTn_STATUS** or the **RXDATAV** interrupt flag in **USARTn_IF** at their arrival. For data to be loaded into the receive buffer, **RXBLOCK** must be cleared in the instant a frame is fully received by the receiver. **RXBLOCK** is set by setting **RXBLOCKEN** in **USARTn_CMD** and disabled by setting **RXBLOCKDIS** also in **USARTn_CMD**. There is one exception where data is loaded into the receive buffer even when **RXBLOCK** is set. This is when an address frame is received when operating in multi-processor mode. See Section 15.3.2.8 (p. 193) for more information.

Frames received containing framing or parity errors will not result in the **FERR** and **PERR** interrupt flags in **USARTn_IF** being set while **RXBLOCK** in **USARTn_STATUS** is set. Hardware recognition is not applied to these erroneous frames, and they are silently discarded.

Note

If a frame is received while **RXBLOCK** in **USARTn_STATUS** is cleared, but stays in the receive shift register because the receive buffer is full, the received frame will be loaded into the receive buffer when space becomes available even if **RXBLOCK** is set at that time.

The overflow interrupt flag **RXOF** in **USARTn_IF** will be set if a frame in the receive shift register, waiting to be loaded into the receive buffer is overwritten by an incoming frame even though **RXBLOCK** in **USARTn_STATUS** is set.

15.3.2.4.3 Clock Recovery and Filtering

The receiver samples the incoming signal at a rate 16, 8, 6 or 4 times higher than the given baud rate, depending on the oversampling mode given by **OVS** in **USARTn_CTRL**. Lower oversampling rates make higher baud rates possible, but give less room for errors.

When a high-to-low transition is registered on the input while the receiver is idle, this is recognized as a start-bit, and the baud rate generator is synchronized with the incoming frame.


For oversampling modes 16, 8 and 6, every bit in the incoming frame is sampled three times to gain a level of noise immunity. These samples are aimed at the middle of the bit-periods, as visualized in Figure 15.5 (p. 188) . With OVS=0 in USARTn_CTRL, the start and data bits are thus sampled at locations 8, 9 and 10 in the figure, locations 4, 5 and 6 for OVS=1 and locations 3, 4, and 5 for OVS=2. The value of a sampled bit is determined by majority vote. If two or more of the three bit-samples are high, the resulting bit value is high. If the majority is low, the resulting bit value is low.

Majority vote is used for all oversampling modes except 4x oversampling. In this mode, a single sample is taken at position 3 as shown in Figure 15.5 (p. 188) .

Majority vote can be disabled by setting MVDIS in USARTn_CTRL.


If the value of the start bit is found to be high, the reception of the frame is aborted, filtering out false start bits possibly generated by noise on the input.

Figure 15.5. USART Sampling of Start and Data Bits

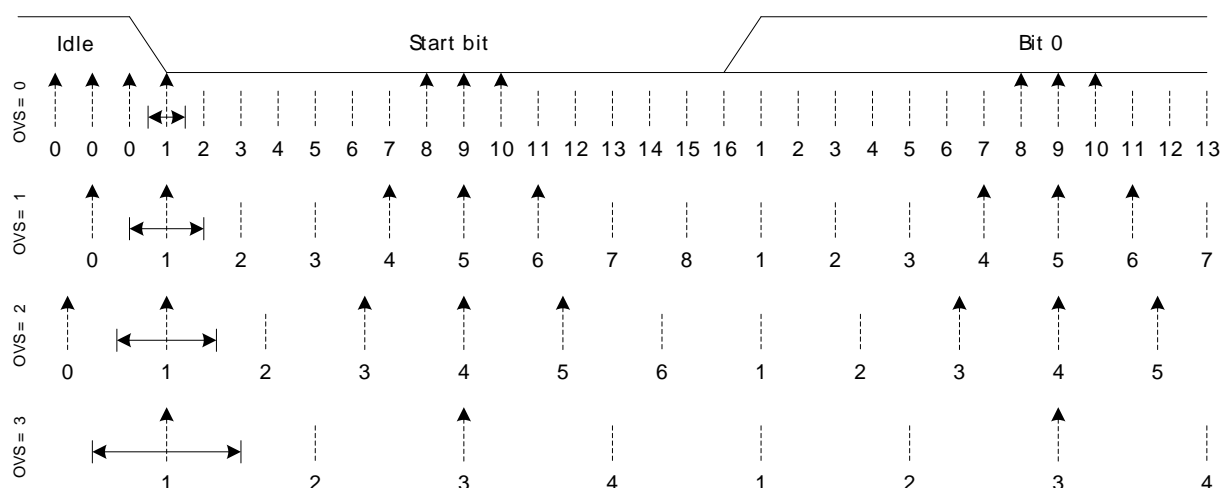

If the baud rate of the transmitter and receiver differ, the location each bit is sampled will be shifted towards the previous or next bit in the frame. This is acceptable for small errors in the baud rate, but for larger errors, it will result in transmission errors.

When the number of stop bits is 1 or more, stop bits are sampled like the start and data bits as seen in Figure 15.6 (p. 189) . When a stop bit has been detected by sampling at positions 8, 9 and 10 for normal mode, or 4, 5 and 6 for smart mode, the USART is ready for a new start bit. As seen in Figure 15.6 (p. 189) , a stop-bit of length 1 normally ends at c, but the next frame will be received correctly as long as the start-bit comes after position a for OVS=0 and OVS=3, and b for OVS=1 and OVS=2.

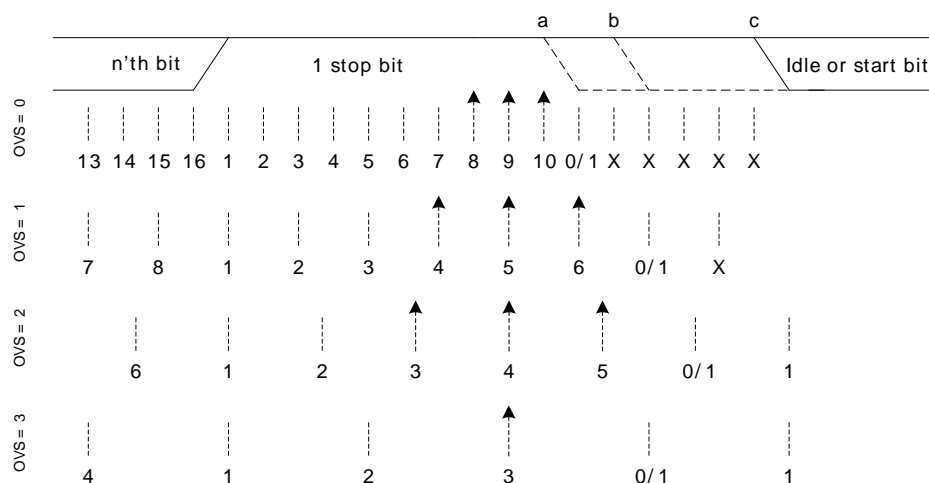Figure 15.6. USART Sampling of Stop Bits when Number of Stop Bits are 1 or More

When working with stop bit lengths of half a baud period, the above sampling scheme no longer suffices. In this case, the stop-bit is not sampled, and no framing error is generated in the receiver if the stop-bit is not generated. The line must still be driven high before the next start bit however for the USART to successfully identify the start bit.

15.3.2.4.4 Parity Error

When parity bits are enabled, a parity check is automatically performed on incoming frames. When a parity error is detected in an incoming frame, the data parity error bit PERR in the frame is set, as well as the interrupt flag PERR in USARTn_IF. Frames with parity errors are loaded into the receive buffer like regular frames.

PERR can be accessed by reading the frame from the receive buffer using the USARTn_RXDATAx, USARTn_RXDATAxP, USARTn_RXDOUBLEX or USARTn_RXDOUBLEXxP registers.

If ERRSTX in USARTn_CTRL is set, the transmitter is disabled on received parity and framing errors. If ERRSRX in USARTn_CTRL is set, the receiver is disabled on parity and framing errors.

15.3.2.4.5 Framing Error and Break Detection

A framing error is the result of an asynchronous frame where the stop bit was sampled to a value of 0. This can be the result of noise and baud rate errors, but can also be the result of a break generated by the transmitter on purpose.

When a framing error is detected in an incoming frame, the framing error bit FERR in the frame is set. The interrupt flag FERR in USARTn_IF is also set. Frames with framing errors are loaded into the receive buffer like regular frames.

FERR can be accessed by reading the frame from the receive buffer using the USARTn_RXDATAx, USARTn_RXDATAxP, USARTn_RXDOUBLEX or USARTn_RXDOUBLEXxP registers.


If ERRSTX in USARTn_CTRL is set, the transmitter is disabled on parity and framing errors. If ERRSRX in USARTn_CTRL is set, the receiver is disabled on parity and framing errors.

15.3.2.5 Local Loopback

The USART receiver samples U(S)n_RX by default, and the transmitter drives U(S)n_TX by default. This is not the only option however. When LOOPBK in USARTn_CTRL is set, the receiver is connected to the U(S)n_TX pin as shown in Figure 15.7 (p. 190). This is useful for debugging, as the USART

can receive the data it transmits, but it is also used to allow the USART to read and write to the same pin, which is required for some half duplex communication modes. In this mode, the U(S)n_TX pin must be enabled as an output in the GPIO.

Figure 15.7. USART Local Loopback

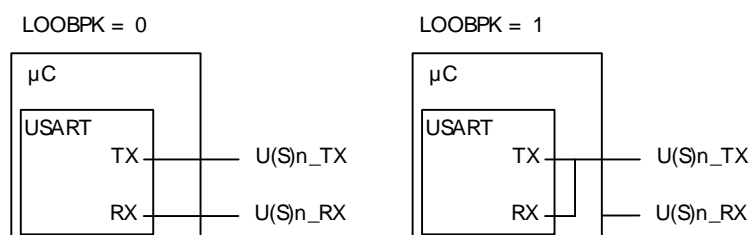

15.3.2.6 Asynchronous Half Duplex Communication

When doing full duplex communication, two data links are provided, making it possible for data to be sent and received at the same time. In half duplex mode, data is only sent in one direction at a time. There are several possible half duplex setups, as described in the following sections.

15.3.2.6.1 Single Data-link

In this setup, the USART both receives and transmits data on the same pin. This is enabled by setting LOOPBK in USARTn_CTRL, which connects the receiver to the transmitter output. Because they are both connected to the same line, it is important that the USART transmitter does not drive the line when receiving data, as this would corrupt the data on the line.

When communicating over a single data-link, the transmitter must thus be tristated whenever not transmitting data. This is done by setting the command bit TXTRIEN in USARTn_CMD, which tristates the transmitter. Before transmitting data, the command bit TXTRIDIS, also in USARTn_CMD, must be set to enable transmitter output again. Whether or not the output is tristated at a given time can be read from TXTRI in USARTn_STATUS. If TXTRI is set when transmitting data, the data is shifted out of the shift register, but is not put out on U(S)n_TX.

When operating a half duplex data bus, it is common to have a bus master, which first transmits a request to one of the bus slaves, then receives a reply. In this case, the frame transmission control bits, which can be set by writing to USARTn_TXDATAx, can be used to make the USART automatically disable transmission, tristate the transmitter and enable reception when the request has been transmitted, making it ready to receive a response from the slave.

Tristating the transmitter can also be performed automatically by the USART by using AUTOTRI in USARTn_CTRL. When AUTOTRI is set, the USART automatically tristates U(S)n_TX whenever the transmitter is idle, and enables transmitter output when the transmitter goes active. If AUTOTRI is set TXTRI is always read as 0.

Note

Another way to tristate the transmitter is to enable wired-and or wired-or mode in GPIO. For wired-and mode, outputting a 1 will be the same as tristating the output, and for wired-or mode, outputting a 0 will be the same as tristating the output. This can only be done on buses with a pull-up or pull-down resistor respectively.


15.3.2.6.2 Single Data-link with External Driver

Some communication schemes, such as RS-485 rely on an external driver. Here, the driver has an extra input which enables it, and instead of tristating the transmitter when receiving data, the external driver must be disabled.

This can be done manually by assigning a GPIO to turn the driver on or off, or it can be handled automatically by the USART. If AUTOCS in USARTn_CTRL is set, the USn_CS output is automatically activated one baud period before the transmitter starts transmitting data, and deactivated when the last bit has been transmitted and there is no more data in the transmit buffer to transmit, or the transmitter becomes disabled. This feature can be used to turn the external driver on when transmitting data, and turn it off when the data has been transmitted.

Figure 15.8 (p. 191) shows an example configuration where USn_CS is used to automatically enable and disable an external driver.

Figure 15.8. USART Half Duplex Communication with External Driver

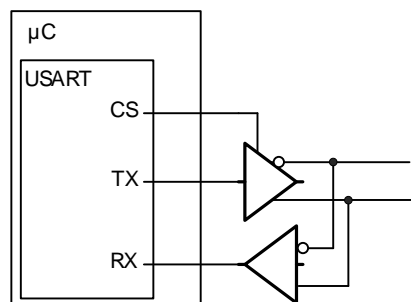

The USn_CS output is active low by default, but its polarity can be changed with CSINV in USARTn_CTRL. AUTOCS works regardless of which mode the USART is in, so this functionality can also be used for automatic chip/slave select when in synchronous mode (e.g. SPI).

15.3.2.6.3 Two Data-links


Some limited devices only support half duplex communication even though two data links are available. In this case software is responsible for making sure data is not transmitted when incoming data is expected.

15.3.2.7 Large Frames

As each frame in the transmit and receive buffers holds a maximum of 9 bits, both the elements in the buffers are combined when working with USART-frames of 10 or more data bits.

To transmit such a frame, at least two elements must be available in the transmit buffer. If only one element is available, the USART will wait for the second element before transmitting the combined frame. Both the elements making up the frame are consumed when transmitting such a frame.

When using large frames, the 9th bits in the buffers are unused. For an 11 bit frame, the 8 least significant bits are thus taken from the first element in the buffer, and the 3 remaining bits are taken from the second element as shown in Figure 15.9 (p. 192). The first element in the transmit buffer, i.e. element 0 in Figure 15.9 (p. 192) is the first element written to the FIFO, or the least significant byte when writing two bytes at a time using USARTn_TXDOUBLE.

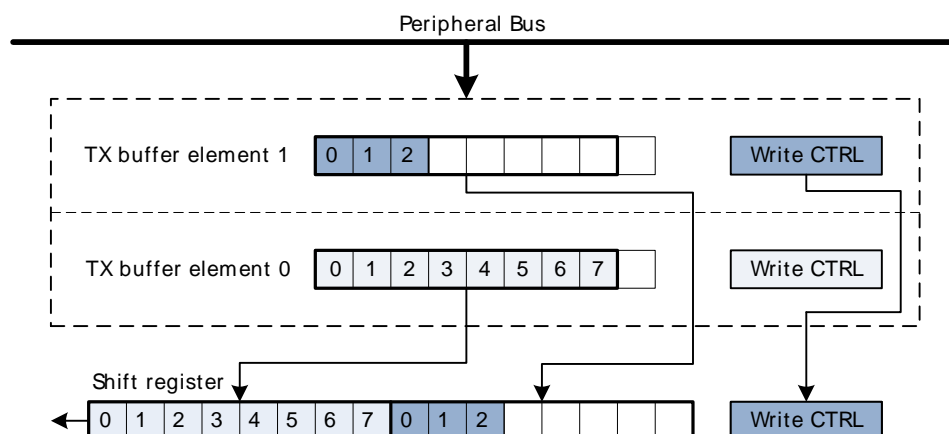Figure 15.9. USART Transmission of Large Frames

As shown in Figure 15.9 (p. 192), frame transmission control bits are taken from the second element in FIFO.

The two buffer elements can be written at the same time using the USARTn_TXDOUBLE or USARTn_TXDOUBLEX register. The TXDATA0 bitfield then refers to buffer element 0, and TXDATA1 refers to buffer element 1.

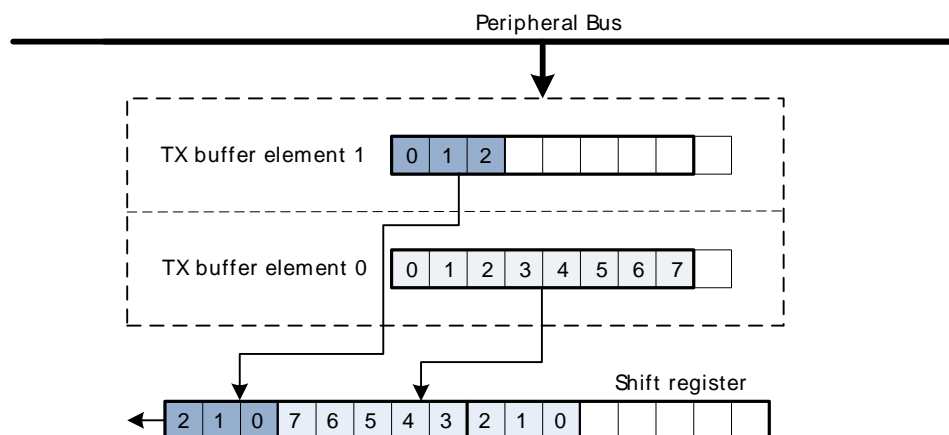
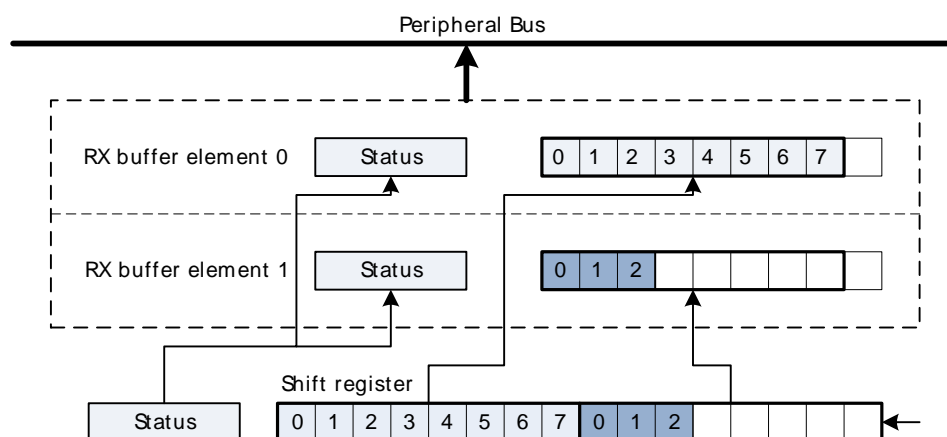
Figure 15.10. USART Transmission of Large Frames, MSBF

Figure 15.10 (p. 192) illustrates the order of the transmitted bits when an 11 bit frame is transmitted with MSBF set. If MSBF is set and the frame is smaller than 10 bits, only the contents of transmit buffer 0 will be transmitted.

When receiving a large frame, BYTESWAP in USARTn_CTRL determines the order the way the large frame is split into the two buffer elements. If BYTESWAP is cleared, the least significant 8 bits of the received frame are loaded into the first element of the receive buffer, and the remaining bits are loaded into the second element, as shown in Figure 15.11 (p. 193). The first byte read from the buffer thus contains the 8 least significant bits. Set BYTESWAP to reverse the order.

The status bits are loaded into both elements of the receive buffer. The frame is not moved from the receive shift register before there are two free spaces in the receive buffer.

Figure 15.11. USART Reception of Large Frames

The two buffer elements can be read at the same time using the USARTn_RXDOUBLE or USARTn_RXDOUBLEX register. RXDATA0 then refers to buffer element 0 and RXDATA1 refers to buffer element 1.

Large frames can be used in both asynchronous and synchronous modes.

15.3.2.8 Multi-Processor Mode

To simplify communication between multiple processors, the USART supports a special multi-processor mode. In this mode the 9th data bit in each frame is used to indicate whether the content of the remaining 8 bits is data or an address.

When multi-processor mode is enabled, an incoming 9-bit frame with the 9th bit equal to the value of MPAB in USARTn_CTRL is identified as an address frame. When an address frame is detected, the MPAF interrupt flag in USARTn_IF is set, and the address frame is loaded into the receive register. This happens regardless of the value of RXBLOCK in USARTn_STATUS.

Multi-processor mode is enabled by setting MPM in USARTn_CTRL, and the value of the 9th bit in address frames can be set in MPAB. Note that the receiver must be enabled for address frames to be detected. The receiver can be blocked however, preventing data from being loaded into the receive buffer while looking for address frames.

Example 15.1 (p. 193) explains basic usage of the multi-processor mode:

Example 15.1. USART Multi-processor Mode Example

1. All slaves enable multi-processor mode and, enable and block the receiver. They will now not receive data unless it is an address frame. MPAB in USARTn_CTRL is set to identify frames with the 9th bit high as address frames.
2. The master sends a frame containing the address of a slave and with the 9th bit set.
3. All slaves receive the address frame and get an interrupt. They can read the address from the receive buffer. The selected slave unblocks the receiver to start receiving data from the master.
4. The master sends data with the 9th bit cleared.
5. Only the slave with RX enabled receives the data. When transmission is complete, the slave blocks the receiver and waits for a new address frame.

When a slave has received an address frame and wants to receive the following data, it must make sure the receiver is unblocked before the next frame has been completely received in order to prevent data loss.

BIT8DV in USARTn_CTRL can be used to specify the value of the 9th bit without writing to the transmit buffer with USARTn_TXDATAx or USARTn_TXDOUBLEX, giving higher efficiency in multi-processor mode, as the 9th bit is only set when writing address frames, and 8-bit writes to the USART can be used when writing the data frames.

15.3.2.9 Collision Detection

The USART supports a basic form of collision detection. When the receiver is connected to the output of the transmitter, either by using the LOOPBK bit in USARTn_CTRL or through an external connection, this feature can be used to detect whether data transmitted on the bus by the USART did get corrupted by a simultaneous transmission by another device on the bus.

For collision detection to be enabled, CCEN in USARTn_CTRL must be set, and the receiver enabled. The data sampled by the receiver is then continuously compared with the data output by the transmitter. If they differ, the CCF interrupt flag in USARTn_IF is set. The collision check includes all bits of the transmitted frames. The CCF interrupt flag is set once for each bit sampled by the receiver that differs from the bit output by the transmitter. When the transmitter output is disabled, i.e. the transmitter is tristated, collisions are not registered.

15.3.2.10 SmartCard Mode


In SmartCard mode, the USART supports the ISO 7816 I/O line T0 mode. With exception of the stop-bits (guard time), the 7816 data frame is equal to the regular asynchronous frame. In this mode, the receiver pulls the line low for one baud, half a baud into the guard time to indicate a parity error. This NAK can for instance be used by the transmitter to re-transmit the frame. SmartCard mode is a half duplex asynchronous mode, so the transmitter must be tristated whenever not transmitting data.

To enable SmartCard mode, set SCMODE in USARTn_CTRL, set the number of databits in a frame to 8, and configure the number of stopbits to 1.5 by writing to STOPBITS in USARTn_FRAME.


The SmartCard mode relies on half duplex communication on a single line, so for it to work, both the receiver and transmitter must work on the same line. This can be achieved by setting LOOPBK in USARTn_CTRL or through an external connection. The TX output should be configured as open-drain in the GPIO module.

When no parity error is identified by the receiver, the data frame is as shown in Figure 15.12 (p. 194). The frame consists of 8 data bits, a parity bit, and 2 stop bits. The transmitter does not drive the output line during the guard time.

Figure 15.12. USART ISO 7816 Data Frame Without Error

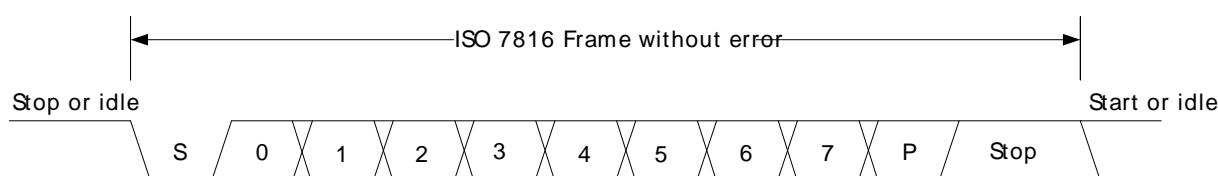

If a parity error is detected by the receiver, it pulls the line I/O line low after half a stop bit, see Figure 15.13 (p. 195). It holds the line low for one bit-period before it releases the line. In this case, the guard time is extended by one bit period before a new transmission can start, resulting in a total of 3 stop bits.

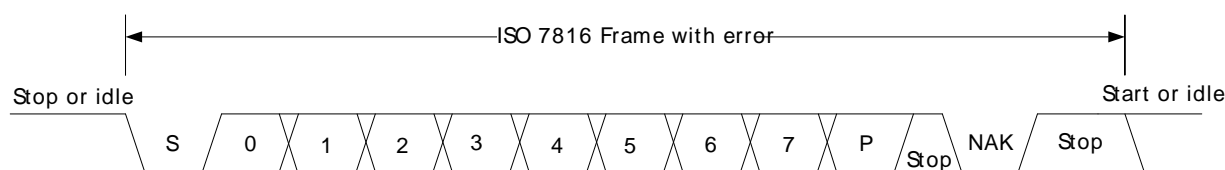
Figure 15.13. USART ISO 7816 Data Frame With Error

On a parity error, the NAK is generated by hardware. The NAK generated by the receiver is sampled as the stop-bit of the frame. Because of this, parity errors when in SmartCard mode are reported with both a parity error and a framing error.

When transmitting a T0 frame, the USART receiver on the transmitting side samples position 16, 17 and 18 in the stop-bit to detect the error signal when in 16x oversampling mode as shown in Figure 15.14 (p. 195). Sampling at this location places the stop-bit sample in the middle of the bit-period used for the error signal (NAK).

If a NAK is transmitted by the receiver, it will thus appear as a framing error at the transmitter, and the FERR interrupt flag in USARTn_IF will be set. If SCRETRANS USARTn_CTRL is set, the transmitter will automatically retransmit a NACK'ed frame. The transmitter will retransmit the frame until it is ACK'ed by the receiver. This only works when the number of databits in a frame is configured to 8.

Set SKIPPERRF in USARTn_CTRL to make the receiver discard frames with parity errors. The PERR interrupt flag in USARTn_IF is set when a frame is discarded because of a parity error.

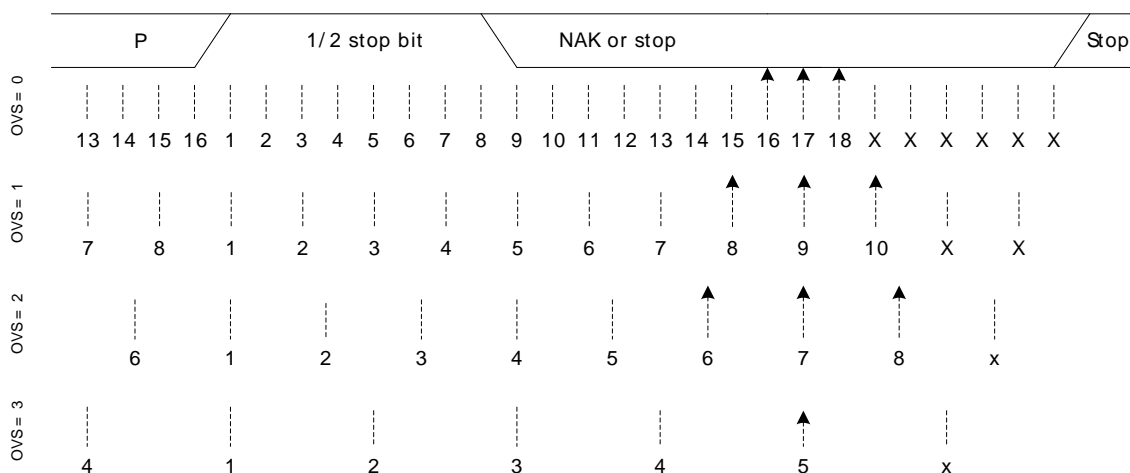Figure 15.14. USART SmartCard Stop Bit Sampling

For communication with a SmartCard, a clock signal needs to be generated for the card. This clock output can be generated using one of the timers. See the ISO 7816 specification for more info on this clock signal.

SmartCard T1 mode is also supported. The T1 frame format used is the same as the asynchronous frame format with parity bit enabled and one stop bit. The USART must then be configured to operate in asynchronous half duplex mode.

15.3.3 Synchronous Operation

Most of the features in asynchronous mode are available in synchronous mode. Multi-processor mode can be enabled for 9-bit frames, loopback is available and collision detection can be performed.

15.3.3.1 Frame Format

The frames used in synchronous mode need no start and stop bits since a single clock is available to all parts participating in the communication. Parity bits cannot be used in synchronous mode.

The USART supports frame lengths of 4 to 16 bits per frame. Larger frames can be simulated by transmitting multiple smaller frames, i.e. a 22 bit frame can be sent using two 11-bit frames, and a 21 bit frame can be generated by transmitting three 7-bit frames. The number of bits in a frame is set using DATABITS in USARTn_FRAME.

The frames in synchronous mode are by default transmitted with the least significant bit first like in asynchronous mode. The bit-order can be reversed by setting MSBF in USARTn_CTRL.

The frame format used by the transmitter can be inverted by setting TXINV in USARTn_CTRL, and the format expected by the receiver can be inverted by setting RXINV, also in USARTn_CTRL.

15.3.3.2 Clock Generation

The bit-rate in synchronous mode is given by Equation 15.3 (p. 196). As in the case of asynchronous operation, the clock division factor have a 13-bit integral part and a 2-bit fractional part.

USART Synchronous Mode Bit Rate

$$br = f_{HFPERCLK} / (2 \times (1 + USARTn_CLKDIV/256)) \quad (15.3)$$

Given a desired baud rate $br_{desired}$, the clock divider USARTn_CLKDIV can be calculated using Equation 15.4 (p. 196)

USART Synchronous Mode Clock Division Factor

$$USARTn_CLKDIV = 256 \times (f_{HFPERCLK} / (2 \times br_{desired}) - 1) \quad (15.4)$$


When the USART operates in master mode, the highest possible bit rate is half the peripheral clock rate. When operating in slave mode however, the highest bit rate is an eighth of the peripheral clock:

- Master mode: $br_{max} = f_{HFPERCLK}/2$
- Slave mode: $br_{max} = f_{HFPERCLK}/8$

On every clock edge data on the data lines, MOSI and MISO, is either set up or sampled. When CLKPHA in USARTn_CTRL is cleared, data is sampled on the leading clock edge and set-up is done on the trailing edge. If CLKPHA is set however, data is set-up on the leading clock edge, and sampled on the trailing edge. In addition to this, the polarity of the clock signal can be changed by setting CLKPOL in USARTn_CTRL, which also defines the idle state of the clock. This results in four different modes which are summarized in Table 15.8 (p. 196). Figure 15.15 (p. 197) shows the resulting timing of data set-up and sampling relative to the bus clock.

Table 15.8. USART SPI Modes

| SPI mode | CLKPOL | CLKPHA | Leading edge | Trailing edge |
|----------|--------|--------|-----------------|-----------------|
| 0 | 0 | 0 | Rising, sample | Falling, set-up |
| 1 | 0 | 1 | Rising, set-up | Falling, sample |
| 2 | 1 | 0 | Falling, sample | Rising, set-up |
| 3 | 1 | 1 | Falling, set-up | Rising, sample |

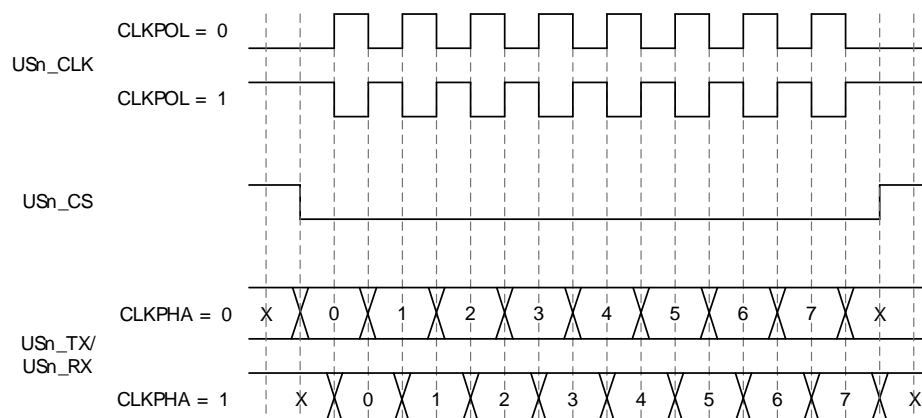Figure 15.15. USART SPI Timing

If CPHA=1, the TX underflow flag, TXUF, will be set on the first setup clock edge of a frame in slave mode if TX data is not available. If CPHA=0, TXUF is set if data is not available in the transmit buffer three HPERCLK cycles prior to the first sample clock edge. The RXDATAV flag is updated on the last sample clock edge of a transfer, while the RX overflow interrupt flag, RXOF, is set on the first sample clock edge if the receive buffer overflows. When a transfer has been performed, interrupt flags TXBL and TXC are updated on the first setup clock edge of the succeeding frame, or when CS is deasserted.

15.3.3.3 Master Mode

When in master mode, the USART is in full control of the data flow on the synchronous bus. When operating in full duplex mode, the slave cannot transmit data to the master without the master transmitting to the slave. The master outputs the bus clock on USn_CLK.

Communication starts whenever there is data in the transmit buffer and the transmitter is enabled. The USART clock then starts, and the master shifts bits out from the transmit shift register using the internal clock.

When there are no more frames in the transmit buffer and the transmit shift register is empty, the clock stops, and communication ends. When the receiver is enabled, it samples data using the internal clock when the transmitter transmits data. Operation of the RX and TX buffers is as in asynchronous mode.

15.3.3.3.1 Operation of USn_CS Pin

When operating in master mode, the USn_CS pin can have one of two functions, or it can be disabled.

If USn_CS is configured as an output, it can be used to automatically generate a chip select for a slave by setting AUTOCS in USARTn_CTRL. If AUTOCS is set, USn_CS is activated when a transmission begins, and deactivated directly after the last bit has been transmitted and there is no more data in the transmit buffer. By default, USn_CS is active low, but its polarity can be inverted by setting CSINV in USARTn_CTRL.

When USn_CS is configured as an input, it can be used by another master that wants control of the bus to make the USART release it. When USn_CS is driven low, or high if CSINV is set, the interrupt flag SSM in USARTn_IF is set, and if CSMA in USARTn_CTRL is set, the USART goes to slave mode.

15.3.3.3.2 AUTOTX

A synchronous master is required to transmit data to a slave in order to receive data from the slave. In some cases, only a few words are transmitted and a lot of data is then received from the slave. In that case, one solution is to keep feeding the TX with data to transmit, but that consumes system bandwidth. Instead AUTOTX can be used.

When AUTOTX in USARTn_CTRL is set, the USART transmits data as long as there is available space in the RX shift register for the chosen frame size. This happens even though there is no data in the TX buffer. The TX underflow interrupt flag TXUF in USARTn_IF is set on the first word that is transmitted which does not contain valid data.

During AUTOTX the USART will always send the previous sent bit, thus reducing the number of transitions on the TX output. So if the last bit sent was a 0, 0's will be sent during AUTOTX and if the last bit sent was a 1, 1's will be sent during AUTOTX.

15.3.3.4 Slave Mode

When the USART is in slave mode, data transmission is not controlled by the USART, but by an external master. The USART is therefore not able to initiate a transmission, and has no control over the number of bytes written to the master.

The output and input to the USART are also swapped when in slave mode, making the receiver take its input from USn_TX (MOSI) and the transmitter drive USn_RX (MISO).

To transmit data when in slave mode, the slave must load data into the transmit buffer and enable the transmitter. The data will remain in the USART until the master starts a transmission by pulling the USn_CS input of the slave low and transmitting data. For every frame the master transmits to the slave, a frame is transferred from the slave to the master. After a transmission, MISO remains in the same state as the last bit transmitted. This also applies if the master transmits to the slave and the slave TX buffer is empty.

If the transmitter is enabled in synchronous slave mode and the master starts transmission of a frame, the underflow interrupt flag TXUF in USARTn_IF will be set if no data is available for transmission to the master.

If the slave needs to control its own chip select signal, this can be achieved by clearing CSPEN in the ROUTE register. The internal chip select signal can then be controlled through CSINV in the CTRL register. The chip select signal will be CSINV inverted, i.e. if CSINV is cleared, the chip select is active and vice versa.

15.3.3.5 Synchronous Half Duplex Communication

Half duplex communication in synchronous mode is very similar to half duplex communication in asynchronous mode as detailed in Section 15.3.2.6 (p. 190). The main difference is that in this mode, the master must generate the bus clock even when it is not transmitting data, i.e. it must provide the slave with a clock to receive data. To generate the bus clock, the master should transmit data with the transmitter tristated, i.e. TXTRI in USARTn_STATUS set, when receiving data. If 2 bytes are expected from the slave, then transmit 2 bytes with the transmitter tristated, and the slave uses the generated bus clock to transmit data to the master. TXTRI can be set by setting the TXTRIEN command bit in USARTn_CMD.

Note

When operating as SPI slave in half duplex mode, TX has to be tristated (not disabled) during data reception if the slave is to transmit data in the current transfer.

15.3.3.6 I2S

I2S is a synchronous format for transmission of audio data. The frame format is 32-bit, but since data is always transmitted with MSB first, an I2S device operating with 16-bit audio may choose to only process the 16 msb of the frame, and only transmit data in the 16 msb of the frame.

In addition to the bit clock used for regular synchronous transfers, I2S mode uses a separate word clock. When operating in mono mode, with only one channel of data, the word clock pulses once at the start of each new word. In stereo mode, the word clock toggles at the start of new words, and also gives away

whether the transmitted word is for the left or right audio channel; A word transmitted while the word clock is low is for the left channel, and a word transmitted while the word clock is high is for the right.

When operating in I2S mode, the CS pin is used as a the word clock. In master mode, this is automatically driven by the USART, and in slave mode, the word clock is expected from an external master.

15.3.3.6.1 Word Format

The general I2S word format is 32 bits wide, but the USART also supports 16-bit and 8-bit words. In addition to this, it can be specified how many bits of the word should actually be used by the USART. These parameters are given by FORMAT in USARTn_I2SCTRL.

As an example, configuring FORMAT to using a 32-bit word with 16-bit data will make each word on the I2S bus 32-bits wide, but when receiving data through the USART, only the 16 most significant bits of each word can be read out of the USART. Similarly, only the 16 most significant bits have to be written to the USART when transmitting. The rest of the bits will be transmitted as zeroes.

15.3.3.6.2 Major Modes

The USART supports a set of different I2S formats as shown in Table 15.9 (p. 199) , but it is not limited to these modes. MONO, JUSTIFY and DELAY in USARTn_I2SCTRL can be mixed and matched to create an appropriate format. MONO enables mono mode, i.e. one data stream instead of two which is the default. JUSTIFY aligns data within a word on the I2S bus, either left or right which can be seen in figures Figure 15.18 (p. 200) and Figure 15.19 (p. 200). Finally, DELAY specifies whether a new I2S word should be started directly on the edge of the word-select signal, or one bit-period after the edge.

Table 15.9. USART I2S Modes

| Mode | MONO | JUSTIFY | DELAY | CLKPOL |
|-----------------|------|---------|-------|--------|
| Regular I2S | 0 | 0 | 1 | 0 |
| Left-Justified | 0 | 0 | 0 | 1 |
| Right-Justified | 0 | 1 | 0 | 1 |
| Mono | 1 | 0 | 0 | 0 |

The regular I2S waveform is shown in Figure 15.16 (p. 199) and Figure 15.17 (p. 200) . The first figure shows a waveform transmitted with full accuracy. The wordlength can be configured to 32-bit, 16-bit or 8-bit using FORMAT in USARTn_I2SCTRL. In the second figure, I2S data is transmitted with reduced accuracy, i.e. the data transmitted has less bits than what is possible in the bus format.

Note that the msb of a word transmitted in regular I2S mode is delayed by one cycle with respect to word select

Figure 15.16. USART Standard I2S waveform

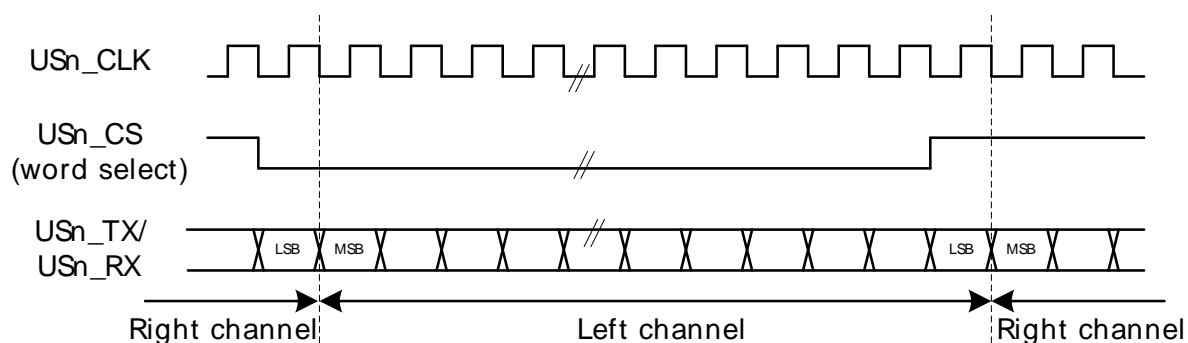
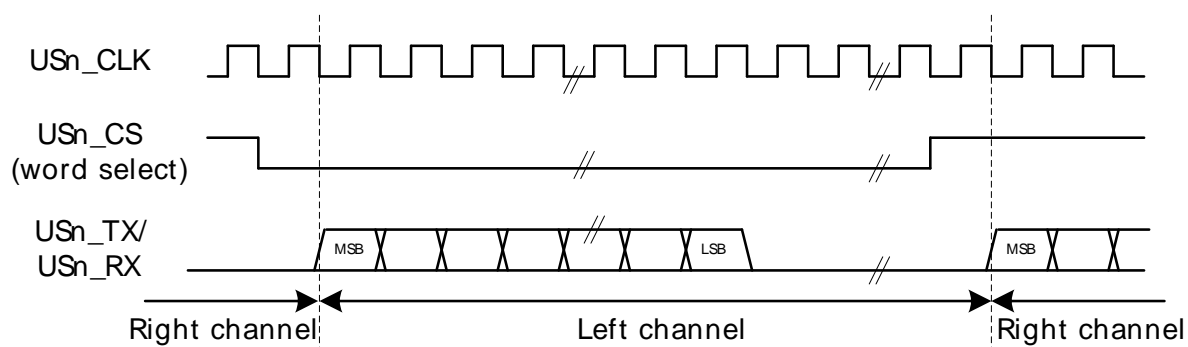
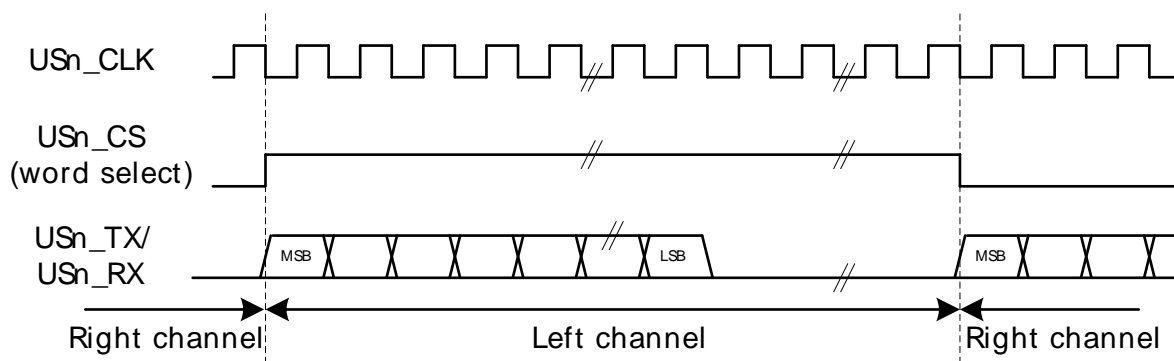
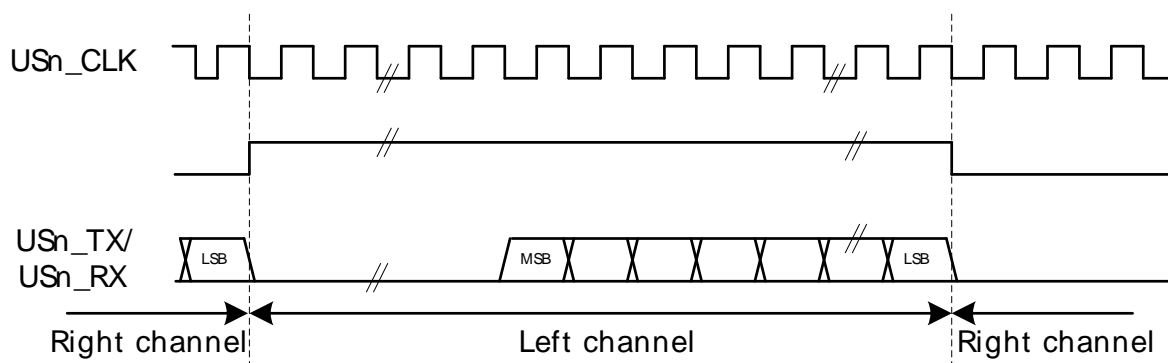


Figure 15.17. USART Standard I2S waveform (reduced accuracy)

A left-justified stream is shown in Figure 15.18 (p. 200). Note that the MSB comes directly after the edge on the word-select signal in contradiction to the regular I2S waveform where it comes one bit-period after.


Figure 15.18. USART Left-justified I2S waveform

A right-justified stream is shown in Figure 15.19 (p. 200). The left and right justified streams are equal when the data-size is equal to the word-width.

Figure 15.19. USART Right-justified I2S waveform

In mono-mode, the word-select signal pulses at the beginning of each word instead of toggling for each word. Mono I2S waveform is shown in Figure 15.20 (p. 201) .

Figure 15.20. USART Mono I2S waveform

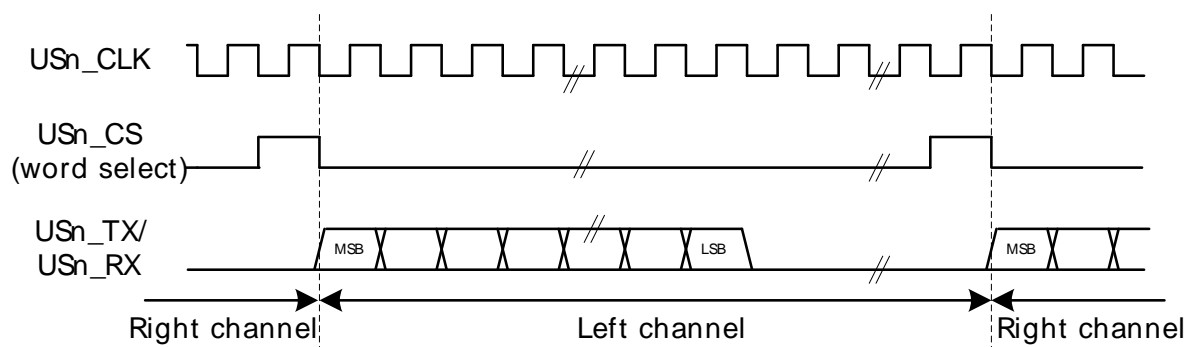

15.3.3.6.3 Using I2S Mode

When using the USART in I2S mode, DATABITS in USARTn_FRAME must be set to 8 or 16 data-bits. 8 databits can be used in all modes, and 16 can be used in the modes where the number of bytes in the I2S word is even. In addition to this, MSBF in USARTn_CTRL should be set, and CLKPOL and CLKPHA in USARTn_CTRL should be cleared.

The USART does not have separate TX and RX buffers for left and right data, so when using I2S in stereo mode, the application must keep track of whether the buffers contain left or right data. This can be done by observing TXBLRIGHT, RXDATAVRIGHT and RXFULLRIGHT in USARTn_STATUS. TXBLRIGHT tells whether TX is expecting data for the left or right channel. It will be set with TXBL if right data is expected. The receiver will set RXDATAVRIGHT if there is at least one right element in the buffer, and RXFULLRIGHT if the buffer is full of right elements.

When using I2S with DMA, separate DMA requests can be used for left and right data by setting DMASPLIT in USARTn_I2SCTRL.

In both master and slave mode the USART always starts transmitting on the LEFT channel after being enabled. In master mode, the transmission will stop if TX becomes empty. In that case, TXC is set. Continuing the transmission in this case will make the data-stream continue where it left off. To make the USART start on the LEFT channel after going empty, disable and re-enable TX.

15.3.4 PRS-triggered Transmissions

If a transmission must be started on an event with very little delay, the PRS system can be used to trigger the transmission. The PRS channel to use as a trigger can be selected using TSEL in USARTn_TRIGCTRL. When a positive edge is detected on this signal, the receiver is enabled if RXTEN in USARTn_TRIGCTRL is set, and the transmitter is enabled if TXTEN in USARTn_TRIGCTRL is set. Only one signal input is supported by the USART.

The AUTOTX feature can also be enabled via PRS. If an external SPI device sets a pin high when there is data to be read from the device, this signal can be routed to the USART through the PRS system and be used to make the USART clock data out of the external device. If AUTOTXTEN in USARTn_TRIGCTRL is set, the USART will transmit data whenever the PRS signal selected by TSEL is high given that there is enough room in the RX buffer for the chosen frame size. Note that if there is no data in the TX buffer when using AUTOTX, the TX underflow interrupt will be set.

AUTOTXTEN can also be combined with TXTEN to make the USART transmit a command to the external device prior to clocking out data. To do this, disable TX using the TXDIS command, load the

TX buffer with the command and enable AUTOTXTEN and TXTEN. When the selected PRS input goes high, the USART will now transmit the loaded command, and then continue clocking out while both the PRS input is high and there is room in the RX buffer

15.3.5 PRS RX Input

The USART can be configured to receive data directly from a PRS channel by setting RXPRS in USARTn_INPUT. The PRS channel used is selected using RXPRSSEL in USARTn_INPUT. This way, for example, a differential RX signal can be input to the ACMP and the output routed via PRS to the USART.

15.3.6 DMA Support

The USART has full DMA support. The DMA controller can write to the transmit buffer using the registers USARTn_TXDATA, USARTn_TXDATAx, USARTn_TXDOUBLE and USARTn_TXDOUBLEx, and it can read from the receive buffer using the registers USARTn_RXDATA, USARTn_RXDATAx, USARTn_RXDOUBLE and USARTn_RXDOUBLEx. This enables single byte transfers, 9 bit data + control/status bits, double byte and double byte + control/status transfers both to and from the USART.

A request for the DMA controller to read from the USART receive buffer can come from the following source:

- Data available in the receive buffer.
- Data available in the receive buffer and data is for the RIGHT I2S channel. Only used in I2S mode.

A write request can come from one of the following sources:

- Transmit buffer and shift register empty. No data to send.
- Transmit buffer has room for more data.
- Transmit buffer has room for RIGHT I2S data. Only used in I2S mode.

Even though there are two sources for write requests to the DMA, only one should be used at a time, since the requests from both sources are cleared even though only one of the requests are used.

In some cases, it may be sensible to temporarily stop DMA access to the USART when an error such as a framing error has occurred. This is enabled by setting ERRSDMA in USARTn_CTRL.

15.3.7 Transmission Delay

By configuring TXDELAY in USARTn_CTRL, the transmitter can be forced to wait a number of bit-periods from it is ready to transmit data, to it actually transmits the data. This delay is only applied to the first frame transmitted after the transmitter has been idle. When transmitting frames back-to-back the delay is not introduced between the transmitted frames.

This is useful on half duplex buses, because the receiver always returns received frames to software during the first stop-bit. The bus may still be driven for up to 3 baud periods, depending on the current frame format. Using the transmission delay, a transmission can be started when a frame is received, and it is possible to make sure that the transmitter does not begin driving the output before the frame on the bus is completely transmitted.

TXDELAY in USARTn_CTRL only applies to asynchronous transmission.

15.3.8 Interrupts

The interrupts generated by the USART are combined into two interrupt vectors. Interrupts related to reception are assigned to one interrupt vector, and interrupts related to transmission are assigned to the other. Separating the interrupts in this way allows different priorities to be set for transmission and reception interrupts.

The transmission interrupt vector groups the transmission-related interrupts generated by the following interrupt flags:

- TXC
- TXBL
- TXOF
- CCF

The reception interrupt on the other hand groups the reception-related interrupts, triggered by the following interrupt flags:

- RXDATAV
- RXFULL
- RXOF
- RXUF
- PERR
- FERR
- MPAF
- SSM


If USART interrupts are enabled, an interrupt will be made if one or more of the interrupt flags in USART_IF and their corresponding bits in USART_IEN are set.

15.3.9 IrDA Modulator/Demodulator

The IrDA modulator on USART0 implements the physical layer of the IrDA specification, which is necessary for communication over IrDA. The modulator takes the signal output from the USART module, and modulates it before it leaves USART0. In the same way, the input signal is demodulated before it enters the actual USART module. The modulator is only available on USART0, and implements the original Rev. 1.0 physical layer and one high speed extension which supports speeds from 2.4 kbps to 1.152 Mbps.

The data from and to the USART is represented in a NRZ (Non Return to Zero) format, where the signal value is at the same level through the entire bit period. For IrDA, the required format is RZI (Return to Zero Inverted), a format where a “1” is signalled by holding the line low, and a “0” is signalled by a short high pulse. An example is given in Figure 15.21 (p. 203) .

Figure 15.21. USART Example RZI Signal for a given Asynchronous USART Frame

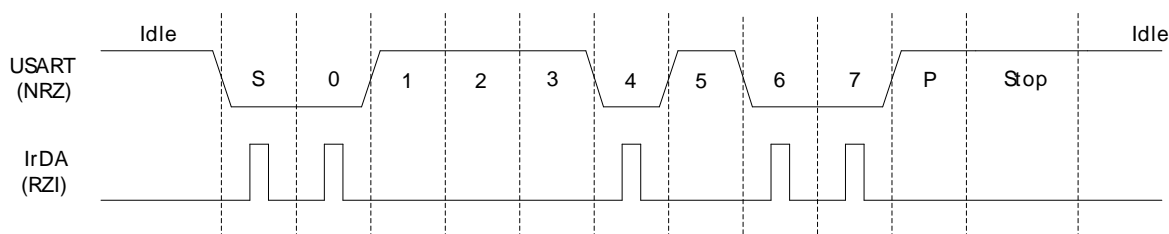

The IrDA module is enabled by setting IREN. The USART transmitter output and receiver input is then routed through the IrDA modulator.

The width of the pulses generated by the IrDA modulator is set by configuring IRPW in USARTn_IRCTRL. Four pulse widths are available, each defined relative to the configured bit period as listed in Table 15.10 (p. 204) .

Table 15.10. USART IrDA Pulse Widths

| IRPW | Pulse width OVS=0 | Pulse width OVS=1 | Pulse width OVS=2 | Pulse width OVS=3 |
|------|-------------------|-------------------|-------------------|-------------------|
| 00 | 1/16 | 1/8 | 1/6 | 1/4 |
| 01 | 2/16 | 2/8 | 2/6 | N/A |
| 10 | 3/16 | 3/8 | N/A | N/A |
| 11 | 4/16 | N/A | N/A | N/A |

By default, no filter is enabled in the IrDA demodulator. A filter can be enabled by setting IRFILT in USARTn_IRCTRL. When the filter is enabled, an incoming pulse has to last for 4 consecutive clock cycles to be detected by the IrDA demodulator.

Note that by default, the idle value of the USART data signal is high. This means that the IrDA modulator generates negative pulses, and the IrDA demodulator expects negative pulses. To make the IrDA module use RZI signalling, both TXINV and RXINV in USARTn_CTRL must be set.

The IrDA module can also modulate a signal from the PRS system, and transmit a modulated signal to the PRS system. To use a PRS channel as transmitter source instead of the USART, set IRPRSEN in USARTn_IRCTRL high. The channel is selected by configuring IRPRSSEL in USARTn_IRCTRL.

15.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|-------------------|------|--|
| 0x000 | USARTn_CTRL | RW | Control Register |
| 0x004 | USARTn_FRAME | RW | USART Frame Format Register |
| 0x008 | USARTn_TRIGCTRL | RW | USART Trigger Control register |
| 0x00C | USARTn_CMD | W1 | Command Register |
| 0x010 | USARTn_STATUS | R | USART Status Register |
| 0x014 | USARTn_CLKDIV | RW | Clock Control Register |
| 0x018 | USARTn_RXDATAx | R | RX Buffer Data Extended Register |
| 0x01C | USARTn_RXDATA | R | RX Buffer Data Register |
| 0x020 | USARTn_RXDOUBLEX | R | RX Buffer Double Data Extended Register |
| 0x024 | USARTn_RXDOUBLE | R | RX FIFO Double Data Register |
| 0x028 | USARTn_RXDATAxP | R | RX Buffer Data Extended Peek Register |
| 0x02C | USARTn_RXDOUBLEXp | R | RX Buffer Double Data Extended Peek Register |
| 0x030 | USARTn_TXDATAx | W | TX Buffer Data Extended Register |
| 0x034 | USARTn_TXDATA | W | TX Buffer Data Register |
| 0x038 | USARTn_TXDOUBLEX | W | TX Buffer Double Data Extended Register |
| 0x03C | USARTn_TXDOUBLE | W | TX Buffer Double Data Register |
| 0x040 | USARTn_IF | R | Interrupt Flag Register |
| 0x044 | USARTn_IFS | W1 | Interrupt Flag Set Register |
| 0x048 | USARTn_IFC | W1 | Interrupt Flag Clear Register |
| 0x04C | USARTn_IEN | RW | Interrupt Enable Register |
| 0x050 | USARTn_IRCTRL | RW | IrDA Control Register |
| 0x054 | USARTn_ROUTE | RW | I/O Routing Register |
| 0x058 | USARTn_INPUT | RW | USART Input Register |
| 0x05C | USARTn_I2SCTRL | RW | I2S Control Register |

15.5 Register Description

15.5.1 USARTn_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|-------|--------|----------|---------|----|----|--------|--------|---------|--------|----------|-----------|--------|---------|--------|-------|-------|-------|-------|------|------|--------|--------|---|-----|-----|------|-----|------|--------|------|----|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | 0 | 0 | 0 | 0x0 | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0x0 | | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | RW | RW | RW | RW | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | | RW | | RW | RW | RW | RW | RW | RW |
| Name | | MVDIS | AUTOTX | BYTESWAP | TXDELAY | | | ERRSTX | ERRSRX | ERRSDMA | BIT8DV | SKIPERRF | SCRETRANS | SCMODE | AUTOTRI | AUTOCS | CSINV | TXINV | RXINV | TXBIL | CSMA | MSBF | CLKPHA | CLKPOL | | | OVS | MPAB | MPM | CCEN | LOOPBK | SYNC | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|--|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 30 | MVDIS | 0 | RW | Majority Vote Disable Disable majority vote for 16x, 8x and 6x oversampling modes. |
| 29 | AUTOTX | 0 | RW | Always Transmit When RX Not Full |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | |
|--|---|--|--------|--|-------|-------------|-------------|---|------|--|---|--------|--|---|--------|--|---|--------|--|
| Transmits as long as RX is not full. If TX is empty, underflows are generated. | | | | | | | | | | | | | | | | | | | |
| 28 | BYTESWAP | 0 | RW | Byteswap In Double Accesses Set to switch the order of the bytes in double accesses. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Normal byte order</td></tr><tr><td>1</td><td>Byte order swapped</td></tr></table> | Value | Description | 0 | Normal byte order | 1 | Byte order swapped | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | Normal byte order | | | | | | | | | | | | | | | | | | |
| 1 | Byte order swapped | | | | | | | | | | | | | | | | | | |
| 27:26 | TXDELAY | 0x0 | RW | TX Delay Transmission Configurable delay before new transfers. Frames sent back-to-back are not delayed. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>NONE</td><td>Frames are transmitted immediately</td></tr><tr><td>1</td><td>SINGLE</td><td>Transmission of new frames are delayed by a single baud period</td></tr><tr><td>2</td><td>DOUBLE</td><td>Transmission of new frames are delayed by two baud periods</td></tr><tr><td>3</td><td>TRIPLE</td><td>Transmission of new frames are delayed by three baud periods</td></tr></table> | Value | Mode | Description | 0 | NONE | Frames are transmitted immediately | 1 | SINGLE | Transmission of new frames are delayed by a single baud period | 2 | DOUBLE | Transmission of new frames are delayed by two baud periods | 3 | TRIPLE | Transmission of new frames are delayed by three baud periods |
| Value | Mode | Description | | | | | | | | | | | | | | | | | |
| 0 | NONE | Frames are transmitted immediately | | | | | | | | | | | | | | | | | |
| 1 | SINGLE | Transmission of new frames are delayed by a single baud period | | | | | | | | | | | | | | | | | |
| 2 | DOUBLE | Transmission of new frames are delayed by two baud periods | | | | | | | | | | | | | | | | | |
| 3 | TRIPLE | Transmission of new frames are delayed by three baud periods | | | | | | | | | | | | | | | | | |
| 25 | Reserved <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | | | | | | | | | | | | | | | | |
| 24 | ERRSTX | 0 | RW | Disable TX On Error When set, the transmitter is disabled on framing and parity errors (asynchronous mode only) in the receiver. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Received framing and parity errors have no effect on transmitter</td></tr><tr><td>1</td><td>Received framing and parity errors disable the transmitter</td></tr></table> | Value | Description | 0 | Received framing and parity errors have no effect on transmitter | 1 | Received framing and parity errors disable the transmitter | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | Received framing and parity errors have no effect on transmitter | | | | | | | | | | | | | | | | | | |
| 1 | Received framing and parity errors disable the transmitter | | | | | | | | | | | | | | | | | | |
| 23 | ERRSRX | 0 | RW | Disable RX On Error When set, the receiver is disabled on framing and parity errors (asynchronous mode only). <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Framing and parity errors have no effect on receiver</td></tr><tr><td>1</td><td>Framing and parity errors disable the receiver</td></tr></table> | Value | Description | 0 | Framing and parity errors have no effect on receiver | 1 | Framing and parity errors disable the receiver | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | Framing and parity errors have no effect on receiver | | | | | | | | | | | | | | | | | | |
| 1 | Framing and parity errors disable the receiver | | | | | | | | | | | | | | | | | | |
| 22 | ERRSDMA | 0 | RW | Halt DMA On Error When set, DMA requests will be cleared on framing and parity errors (asynchronous mode only). <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Framing and parity errors have no effect on DMA requests from the USART</td></tr><tr><td>1</td><td>DMA requests from the USART are blocked while the PERR or FERR interrupt flags are set</td></tr></table> | Value | Description | 0 | Framing and parity errors have no effect on DMA requests from the USART | 1 | DMA requests from the USART are blocked while the PERR or FERR interrupt flags are set | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | Framing and parity errors have no effect on DMA requests from the USART | | | | | | | | | | | | | | | | | | |
| 1 | DMA requests from the USART are blocked while the PERR or FERR interrupt flags are set | | | | | | | | | | | | | | | | | | |
| 21 | BIT8DV | 0 | RW | Bit 8 Default Value The default value of the 9th bit. If 9-bit frames are used, and an 8-bit write operation is done, leaving the 9th bit unspecified, the 9th bit is set to the value of BIT8DV. | | | | | | | | | | | | | | | |
| 20 | SKIPPERRF | 0 | RW | Skip Parity Error Frames When set, the receiver discards frames with parity errors (asynchronous mode only). The PERR interrupt flag is still set. | | | | | | | | | | | | | | | |
| 19 | SCRETRANS | 0 | RW | SmartCard Retransmit When in SmartCard mode, a NACK'ed frame will be kept in the shift register and retransmitted if the transmitter is still enabled. | | | | | | | | | | | | | | | |
| 18 | SCMODE | 0 | RW | SmartCard Mode Use this bit to enable or disable SmartCard mode. | | | | | | | | | | | | | | | |
| 17 | AUTOTRI | 0 | RW | Automatic TX Tristate When enabled, TXTRI is set by hardware whenever the transmitter is idle, and TXTRI is cleared by hardware when transmission starts. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>The output on U(S)n_TX when the transmitter is idle is defined by TXINV</td></tr><tr><td>1</td><td>U(S)n_TX is tristated whenever the transmitter is idle</td></tr></table> | Value | Description | 0 | The output on U(S)n_TX when the transmitter is idle is defined by TXINV | 1 | U(S)n_TX is tristated whenever the transmitter is idle | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | The output on U(S)n_TX when the transmitter is idle is defined by TXINV | | | | | | | | | | | | | | | | | | |
| 1 | U(S)n_TX is tristated whenever the transmitter is idle | | | | | | | | | | | | | | | | | | |
| 16 | AUTOCS | 0 | RW | Automatic Chip Select When enabled, the output on USn_CS will be activated one baud-period before transmission starts, and deactivated when transmission ends. | | | | | | | | | | | | | | | |
| 15 | CSINV | 0 | RW | Chip Select Invert | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|--|---|--|--|
| Default value is active low. This affects both the selection of external slaves, as well as the selection of the microcontroller as a slave. | | | | |
| Value | | Description | | |
| 0 | | Chip select is active low | | |
| 1 | | Chip select is active high | | |
| 14 | TXINV | 0 | RW | Transmitter output Invert |
| The output from the USART transmitter can optionally be inverted by setting this bit. | | | | |
| Value | | Description | | |
| 0 | | Output from the transmitter is passed unchanged to U(S)n_TX | | |
| 1 | | Output from the transmitter is inverted before it is passed to U(S)n_TX | | |
| 13 | RXINV | 0 | RW | Receiver Input Invert |
| Setting this bit will invert the input to the USART receiver. | | | | |
| Value | | Description | | |
| 0 | | Input is passed directly to the receiver | | |
| 1 | | Input is inverted before it is passed to the receiver | | |
| 12 | TXBIL | 0 | RW | TX Buffer Interrupt Level |
| Determines the interrupt and status level of the transmit buffer. | | | | |
| Value | | Mode | Description | |
| 0 | | EMPTY | TXBL and the TXBL interrupt flag are set when the transmit buffer becomes empty. TXBL is cleared when the buffer becomes nonempty. | |
| 1 | | HALFFULL | TXBL and TXBLIF are set when the transmit buffer goes from full to half-full or empty. TXBL is cleared when the buffer becomes full. | |
| 11 | CSMA | 0 | RW | Action On Slave-Select In Master Mode |
| This register determines the action to be performed when slave-select is configured as an input and driven low while in master mode. | | | | |
| Value | | Mode | Description | |
| 0 | | NOACTION | No action taken | |
| 1 | | GOTOSLAVEMODE | Go to slave mode | |
| 10 | MSBF | 0 | RW | Most Significant Bit First |
| Decides whether data is sent with the least significant bit first, or the most significant bit first. | | | | |
| Value | | Description | | |
| 0 | | Data is sent with the least significant bit first | | |
| 1 | | Data is sent with the most significant bit first | | |
| 9 | CLKPHA | 0 | RW | Clock Edge For Setup/Sample |
| Determines where data is set-up and sampled according to the bus clock when in synchronous mode. | | | | |
| Value | | Mode | Description | |
| 0 | | SAMPLELEADING | Data is sampled on the leading edge and set-up on the trailing edge of the bus clock in synchronous mode | |
| 1 | | SAMPLETRAILING | Data is set-up on the leading edge and sampled on the trailing edge of the bus clock in synchronous mode | |
| 8 | CLKPOL | 0 | RW | Clock Polarity |
| Determines the clock polarity of the bus clock used in synchronous mode. | | | | |
| Value | | Mode | Description | |
| 0 | | IDLELOW | The bus clock used in synchronous mode has a low base value | |
| 1 | | IDLEHIGH | The bus clock used in synchronous mode has a high base value | |
| 7 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 6:5 | OVS | 0x0 | RW | Oversampling |
| Sets the number of clock periods in a UART bit-period. More clock cycles gives better robustness, while less clock cycles gives better performance. | | | | |
| Value | | Mode | Description | |
| 0 | | X16 | Regular UART mode with 16X oversampling in asynchronous mode | |

| Bit | Name | Reset | Access | Description |
|-----|--------|--|--------|---|
| | Value | Mode | | Description |
| | 1 | X8 | | Double speed with 8X oversampling in asynchronous mode |
| | 2 | X6 | | 6X oversampling in asynchronous mode |
| | 3 | X4 | | Quadruple speed with 4X oversampling in asynchronous mode |
| 4 | MPAB | 0 | RW | Multi-Processor Address-Bit Defines the value of the multi-processor address bit. An incoming frame with its 9th bit equal to the value of this bit marks the frame as a multi-processor address frame. |
| 3 | MPM | 0 | RW | Multi-Processor Mode Multi-processor mode uses the 9th bit of the USART frames to tell whether the frame is an address frame or a data frame. |
| | Value | Description | | |
| | 0 | The 9th bit of incoming frames has no special function | | |
| | 1 | An incoming frame with the 9th bit equal to MPAB will be loaded into the receive buffer regardless of RXBLOCK and will result in the MPAB interrupt flag being set | | |
| 2 | CCEN | 0 | RW | Collision Check Enable Enables collision checking on data when operating in half duplex modus. |
| | Value | Description | | |
| | 0 | Collision check is disabled | | |
| | 1 | Collision check is enabled. The receiver must be enabled for the check to be performed | | |
| 1 | LOOPBK | 0 | RW | Loopback Enable Allows the receiver to be connected directly to the USART transmitter for loopback and half duplex communication. |
| | Value | Description | | |
| | 0 | The receiver is connected to and receives data from U(S)n_RX | | |
| | 1 | The receiver is connected to and receives data from U(S)n_TX | | |
| 0 | SYNC | 0 | RW | USART Synchronous Mode Determines whether the USART is operating in asynchronous or synchronous mode. |
| | Value | Description | | |
| | 0 | The USART operates in asynchronous mode | | |
| | 1 | The USART operates in synchronous mode | | |

15.5.2 USARTn_FRAME - USART Frame Format Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|----|---|--------|---|---|---|---|---|---|-----|---|--|----------|--|--|--|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | 0x1 | | | | 0x0 | | | | | | | 0x5 | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | RW | | | | RW | | | | | | | RW | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | STOPBITS | | | | PARITY | | | | | | | | | | DATABITS | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 13:12 | STOPBITS | 0x1 | RW | Stop-Bit Mode Determines the number of stop-bits used. |
| | Value | Mode | | Description |
| | 0 | HALF | | The transmitter generates a half stop bit. Stop-bits are not verified by receiver |
| | 1 | ONE | | One stop bit is generated and verified |
| | 2 | ONEANDAHALF | | The transmitter generates one and a half stop bit. The receiver verifies the first stop bit |

| Bit | Name | Reset | Access | Description |
|-------|---|----------|--------|--|
| | Value | Mode | | Description |
| | 3 | TWO | | The transmitter generates two stop bits. The receiver checks the first stop-bit only |
| 11:10 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 9:8 | PARITY | 0x0 | RW | Parity-Bit Mode |
| | Determines whether parity bits are enabled, and whether even or odd parity should be used. Only available in asynchronous mode. | | | |
| | Value | Mode | | Description |
| | 0 | NONE | | Parity bits are not used |
| | 2 | EVEN | | Even parity are used. Parity bits are automatically generated and checked by hardware. |
| | 3 | ODD | | Odd parity is used. Parity bits are automatically generated and checked by hardware. |
| 7:4 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 3:0 | DATABITS | 0x5 | RW | Data-Bit Mode |
| | This register sets the number of data bits in a USART frame. | | | |
| | Value | Mode | | Description |
| | 1 | FOUR | | Each frame contains 4 data bits |
| | 2 | FIVE | | Each frame contains 5 data bits |
| | 3 | SIX | | Each frame contains 6 data bits |
| | 4 | SEVEN | | Each frame contains 7 data bits |
| | 5 | EIGHT | | Each frame contains 8 data bits |
| | 6 | NINE | | Each frame contains 9 data bits |
| | 7 | TEN | | Each frame contains 10 data bits |
| | 8 | ELEVEN | | Each frame contains 11 data bits |
| | 9 | TWELVE | | Each frame contains 12 data bits |
| | 10 | THIRTEEN | | Each frame contains 13 data bits |
| | 11 | FOURTEEN | | Each frame contains 14 data bits |
| | 12 | FIFTEEN | | Each frame contains 15 data bits |
| | 13 | SIXTEEN | | Each frame contains 16 data bits |

15.5.3 USARTn_TRIGCTRL - USART Trigger Control register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-----------|---|--------|---|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | AUTOTXTEN | 0 | RW | AUTOTX Trigger Enable When set, AUTOTX is enabled as long as the PRS channel selected by TSEL has a high value. |
| 5 | TXTEN | 0 | RW | Transmit Trigger Enable When set, the PRS channel selected by TSEL sets TXEN, enabling the transmitter on positive trigger edges. |
| 4 | RXTEN | 0 | RW | Receive Trigger Enable When set, the PRS channel selected by TSEL sets RXEN, enabling the receiver on positive trigger edges. |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2:0 | TSEL | 0x0 | RW | Trigger PRS Channel Select |

| Bit | Name | Reset | Access | Description |
|--|-------|--------|------------------------|-------------|
| Select USART PRS trigger channel. The PRS signal can enable RX and/or TX, depending on the setting of RXTEN and TXTEN. | | | | |
| | Value | Mode | Description | |
| | 0 | PRSCH0 | PRS Channel 0 selected | |
| | 1 | PRSCH1 | PRS Channel 1 selected | |
| | 2 | PRSCH2 | PRS Channel 2 selected | |
| | 3 | PRSCH3 | PRS Channel 3 selected | |
| | 4 | PRSCH4 | PRS Channel 4 selected | |
| | 5 | PRSCH5 | PRS Channel 5 selected | |
| | 6 | PRSCH6 | PRS Channel 6 selected | |
| | 7 | PRSCH7 | PRS Channel 7 selected | |

15.5.4 USARTn_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|---------|---------|---------|------------|-----------|-----------|----------|-------|------|-------|------|----|----|----|----|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | CLEARRX | CLEARTX | TXTRDIS | TXTRIEN | RXBLOCKDIS | RXBLOCKEN | MASTERDIS | MASTEREN | TXDIS | TXEN | RXDIS | RXEN | | | | |

| Bit | Name | Reset | Access | Description |
|-------|------------|---|--------|--|
| 31:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 11 | CLEARRX | 0 | W1 | Clear RX Set to clear receive buffer and the RX shift register. |
| 10 | CLEARTX | 0 | W1 | Clear TX Set to clear transmit buffer and the TX shift register. |
| 9 | TXTRDIS | 0 | W1 | Transmitter Tristate Disable Disables tristating of the transmitter output. |
| 8 | TXTRIEN | 0 | W1 | Transmitter Tristate Enable Tristates the transmitter output. |
| 7 | RXBLOCKDIS | 0 | W1 | Receiver Block Disable Set to clear RXBLOCK, resulting in all incoming frames being loaded into the receive buffer. |
| 6 | RXBLOCKEN | 0 | W1 | Receiver Block Enable Set to set RXBLOCK, resulting in all incoming frames being discarded. |
| 5 | MASTERDIS | 0 | W1 | Master Disable Set to disable master mode, clearing the MASTER status bit and putting the USART in slave mode. |
| 4 | MASTEREN | 0 | W1 | Master Enable Set to enable master mode, setting the MASTER status bit. Master mode should not be enabled while TXENS is set to 1. To enable both master and TX mode, write MASTEREN before TXEN, or enable them both in the same write operation. |
| 3 | TXDIS | 0 | W1 | Transmitter Disable Set to disable transmission. |
| 2 | TXEN | 0 | W1 | Transmitter Enable Set to enable data transmission. |
| 1 | RXDIS | 0 | W1 | Receiver Disable Set to disable data reception. If a frame is under reception when the receiver is disabled, the incoming frame is discarded. |

| Bit | Name | Reset | Access | Description |
|-----|------|-------|--------|---|
| 0 | RXEN | 0 | W1 | Receiver Enable Set to activate data reception on U(S)n_RX. |

15.5.5 USARTn_STATUS - USART Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------------|----|--------------|---|-----------|---|-----------|---|--------|---|---------|---|------|---|-----|---|-------|---|---------|---|--------|---|-------|---|-------|---|---|---|---|--|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 1 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | |
| Name | | | | | | | | | | | | | | | | | | | | | RXFULLRIGHT | | RXDATAVRIGHT | | TXBSRIGHT | | TXBDRIGHT | | RXFULL | | RXDATAV | | TXBL | | TXC | | TXTRI | | RXBLOCK | | MASTER | | TXENS | | RXENS | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|--------------|---|--------|--|
| 31:13 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 12 | RXFULLRIGHT | 0 | R | RX Full of Right Data When set, the entire RX buffer contains right data. Only used in I2S mode. |
| 11 | RXDATAVRIGHT | 0 | R | RX Data Right When set, reading RXDATA or RXDATAV gives right data. Else left data is read. Only used in I2S mode. |
| 10 | TXBSRIGHT | 0 | R | TX Buffer Expects Single Right Data When set, the TX buffer expects at least a single right data. Else it expects left data. Only used in I2S mode. |
| 9 | TXBDRIGHT | 0 | R | TX Buffer Expects Double Right Data When set, the TX buffer expects double right data. Else it may expect a single right data or left data. Only used in I2S mode. |
| 8 | RXFULL | 0 | R | RX FIFO Full Set when the RXFIFO is full. Cleared when the receive buffer is no longer full. When this bit is set, there is still room for one more frame in the receive shift register. |
| 7 | RXDATAV | 0 | R | RX Data Valid Set when data is available in the receive buffer. Cleared when the receive buffer is empty. |
| 6 | TXBL | 1 | R | TX Buffer Level Indicates the level of the transmit buffer. If TXBIL is cleared, TXBL is set whenever the transmit buffer is empty, and if TXBIL is set, TXBL is set whenever the transmit buffer is half-full or empty. |
| 5 | TXC | 0 | R | TX Complete Set when a transmission has completed and no more data is available in the transmit buffer and shift register. Cleared when data is written to the transmit buffer. |
| 4 | TXTRI | 0 | R | Transmitter Tristated Set when the transmitter is tristated, and cleared when transmitter output is enabled. If AUTOTRI in USARTn_CTRL is set this bit is always read as 0. |
| 3 | RXBLOCK | 0 | R | Block Incoming Data When set, the receiver discards incoming frames. An incoming frame will not be loaded into the receive buffer if this bit is set at the instant the frame has been completely received. |
| 2 | MASTER | 0 | R | SPI Master Mode Set when the USART operates as a master. Set using the MASTEREN command and clear using the MASTERDIS command. |
| 1 | TXENS | 0 | R | Transmitter Enable Status Set when the transmitter is enabled. |
| 0 | RXENS | 0 | R | Receiver Enable Status |

| Bit | Name | Reset | Access | Description |
|-----|------|-------|--------|-----------------------------------|
| | | | | Set when the receiver is enabled. |

15.5.6 USARTn_CLKDIV - Clock Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | DIV | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:21 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 20:6 | DIV | 0x0000 | RW | Fractional Clock Divider Specifies the fractional clock divider for the USART. |
| 5:0 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

15.5.7 USARTn_RXDATAx - RX Buffer Data Extended Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|------|----|----|----|----|---|---|---|---|--------|---|---|---|---|---|--|--|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | 0 | 0 | | | | | | | | | 0x000 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | R | | | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | FERR | PERR | | | | | | | | | RXDATA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15 | FERR | 0 | R | Data Framing Error Set if data in buffer has a framing error. Can be the result of a break condition. |
| 14 | PERR | 0 | R | Data Parity Error Set if data in buffer has a parity error (asynchronous mode only). |
| 13:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | RXDATA | 0x000 | R | RX Data Use this register to access data read from the USART. Buffer is cleared on read access. |

15.5.8 USARTn_RXDATA - RX Buffer Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | RXDATA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|----------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | RXDATA | 0x00 | R | RX Data |
| Use this register to access data read from USART. Buffer is cleared on read access. Only the 8 LSB can be read using this register. | | | | |

15.5.9 USARTn_RXDOUBLEX - RX Buffer Double Data Extended Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|-------|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|-------|-------|----|----|----|---|---|---------|---|---|---|---|---|---|---|--|--|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | 0 | 0 | | | | | | 0x000 | | | | | | | | | | 0 | 0 | | | | | | 0x000 | | | | | | | | | |
| Access | R | R | | | | | | R | | | | | | | | | | R | R | | | | | | R | | | | | | | | | |
| Name | FERR1 | PERR1 | | | | | | RXDATA1 | | | | | | | | | | FERR0 | PERR0 | | | | | | RXDATA0 | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|-----------------------------|
| 31 | FERR1 | 0 | R | Data Framing Error 1 |
| Set if data in buffer has a framing error. Can be the result of a break condition. | | | | |
| 30 | PERR1 | 0 | R | Data Parity Error 1 |
| Set if data in buffer has a parity error (asynchronous mode only). | | | | |
| 29:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 24:16 | RXDATA1 | 0x000 | R | RX Data 1 |
| Second frame read from buffer. | | | | |
| 15 | FERR0 | 0 | R | Data Framing Error 0 |
| Set if data in buffer has a framing error. Can be the result of a break condition. | | | | |
| 14 | PERR0 | 0 | R | Data Parity Error 0 |
| Set if data in buffer has a parity error (asynchronous mode only). | | | | |
| 13:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | RXDATA0 | 0x000 | R | RX Data 0 |
| First frame read from buffer. | | | | |

15.5.10 USARTn_RXDOUBLE - RX FIFO Double Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---------|---|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x00 | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | RXDATA1 | | | | | | | | RXDATA0 | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:8 | RXDATA1 | 0x00 | R | RX Data 1 Second frame read from buffer. |
| 7:0 | RXDATA0 | 0x00 | R | RX Data 0 First frame read from buffer. |

15.5.11 USARTn_RXDATAEXP - RX Buffer Data Extended Peek Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|-------|----|----|----|----|---|---|---------|---|---|---|---|---|---|---|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0 | 0 | | | | | | | 0x000 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | R | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | FERRP | PERRP | | | | | | | RXDATAP | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15 | FERRP | 0 | R | Data Framing Error Peek Set if data in buffer has a framing error. Can be the result of a break condition. |
| 14 | PERRP | 0 | R | Data Parity Error Peek Set if data in buffer has a parity error (asynchronous mode only). |
| 13:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | RXDATAP | 0x000 | R | RX Data Peek Use this register to access data read from the USART. |

15.5.12 USARTn_RXDOUBLEXP - RX Buffer Double Data Extended Peek Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|--------|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|--------|--------|----|----|----|----|---|----------|---|---|---|---|---|---|---|---|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0 | 0 | | | | | | 0x000 | | | | | | | | | 0 | 0 | | | | | | 0x000 | | | | | | | | |
| Access | R | R | | | | | | R | | | | | | | | | R | R | | | | | | R | | | | | | | | |
| Name | FERRP1 | PERRP1 | | | | | | RXDATAP1 | | | | | | | | | FERRP0 | PERRP0 | | | | | | RXDATAPO | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31 | FERRP1 | 0 | R | Data Framing Error 1 Peek Set if data in buffer has a framing error. Can be the result of a break condition. |
| 30 | PERRP1 | 0 | R | Data Parity Error 1 Peek Set if data in buffer has a parity error (asynchronous mode only). |
| 29:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 24:16 | RXDATAP1 | 0x000 | R | RX Data 1 Peek Second frame read from FIFO. |
| 15 | FERRP0 | 0 | R | Data Framing Error 0 Peek Set if data in buffer has a framing error. Can be the result of a break condition. |
| 14 | PERRP0 | 0 | R | Data Parity Error 0 Peek Set if data in buffer has a parity error (asynchronous mode only). |
| 13:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | RXDATAPO | 0x000 | R | RX Data 0 Peek First frame read from FIFO. |

15.5.13 USARTn_TXDATAx - TX Buffer Data Extended Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|---------|---------|---------|--------|---------|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | |
| Reset | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0x000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W | W | W | W | W | W | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | RXENAT | TXDISAT | TXBREAK | TXTRIAT | UBRXAT | TXDATAx | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15 | RXENAT | 0 | W | Enable RX After Transmission Set to enable reception after transmission. |
| 14 | TXDISAT | 0 | W | Clear TXEN After Transmission |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| | | | | Set to disable transmitter and release data bus directly after transmission. |
| 13 | TXBREAK | 0 | W | Transmit Data As Break Set to send data as a break. Recipient will see a framing error or a break condition depending on its configuration and the value of WDATA. |
| 12 | TXTRIAT | 0 | W | Set TXTRI After Transmission Set to tristate transmitter by setting TXTRI after transmission. |
| 11 | UBRXAT | 0 | W | Unblock RX After Transmission Set clear RXBLOCK after transmission, unblocking the receiver. |
| 10:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | TXDATA | 0x000 | W | TX Data Use this register to write data to the USART. If TXEN is set, a transfer will be initiated at the first opportunity. |

15.5.14 USARTn_TXDATA - TX Buffer Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | TXDATA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | TXDATA | 0x00 | W | TX Data This frame will be added to TX buffer. Only 8 LSB can be written using this register. 9th bit and control bits will be cleared. |

15.5.15 USARTn_TXDOUBLEX - TX Buffer Double Data Extended Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----------|----------|----------|---------|----|----|---------|----|----|----|----|----|----|----|----|---------|----------|----------|----------|---------|----|---|---------|---|-------|---|---|---|---|---|---|--|--|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | 0 | 0 | 0 | 0 | 0 | | | 0x000 | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | 0x000 | | | | | | | | |
| Access | W | W | W | W | W | | | W | | | | | | | | | W | W | W | W | W | W | W | W | | | W | | | | | | | |
| Name | RXENAT1 | TXDISAT1 | TXBREAK1 | TXTRIAT1 | UBRXAT1 | | | TXDATA1 | | | | | | | | | RXENAT0 | TXDISAT0 | TXBREAK0 | TXTRIAT0 | UBRXAT0 | | | TXDATA0 | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|----------|-------|--------|--|
| 31 | RXENAT1 | 0 | W | Enable RX After Transmission Set to enable reception after transmission. |
| 30 | TXDISAT1 | 0 | W | Clear TXEN After Transmission |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| | | | | Set to disable transmitter and release data bus directly after transmission. |
| 29 | TXBREAK1 | 0 | W | Transmit Data As Break Set to send data as a break. Recipient will see a framing error or a break condition depending on its configuration and the value of USARTn_WDATA. |
| 28 | TXTRIAT1 | 0 | W | Set TXTRI After Transmission Set to tristate transmitter by setting TXTRI after transmission. |
| 27 | UBRXAT1 | 0 | W | Unblock RX After Transmission Set clear RXBLOCK after transmission, unblocking the receiver. |
| 26:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 24:16 | TXDATA1 | 0x000 | W | TX Data Second frame to write to FIFO. |
| 15 | RXENAT0 | 0 | W | Enable RX After Transmission Set to enable reception after transmission. |
| 14 | TXDISAT0 | 0 | W | Clear TXEN After Transmission Set to disable transmitter and release data bus directly after transmission. |
| 13 | TXBREAK0 | 0 | W | Transmit Data As Break Set to send data as a break. Recipient will see a framing error or a break condition depending on its configuration and the value of WDATA. |
| 12 | TXTRIAT0 | 0 | W | Set TXTRI After Transmission Set to tristate transmitter by setting TXTRI after transmission. |
| 11 | UBRXAT0 | 0 | W | Unblock RX After Transmission Set clear RXBLOCK after transmission, unblocking the receiver. |
| 10:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | TXDATA0 | 0x000 | W | TX Data First frame to write to buffer. |

15.5.16 USARTn_TXDOUBLE - TX Buffer Double Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---------|---|---|---|---|---|---|---|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x00 | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W | | | | | | | | W | | | | | | | |
| Name | | | | | | | | | | | | | | | | | TXDATA1 | | | | | | | | TXDATA0 | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:8 | TXDATA1 | 0x00 | W | TX Data Second frame to write to buffer. |
| 7:0 | TXDATA0 | 0x00 | W | TX Data First frame to write to buffer. |

15.5.17 USARTn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|---|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 0 | R | 0 | 10 | R | 0 | 9 | R | 0 | 8 | R | 0 | 7 | R | 0 | 6 | R | 0 | 5 | R | 0 | 4 | R | 0 | 3 | R | 0 | 2 | R | 1 | 1 | R | 0 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:13 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 12 | CCF | 0 | R | Collision Check Fail Interrupt Flag Set when a collision check notices an error in the transmitted data. |
| 11 | SSM | 0 | R | Slave-Select In Master Mode Interrupt Flag Set when the device is selected as a slave when in master mode. |
| 10 | MPAF | 0 | R | Multi-Processor Address Frame Interrupt Flag Set when a multi-processor address frame is detected. |
| 9 | FERR | 0 | R | Framing Error Interrupt Flag Set when a frame with a framing error is received while RXBLOCK is cleared. |
| 8 | PERR | 0 | R | Parity Error Interrupt Flag Set when a frame with a parity error (asynchronous mode only) is received while RXBLOCK is cleared. |
| 7 | TXUF | 0 | R | TX Underflow Interrupt Flag Set when operating as a synchronous slave, no data is available in the transmit buffer when the master starts transmission of a new frame. |
| 6 | TXOF | 0 | R | TX Overflow Interrupt Flag Set when a write is done to the transmit buffer while it is full. The data already in the transmit buffer is preserved. |
| 5 | RXUF | 0 | R | RX Underflow Interrupt Flag Set when trying to read from the receive buffer when it is empty. |
| 4 | RXOF | 0 | R | RX Overflow Interrupt Flag Set when data is incoming while the receive shift register is full. The data previously in the shift register is lost. |
| 3 | RXFULL | 0 | R | RX Buffer Full Interrupt Flag Set when the receive buffer becomes full. |
| 2 | RXDATAV | 0 | R | RX Data Valid Interrupt Flag Set when data becomes available in the receive buffer. |
| 1 | TXBL | 1 | R | TX Buffer Level Interrupt Flag Set when buffer becomes empty if TXBIL is set, or when buffer goes from full to half-full if TXBIL is cleared. |
| 0 | TXC | 0 | R | TX Complete Interrupt Flag This interrupt is used after a transmission when both the TX buffer and shift register are empty. |

15.5.18 USARTn_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|------|------|------|------|------|------|------|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|
| 0x044 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | CCF | SSM | MPAF | FERR | PERR | TXUF | TXOF | RXUF | RXOF | RXFULL | | | | | | | | | | | | | | | | | | | | TXC |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:13 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 12 | CCF | 0 | W1 | Set Collision Check Fail Interrupt Flag Write to 1 to set the CCF interrupt flag. |
| 11 | SSM | 0 | W1 | Set Slave-Select in Master mode Interrupt Flag Write to 1 to set the SSM interrupt flag. |
| 10 | MPAF | 0 | W1 | Set Multi-Processor Address Frame Interrupt Flag Write to 1 to set the MPAF interrupt flag. |
| 9 | FERR | 0 | W1 | Set Framing Error Interrupt Flag Write to 1 to set the FERR interrupt flag. |
| 8 | PERR | 0 | W1 | Set Parity Error Interrupt Flag Write to 1 to set the PERR interrupt flag. |
| 7 | TXUF | 0 | W1 | Set TX Underflow Interrupt Flag Write to 1 to set the TXUF interrupt flag. |
| 6 | TXOF | 0 | W1 | Set TX Overflow Interrupt Flag Write to 1 to set the TXOF interrupt flag. |
| 5 | RXUF | 0 | W1 | Set RX Underflow Interrupt Flag Write to 1 to set the RXUF interrupt flag. |
| 4 | RXOF | 0 | W1 | Set RX Overflow Interrupt Flag Write to 1 to set the RXOF interrupt flag. |
| 3 | RXFULL | 0 | W1 | Set RX Buffer Full Interrupt Flag Write to 1 to set the RXFULL interrupt flag. |
| 2:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | TXC | 0 | W1 | Set TX Complete Interrupt Flag Write to 1 to set the TXC interrupt flag. |

15.5.19 USARTn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|------|------|------|------|------|------|------|--------|----|----|----|----|-----|----|----|----|----|----|----|----|----|----|----|--|--|----|
| 0x048 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | 0 | 0 | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | | | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | CCF | SSM | MPAF | FERR | PERR | TXUF | TXOF | RXUF | RXOF | RXFULL | | | | | TXC | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:13 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 12 | CCF | 0 | W1 | Clear Collision Check Fail Interrupt Flag Write to 1 to clear the CCF interrupt flag. |
| 11 | SSM | 0 | W1 | Clear Slave-Select In Master Mode Interrupt Flag Write to 1 to clear the SSM interrupt flag. |
| 10 | MPAF | 0 | W1 | Clear Multi-Processor Address Frame Interrupt Flag Write to 1 to clear the MPAF interrupt flag. |
| 9 | FERR | 0 | W1 | Clear Framing Error Interrupt Flag Write to 1 to clear the FERR interrupt flag. |
| 8 | PERR | 0 | W1 | Clear Parity Error Interrupt Flag Write to 1 to clear the PERR interrupt flag. |
| 7 | TXUF | 0 | W1 | Clear TX Underflow Interrupt Flag Write to 1 to clear the TXUF interrupt flag. |
| 6 | TXOF | 0 | W1 | Clear TX Overflow Interrupt Flag Write to 1 to clear the TXOF interrupt flag. |
| 5 | RXUF | 0 | W1 | Clear RX Underflow Interrupt Flag Write to 1 to clear the RXUF interrupt flag. |
| 4 | RXOF | 0 | W1 | Clear RX Overflow Interrupt Flag Write to 1 to clear the RXOF interrupt flag. |
| 3 | RXFULL | 0 | W1 | Clear RX Buffer Full Interrupt Flag Write to 1 to clear the RXFULL interrupt flag. |
| 2:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | TXC | 0 | W1 | Clear TX Complete Interrupt Flag Write to 1 to clear the TXC interrupt flag. |

15.5.20 USARTn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|------|------|------|------|------|------|------|--------|---------|------|-----|----|----|----|
| 0x04C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | CCF | SSM | MPAF | FERR | PERR | TXUF | TXOF | RXUF | RXOF | RXFULL | RXDATAV | TXBL | TXC | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:13 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 12 | CCF | 0 | RW | Collision Check Fail Interrupt Enable Enable interrupt on collision check error detected. |
| 11 | SSM | 0 | RW | Slave-Select In Master Mode Interrupt Enable Enable interrupt on slave-select in master mode. |
| 10 | MPAF | 0 | RW | Multi-Processor Address Frame Interrupt Enable Enable interrupt on multi-processor address frame. |
| 9 | FERR | 0 | RW | Framing Error Interrupt Enable Enable interrupt on framing error. |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|--|
| 8 | PERR | 0 | RW | Parity Error Interrupt Enable Enable interrupt on parity error (asynchronous mode only). |
| 7 | TXUF | 0 | RW | TX Underflow Interrupt Enable Enable interrupt on TX underflow. |
| 6 | TXOF | 0 | RW | TX Overflow Interrupt Enable Enable interrupt on TX overflow. |
| 5 | RXUF | 0 | RW | RX Underflow Interrupt Enable Enable interrupt on RX underflow. |
| 4 | RXOF | 0 | RW | RX Overflow Interrupt Enable Enable interrupt on RX overflow. |
| 3 | RXFULL | 0 | RW | RX Buffer Full Interrupt Enable Enable interrupt on RX Buffer full. |
| 2 | RXDATAV | 0 | RW | RX Data Valid Interrupt Enable Enable interrupt on RX data. |
| 1 | TXBL | 0 | RW | TX Buffer Level Interrupt Enable Enable interrupt on TX buffer level. |
| 0 | TXC | 0 | RW | TX Complete Interrupt Enable Enable interrupt on TX complete. |

15.5.21 USARTn_IRCTRL - IrDA Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----------|----|--------|----|------|---|
| 0x050 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Reset | | | | | | | | | | | | | | | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | | | | | | | | | | RW | | RW | | RW | | RW | |
| Name | | | | | | | | | | | | | | | | | IRPRSEN | | IRPRSSEL | | IRFILT | | IRPW | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|----------|---|--------|---|-------|------|-------------|---|--------|------------------------|---|--------|------------------------|---|--------|------------------------|---|--------|------------------------|---|--------|------------------------|---|--------|------------------------|---|--------|------------------------|---|--------|------------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | IRPRSEN | 0 | RW | IrDA PRS Channel Enable Enable the PRS channel selected by IRPRSSEL as input to IrDA module instead of TX. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6:4 | IRPRSSEL | 0x0 | RW | IrDA PRS Channel Select A PRS can be used as input to the pulse modulator instead of TX. This value selects the channel to use. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PRSCH0</td><td>PRS Channel 0 selected</td></tr><tr><td>1</td><td>PRSCH1</td><td>PRS Channel 1 selected</td></tr><tr><td>2</td><td>PRSCH2</td><td>PRS Channel 2 selected</td></tr><tr><td>3</td><td>PRSCH3</td><td>PRS Channel 3 selected</td></tr><tr><td>4</td><td>PRSCH4</td><td>PRS Channel 4 selected</td></tr><tr><td>5</td><td>PRSCH5</td><td>PRS Channel 5 selected</td></tr><tr><td>6</td><td>PRSCH6</td><td>PRS Channel 6 selected</td></tr><tr><td>7</td><td>PRSCH7</td><td>PRS Channel 7 selected</td></tr></table> | | | | | Value | Mode | Description | 0 | PRSCH0 | PRS Channel 0 selected | 1 | PRSCH1 | PRS Channel 1 selected | 2 | PRSCH2 | PRS Channel 2 selected | 3 | PRSCH3 | PRS Channel 3 selected | 4 | PRSCH4 | PRS Channel 4 selected | 5 | PRSCH5 | PRS Channel 5 selected | 6 | PRSCH6 | PRS Channel 6 selected | 7 | PRSCH7 | PRS Channel 7 selected |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PRSCH0 | PRS Channel 0 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PRSCH1 | PRS Channel 1 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PRSCH2 | PRS Channel 2 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PRSCH3 | PRS Channel 3 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PRSCH4 | PRS Channel 4 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PRSCH5 | PRS Channel 5 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | PRSCH6 | PRS Channel 6 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | PRSCH7 | PRS Channel 7 selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | IRFILT | 0 | RW | IrDA RX Filter Set to enable filter on IrDA demodulator. | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|-------|--|--|----------------------------|
| | Value | Description | | |
| | 0 | No filter enabled | | |
| | 1 | Filter enabled. IrDA pulse must be high for at least 4 consecutive clock cycles to be detected | | |
| 2:1 | IRPW | 0x0 | RW | IrDA TX Pulse Width |
| Configure the pulse width generated by the IrDA modulator as a fraction of the configured USART bit period. | | | | |
| | Value | Mode | Description | |
| | 0 | ONE | IrDA pulse width is 1/16 for OVS=0 and 1/8 for OVS=1 | |
| | 1 | TWO | IrDA pulse width is 2/16 for OVS=0 and 2/8 for OVS=1 | |
| | 2 | THREE | IrDA pulse width is 3/16 for OVS=0 and 3/8 for OVS=1 | |
| | 3 | FOUR | IrDA pulse width is 4/16 for OVS=0 and 4/8 for OVS=1 | |
| 0 | IREN | 0 | RW | Enable IrDA Module |
| Enable IrDA module and rout USART signals through it. | | | | |

15.5.22 USARTn_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|---|---|---|---|---|---|--------|-------|-------|-------|
| 0x054 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | | | | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | RW | RW | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | LOCATION | | | | | | | | CLKPEN | CSPEN | TXPEN | RXPEN |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | |
|---|-----------------------------|---|--------|---|-------|-------------|-------------|-----------------------------|------|----------------------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 10:8 | LOCATION | 0x0 | RW | I/O Location Decides the location of the USART I/O pins. | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr><tr><td>2</td><td>LOC2</td><td>Location 2</td></tr><tr><td>3</td><td>LOC3</td><td>Location 3</td></tr><tr><td>4</td><td>LOC4</td><td>Location 4</td></tr><tr><td>5</td><td>LOC5</td><td>Location 5</td></tr></table> | | | | | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 | 2 | LOC2 | Location 2 | 3 | LOC3 | Location 3 | 4 | LOC4 | Location 4 | 5 | LOC5 | Location 5 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | LOC2 | Location 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | LOC3 | Location 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | LOC4 | Location 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | LOC5 | Location 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 7:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | CLKPEN | 0 | RW | CLK Pin Enable When set, the CLK pin of the USART is enabled. | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>The USn_CLK pin is disabled</td></tr><tr><td>1</td><td>The USn_CLK pin is enabled</td></tr></table> | | | | | Value | Description | 0 | The USn_CLK pin is disabled | 1 | The USn_CLK pin is enabled | | | | | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | The USn_CLK pin is disabled | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | The USn_CLK pin is enabled | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | CSPEN | 0 | RW | CS Pin Enable When set, the CS pin of the USART is enabled. | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>The USn_CS pin is disabled</td></tr><tr><td>1</td><td>The USn_CS pin is enabled</td></tr></table> | | | | | Value | Description | 0 | The USn_CS pin is disabled | 1 | The USn_CS pin is enabled | | | | | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | The USn_CS pin is disabled | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | The USn_CS pin is enabled | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | TXPEN | 0 | RW | TX Pin Enable When set, the TX/MOSI pin of the USART is enabled | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|-------|-------------------------------------|--------|----------------------|
| | Value | Description | | |
| | 0 | The U(S)n_TX (MOSI) pin is disabled | | |
| | 1 | The U(S)n_TX (MOSI) pin is enabled | | |
| 0 | RXPEN | 0 | RW | RX Pin Enable |
| When set, the RX/MISO pin of the USART is enabled. | | | | |
| | Value | Description | | |
| | 0 | The U(S)n_RX (MISO) pin is disabled | | |
| | 1 | The U(S)n_RX (MISO) pin is enabled | | |

15.5.23 USARTn_INPUT - USART Input Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|---|----------|---|---|---|
| 0x058 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | | | 0x0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | RW | | | RW | | | |
| Name | | | | | | | | | | | | | | | | | | | | | RXPRS | | | RXPRSSEL | | | |



| Bit | Name | Reset | Access | Description |
|--|----------|---|------------------------|------------------------------|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 4 | RXPRS | 0 | RW | PRS RX Enable |
| When set, the PRS channel selected as input to RX. | | | | |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2:0 | RXPRSSEL | 0x0 | RW | RX PRS Channel Select |
| Select PRS channel as input to RX. | | | | |
| Value | | Mode | Description | |
| 0 | | PRSCH0 | PRS Channel 0 selected | |
| 1 | | PRSCH1 | PRS Channel 1 selected | |
| 2 | | PRSCH2 | PRS Channel 2 selected | |
| 3 | | PRSCH3 | PRS Channel 3 selected | |
| 4 | | PRSCH4 | PRS Channel 4 selected | |
| 5 | | PRSCH5 | PRS Channel 5 selected | |
| 6 | | PRSCH6 | PRS Channel 6 selected | |
| 7 | | PRSCH7 | PRS Channel 7 selected | |

15.5.24 USARTn_I2SCTRL - I2S Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|---|---|---|---|-------|---|----------|----|---------|----|------|----|----|--|
| 0x05C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | 0 | 0 | 0 | 0 | 0 | 0 | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | RW | | | | | RW | | RW | RW | RW | RW | RW | RW | RW | |
| Name | | | | | | | | | | | | | | | | | | | | | | FORMAT | | | | | DELAY | | DMASPLIT | | JUSTIFY | | MONO | | EN | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|----------|---|--------|--|-------|------|-------------|---|--------|--------------------------|---|---------|--|---|--------|--------------------------|---|--------|--------------------------|---|-------|-------------------------|---|--------|--------------------------|---|-------|-------------------------|---|------|------------------------|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10:8 | FORMAT | 0x0 | RW | I2S Word Format Configure the data-width used internally for I2S data | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>W32D32</td><td>32-bit word, 32-bit data</td></tr><tr><td>1</td><td>W32D24M</td><td>32-bit word, 32-bit data with 8 lsb masked</td></tr><tr><td>2</td><td>W32D24</td><td>32-bit word, 24-bit data</td></tr><tr><td>3</td><td>W32D16</td><td>32-bit word, 16-bit data</td></tr><tr><td>4</td><td>W32D8</td><td>32-bit word, 8-bit data</td></tr><tr><td>5</td><td>W16D16</td><td>16-bit word, 16-bit data</td></tr><tr><td>6</td><td>W16D8</td><td>16-bit word, 8-bit data</td></tr><tr><td>7</td><td>W8D8</td><td>8-bit word, 8-bit data</td></tr></table> | | | | | Value | Mode | Description | 0 | W32D32 | 32-bit word, 32-bit data | 1 | W32D24M | 32-bit word, 32-bit data with 8 lsb masked | 2 | W32D24 | 32-bit word, 24-bit data | 3 | W32D16 | 32-bit word, 16-bit data | 4 | W32D8 | 32-bit word, 8-bit data | 5 | W16D16 | 16-bit word, 16-bit data | 6 | W16D8 | 16-bit word, 8-bit data | 7 | W8D8 | 8-bit word, 8-bit data |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | W32D32 | 32-bit word, 32-bit data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | W32D24M | 32-bit word, 32-bit data with 8 lsb masked | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | W32D24 | 32-bit word, 24-bit data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | W32D16 | 32-bit word, 16-bit data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | W32D8 | 32-bit word, 8-bit data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | W16D16 | 16-bit word, 16-bit data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | W16D8 | 16-bit word, 8-bit data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | W8D8 | 8-bit word, 8-bit data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | DELAY | 0 | RW | Delay on I2S data Set to add a one-cycle delay between a transition on the word-clock and the start of the I2S word. Should be set for standard I2S format | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | DMASPLIT | 0 | RW | Separate DMA Request For Left/Right Data When set DMA requests for right-channel data are put on the TXBLRIGHT and RXDATAVRIGHT DMA requests. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | JUSTIFY | 0 | RW | Justification of I2S Data Determines whether the I2S data is left or right justified | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>LEFT</td><td>Data is left-justified</td></tr><tr><td>1</td><td>RIGHT</td><td>Data is right-justified</td></tr></table> | | | | | Value | Mode | Description | 0 | LEFT | Data is left-justified | 1 | RIGHT | Data is right-justified | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | LEFT | Data is left-justified | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | RIGHT | Data is right-justified | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | MONO | 0 | RW | Stereo or Mono Switch between stereo and mono mode. Set for mono | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | EN | 0 | RW | Enable I2S Mode Set the U(S)ART in I2S mode. | | | | | | | | | | | | | | | | | | | | | | | | | | | |

16 LEUART - Low Energy Universal Asynchronous Receiver/Transmitter

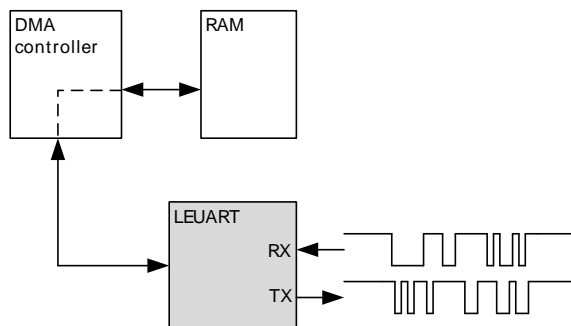

Quick Facts

What?

The LEUART provides full UART communication using a low frequency 32.768 kHz clock, and has special features for communication without CPU intervention.

Why?

It allows UART communication to be performed in low energy modes, using only a few μA during active communication and only 150 nA when waiting for incoming data.

How?

A low frequency clock signal allows communication with less energy. Using DMA, the LEUART can transmit and receive data with minimal CPU intervention. Special UART-frames can be configured to help control the data flow, further automating data transmission.

16.1 Introduction

The unique LEUART[™], the Low Energy UART, is a UART that allows two-way UART communication on a strict power budget. Only a 32.768 kHz clock is needed to allow UART communication at baud rates up to 9600.

Even when the EFM is in low energy mode EM2 (with most core functionality turned off), the LEUART can wait for an incoming UART frame while having an extremely low energy consumption. When a UART frame is completely received, the CPU can quickly be woken up. Alternatively, multiple frames can be transferred via the Direct Memory Access (DMA) module into RAM memory before waking up the CPU.

Received data can optionally be blocked until a configurable start frame is detected. A signal frame can be configured to generate an interrupt to indicate e.g. the end of a data transmission. The start frame and signal frame can be used in combination for instance to handle higher level communication protocols.

Similarly, data can be transmitted in EM2 either on a frame-by-frame basis with data from the CPU or through use of the DMA.

The LEUART includes all necessary hardware support to make asynchronous serial communication possible with minimum of software intervention and energy consumption.

16.2 Features


- Low energy asynchronous serial communications
- Full/half duplex communication
- Separate TX / RX enable
- Separate double buffered transmit buffer and receive buffer
- Programmable baud rate, generated as a fractional division of the LFBCLK
 - Supports baud rates from 300 baud/s to 9600 baud/s

- Can use a high frequency clock source for even higher baud rates
- Configurable number of data bits: 8 or 9 (plus parity bit, if enabled)
- Configurable parity: off, even or odd
 - HW parity bit generation and check
- Configurable number of stop bits, 1 or 2
- Capable of sleep-mode wake-up on received frame
 - Either wake-up on any received byte or
 - Wake up only on specified start and signal frames
- Supports transmission and reception in EM0, EM1 and EM2 with
 - Full DMA support
 - Specified start-byte can start reception automatically
- IrDA modulator (pulse generator, pulse extender)
- Multi-processor mode
- Loopback mode
 - Half duplex communication
 - Communication debugging
- PRS RX input

16.3 Functional Description

An overview of the LEUART module is shown in Figure 16.1 (p. 226) .

Figure 16.1. LEUART Overview

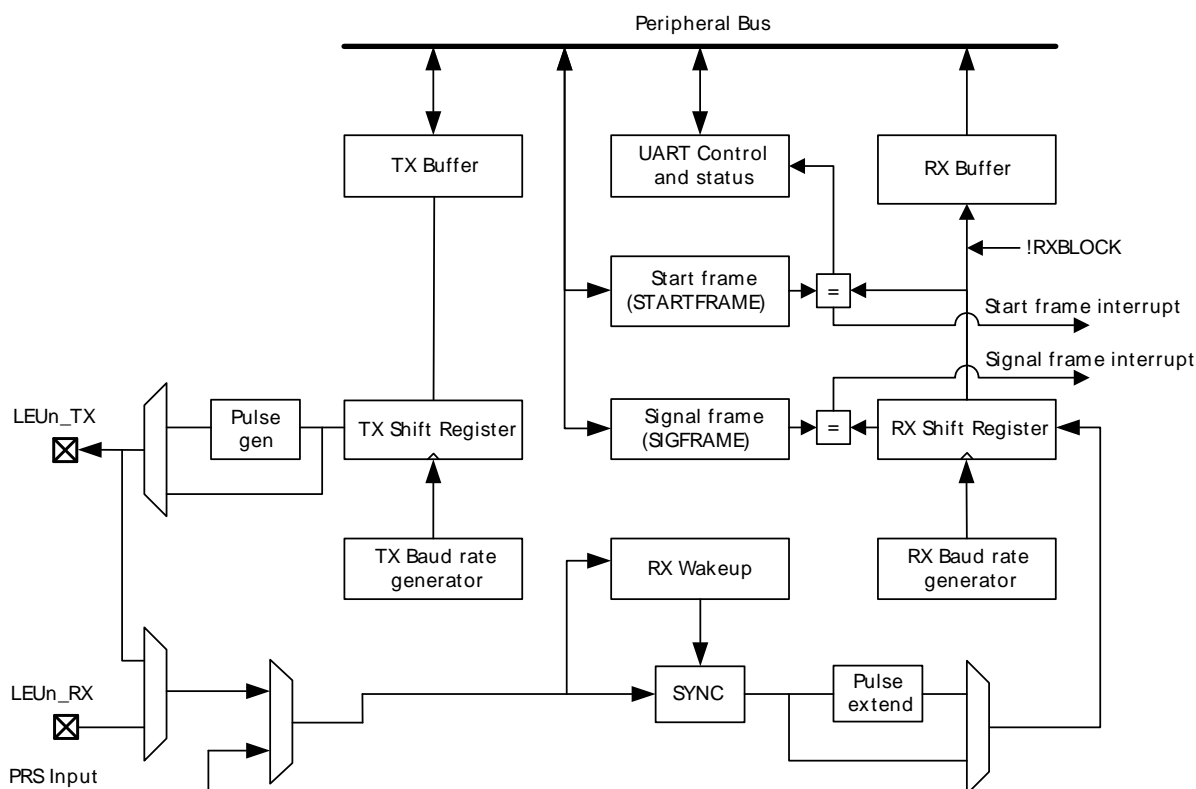


16.3.1 Frame Format

The frame format used by the LEUART consists of a set of data bits in addition to bits for synchronization and optionally a parity bit for error checking. A frame starts with one start-bit (S), where the line is driven

low for one bit-period. This signals the start of a frame, and is used for synchronization. Following the start bit are 8 or 9 data bits and an optional parity bit. The data is transmitted with the least significant bit first. Finally, a number of stop-bits, where the line is driven high, end the frame. The frame format is shown in Figure 16.2 (p. 227) .

Figure 16.2. LEUART Asynchronous Frame Format

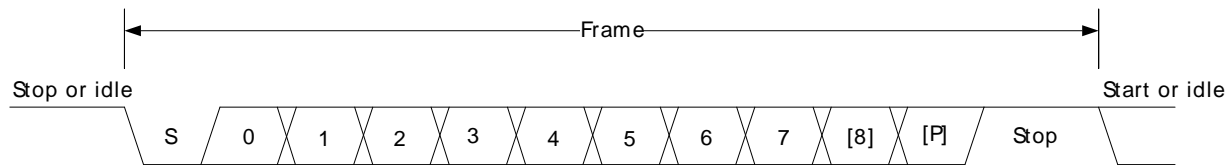

The number of data bits in a frame is set by DATABITS in LEUARTn_CTRL, and the number of stop-bits is set by STOPBITS in LEUARTn_CTRL. Whether or not a parity bit should be included, and whether it should be even or odd is defined by PARITY in LEUARTn_CTRL. For communication to be possible, all parties of an asynchronous transfer must agree on the frame format being used.

The frame format used by the LEUART can be inverted by setting INV in LEUARTn_CTRL. This affects the entire frame, resulting in a low idle state, a high start-bit, inverted data and parity bits, and low stop-bits. INV should only be changed while the receiver is disabled.

16.3.1.1 Parity Bit Calculation and Handling

Hardware automatically inserts parity bits into outgoing frames and checks the parity bits of incoming frames. The possible parity modes are defined in Table 16.1 (p. 227) . When even parity is chosen, a parity bit is inserted to make the number of high bits (data + parity) even. If odd parity is chosen, the parity bit makes the total number of high bits odd. When parity bits are disabled, which is the default configuration, the parity bit is omitted.

Table 16.1. LEUART Parity Bit

| PARITY [1:0] | Description |
|--------------|---------------------|
| 00 | No parity (default) |
| 01 | Reserved |
| 10 | Even parity |
| 11 | Odd parity |

See Section 16.3.5.4 (p. 232) for more information on parity bit handling.

16.3.2 Clock Source

The LEUART clock source is selected by the LFB bit field the CMU_LFCLKSEL register. The clock is prescaled by the LEUARTn bitfield in the CMU_LFBPRESC0 register and enabled by the LEUARTn bit in the CMU_LFBCLKEN0.

To use this module, the LE interface clock must be enabled in CMU_HFCORECLKEN0, in addition to the module clock.

16.3.3 Clock Generation

The LEUART clock defines the transmission and reception data rate. The clock generator employs a fractional clock divider to allow baud rates that are not attainable by integral division of the 32.768 kHz clock that drives the LEUART.

The clock divider used in the LEUART is a 12-bit value, with a 7-bit integral part and a 5-bit fractional part. The baud rate of the LEUART is given by :

LEUART Baud Rate Equation

$$br = f_{LEUARTn} / (1 + LEUARTn_CLKDIV / 256) \quad (16.1)$$

where $f_{LEUARTn}$ is the clock frequency supplied to the LEUART. The value of $LEUARTn_CLKDIV$ thus defines the baud rate of the LEUART. The integral part of the divider is right-aligned in the upper 24 bits of $LEUARTn_CLKDIV$ and the fractional part is left-aligned in the lower 8 bits. The divider is thus a 256th of $LEUARTn_CLKDIV$ as seen in the equation.

For a desired baud rate $br_{DESIRED}$, $LEUARTn_CLKDIV$ can be calculated by using:

LEUART CLKDIV Equation

$$LEUARTn_CLKDIV = 256 \times (f_{LEUARTn} / br_{DESIRED} - 1) \quad (16.2)$$

Table 16.2 (p. 228) lists a set of desired baud rates and the closest baud rates reachable by the LEUART with a 32.768 kHz clock source. It also shows the average baud rate error.

Table 16.2. LEUART Baud Rates

| Desired baud rate [baud/s] | LEUARTn_CLKDIV | LEUARTn_CLKDIV/256 | Actual baud rate [baud/s] | Error [%] |
|-------------------------------|----------------|--------------------|------------------------------|-----------|
| 300 | 27704 | 108,21875 | 300,0217 | 0,01 |
| 600 | 13728 | 53,625 | 599,8719 | -0,02 |
| 1200 | 6736 | 26,3125 | 1199,744 | -0,02 |
| 2400 | 3240 | 12,65625 | 2399,487 | -0,02 |
| 4800 | 1488 | 5,8125 | 4809,982 | 0,21 |
| 9600 | 616 | 2,40625 | 9619,963 | 0,21 |

16.3.4 Data Transmission

Data transmission is initiated by writing data to the transmit buffer using one of the methods described in Section 16.3.4.1 (p. 228). When the transmission shift register is empty and ready for new data, a frame from the transmit buffer is loaded into the shift register, and if the transmitter is enabled, transmission begins. When the frame has been transmitted, a new frame is loaded into the shift register if available, and transmission continues. If the transmit buffer is empty, the transmitter goes to an idle state, waiting for a new frame to become available. Transmission is enabled through the command register $LEUARTn_CMD$ by setting $TXEN$, and disabled by setting $TXDIS$. When the transmitter is disabled using $TXDIS$, any ongoing transmission is aborted, and any frame currently being transmitted is discarded. When disabled, the TX output goes to an idle state, which by default is a high value. Whether or not the transmitter is enabled at a given time can be read from $TXENS$ in $LEUARTn_STATUS$. After a transmission, when there is no more data in the shift register or transmit buffer, the TXC flag in $LEUARTn_STATUS$ and the TXC interrupt flag in $LEUARTn_IF$ are set, signaling that the transmitter is idle. The TXC status flag is cleared when a new byte becomes available for transmission, but the TXC interrupt flag must be cleared by software.

16.3.4.1 Transmit Buffer Operation


A frame can be loaded into the transmit buffer by writing to $LEUARTn_TXDATA$ or $LEUARTn_TXDATA_X$. Using $LEUARTn_TXDATA$ allows 8 bits to be written to the buffer. If 9 bit frames are used, the 9th bit will in that case be set to the value of $BIT8DV$ in $LEUARTn_CTRL$. To set the 9th bit directly and/or use transmission control, $LEUARTn_TXDATA_X$ must be used. When writing data to the transmit buffer using $LEUARTn_TXDATA_X$, the 9th bit written to $LEUARTn_TXDATA_X$ overrides the value in $BIT8DV$, and alone defines the 9th bit that is transmitted if 9-bit frames are used.

If a write is attempted to the transmit buffer when it is not empty, the TXOF interrupt flag in LEUARTn_IF is set, indicating the overflow. The data already in the buffer is in that case preserved, and no data is written.

In addition to the interrupt flag TXC in LEUARTn_IF and the status flag TXC in LEUARTn_STATUS which are set when the transmitter becomes idle, TXBL in LEUARTn_STATUS and the TXBL interrupt flag in LEUARTn_IF are used to indicate the level of the transmit buffer. Whenever the transmit buffer becomes empty, these flags are set high. Both the TXBL status flag and the TXBL interrupt flag are cleared automatically when data is written to the transmit buffer.

The transmit buffer, including the TX shift register can be cleared by setting command bit CLEAR_TX in LEUARTn_CMD. This will prevent the LEUART from transmitting the data in the buffer and shift register, and will make them available for new data. Any frame currently being transmitted will not be aborted. Transmission of this frame will be completed. An overview of the operation of the transmitter is shown in Figure 16.3 (p. 229) .

Figure 16.3. LEUART Transmitter Overview

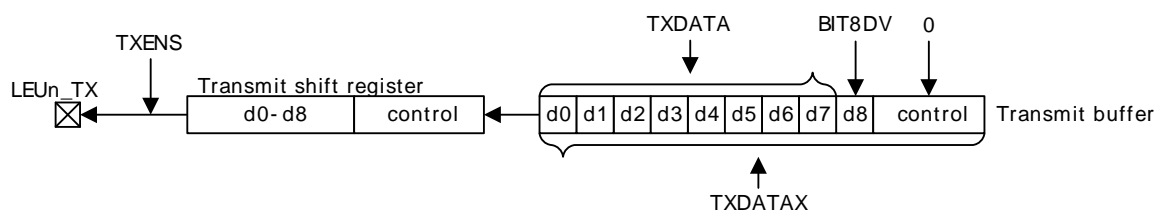

16.3.4.2 Frame Transmission Control

The transmission control bits, which can be written using LEUARTn_TXDATAx, affect the transmission of the written frame. The following options are available:

- **Generate break:** By setting WBREAK, the output will be held low during the first stop-bit period to generate a framing error. A receiver that supports break detection detects this state, allowing it to be used e.g. for framing of larger data packets. The line is driven high for one baud period before the next frame is transmitted so the next start condition can be identified correctly by the recipient. Continuous breaks lasting longer than an UART frame are thus not supported by the LEUART. GPIO can be used for this. Note that when AUTOTRI in LEUARTn_CTRL is used, the transmitter is not tristated before the high-bit after the break has been transmitted.
- **Disable transmitter after transmission:** If TXDISAT is set, the transmitter is disabled after the frame has been fully transmitted.
- **Enable receiver after transmission:** If RXENAT is set, the receiver is enabled after the frame has been fully transmitted. It is enabled in time to detect a start-bit directly after the last stop-bit has been transmitted.

The transmission control bits in the LEUART cannot tristate the transmitter. This is performed automatically by hardware however, if AUTOTRI in LEUARTn_CTRL is set. See Section 16.3.7 (p. 234) for more information on half duplex operation.

16.3.4.3 Jitter in Transmitted Data

Internally the LEUART module uses only the positive edges of the 32.768 kHz clock (LFBCLK) for transmission and reception. Transmitted data will thus have jitter equal to the difference between the optimal data set-up location and the closest positive edge on the 32.768 kHz clock. The jitter in on the location data is set up by the transmitter will thus be no more than half a clock period according to the optimal set-up location. The jitter in the period of a single baud output by the transmitter will never be more than one clock period.

16.3.5 Data Reception

Data reception is enabled by setting RXEN in LEUARTn_CMD. When the receiver is enabled, it actively samples the input looking for a transition from high to low indicating the start baud of a new frame. When a start baud is found, reception of the new frame begins if the receive shift register is empty and ready for new data. When the frame has been received, it is pushed into the receive buffer, making the shift register ready for another frame of data, and the receiver starts looking for another start baud. If the receive buffer is full, the received frame remains in the shift register until more space in the receive buffer is available.

If an incoming frame is detected while both the receive buffer and the receive shift register are full, the data in the receive shift register is overwritten, and the RXOF interrupt flag in LEUARTn_IF is set to indicate the buffer overflow.

The receiver can be disabled by setting the command bit RXDIS in LEUARTn_CMD. Any frame currently being received when the receiver is disabled is discarded. Whether or not the receiver is enabled at a given time can be read out from RXENS in LEUARTn_STATUS.

16.3.5.1 Receive Buffer Operation


When data becomes available in the receive buffer, the RXDATAV flag in LEUARTn_STATUS and the RXDATAV interrupt flag in LEUARTn_IF are set. Both the RXDATAV status flag and the RXDATAV interrupt flag are cleared by hardware when data is no longer available, i.e. when data has been read out of the buffer.

Data can be read from receive buffer using either LEUARTn_RXDATA or LEUARTn_RXDATAx. LEUARTn_RXDATA gives access to the 8 least significant bits of the received frame, while LEUARTn_RXDATAx must be used to get access to the 9th, most significant bit. The latter register also contains status information regarding the frame.

When a frame is read from the receive buffer using LEUARTn_RXDATA or LEUARTn_RXDATAx, the frame is removed from the buffer, making room for a new one. If an attempt is done to read more frames from the buffer than what is available, the RXUF interrupt flag in LEUARTn_IF is set to signal the underflow, and the data read from the buffer is undefined.

Frames can also be read from the receive buffer without removing the data by using LEUARTn_RXDATAxp, which gives access to the frame in the buffer including control bits. Data read from this register when the receive buffer is empty is undefined. No underflow interrupt is generated by a read using LEUARTn_RXDATAxp, i.e. the RXUF interrupt flag is never set as a result of reading from LEUARTn_RXDATAxp.

An overview of the operation of the receiver is shown in Figure 16.4 (p. 231) .

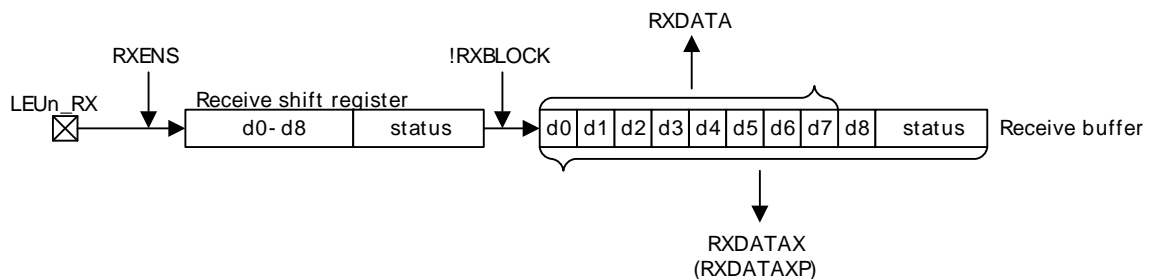Figure 16.4. LEUART Receiver Overview

16.3.5.2 Blocking Incoming Data

When using hardware frame recognition, as detailed in Section 16.3.5.6 (p. 232), Section 16.3.5.7 (p. 233), and Section 16.3.5.8 (p. 233), it is necessary to be able to let the receiver sample incoming frames without passing the frames to software by loading them into the receive buffer. This is accomplished by blocking incoming data.

Incoming data is blocked as long as **RXBLOCK** in **LEUARTn_STATUS** is set. When blocked, frames received by the receiver will not be loaded into the receive buffer, and software is not notified by the **RXDATAV** bit in **LEUARTn_STATUS** or the **RXDATAV** interrupt flag in **LEUARTn_IF** at their arrival. For data to be loaded into the receive buffer, **RXBLOCK** must be cleared in the instant a frame is fully received by the receiver. **RXBLOCK** is set by setting **RXBLOCKEN** in **LEUARTn_CMD** and disabled by setting **RXBLOCKDIS** also in **LEUARTn_CMD**. There are two exceptions where data is loaded into the receive buffer even when **RXBLOCK** is set. The first is when an address frame is received when in operating in multi-processor mode as shown in Section 16.3.5.8 (p. 233). The other case is when receiving a start-frame when **SFUBRX** in **LEUARTn_CTRL** is set; see Section 16.3.5.6 (p. 232).

Frames received containing framing or parity errors will not result in the **FERR** and **PERR** interrupt flags in **LEUARTn_IF** being set while **RXBLOCK** is set. Hardware recognition is not applied to these erroneous frames, and they are silently discarded.

Note

If a frame is received while **RXBLOCK** in **LEUARTn_STATUS** is cleared, but stays in the receive shift register because the receive buffer is full, the received frame will be loaded into the receive buffer when space becomes available even if **RXBLOCK** is set at that time.

The overflow interrupt flag **RXOF** in **LEUARTn_IF** will be set if a frame in the receive shift register, waiting to be loaded into the receive buffer is overwritten by an incoming frame even though **RXBLOCK** is set.

16.3.5.3 Data Sampling

The receiver samples each incoming baud as close as possible to the middle of the baud-period. Except for the start-bit, only a single sample is taken of each of the incoming bauds.

The length of a baud-period is given by $1 + \text{LEUARTn_CLKDIV}/256$, as a number of 32.768 kHz clock periods. Let the clock cycle where a start-bit is first detected be given the index 0. The optimal sampling point for each baud in the UART frame is then given by the following equation:

LEUART Optimal Sampling Point

$$S_{\text{opt}}(n) = n (1 + \text{LEUARTn_CLKDIV}/256) + \text{CLKDIV}/512 \quad (16.3)$$

where n is the bit-index.

Since samples are only done on the positive edges of the 32.768 kHz clock, the actual samples are performed on the closest positive edge, i.e. the edge given by the following equation:

LEUART Actual Sampling Point

$$S(n) = \text{floor}(n \times (1 + \text{LEUARTn_CLKDIV}/256) + \text{LEUARTn_CLKDIV}/512) \quad (16.4)$$

The sampling location will thus have jitter according to difference between S_{opt} and S. The start-bit is found at n=0, then follows the data bits, any parity bit, and the stop bits.

If the value of the start-bit is found to be high, then the start-bit is discarded, and the receiver waits for a new start-bit.

16.3.5.4 Parity Error

When the parity bit is enabled, a parity check is automatically performed on incoming frames. When a parity error is detected in a frame, the data parity error bit PERR in the frame is set, as well as the interrupt flag PERR. Frames with parity errors are loaded into the receive buffer like regular frames.

PERR can be accessed by reading the frame from the receive buffer using the LEUARTn_RXDATA register.

16.3.5.5 Framing Error and Break Detection

A framing error is the result of a received frame where the stop bit was sampled to a value of 0. This can be the result of noise and baud rate errors, but can also be the result of a break generated by the transmitter on purpose.

When a framing error is detected, the framing error bit FERR in the received frame is set. The interrupt flag FERR in LEUARTn_IF is also set. Frames with framing errors are loaded into the receive buffer like regular frames.

FERR can be accessed by reading the frame from the receive buffer using the LEUARTn_RXDATA or LEUARTn_RXDATA_P registers.

16.3.5.6 Programmable Start Frame

The LEUART can be configured to start receiving data when a special start frame is detected on the input. This can be useful when operating in low energy modes, allowing other devices to gain the attention of the LEUART by transmitting a given frame.

When SFUBRX in LEUARTn_CTRL is set, an incoming frame matching the frame defined in LEUARTn_STARTFRAME will result in RXBLOCK in LEUARTn_STATUS being cleared. This can be used to enable reception when a specified start frame is detected. If the receiver is enabled and blocked, i.e. RXENS and RXBLOCK in LEUARTn_STATUS are set, the receiver will receive all incoming frames, but unless an incoming frame is a start frame it will be discarded and not loaded into the receive buffer. When a start frame is detected, the block is cleared, and frames received from that point, including the start frame, are loaded into the receive buffer.

An incoming start frame results in the STARTF interrupt flag in LEUARTn_IF being set, regardless of the value of SFUBRX in LEUARTn_CTRL. This allows an interrupt to be made when the start frame is detected.

When 8 data-bit frame formats are used, only the 8 least significant bits of LEUARTn_STARTFRAME are compared to incoming frames. The full length of LEUARTn_STARTFRAME is used when operating with frames consisting of 9 data bits.

Note

The receiver must be enabled for start frames to be detected. In addition, a start frame with a parity error or framing error is not detected as a start frame.

16.3.5.7 Programmable Signal Frame

As well as the configurable start frame, a special signal frame can be specified. When a frame matching the frame defined in LEUARTn_SIGFRAME is detected by the receiver, the SIGF interrupt flag in LEUARTn_IF is set. As for start frame detection, the receiver must be enabled for signal frames to be detected.

One use of the programmable signal frame is to signal the end of a multi-frame message transmitted to the LEUART. An interrupt will then be triggered when the packet has been completely received, allowing software to process it. Used in conjunction with the programmable start frame and DMA, this makes it possible for the LEUART to automatically begin the reception of a packet on a specified start frame, load the entire packet into memory, and give an interrupt when reception of a packet has completed. The device can thus wait for data packets in EM2, and only be woken up when a packet has been completely received.

A signal frame with a parity error or framing error is not detected as a signal frame.

16.3.5.8 Multi-Processor Mode

To simplify communication between multiple processors and maintain compatibility with the USART, the LEUART supports a multi-processor mode. In this mode the 9th data bit in each frame is used to indicate whether the content of the remaining 8 bits is data or an address.

When multi-processor mode is enabled, an incoming 9-bit frame with the 9th bit equal to the value of MPAB in LEUARTn_CTRL is identified as an address frame. When an address frame is detected, the MPAF interrupt flag in LEUARTn_IF is set, and the address frame is loaded into the receive register. This happens regardless of the value of RXBLOCK in LEUARTn_STATUS.

Multi-processor mode is enabled by setting MPM in LEUARTn_CTRL. The mode can be used in buses with multiple slaves, allowing the slaves to be addressed using the special address frames. An addressed slave, which was previously blocking reception using RXBLOCK, would then unblock reception, receive a message from the bus master, and then block reception again, waiting for the next message. See the USART for a more detailed example.


Note

The programmable start frame functionality can be used for automatic address matching, enabling reception on a correctly configured incoming frame.

An address frame with a parity error or a framing error is not detected as an address frame.

16.3.6 Loopback

The LEUART receiver samples LEUn_RX by default, and the transmitter drives LEUn_TX by default. This is not the only configuration however. When LOOPBK in LEUARTn_CTRL is set, the receiver is connected to the LEUn_TX pin as shown in Figure 16.5 (p. 234). This is useful for debugging, as the LEUART can receive the data it transmits, but it is also used to allow the LEUART to read and write to the same pin, which is required for some half duplex communication modes. In this mode, the LEUn_TX pin must be enabled as an output in the GPIO.

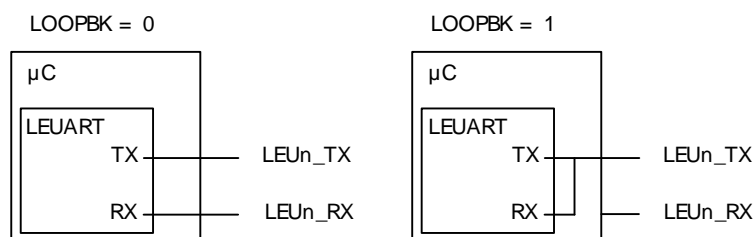Figure 16.5. LEUART Local Loopback

16.3.7 Half Duplex Communication

When doing full duplex communication, two data links are provided, making it possible for data to be sent and received at the same time. In half duplex mode, data is only sent in one direction at a time. There are several possible half duplex setups, as described in the following sections.

16.3.7.1 Single Data-link

In this setup, the LEUART both receives and transmits data on the same pin. This is enabled by setting LOOPBK in LEUARTn_CTRL, which connects the receiver to the transmitter output. Because they are both connected to the same line, it is important that the LEUART transmitter does not drive the line when receiving data, as this would corrupt the data on the line.

When communicating over a single data-link, the transmitter must thus be tristated whenever not transmitting data. If AUTOTRI in LEUARTn_CTRL is set, the LEUART automatically tristates LEUn_TX whenever the transmitter is inactive. It is then the responsibility of the software protocol to make sure the transmitter is not transmitting data whenever incoming data is expected.


The transmitter can also be tristated from software by configuring the GPIO pin as an input and disabling the LEUART output on LEUn_TX.

Note

Another way to tristate the transmitter is to enable wired-and or wired-or mode in GPIO. For wired-and mode, outputting a 1 will be the same as tristating the output, and for wired-or mode, outputting a 0 will be the same as tristating the output. This can only be done on buses with a pull-up or pull-down resistor respectively.

16.3.7.2 Single Data-link with External Driver

Some communication schemes, such as RS-485 rely on an external driver. Here, the driver has an extra input which enables it, and instead of Tristating the transmitter when receiving data, the external driver must be disabled. The USART has hardware support for automatically turning the driver on and off. When using the LEUART in such a setup, the driver must be controlled by a GPIO. Figure 16.6 (p. 234) shows an example configuration using an external driver.

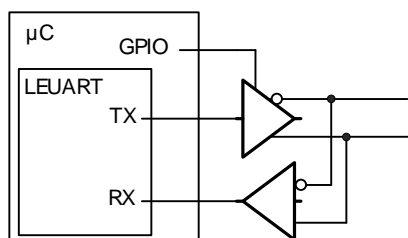Figure 16.6. LEUART Half Duplex Communication with External Driver

16.3.7.3 Two Data-links

Some limited devices only support half duplex communication even though two data links are available. In this case software is responsible for making sure data is not transmitted when incoming data is expected.

16.3.8 Transmission Delay

By configuring TXDELAY in LEUARTn_CTRL, the transmitter can be forced to wait a number of bit-periods from it is ready to transmit data, to it actually transmits the data. This delay is only applied to the first frame transmitted after the transmitter has been idle. When transmitting frames back-to-back the delay is not introduced between the transmitted frames.

This is useful on half duplex buses, because the receiver always returns received frames to software during the first stop-bit. The bus may still be driven for up to 3 baud periods, depending on the current frame format. Using the transmission delay, a transmission can be started when a frame is received, and it is possible to make sure that the transmitter does not begin driving the output before the frame on the bus is completely transmitted.

16.3.9 PRS RX Input

The LEUART can be configured to receive data directly from the PRS channel by setting RX_PRS in LEUARTn_INPUT. The PRS channel used can be selected using RX_PRS_SEL in LEUARTn_INPUT.

16.3.10 DMA Support

The LEUART has full DMA support in energy modes EM0 – EM2. The DMA controller can write to the transmit buffer using the registers LEUARTn_TXDATA and LEUARTn_TXDATA_X, and it can read from receive buffer using the registers LEUARTn_RXDATA and LEUARTn_RXDATA_X. This enables single byte transfers and 9 bit data + control/status bits transfers both to and from the LEUART. The DMA will start up the HFRCO and run from this when it is waken by the LEUART in EM2. The HFRCO is disabled once the transaction is done.

A request for the DMA controller to read from the receive buffer can come from one of the following sources:

- Receive buffer full

A write request can come from one of the following sources:

- Transmit buffer and shift register empty. No data to send.
- Transmit buffer empty

In some cases, it may be sensible to temporarily stop DMA access to the LEUART when a parity or framing error has occurred. This is enabled by setting ERRSDMA in LEUARTn_CTRL. When this bit is set, the DMA controller will not get requests from the receive buffer if a framing error or parity error is detected in the received byte. The ERRSDMA bit applies only to the RX DMA.

When operating in EM2, the DMA controller must be powered up in order to perform the transfer. This is automatically performed for read operations if RXDMAWU in LEUARTn_CTRL is set and for write operations if TXDMAWU in LEUARTn_CTRL is set. To make sure the DMA controller still transfers bits to and from the LEUART in low energy modes, these bits must thus be configured accordingly.

Note


When RXDMAWU or TXDMAWU is set, the system will not be able to go to EM2/EM3 before all related LEUART DMA requests have been processed. This means that if RXDMAWU is set and the LEUART receives a frame, the system will not be able to go to

EM2/EM3 before the frame has been read from the LEUART. In order for the system to go to EM2 during the last byte transmission, LEUART_CTRL_TXDMAWU must be cleared in the DMA interrupt service routine. This is because TXBL will be high during that last byte transfer.

16.3.11 Pulse Generator/ Pulse Extender

The LEUART has an optional pulse generator for the transmitter output, and a pulse extender on the receiver input. These are enabled by setting PULSEEN in LEUARTn_PULSECTRL, and with INV in LEUARTn_CTRL set, they will change the output/input format of the LEUART from NRZ to RZI as shown in Figure 16.7 (p. 236) .

Figure 16.7. LEUART - NRZ vs. RZI

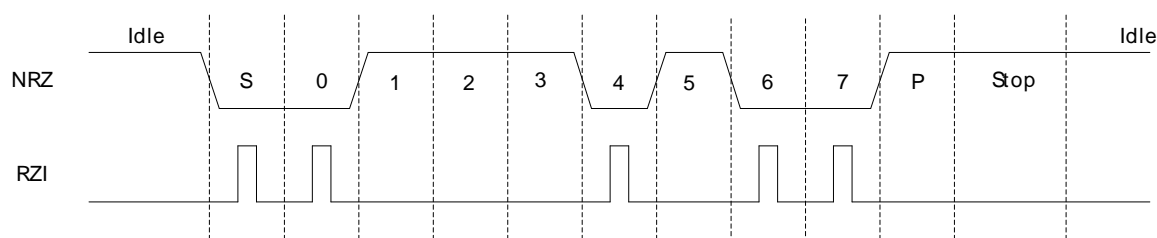

If PULSEEN in LEUARTn_PULSECTRL is set while INV in LEUARTn_CTRL is cleared, the output waveform will like RZI shown in Figure 16.7 (p. 236) , only inverted.

The width of the pulses from the pulse generator can be configured using PULSEW in LEUARTn_PULSECTRL. The generated pulse width is PULSEW + 1 cycles of the 32.768 kHz clock, which makes pulse width from 31.25µs to 500µs possible.

Since the incoming signal is only sampled on positive clock edges, the width of the incoming pulses must be at least two 32.768 kHz clock periods wide for reliable detection by the LEUART receiver. They must also be shorter than half a UART baud period.

At 2400 baud/s or lower, the pulse generator is able to generate RZI pulses compatible with the IrDA physical layer specification. The external IrDA device must generate pulses of sufficient length for successful two-way communication.

16.3.11.1 Interrupts

The interrupts generated by the LEUART are combined into one interrupt vector. If LEUART interrupts are enabled, an interrupt will be made if one or more of the interrupt flags in LEUARTn_IF and their corresponding bits in LEUART_IEN are set.

16.3.12 Register access

Since this module is a Low Energy Peripheral, and runs off a clock which is asynchronous to the HFCORECLK, special considerations must be taken when accessing registers. Please refer to Section 5.3 (p. 20) for a description on how to perform register accesses to Low Energy Peripherals.

16.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|--------------------|------|--|
| 0x000 | LEUARTn_CTRL | RW | Control Register |
| 0x004 | LEUARTn_CMD | W1 | Command Register |
| 0x008 | LEUARTn_STATUS | R | Status Register |
| 0x00C | LEUARTn_CLKDIV | RW | Clock Control Register |
| 0x010 | LEUARTn_STARTFRAME | RW | Start Frame Register |
| 0x014 | LEUARTn_SIGFRAME | RW | Signal Frame Register |
| 0x018 | LEUARTn_RXDATAx | R | Receive Buffer Data Extended Register |
| 0x01C | LEUARTn_RXDATA | R | Receive Buffer Data Register |
| 0x020 | LEUARTn_RXDATAxP | R | Receive Buffer Data Extended Peek Register |
| 0x024 | LEUARTn_TXDATAx | W | Transmit Buffer Data Extended Register |
| 0x028 | LEUARTn_TXDATA | W | Transmit Buffer Data Register |
| 0x02C | LEUARTn_IF | R | Interrupt Flag Register |
| 0x030 | LEUARTn_IFS | W1 | Interrupt Flag Set Register |
| 0x034 | LEUARTn_IFC | W1 | Interrupt Flag Clear Register |
| 0x038 | LEUARTn_IEN | RW | Interrupt Enable Register |
| 0x03C | LEUARTn_PULSECTRL | RW | Pulse Control Register |
| 0x040 | LEUARTn_FREEZE | RW | Freeze Register |
| 0x044 | LEUARTn_SYNCBUSY | R | Synchronization Busy Register |
| 0x054 | LEUARTn_ROUTE | RW | I/O Routing Register |
| 0x0AC | LEUARTn_INPUT | RW | LEUART Input Register |

16.5 Register Description

16.5.1 LEUARTn_CTRL - Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|---------|---------|--------|------|-----|--------|--------|---------|-----|----------|---|--------|---|----------|---------|---|---|---|---|---|---|---|---|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | 0x0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0x0 | 0 | 0 | 0 | | | | | | |
| Access | | | | | | | | | | | | | | | | | | RW | | RW | RW | RW | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Name | | | | | | | | | | | | | | | | | | TXDELAY | | TXDMAWU | RXDMAWU | BIT8DV | MPAB | MPM | SFUBRX | LOOPBK | ERRSDMA | INV | STOPBITS | | PARITY | | DATABITS | AUTOTRI | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|------------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:14 | TXDELAY | 0x0 | RW | TX Delay Transmission |

Configurable delay before new transfers. Frames sent back-to-back are not delayed.

| Value | Mode | Description |
|-------|--------|--|
| 0 | NONE | Frames are transmitted immediately |
| 1 | SINGLE | Transmission of new frames are delayed by a single baud period |
| 2 | DOUBLE | Transmission of new frames are delayed by two baud periods |

| Bit | Name | Reset | Access | Description |
|-----|----------|--|--------|--|
| | Value | Mode | | Description |
| | 3 | TRIPLE | | Transmission of new frames are delayed by three baud periods |
| 13 | TXDMAWU | 0 | RW | TX DMA Wakeup Set to wake the DMA controller up when in EM2 and space is available in the transmit buffer. |
| | Value | Description | | |
| | 0 | While in EM2, the DMA controller will not get requests about space being available in the transmit buffer | | |
| | 1 | DMA is available in EM2 for the request about space available in the transmit buffer | | |
| 12 | RXDMAWU | 0 | RW | RX DMA Wakeup Set to wake the DMA controller up when in EM2 and data is available in the receive buffer. |
| | Value | Description | | |
| | 0 | While in EM2, the DMA controller will not get requests about data being available in the receive buffer | | |
| | 1 | DMA is available in EM2 for the request about data in the receive buffer | | |
| 11 | BIT8DV | 0 | RW | Bit 8 Default Value When 9-bit frames are transmitted, the default value of the 9th bit is given by BIT8DV. If TXDATA is used to write a frame, then the value of BIT8DV is assigned to the 9th bit of the outgoing frame. If a frame is written with TXDATAx however, the default value is overridden by the written value. |
| 10 | MPAB | 0 | RW | Multi-Processor Address-Bit Defines the value of the multi-processor address bit. An incoming frame with its 9th bit equal to the value of this bit marks the frame as a multi-processor address frame. |
| 9 | MPM | 0 | RW | Multi-Processor Mode Set to enable multi-processor mode. |
| | Value | Description | | |
| | 0 | The 9th bit of incoming frames have no special function | | |
| | 1 | An incoming frame with the 9th bit equal to MPAB will be loaded into the receive buffer regardless of RXBLOCK and will result in the MPAB interrupt flag being set | | |
| 8 | SFUBRX | 0 | RW | Start-Frame UnBlock RX Clears RXBLOCK when the start-frame is found in the incoming data. The start-frame is loaded into the receive buffer. |
| | Value | Description | | |
| | 0 | Detected start-frames have no effect on RXBLOCK | | |
| | 1 | When a start-frame is detected, RXBLOCK is cleared and the start-frame is loaded into the receive buffer | | |
| 7 | LOOPBK | 0 | RW | Loopback Enable Set to connect receiver to LEUn_TX instead of LEUn_RX. |
| | Value | Description | | |
| | 0 | The receiver is connected to and receives data from LEUn_RX | | |
| | 1 | The receiver is connected to and receives data from LEUn_TX | | |
| 6 | ERRSDMA | 0 | RW | Clear RX DMA On Error When set, RX DMA requests will be cleared on framing and parity errors. |
| | Value | Description | | |
| | 0 | Framing and parity errors have no effect on DMA requests from the LEUART | | |
| | 1 | RX DMA requests from the LEUART are disabled if a framing error or parity error occurs. | | |
| 5 | INV | 0 | RW | Invert Input And Output Set to invert the output on LEUn_TX and input on LEUn_RX. |
| | Value | Description | | |
| | 0 | A high value on the input/output is 1, and a low value is 0. | | |
| | 1 | A low value on the input/output is 0, and a high value is 0. | | |
| 4 | STOPBITS | 0 | RW | Stop-Bit Mode Determines the number of stop-bits used. Only used when transmitting data. The receiver only verifies that one stop bit is present. |

| Bit | Name | Reset | Access | Description |
|-----|----------|--|--------|--|
| | Value | Mode | | Description |
| | 0 | ONE | | One stop-bit is transmitted with every frame |
| | 1 | TWO | | Two stop-bits are transmitted with every frame |
| 3:2 | PARITY | 0x0 | RW | Parity-Bit Mode Determines whether parity bits are enabled, and whether even or odd parity should be used. |
| | Value | Mode | | Description |
| | 0 | NONE | | Parity bits are not used |
| | 2 | EVEN | | Even parity are used. Parity bits are automatically generated and checked by hardware. |
| | 3 | ODD | | Odd parity is used. Parity bits are automatically generated and checked by hardware. |
| 1 | DATABITS | 0 | RW | Data-Bit Mode This register sets the number of data bits. |
| | Value | Mode | | Description |
| | 0 | EIGHT | | Each frame contains 8 data bits |
| | 1 | NINE | | Each frame contains 9 data bits |
| 0 | AUTOTRI | 0 | RW | Automatic Transmitter Tristate When set, LEUn_TX is tristated whenever the transmitter is inactive. |
| | Value | Description | | |
| | 0 | LEUn_TX is held high when the transmitter is inactive. INV inverts the inactive state. | | |
| | 1 | LEUn_TX is tristated when the transmitter is inactive | | |

16.5.2 LEUARTn_CMD - Command Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|------------|---|--------|---|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | CLEARRX | 0 | W1 | Clear RX Set to clear receive buffer and the RX shift register. |
| 6 | CLEARTX | 0 | W1 | Clear TX Set to clear transmit buffer and the TX shift register. |
| 5 | RXBLOCKDIS | 0 | W1 | Receiver Block Disable Set to clear RXBLOCK, resulting in all incoming frames being loaded into the receive buffer. |
| 4 | RXBLOCKEN | 0 | W1 | Receiver Block Enable Set to set RXBLOCK, resulting in all incoming frames being discarded. |
| 3 | TXDIS | 0 | W1 | Transmitter Disable Set to disable transmission. |
| 2 | TXEN | 0 | W1 | Transmitter Enable Set to enable data transmission. |

| Bit | Name | Reset | Access | Description |
|-----|-------|-------|--------|---|
| 1 | RXDIS | 0 | W1 | Receiver Disable Set to disable data reception. If a frame is under reception when the receiver is disabled, the incoming frame is discarded. |
| 0 | RXEN | 0 | W1 | Receiver Enable Set to activate data reception on LEUn_RX. |

16.5.3 LEUARTn_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---------|---|------|---|-----|---|---------|---|-------|---|-------|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 1 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | | R | | R | | R | | R | | R | | R | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RXDATAV | | TXBL | | TXC | | RXBLOCK | | TXENS | | RXENS | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | RXDATAV | 0 | R | RX Data Valid Set when data is available in the receive buffer. Cleared when the receive buffer is empty. |
| 4 | TXBL | 1 | R | TX Buffer Level Indicates the level of the transmit buffer. Set when the transmit buffer is empty, and cleared when it is full. |
| 3 | TXC | 0 | R | TX Complete Set when a transmission has completed and no more data is available in the transmit buffer. Cleared when a new transmission starts. |
| 2 | RXBLOCK | 0 | R | Block Incoming Data When set, the receiver discards incoming frames. An incoming frame will not be loaded into the receive buffer if this bit is set at the instant the frame has been completely received. |
| 1 | TXENS | 0 | R | Transmitter Enable Status Set when the transmitter is enabled. |
| 0 | RXENS | 0 | R | Receiver Enable Status Set when the receiver is enabled. The receiver must be enabled for start frames, signal frames, and multi-processor address bit detection. |

16.5.4 LEUARTn_CLKDIV - Clock Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--|--|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | 0x000 | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | DIV | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:15 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 14:3 | DIV | 0x000 | RW | Fractional Clock Divider Specifies the fractional clock divider for the LEUART. |
| 2:0 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

16.5.5 LEUARTn_STARTFRAME - Start Frame Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|------------|---|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | 0x000 | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | STARTFRAME | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|------------|---|--------|--|
| 31:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | STARTFRAME | 0x000 | RW | Start Frame When a frame matching STARTFRAME is detected by the receiver, STARTF interrupt flag is set, and if SFUBRX is set, RXBLOCK is cleared. The start-frame is be loaded into the RX buffer. |

16.5.6 LEUARTn_SIGFRAME - Signal Frame Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|----------|---|---|---|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x000 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | SIGFRAME | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | SIGFRAME | 0x000 | RW | Signal Frame When a frame matching SIGFRAME is detected by the receiver, SIGF interrupt flag is set. |

16.5.7 LEUARTn_RXDATAx - Receive Buffer Data Extended Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|------|----|----|----|----|---|---|---|---|--------|---|---|---|---|---|--|--|--|--|--|--|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | 0 | 0 | | | | | | | | | 0x000 | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | R | | | | | | | | | R | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | FERR | PERR | | | | | | | | | RXDATA | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15 | FERR | 0 | R | Receive Data Framing Error Set if data in buffer has a framing error. Can be the result of a break condition. |
| 14 | PERR | 0 | R | Receive Data Parity Error Set if data in buffer has a parity error. |
| 13:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | RXDATA | 0x000 | R | RX Data Use this register to access data read from the LEUART. Buffer is cleared on read access. |

16.5.8 LEUARTn_RXDATA - Receive Buffer Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | RXDATA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | RXDATA | 0x00 | R | RX Data Use this register to access data read from LEUART. Buffer is cleared on read access. Only the 8 LSB can be read using this register. |

16.5.9 LEUARTn_RXDATAXP - Receive Buffer Data Extended Peek Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|-------|----|----|----|----|---|---|---|---|---------|---|---|---|---|---|--|--|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | 0 | 0 | | | | | | | | | 0x000 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | R | | | | | | | | | R | | | | | | | |
| Name | | | | | | | | | | | | | | | | | FERRP | PERRP | | | | | | | | | RXDATAP | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15 | FERRP | 0 | R | Receive Data Framing Error Peek Set if data in buffer has a framing error. Can be the result of a break condition. |
| 14 | PERRP | 0 | R | Receive Data Parity Error Peek Set if data in buffer has a parity error. |
| 13:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | RXDATAP | 0x000 | R | RX Data Peek Use this register to access data read from the LEUART. |

16.5.10 LEUARTn_TXDATAAX - Transmit Buffer Data Extended Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|---------|---------|----|----|----|---|--------|---|---|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0 | 0 | 0 | | | | | 0x000 | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W | W | W | | | | | W | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | RXENAT | TXDISAT | TXBREAK | | | | | TXDATA | | | | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | |
|-------|---|---|--------|---|-------|-------------|---|---|---|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 15 | RXENAT | 0 | W | Enable RX After Transmission Set to enable reception after transmission. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>-</td></tr><tr><td>1</td><td>The receiver is enabled, setting RXENS after the frame has been transmitted</td></tr></table> | Value | Description | 0 | - | 1 | The receiver is enabled, setting RXENS after the frame has been transmitted |
| Value | Description | | | | | | | | | |
| 0 | - | | | | | | | | | |
| 1 | The receiver is enabled, setting RXENS after the frame has been transmitted | | | | | | | | | |
| 14 | TXDISAT | 0 | W | Disable TX After Transmission Set to disable transmitter directly after transmission has competed. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>-</td></tr></table> | Value | Description | 0 | - | | |
| Value | Description | | | | | | | | | |
| 0 | - | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|--|---|--------|-------------------------------|
| | Value | Description | | |
| | 1 | The transmitter is disabled, clearing TXENS after the frame has been transmitted | | |
| 13 | TXBREAK | 0 | W | Transmit Data As Break |
| | Set to send data as a break. Recipient will see a framing error or a break condition depending on its configuration and the value of TXDATA. | | | |
| | Value | Description | | |
| | 0 | The specified number of stop-bits are transmitted | | |
| | 1 | Instead of the ordinary stop-bits, 0 is transmitted to generate a break. A single stop-bit is generated after the break to allow the receiver to detect the start of the next frame | | |
| 12:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:0 | TXDATA | 0x000 | W | TX Data |
| | Use this register to write data to the LEUART. If the transmitter is enabled, a transfer will be initiated at the first opportunity. | | | |

16.5.11 LEUARTn_TXDATA - Transmit Buffer Data Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | TXDATA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|-------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | TXDATA | 0x00 | W | TX Data |
| This frame will be added to the transmit buffer. Only 8 LSB can be written using this register. 9th bit and control bits will be cleared. | | | | |

16.5.12 LEUARTn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|--------|------|------|------|------|------|------|---------|------|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | SIGF | STARTF | MPAF | FERR | PERR | TXOF | RXUF | RXOF | RXDATAV | TXBL | TXC | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|--------------------------------------|---|--------|--|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | SIGF | 0 | R | Signal Frame Interrupt Flag |
| | Set when a signal frame is detected. | | | |
| 9 | STARTF | 0 | R | Start Frame Interrupt Flag |
| | Set when a start frame is detected. | | | |
| 8 | MPAF | 0 | R | Multi-Processor Address Frame Interrupt Flag |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|--|
| | | | | Set when a multi-processor address frame is detected. |
| 7 | FERR | 0 | R | Framing Error Interrupt Flag Set when a frame with a framing error is received while RXBLOCK is cleared. |
| 6 | PERR | 0 | R | Parity Error Interrupt Flag Set when a frame with a parity error is received while RXBLOCK is cleared. |
| 5 | TXOF | 0 | R | TX Overflow Interrupt Flag Set when a write is done to the transmit buffer while it is full. The data already in the transmit buffer is preserved. |
| 4 | RXUF | 0 | R | RX Underflow Interrupt Flag Set when trying to read from the receive buffer when it is empty. |
| 3 | RXOF | 0 | R | RX Overflow Interrupt Flag Set when data is incoming while the receive shift register is full. The data previously in shift register is overwritten by the new data. |
| 2 | RXDATAV | 0 | R | RX Data Valid Interrupt Flag Set when data becomes available in the receive buffer. |
| 1 | TXBL | 1 | R | TX Buffer Level Interrupt Flag Set when space becomes available in the transmit buffer for a new frame. |
| 0 | TXC | 0 | R | TX Complete Interrupt Flag Set after a transmission when both the TX buffer and shift register are empty. |

16.5.13 LEUARTn_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|--------|------|------|------|------|------|------|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|--|--|--|--|--|--|--|--|-----|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | SIGF | STARTF | MPAF | FERR | PERR | TXOF | RXUF | RXOF | | | | | | | | | | | | | | | | | | | | | | | | | | TXC |

| Bit | Name | Reset | Access | Description |
|-------|-----------------|--|--------|---|
| 31:11 | <i>Reserved</i> | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | |
| 10 | SIGF | 0 | W1 | Set Signal Frame Interrupt Flag Write to 1 to set the SIGF interrupt flag. |
| 9 | STARTF | 0 | W1 | Set Start Frame Interrupt Flag Write to 1 to set the STARTF interrupt flag. |
| 8 | MPAF | 0 | W1 | Set Multi-Processor Address Frame Interrupt Flag Write to 1 to set the MPAF interrupt flag. |
| 7 | FERR | 0 | W1 | Set Framing Error Interrupt Flag Write to 1 to set the FERR interrupt flag. |
| 6 | PERR | 0 | W1 | Set Parity Error Interrupt Flag Write to 1 to set the PERR interrupt flag. |
| 5 | TXOF | 0 | W1 | Set TX Overflow Interrupt Flag Write to 1 to set the TXOF interrupt flag. |
| 4 | RXUF | 0 | W1 | Set RX Underflow Interrupt Flag Write to 1 to set the RXUF interrupt flag. |
| 3 | RXOF | 0 | W1 | Set RX Overflow Interrupt Flag |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|---------------------------------------|
| Write to 1 to set the RXOF interrupt flag. | | | | |
| 2:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | TXC | 0 | W1 | Set TX Complete Interrupt Flag |
| Write to 1 to set the TXC interrupt flag. | | | | |

16.5.14 LEUARTn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|--------|------|------|------|------|------|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | |
| Name | | | | | | | | | | | | | | | | | | | | | | SIGF | STARTF | MPAF | FERR | PERR | TXOF | RXUF | RXOF | | | | | | | | | | | | | | | | | | | | | | | | TXC |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|---|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | SIGF | 0 | W1 | Clear Signal-Frame Interrupt Flag |
| Write to 1 to clear the SIGF interrupt flag. | | | | |
| 9 | STARTF | 0 | W1 | Clear Start-Frame Interrupt Flag |
| Write to 1 to clear the STARTF interrupt flag. | | | | |
| 8 | MPAF | 0 | W1 | Clear Multi-Processor Address Frame Interrupt Flag |
| Write to 1 to clear the MPAF interrupt flag. | | | | |
| 7 | FERR | 0 | W1 | Clear Framing Error Interrupt Flag |
| Write to 1 to clear the FERR interrupt flag. | | | | |
| 6 | PERR | 0 | W1 | Clear Parity Error Interrupt Flag |
| Write to 1 to clear the PERR interrupt flag. | | | | |
| 5 | TXOF | 0 | W1 | Clear TX Overflow Interrupt Flag |
| Write to 1 to clear the TXOF interrupt flag. | | | | |
| 4 | RXUF | 0 | W1 | Clear RX Underflow Interrupt Flag |
| Write to 1 to clear the RXUF interrupt flag. | | | | |
| 3 | RXOF | 0 | W1 | Clear RX Overflow Interrupt Flag |
| Write to 1 to clear the RXOF interrupt flag. | | | | |
| 2:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | TXC | 0 | W1 | Clear TX Complete Interrupt Flag |
| Write to 1 to clear the TXC interrupt flag. | | | | |

16.5.15 LEUARTn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|--------|------|------|------|------|------|------|---------|------|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | SIGF | STARTF | MPAF | FERR | PERR | TXOF | RXUF | RXOF | RXDATAV | TXBL | TXC | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | SIGF | 0 | RW | Signal Frame Interrupt Enable Enable interrupt on signal frame. |
| 9 | STARTF | 0 | RW | Start Frame Interrupt Enable Enable interrupt on start frame. |
| 8 | MPAF | 0 | RW | Multi-Processor Address Frame Interrupt Enable Enable interrupt on multi-processor address frame. |
| 7 | FERR | 0 | RW | Framing Error Interrupt Enable Enable interrupt on framing error. |
| 6 | PERR | 0 | RW | Parity Error Interrupt Enable Enable interrupt on parity error. |
| 5 | TXOF | 0 | RW | TX Overflow Interrupt Enable Enable interrupt on TX overflow. |
| 4 | RXUF | 0 | RW | RX Underflow Interrupt Enable Enable interrupt on RX underflow. |
| 3 | RXOF | 0 | RW | RX Overflow Interrupt Enable Enable interrupt on RX overflow. |
| 2 | RXDATAV | 0 | RW | RX Data Valid Interrupt Enable Enable interrupt on RX data. |
| 1 | TXBL | 0 | RW | TX Buffer Level Interrupt Enable Enable interrupt on TX buffer level. |
| 0 | TXC | 0 | RW | TX Complete Interrupt Enable Enable interrupt on TX complete. |

16.5.16 LEUARTn_PULSECTRL - Pulse Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-----------|---|---|---|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | PULSEFILT | 0 | RW | Pulse Filter Enable a one-cycle pulse filter for pulse extender |
| | | Value | Description | |
| | | 0 | Filter is disabled. Pulses must be at least 2 cycles long for reliable detection. | |
| | | 1 | Filter is enabled. Pulses must be at least 3 cycles long for reliable detection. | |
| 4 | PULSEEN | 0 | RW | Pulse Generator/Extender Enable Filter LEUART output through pulse generator and the LEUART input through the pulse extender. |
| 3:0 | PULSEW | 0x0 | RW | Pulse Width Configure the pulse width of the pulse generator as a number of 32.768 kHz clock cycles. |

16.5.17 LEUARTn_FREEZE - Freeze Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|-----------|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | REGFREEZE |

| Bit | Name | Reset | Access | Description |
|------|-----------|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | REGFREEZE | 0 | RW | Register Update Freeze When set, the update of the LEUART is postponed until this bit is cleared. Use this bit to update several registers simultaneously. |
| | | Value | Mode | Description |
| | | 0 | UPDATE | Each write access to a LEUART register is updated into the Low Frequency domain as soon as possible. |
| | | 1 | FREEZE | The LEUART is not updated with the new written value. |

16.5.18 LEUARTn_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-----------|--------|--------|----------|------------|--------|-----|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| 0x044 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | PULSECTRL | TXDATA | TXDATA | SIGFRAME | STARTFRAME | CLKDIV | CMD | CTRL | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-----------|---|--------|--|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | PULSECTRL | 0 | R | PULSECTRL Register Busy Set when the value written to PULSECTRL is being synchronized. |
| 6 | TXDATA | 0 | R | TXDATA Register Busy |

| Bit | Name | Reset | Access | Description |
|-----|------------|-------|--------|--|
| | | | | Set when the value written to TXDATA is being synchronized. |
| 5 | TXDATA_X | 0 | R | TXDATA_X Register Busy Set when the value written to TXDATA_X is being synchronized. |
| 4 | SIGFRAME | 0 | R | SIGFRAME Register Busy Set when the value written to SIGFRAME is being synchronized. |
| 3 | STARTFRAME | 0 | R | STARTFRAME Register Busy Set when the value written to STARTFRAME is being synchronized. |
| 2 | CLKDIV | 0 | R | CLKDIV Register Busy Set when the value written to CLKDIV is being synchronized. |
| 1 | CMD | 0 | R | CMD Register Busy Set when the value written to CMD is being synchronized. |
| 0 | CTRL | 0 | R | CTRL Register Busy Set when the value written to CTRL is being synchronized. |

16.5.19 LEUARTn_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|---|---|---|---|---|---|---|---|---|---|--|---|---|----|-------|-------|
| 0x054 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | | | | | | | | 0 | 0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | RW | RW | |
| Name | | | | | | | | | | | | | | | | | | | | | | LOCATION | | | | | | | | | | | | | | | TXPEN | RXPEN |



16.5.20 LEUARTn_INPUT - LEUART Input Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x0AC | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 4 | RXPRS | 0 | RW | PRS RX Enable When set, the PRS channel selected as input to RX. |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2:0 | RXPRSSEL | 0x0 | RW | RX PRS Channel Select Select PRS channel as input to RX. |

| Value | Mode | Description |
|-------|--------|------------------------|
| 0 | PRSCH0 | PRS Channel 0 selected |
| 1 | PRSCH1 | PRS Channel 1 selected |
| 2 | PRSCH2 | PRS Channel 2 selected |
| 3 | PRSCH3 | PRS Channel 3 selected |
| 4 | PRSCH4 | PRS Channel 4 selected |
| 5 | PRSCH5 | PRS Channel 5 selected |
| 6 | PRSCH6 | PRS Channel 6 selected |
| 7 | PRSCH7 | PRS Channel 7 selected |

17 TIMER - Timer/Counter

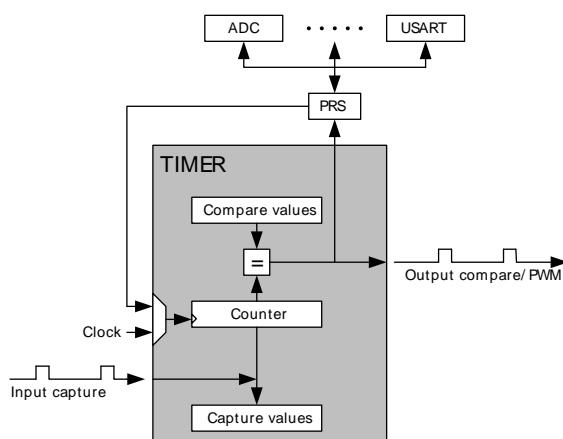

Quick Facts

What?

The TIMER (Timer/Counter) keeps track of timing and counts events, generates output waveforms and triggers timed actions in other peripherals.

Why?

Most applications have activities that need to be timed accurately with as little CPU intervention and energy consumption as possible.

How?

The flexible 16-bit TIMER can be configured to provide PWM waveforms or work as a frequency generator. The Timer can also count events and control other peripherals through the PRS, which offloads the CPU and reduce energy consumption.

17.1 Introduction

The 16-bit general purpose Timer has 3 compare/capture channels for input capture and compare/Pulse-Width Modulation (PWM) output.

17.2 Features


- 16-bit auto reload up/down counter
 - Dedicated 16-bit reload register which serves as counter maximum
- 3 Compare/Capture channels
 - Individual configurable as either input capture or output compare/PWM
- Multiple Counter modes
 - Count up
 - Count down
 - Count up/down
 - Quadrature Decoder
 - Direction and count from external pins
- 2x Count Mode
- Counter control from PRS or external pin
 - Start
 - Stop
 - Reload and start
- Inter-Timer connection
 - Allows 32-bit counter mode
 - Start/stop synchronization between several Timers
- Input Capture
 - Period measurement
 - Pulse width measurement

- Two capture registers for each capture channel
 - Capture on either positive or negative edge
 - Capture on both edges
- Optional digital noise filtering on capture inputs
- Output Compare
 - Compare output toggle/pulse on compare match
 - Immediate update of compare registers
- PWM
 - Up-count PWM
 - Up/down-count PWM
 - Predictable initial PWM output state (configured by SW)
 - Buffered compare register to ensure glitch-free update of compare values
- Clock sources
 - HFPERCLK_{TIMERn}
 - 10-bit Prescaler
 - External pin
 - Peripheral Reflex System
- Debug mode
 - Configurable to either run or stop when processor is stopped (break)
- Interrupts, PRS output and/or DMA request
 - Underflow
 - Overflow
 - Compare/Capture event

17.3 Functional Description

An overview of the TIMER module is shown in Figure 17.1 (p. 252) . The Timer module consists of a 16 bit up/down counter with 3 Compare/Capture channels connected to pins TIMn_CC0, TIMn_CC1, and TIMn_CC2.

Figure 17.1. TIMER Block Overview

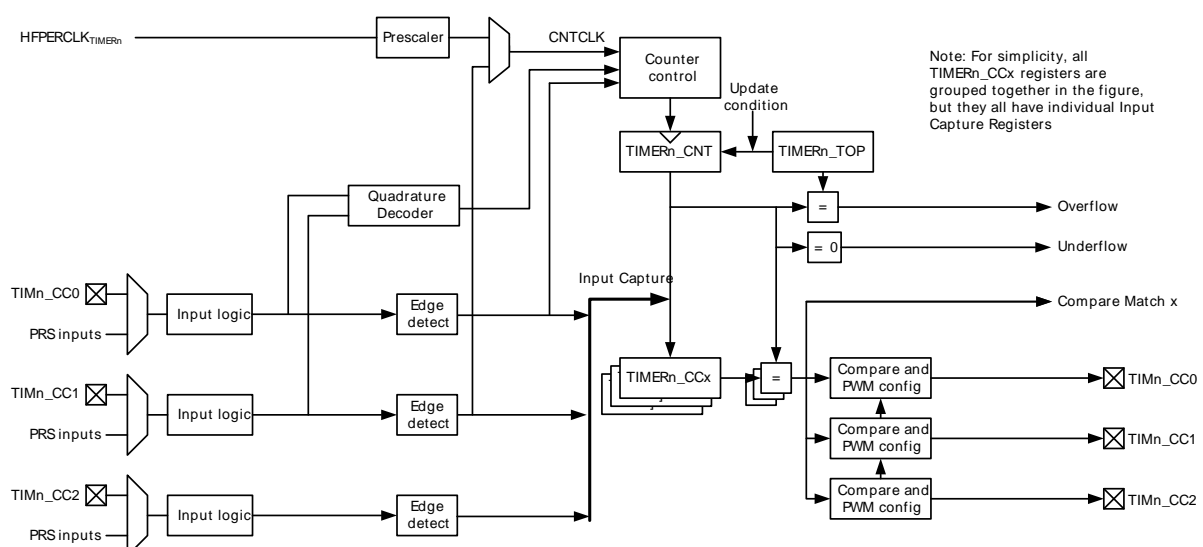

17.3.1 Counter Modes

The Timer consists of a counter that can be configured to the following modes:

1. Up-count: Counter counts up until it reaches the value in `TIMERn_TOP`, where it is reset to 0 before counting up again.
2. Down-count: The counter starts at the value in `TIMERn_TOP` and counts down. When it reaches 0, it is reloaded with the value in `TIMERn_TOP`.
3. Up/Down-count: The counter starts at 0 and counts up. When it reaches the value in `TIMERn_TOP`, it counts down until it reaches 0 and starts counting up again.
4. Quadrature Decoder: Two input channels where one determines the count direction, while the other pin triggers a clock event.

In addition, to the TIMER modes listed above, the TIMER also supports a 2x Count Mode. In this mode the counter increments/decrements by 2. The 2x Count Mode intended use is to generate 2x PWM frequency when the Compare/Capture channel is put in PWM mode. The 2x Count Mode can be enabled by setting the `X2CNT` bitfield in the `TIMERn_CTRL` register.

The counter value can be read or written by software at any time by accessing the `CNT` field in `TIMERn_CNT`.

17.3.1.1 Events

Overflow is set when the counter value shifts from `TIMERn_TOP` to the next value when counting up. In up-count mode the next value is 0. In up/down-count mode, the next value is `TIMERn_TOP-1`.

Underflow is set when the counter value shifts from 0 to the next value when counting down. In down-count mode, the next value is `TIMERn_TOP`. In up/down-count mode the next value is 1.

Update event is set on overflow in up-count mode and on underflow in down-count or up/down count mode. This event is used to time updates of buffered values.

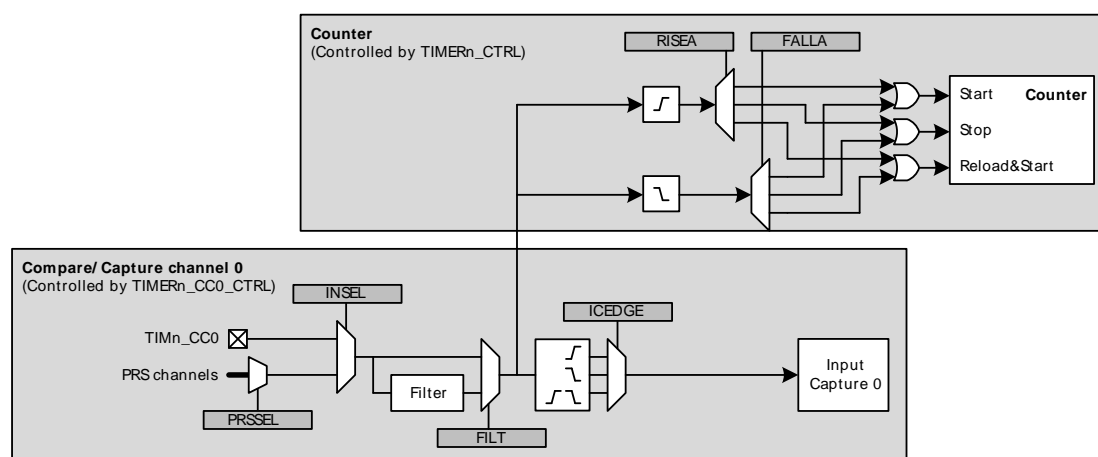
17.3.1.2 Operation

Figure 17.2 (p. 254) shows the hardware Timer/Counter control. Software can start or stop the counter by writing a 1 to the `START` or `STOP` bits in `TIMERn_CMD`. The counter value (`CNT` in `TIMERn_CNT`) can always be written by software to any 16-bit value.

It is also possible to control the counter through either an external pin or PRS input. This is done through the input logic for the Compare/Capture Channel 0. The Timer/Counter allows individual actions (start, stop, reload) to be taken for rising and falling input edges. This is configured in the `RISEA` and `FALLA` fields in `TIMERn_CTRL`. The reload value is 0 in up-count and up/down-count mode and `TOP` in down-count mode.


The `RUNNING` bit in `TIMERn_STATUS` indicates if the Timer is running or not. If the `SYNC` bit in `TIMERn_CTRL` is set, the Timer is started/stopped/reloaded (external pin or PRS) when any of the other timers are started/stopped/reloaded.

The `DIR` bit in `TIMERn_STATUS` indicates the counting direction of the Timer at any given time. The counter value can be read or written by software through the `CNT` field in `TIMERn_CNT`. In Up/Down-Count mode the count direction will be set to up if the `CNT` value is written by software.

Figure 17.2. TIMER Hardware Timer/Counter Control

17.3.1.3 Clock Source

The counter can be clocked from several sources, which are all synchronized with the peripheral clock (HFPERCLK). See Figure 17.3 (p. 254) .

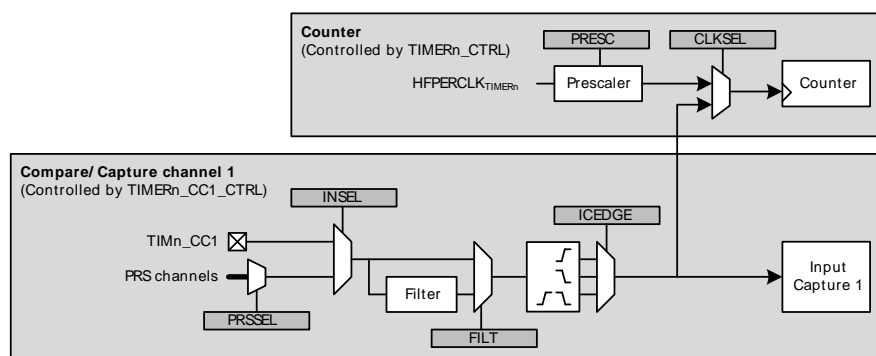Figure 17.3. TIMER Clock Selection

17.3.1.3.1 Peripheral Clock (HFPERCLK)

The peripheral clock (HFPERCLK) can be used as a source with a configurable prescale factor of 2^{PRESC} , where PRESC is an integer between 0 and 10, which is set in PRESC in TIMERN_CTRL. However, if 2x Count Mode is enabled and the Compare/Capture channels are put in PWM mode, the CC output is updated on both clock edges so prescaling the peripheral clock will result in incorrect result. The prescaler is stopped and reset when the timer is stopped.


17.3.1.3.2 Compare/ Capture Channel 1 Input

The Timer can also be clocked by positive and/or negative edges on the Compare/Capture channel 1 input. This input can either come from the TIMN_CC1 pin or one of the PRS channels. The input signal must not have a higher frequency than $f_{\text{HFPERCLK}}/3$ when running from a pin input or a PRS input with FILT enabled in TIMERN_CCx_CTRL. When running from PRS without FILT, the frequency can be as high as f_{HFPERCLK} . Note that when clocking the Timer from the same pulse that triggers a start (through RISEA/FALLA in TIMERN_CTRL), the starting pulse will not update the Counter Value.

17.3.1.3.3 Underflow/Overflow from Neighboring Timer

All Timers are linked together (see Figure 17.4 (p. 255)), allowing timers to count on overflow/underflow from the lower numbered neighbouring timers to form a 32-bit or 48-bit timer. Note that all timers must be set to same count direction and less significant timer(s) can only be set to count up or down.

Figure 17.4. TIMER Connections




17.3.1.4 One-Shot Mode

By default, the counter counts continuously until it is stopped. If the OSMEN bit is set in the TIMERN_CTRL register, however, the counter is disabled by hardware on the first *update event*. Note that when the counter is running with CC1 as clock source (0b01 in CLKSEL in TIMERN_CTRL) and OSMEN is set, a CC1 capture event will not take place on the *update event* (CC1 rising edge) that stops the Timer.

17.3.1.5 Top Value Buffer


The TIMERN_TOP register can be altered either by writing it directly or by writing to the TIMER_TOPB (buffer) register. When writing to the buffer register the TIMERN_TOPB register will be written to TIMERN_TOP on the next update event. Buffering ensures that the TOP value is not set below the actual count value. The TOPBV flag in TIMERN_STATUS indicates whether the TIMERN_TOPB register contains data that have not yet been written to the TIMERN_TOP register (see Figure 17.5 (p. 255)).

Figure 17.5. TIMER TOP Value Update Functionality

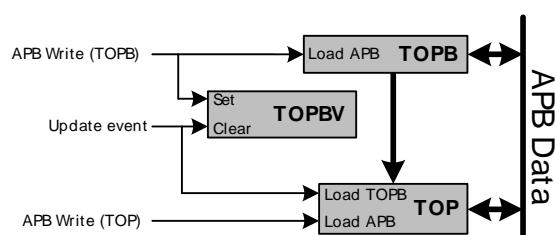


17.3.1.6 Quadrature Decoder

Quadrature Decoding mode is used to track motion and determine both rotation direction and position. The Quadrature Decoder uses two input channels that are 90 degrees out of phase (see Figure 17.6 (p. 256)).

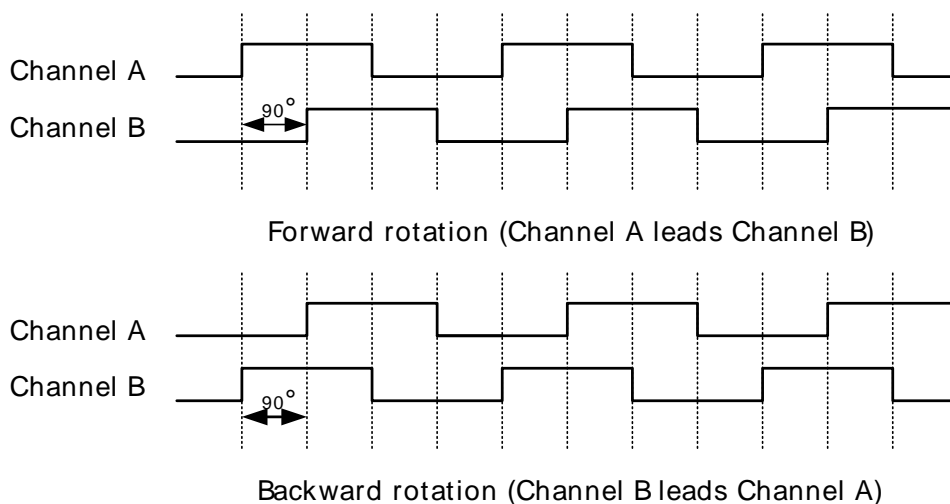Figure 17.6. TIMER Quadrature Encoded Inputs

In the Timer these inputs are tapped from the Compare/Capture channel 0 (Channel A) and 1 (Channel B) inputs before edge detection. The Timer/Counter then increments or decrements the counter, based on the phase relation between the two inputs. The Quadrature Decoder Mode supports two channels, but if a third channel (Z-terminal) is available, this can be connected to an external interrupt and trigger a counter reset from the interrupt service routine. By connecting a periodic signal from another timer as input capture on Compare/Capture Channel 2, it is also possible to calculate speed and acceleration.

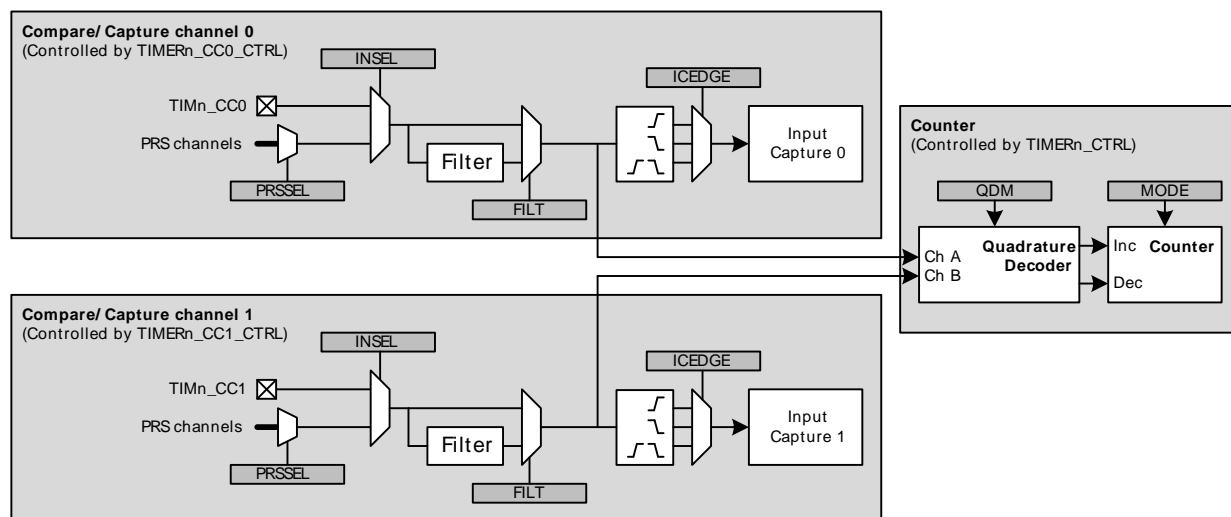Figure 17.7. TIMER Quadrature Decoder Configuration


The Quadrature Decoder can be set in either X2 or X4 mode, which is configured in the QDM bit in TIMERN_CTRL. See Figure 17.7 (p. 256)

17.3.1.6.1 X2 Decoding Mode

In X2 Decoding mode, the counter increments or decrements on every edge of Channel A, see Table 17.1 (p. 257) and Figure 17.8 (p. 257) .

Table 17.1. TIMER Counter Response in X2 Decoding Mode

| Channel B | Channel A | |
|-----------|-----------|-----------|
| | Rising | Falling |
| 0 | Increment | Decrement |
| 1 | Decrement | Increment |

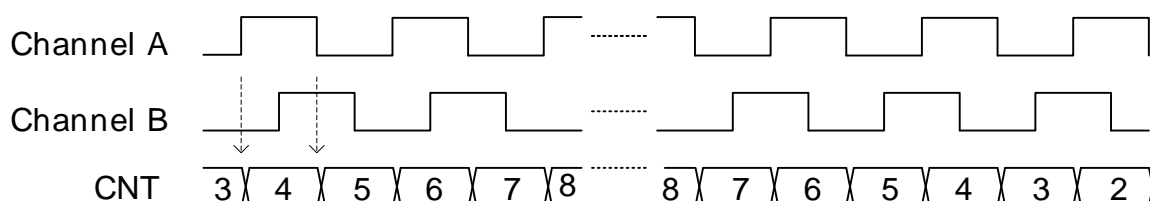
Figure 17.8. TIMER X2 Decoding Mode

17.3.1.6.2 X4 Decoding Mode

In X4 Decoding mode, the counter increments or decrements on every edge of Channel A and Channel B, see Figure 17.9 (p. 257) and Table 17.2 (p. 257) .

Table 17.2. TIMER Counter Response in X4 Decoding Mode

| Opposite Channel | Channel A | | Channel B | |
|------------------|-----------|-----------|-----------|-----------|
| | Rising | Falling | Rising | Falling |
| Channel A = 0 | | | Decrement | Increment |
| Channel A = 1 | | | Increment | Decrement |
| Channel B = 0 | Increment | Decrement | | |
| Channel B = 1 | Decrement | Increment | | |

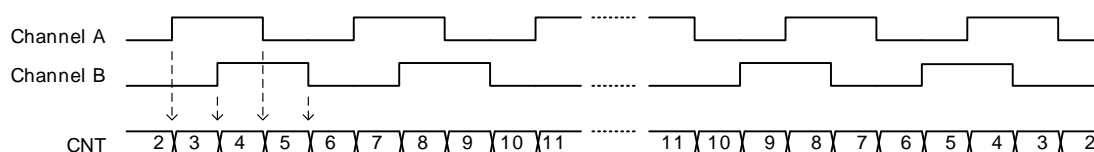Figure 17.9. TIMER X4 Decoding Mode

17.3.1.6.3 TIMER Rotational Position

To calculate a position Equation 17.1 (p. 257) can be used.

TIMER Rotational Position Equation

$$\text{pos}^\circ = (\text{CNT}/X \times N) \times 360^\circ \quad (17.1)$$

where X = Encoding type and N = Number of pulses per revolution.

17.3.2 Compare/Capture Channels


The Timer contains 3 Compare/Capture channels, which can be configured in the following modes:

1. Input Capture
2. Output Compare
3. PWM

17.3.2.1 Input Pin Logic

Each Compare/Capture channel can be configured as an input source for the Capture Unit or as external clock source for the Timer (see Figure 17.10 (p. 258)). Compare/Capture channels 0 and 1 are the inputs for the Quadrature Decoder Mode. The input channel can be filtered before it is used, which requires the input to remain stable for 5 cycles in a row before the input is propagated to the output.

Figure 17.10. TIMER Input Pin Logic

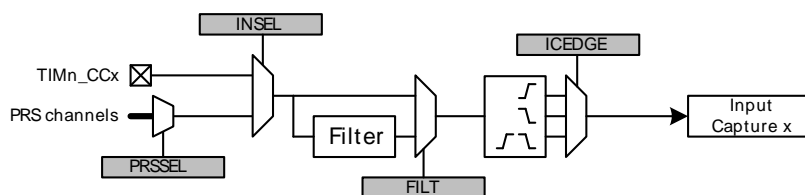

17.3.2.2 Compare/Capture Registers

The Compare/Capture channel registers are prefixed with `TIMERN_CCx_`, where the `x` stands for the channel number. Since the Compare/Capture channels serve three functions (input capture, compare, PWM), the behavior of the Compare/Capture registers (`TIMERN_CCx_CCV`) and buffer registers (`TIMERN_CCx_CCVB`) change depending on the mode the channel is set in.


17.3.2.2.1 Input Capture mode

When running in Input Capture mode, `TIMERN_CCx_CCV` and `TIMERN_CCx_CCVB` form a FIFO buffer, and new capture values are added on a capture event, see Figure 17.11 (p. 259) . The first capture can always be read from `TIMERN_CCx_CCV`, and reading this address will load the next capture value into `TIMERN_CCx_CCV` from `TIMERN_CCx_CCVB` if it contains valid data. The CC value can be read without altering the FIFO contents by reading `TIMERN_CCx_CCVP`. `TIMERN_CCx_CCVB` can also be read without altering the FIFO contents. The ICV flag in `TIMERN_STATUS` indicates if there is a valid unread capture in `TIMERN_CCx_CCV`.

In case a capture is triggered while both `CCV` and `CCVB` contain unread capture values, the buffer overflow interrupt flag (`ICBOF` in `TIMERN_IF`) will be set. New capture values will on overflow overwrite the value in `TIMERN_CCx_CCVB`.


Note

In input capture mode, the timer will only trigger interrupts when it is running

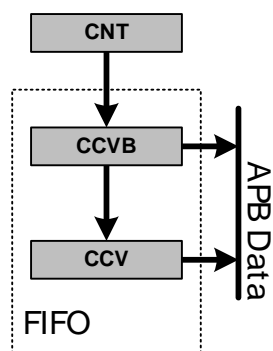Figure 17.11. TIMER Input Capture Buffer Functionality


17.3.2.2.2 Compare and PWM Mode

When running in Output Compare or PWM mode, the value in `TIMERn_CCx_CCv` will be compared against the count value. In Compare mode the output can be configured to toggle, clear or set on compare match, overflow and underflow through the `CMOA`, `COFOA` and `CUFOA` fields in `TIMERn_CCx_CTRL`. `TIMERn_CCx_CCv` can be accessed directly or through the buffer register `TIMERn_CCx_CCvB`, see Figure 17.12 (p. 259). When writing to the buffer register, the value in `TIMERn_CCx_CCvB` will be written to `TIMERn_CCx_CCv` on the next update event. This functionality ensures glitch free PWM outputs. The `CCVBV` flag in `TIMERn_STATUS` indicates whether the `TIMERn_CCx_CCvB` register contains data that have not yet been written to the `TIMERn_CCx_CCv` register. Note that when writing 0 to `TIMERn_CCx_CCvB` the `CCv` value is updated when the timer counts from 0 to 1. Thus, the compare match for the next period will not happen until the timer reaches 0 again on the way down.

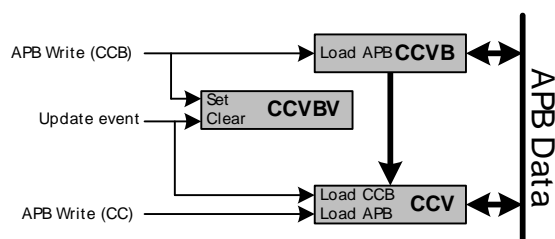Figure 17.12. TIMER Output Compare/PWM Buffer Functionality


17.3.2.3 Input Capture

In Input Capture Mode, the counter value (`TIMERn_CNT`) can be captured in the Compare/Capture Register (`TIMERn_CCx_CCv`), see Figure 17.13 (p. 260). In this mode, `TIMERn_CCx_CCv` is read-only. Together with the Compare/Capture Buffer Register (`TIMERn_CCx_CCvB`) the `TIMERn_CCx_CCv` form a double-buffered capture registers allowing two subsequent capture events to take place before a read-out is required. The `CCPOL` bits in `TIMERn_STATUS` indicate the polarity the edge that triggered the capture in `TIMERn_CCx_CCv`.

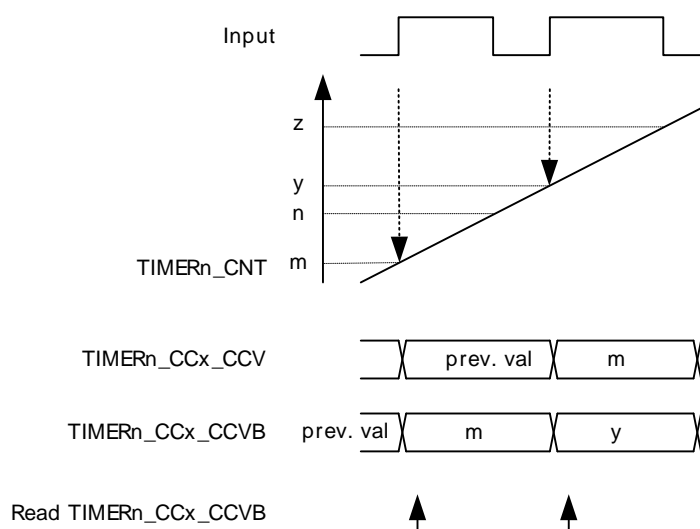Figure 17.13. TIMER Input Capture


17.3.2.3.1 Period/Pulse-Width Capture

Period and/or pulse-width capture can be achieved by setting the RISEA field in `TIMERn_CTRL` to `Clear&Start`, and select the wanted input from either external pin or PRS, see Figure 17.14 (p. 260). For period capture, the Compare/Capture Channel should then be set to input capture on a rising edge of the same input signal. To capture a the width of a high pulse, the Compare/Capture Channel should be set to capture on a falling edge of the input signal. To start the measuring period on either a falling edge or measure the low pulse-width of a signal, opposite polarities should be chosen.

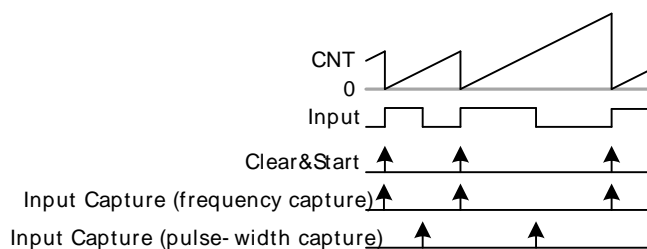Figure 17.14. TIMER Period and/or Pulse width Capture

17.3.2.4 Compare


Each Compare/Capture channel contains a comparator which outputs a compare match if the contents of `TIMERn_CCx_CCV` matches the counter value, see Figure 17.15 (p. 261). In compare mode, each compare channel can be configured to either set, clear or toggle the output on an event (compare match, overflow or underflow). The output from each channel is represented as an alternative function on the port it is connected to, which needs to be enabled for the CC outputs to propagate to the pins.

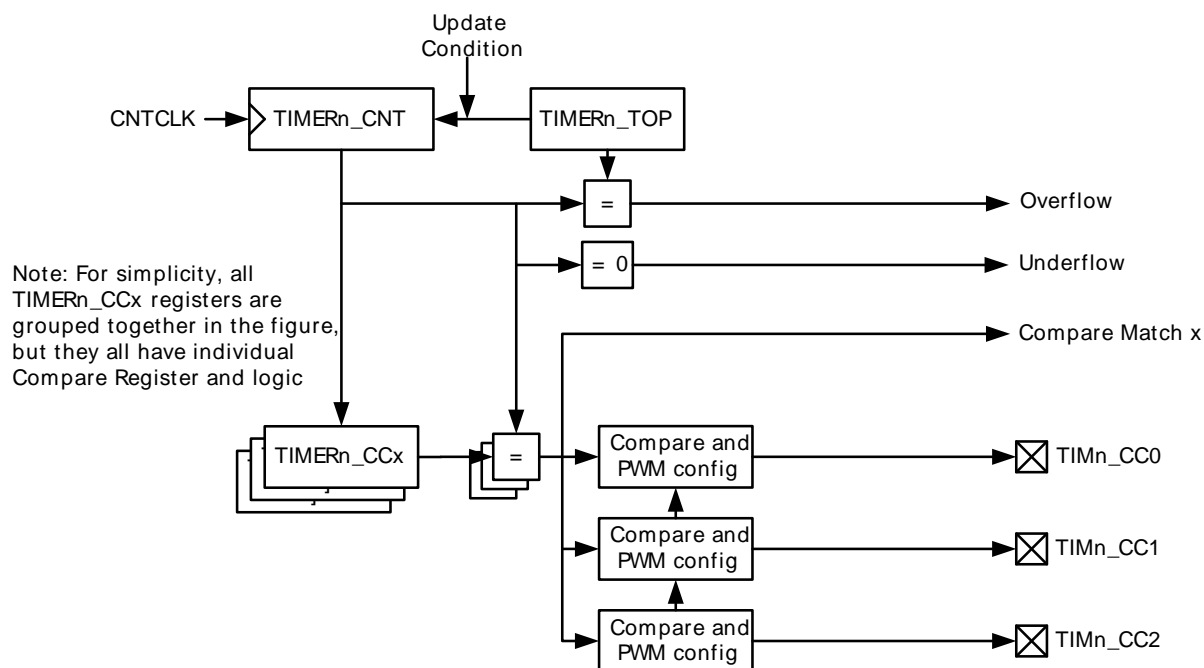Figure 17.15. TIMER Block Diagram Showing Comparison Functionality

If occurring in the same cycle, match action will have priority over overflow or underflow action.

The input selected (through `PRSEL`, `INSEL` and `FILTSEL` in `TIMERn_CCx_CTRL`) for the CC channel will also be sampled on compare match and the result is found in the `CCPOL` bits in `TIMERn_STATUS`. It is also possible to configure the `CCPOL` to always track the inputs by setting `ATI` in `TIMERn_CTRL`.


The `COIST` bit in `TIMERn_CCx_CTRL` is the initial state of the compare/PWM output. The `COIST` bit can also be used as an initial value to the compare outputs on a reload-start when `RSSCOIST` is set in `TIMERn_CTRL`. Also the resulting output can be inverted by setting `OUTINV` in `TIMERn_CCx_CTRL`. It is recommended to turn off the CC channel before configuring the output state to avoid any pulses on the output. The CC channel can be turned off by setting `MODE` to `OFF` in `TIMERn_CCx_CTRL`.

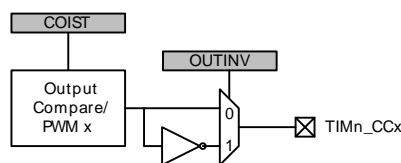Figure 17.16. TIMER Output Logic

17.3.2.4.1 Frequency Generation (FRG)

Frequency generation (see Figure 17.17 (p. 262)) can be achieved in compare mode by:

- Setting the counter in up-count mode
- Enabling buffering of the TOP value.
- Setting the CC channels overflow action to toggle

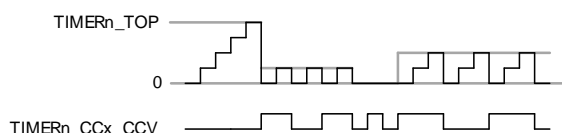Figure 17.17. TIMER Up-count Frequency Generation

The output frequency is given by Equation 17.2 (p. 262)

TIMER Up-count Frequency Generation Equation


$$f_{\text{FRG}} = f_{\text{HPPERCLK}} / (2^{(\text{PRESC} + 1)} \times (\text{TOP} + 1) \times 2) \quad (17.2)$$

17.3.2.5 Pulse-Width Modulation (PWM)

In PWM mode, TIMERN_CCx_CCV is buffered to avoid glitches in the output. The settings in the Compare Output Action configuration bits are ignored in PWM mode and PWM generation is only supported for up-count and up/down-count mode.

17.3.2.6 Up-count (Single-slope) PWM

If the counter is set to up-count and the Compare/Capture channel is put in PWM mode, single slope PWM output will be generated (see Figure 17.18 (p. 262)). In up-count mode the PWM period is TOP +1 cycles and the PWM output will be high for a number of cycles equal to TIMERN_CCx_CCV. This means that a constant high output is achieved by setting TIMER_CCx to TOP+1 or higher. The PWM resolution (in bits) is then given by Equation 17.3 (p. 262).

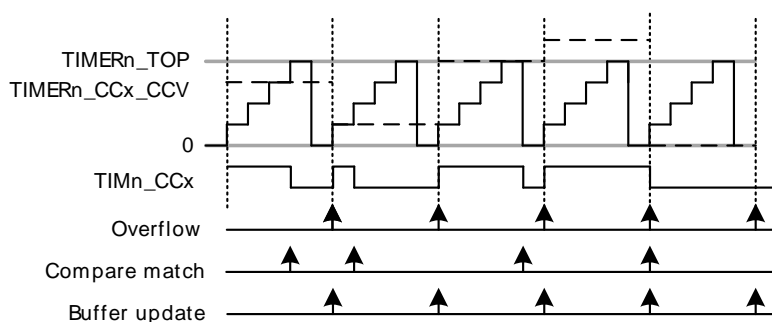Figure 17.18. TIMER Up-count PWM Generation**TIMER Up-count PWM Resolution Equation**

$$R_{\text{PWMup}} = \log(\text{TOP} + 1) / \log(2) \quad (17.3)$$

The PWM frequency is given by Equation 17.4 (p. 262) :

TIMER Up-count PWM Frequency Equation

$$f_{\text{PWMup/down}} = f_{\text{HPPERCLK}} / (2^{\text{PRESC}} \times (\text{TOP} + 1)) \quad (17.4)$$

The high duty cycle is given by Equation 17.5 (p. 263)


TIMER Up-count Duty Cycle Equation

$$DS_{up} = CCVx/TOP \quad (17.5)$$

17.3.2.6.1 2x Count Mode

When the Timer is set in 2x mode, the TIMER will count up by two. This will in effect make any odd Top value be rounded down to the closest even number. Similarly, any odd CC value will generate a match on the closest lower even value as shown in Figure 17.19 (p. 263)

Figure 17.19. TIMER CC out in 2x mode

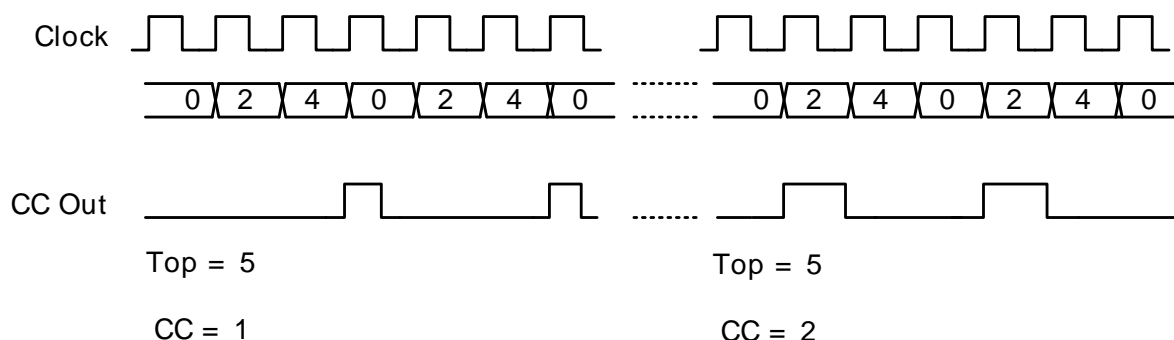

The mode is enabled by setting the X2CNT field in TIMERN_CTRL register. The intended use of the 2x mode is to generate 2x PWM frequency when the Compare/Capture channel is put in PWM mode. Since the PWM output is updated on both edges of the clock, frequency prescaling will result in incorrect result in this mode. The PWM resolution (in bits) is then given by Equation 17.6 (p. 263) .

TIMER 2x PWM Resolution Equation

$$R_{PWM_{2xmode}} = \log(TOP/2+1)/\log(2) \quad (17.6)$$

The PWM frequency is given by Equation 17.7 (p. 263) :

TIMER 2x Mode PWM Frequency Equation(Up-count)

$$f_{PWM_{2xmode}} = 2 \times f_{HCLK} / \text{floor}(TOP/2)+1 \quad (17.7)$$


The high duty cycle is given by Equation 17.8 (p. 263)

TIMER 2x Mode Duty Cycle Equation

$$DS_{2xmode} = CCVx/TOP \quad (17.8)$$

17.3.2.7 Up/Down-count (Dual-slope) PWM

If the counter is set to up-down count and the Compare/Capture channel is put in PWM mode, dual slope PWM output will be generated by Figure 17.20 (p. 264) .The resolution (in bits) is given by Equation 17.9 (p. 264) .

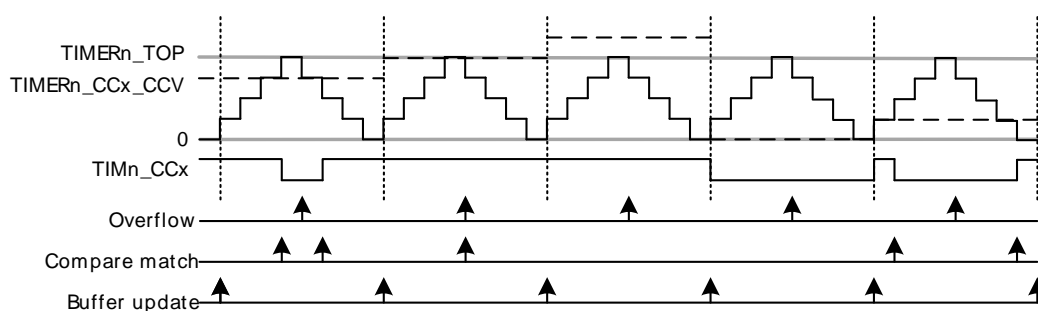Figure 17.20. TIMER Up/Down-count PWM Generation**TIMER Up/Down-count PWM Resolution Equation**

$$R_{PWM_{up/down}} = \log(TOP+1)/\log(2) \quad (17.9)$$

The PWM frequency is given by Equation 17.10 (p. 264) :

TIMER Up/Down-count PWM Frequency Equation

$$f_{PWM_{up/down}} = f_{HCLK} / (2^{(PRESC+1)} \times TOP) \quad (17.10)$$


The high duty cycle is given by Equation 17.11 (p. 264)

TIMER Up/Down-count Duty Cycle Equation

$$DS_{up/down} = CCVx/TOP \quad (17.11)$$

17.3.2.7.1 2x Count Mode

When the Timer is set in 2x mode, the TIMER will count up/down by two. This will in effect make any odd Top value be rounded down to the closest even number. Similarly, any odd CC value will generate a match on the closest lower even value as shown in Figure 17.21 (p. 264)

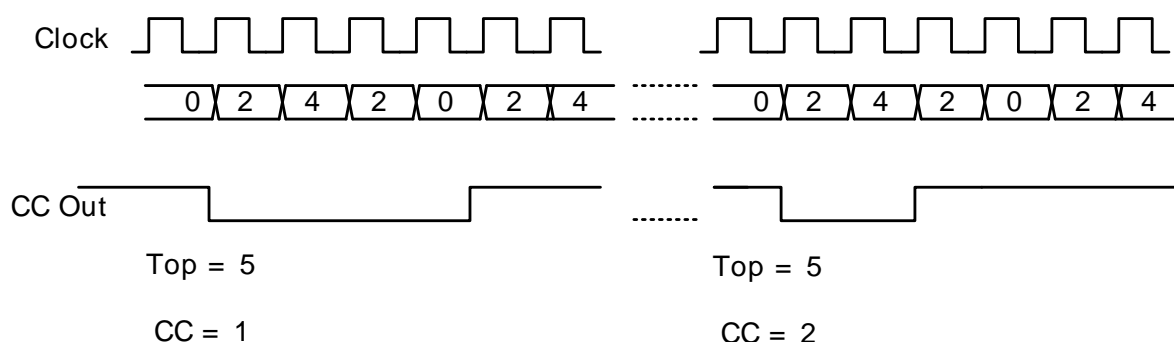Figure 17.21. TIMER CC out in 2x mode

The mode is enabled by setting the X2CNT field in TIMERN_CTRL register. The intended use of the 2x mode is to generate 2x PWM frequency when the Compare/Capture channel is put in PWM mode. Since the PWM output is updated on both edges of the clock, frequency prescaling will result in incorrect result in this mode. The PWM resolution (in bits) is then given by Equation 17.12 (p. 264) .

TIMER 2x PWM Resolution Equation

$$R_{PWM_{2xmode}} = \log(TOP/2+1)/\log(2) \quad (17.12)$$

The PWM frequency is given by Equation 17.7 (p. 263) :

TIMER 2x Mode PWM Frequency Equation(Up/Down-count)

$$f_{PWM_{2xmode}} = f_{HFPERCLK} / TOP \quad (17.13)$$

The high duty cycle is given by Equation 17.14 (p. 265)

TIMER 2x Mode Duty Cycle Equation

$$DS_{2xmode} = CCVx/TOP \quad (17.14)$$

17.3.3 Debug Mode

When the CPU is halted in debug mode, the timer can be configured to either continue to run or to be frozen. This is configured in DBGHALT in TIMERN_CTRL.

17.3.4 Interrupts, DMA and PRS Output

The Timer has 5 output events:

- Counter Underflow
- Counter Overflow
- Compare match or input capture (one per Compare/Capture channel)

Each of the events has its own interrupt flag. Also, there is one interrupt flag for each Compare/Capture channel which is set on buffer overflow in capture mode. Buffer overflow happens when a new capture pushes an old unread capture out of the TIMERN_CCx_CCv/TIMERN_CCx_CCVB register pair.

If the interrupt flags are set and the corresponding interrupt enable bits in TIMERN_IEN) are set high, the Timer will send out an interrupt request. Each of the events will also lead to a one HFPERCLK_{TIMERN} cycle high pulse on individual PRS outputs.

Each of the events will also set a DMA request when they occur. The different DMA requests are cleared when certain acknowledge conditions are met, see Table 17.3 (p. 265) . If DMACLRACT is set in TIMERN_CTRL, the DMA request is cleared when the triggered DMA channel is active, without having to access any timer registers.

Table 17.3. TIMER Events

| Event | Acknowledge |
|--------------------|--|
| Underflow/Overflow | Read or write to TIMERN_CNT or TIMERN_TOPB |
| CC 0 | Read or write to TIMERN_CC0_CCv or TIMERN_CC0_CCVB |
| CC 1 | Read or write to TIMERN_CC1_CCv or TIMERN_CC1_CCVB |
| CC 2 | Read or write to TIMERN_CC2_CCv or TIMERN_CC2_CCVB |

17.3.5 GPIO Input/Output

The TIMn_CCx inputs/outputs are accessible as alternate functions through GPIO. Each pin connection can be enabled/disabled separately by setting the corresponding CCxPEN bits in TIMERN_ROUTE. The LOCATION bits in the same register can be used to move all enabled pins to alternate pins.

17.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|------------------|------|---------------------------------------|
| 0x000 | TIMERn_CTRL | RW | Control Register |
| 0x004 | TIMERn_CMD | W1 | Command Register |
| 0x008 | TIMERn_STATUS | R | Status Register |
| 0x00C | TIMERn_IEN | RW | Interrupt Enable Register |
| 0x010 | TIMERn_IF | R | Interrupt Flag Register |
| 0x014 | TIMERn_IFS | W1 | Interrupt Flag Set Register |
| 0x018 | TIMERn_IFC | W1 | Interrupt Flag Clear Register |
| 0x01C | TIMERn_TOP | RWH | Counter Top Value Register |
| 0x020 | TIMERn_TOPB | RW | Counter Top Value Buffer Register |
| 0x024 | TIMERn_CNT | RWH | Counter Value Register |
| 0x028 | TIMERn_ROUTE | RW | I/O Routing Register |
| 0x030 | TIMERn_CC0_CTRL | RW | CC Channel Control Register |
| 0x034 | TIMERn_CC0_CCV | RWH | CC Channel Value Register |
| 0x038 | TIMERn_CC0_CCV_P | R | CC Channel Value Peek Register |
| 0x03C | TIMERn_CC0_CCVB | RWH | CC Channel Buffer Register |
| 0x040 | TIMERn_CC1_CTRL | RW | CC Channel Control Register |
| 0x044 | TIMERn_CC1_CCV | RWH | CC Channel Value Register |
| 0x048 | TIMERn_CC1_CCV_P | R | CC Channel Value Peek Register |
| 0x04C | TIMERn_CC1_CCVB | RWH | CC Channel Buffer Register |
| 0x050 | TIMERn_CC2_CTRL | RW | CC Channel Control Register |
| 0x054 | TIMERn_CC2_CCV | RWH | CC Channel Value Register |
| 0x058 | TIMERn_CC2_CCV_P | R | CC Channel Value Peek Register |
| 0x05C | TIMERn_CC2_CCVB | RWH | CC Channel Buffer Register |
| 0x070 | TIMERn_DTCTRL | RW | DTI Control Register |
| 0x074 | TIMERn_DTTIME | RW | DTI Time Control Register |
| 0x078 | TIMERn_DTFC | RW | DTI Fault Configuration Register |
| 0x07C | TIMERn DTOGEN | RW | DTI Output Generation Enable Register |
| 0x080 | TIMERn_DTFAULT | R | DTI Fault Register |
| 0x084 | TIMERn_DTFAULTC | W1 | DTI Fault Clear Register |
| 0x088 | TIMERn_DTLCK | RW | DTI Configuration Lock Register |

17.5 Register Description

17.5.1 TIMERN_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----------|-----|----|----|-----|-------|----|----|----|----|----|----|-----|--------|----|----|----|-------|----|----|-------|---|---|-------|-----------|---|---------|-----|-------|------|---|---|------|-----|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | 0 | 0 | | | 0x0 | | | | | | | | 0x0 | | | | | | | | | | | | | | | 0x0 | | | | | | |
| Access | | | RW | RW | | | RW | | | | | | | | RW | | | | RW | | | RW | 0x0 | | | RW | 0x0 | | RW | 0 | 0 | 0 | 0 | 0 | RW | 0x0 |
| Name | | | RSSCOIST | ATI | | | | PRESC | | | | | | | | CLKSEL | | | | X2CNT | | | FALLA | | | RISEA | DMACTRACT | | DEBGRUN | QDM | OSMEN | SYNC | | | MODE | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:30 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|-------|----------|-----|----|---|
| 29 | RSSCOIST | 0 | RW | Reload-Start Sets Compare Output initial State When enabled, compare output is set to COIST value at Reload-Start event |
| 28 | ATI | 0 | RW | Always Track Inputs Enable ATI makes CCPOL always track the polarity of the inputs |
| 27:24 | PRESC | 0x0 | RW | Prescaler Setting These bits select the prescaling factor. |

| Value | Mode | Description |
|-------|---------|---------------------------------|
| 0 | DIV1 | The HFPERCLK is undivided |
| 1 | DIV2 | The HFPERCLK is divided by 2 |
| 2 | DIV4 | The HFPERCLK is divided by 4 |
| 3 | DIV8 | The HFPERCLK is divided by 8 |
| 4 | DIV16 | The HFPERCLK is divided by 16 |
| 5 | DIV32 | The HFPERCLK is divided by 32 |
| 6 | DIV64 | The HFPERCLK is divided by 64 |
| 7 | DIV128 | The HFPERCLK is divided by 128 |
| 8 | DIV256 | The HFPERCLK is divided by 256 |
| 9 | DIV512 | The HFPERCLK is divided by 512 |
| 10 | DIV1024 | The HFPERCLK is divided by 1024 |

| | | | | |
|-------|----------|---|--|--|
| 23:18 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
|-------|----------|---|--|--|

| | | | | |
|---|---------------|--|----|----------------------------|
| 17:16 | CLKSEL | 0x0 | RW | Clock Source Select |
| These bits select the clock source for the timer. | | | | |
| Value | Mode | Description | | |
| 0 | PRESCHFPERCLK | Prescaled HFPERCLK | | |
| 1 | CC1 | Compare/Capture Channel 1 Input | | |
| 2 | TIMEROUF | Timer is clocked by underflow(down-count) or overflow(up-count) in the lower numbered neighbor Timer | | |

| | | | | |
|-------|----------|---|--|--|
| 15:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
|-------|----------|---|--|--|

| | | | | |
|----|-------|---|----|--|
| 13 | X2CNT | 0 | RW | 2x Count Mode Enable 2x count mode |
|----|-------|---|----|--|

| | | | | |
|----|----------|---|--|--|
| 12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
|----|----------|---|--|--|

| | | | | |
|--|-------|-------|------------------------------|--|
| 11:10 | FALLA | 0x0 | RW | Timer Falling Input Edge Action |
| These bits select the action taken in the counter when a falling edge occurs on the input. | | | | |
| | Value | Mode | Description | |
| | 0 | NONE | No action | |
| | 1 | START | Start counter without reload | |

| Bit | Name | Reset | Access | Description |
|---|---|---|--------|--|
| | Value | Mode | | Description |
| | 2 | STOP | | Stop counter without reload |
| | 3 | RELOADSTART | | Reload and start counter |
| | | | | |
| 9:8 | RISEA | 0x0 | RW | Timer Rising Input Edge Action |
| These bits select the action taken in the counter when a rising edge occurs on the input. | | | | |
| | Value | Mode | | Description |
| | 0 | NONE | | No action |
| | 1 | START | | Start counter without reload |
| | 2 | STOP | | Stop counter without reload |
| | 3 | RELOADSTART | | Reload and start counter |
| | | | | |
| 7 | DMACLRACT | 0 | RW | DMA Request Clear on Active |
| When this bit is set, the DMA requests are cleared when the corresponding DMA channel is active. This enables the timer DMA requests to be cleared without accessing the timer. | | | | |
| 6 | DEBUGRUN | 0 | RW | Debug Mode Run Enable |
| Set this bit to enable timer to run in debug mode. | | | | |
| | Value | Description | | |
| | 0 | Timer is frozen in debug mode | | |
| | 1 | Timer is running in debug mode | | |
| | | | | |
| 5 | QDM | 0 | RW | Quadrature Decoder Mode Selection |
| This bit sets the mode for the quadrature decoder. | | | | |
| | Value | Mode | | Description |
| | 0 | X2 | | X2 mode selected |
| | 1 | X4 | | X4 mode selected |
| | | | | |
| 4 | OSMEN | 0 | RW | One-shot Mode Enable |
| Enable/disable one shot mode. | | | | |
| 3 | SYNC | 0 | RW | Timer Start/Stop/Reload Synchronization |
| When this bit is set, the Timer is started/stopped/reloaded by start/stop/reload commands in the other timers | | | | |
| | Value | Description | | |
| | 0 | Timer is not started/stopped/reloaded by other timers | | |
| | 1 | Timer is started/stopped/reloaded by other timers | | |
| | | | | |
| 2 | <i>Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 1:0 | MODE | 0x0 | RW | Timer Mode |
| These bit set the counting mode for the Timer. Note, when Quadrature Decoder Mode is selected (MODE = 'b11), the CLKSEL is don't care. The Timer is clocked by the Decoder Mode clock output. | | | | |
| | Value | Mode | | Description |
| | 0 | UP | | Up-count mode |
| | 1 | DOWN | | Down-count mode |
| | 2 | UPDOWN | | Up/down-count mode |
| | 3 | QDEC | | Quadrature decoder mode |

17.5.2 TIMERN_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|------|-------|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | STOP | START |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | STOP | 0 | W1 | Stop Timer Write a 1 to this bit to stop timer |
| 0 | START | 0 | W1 | Start Timer Write a 1 to this bit to start timer |

17.5.3 TIMERN_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|--------|--------|--------|----|----|----|----|----|------|------|------|----|----|----|----|----|--------|--------|--------|---|---|---|---|---|-------|-----|---------|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | 0 | 0 | 0 | | | | | | 0 | 0 | 0 | | | | | | 0 | 0 | 0 | | | | | | 0 | 0 | 0 | 0 |
| Access | | | | | | R | R | R | | | | | | R | R | R | | | | | | R | R | R | | | | | | R | R | R | R |
| Name | | | | | | CCPOL2 | CCPOL1 | CCPOL0 | | | | | | ICV2 | ICV1 | ICV0 | | | | | | CCVBV2 | CCVBV1 | CCVBV0 | | | | | | TOPBV | DIR | RUNNING | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------------------------------------|--|
| 31:27 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 26 | CCPOL2 | 0 | R | CC2 Polarity In Input Capture mode, this bit indicates the polarity of the edge that triggered capture in TIMERN_CC2_CCv. In Compare/PWM mode, this bit indicates the polarity of the selected input to CC channel 2. These bits are cleared when CCMODE is written to 0b00 (Off). |
| | Value | Mode | Description | |
| | 0 | LOWRISE | CC2 polarity low level/rising edge | |
| | 1 | HIGHFALL | CC2 polarity high level/falling edge | |
| 25 | CCPOL1 | 0 | R | CC1 Polarity In Input Capture mode, this bit indicates the polarity of the edge that triggered capture in TIMERN_CC1_CCv. In Compare/PWM mode, this bit indicates the polarity of the selected input to CC channel 1. These bits are cleared when CCMODE is written to 0b00 (Off). |
| | Value | Mode | Description | |
| | 0 | LOWRISE | CC1 polarity low level/rising edge | |
| | 1 | HIGHFALL | CC1 polarity high level/falling edge | |
| 24 | CCPOL0 | 0 | R | CC0 Polarity In Input Capture mode, this bit indicates the polarity of the edge that triggered capture in TIMERN_CC0_CCv. In Compare/PWM mode, this bit indicates the polarity of the selected input to CC channel 0. These bits are cleared when CCMODE is written to 0b00 (Off). |
| | Value | Mode | Description | |
| | 0 | LOWRISE | CC0 polarity low level/rising edge | |
| | 1 | HIGHFALL | CC0 polarity high level/falling edge | |

| Bit | Name | Reset | Access | Description | | | | | | |
|-------|--|---|--------|--|-------|-------------|-------------|---|----|--|
| 23:19 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 18 | ICV2 | 0 | R | CC2 Input Capture Valid This bit indicates that TIMERN_CC2_CCV contains a valid capture value. These bits are only used in input capture mode and are cleared when CCMODE is written to 0b00 (Off). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>TIMERN_CC2_CCV does not contain a valid capture value(FIFO empty)</td></tr><tr><td>1</td><td>TIMERN_CC2_CCV contains a valid capture value(FIFO not empty)</td></tr></table> | Value | Description | 0 | TIMERN_CC2_CCV does not contain a valid capture value(FIFO empty) | 1 | TIMERN_CC2_CCV contains a valid capture value(FIFO not empty) |
| Value | Description | | | | | | | | | |
| 0 | TIMERN_CC2_CCV does not contain a valid capture value(FIFO empty) | | | | | | | | | |
| 1 | TIMERN_CC2_CCV contains a valid capture value(FIFO not empty) | | | | | | | | | |
| 17 | ICV1 | 0 | R | CC1 Input Capture Valid This bit indicates that TIMERN_CC1_CCV contains a valid capture value. These bits are only used in input capture mode and are cleared when CCMODE is written to 0b00 (Off). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>TIMERN_CC1_CCV does not contain a valid capture value(FIFO empty)</td></tr><tr><td>1</td><td>TIMERN_CC1_CCV contains a valid capture value(FIFO not empty)</td></tr></table> | Value | Description | 0 | TIMERN_CC1_CCV does not contain a valid capture value(FIFO empty) | 1 | TIMERN_CC1_CCV contains a valid capture value(FIFO not empty) |
| Value | Description | | | | | | | | | |
| 0 | TIMERN_CC1_CCV does not contain a valid capture value(FIFO empty) | | | | | | | | | |
| 1 | TIMERN_CC1_CCV contains a valid capture value(FIFO not empty) | | | | | | | | | |
| 16 | ICV0 | 0 | R | CC0 Input Capture Valid This bit indicates that TIMERN_CC0_CCV contains a valid capture value. These bits are only used in input capture mode and are cleared when CCMODE is written to 0b00 (Off). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>TIMERN_CC0_CCV does not contain a valid capture value(FIFO empty)</td></tr><tr><td>1</td><td>TIMERN_CC0_CCV contains a valid capture value(FIFO not empty)</td></tr></table> | Value | Description | 0 | TIMERN_CC0_CCV does not contain a valid capture value(FIFO empty) | 1 | TIMERN_CC0_CCV contains a valid capture value(FIFO not empty) |
| Value | Description | | | | | | | | | |
| 0 | TIMERN_CC0_CCV does not contain a valid capture value(FIFO empty) | | | | | | | | | |
| 1 | TIMERN_CC0_CCV contains a valid capture value(FIFO not empty) | | | | | | | | | |
| 15:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 10 | CCVBV2 | 0 | R | CC2 CCVB Valid This field indicates that the TIMERN_CC2_CCVB registers contain data which have not been written to TIMERN_CC2_CCV. These bits are only used in output compare/pwm mode and are cleared when CCMODE is written to 0b00 (Off). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>TIMERN_CC2_CCVB does not contain valid data</td></tr><tr><td>1</td><td>TIMERN_CC2_CCVB contains valid data which will be written to TIMERN_CC2_CCV on the next update event</td></tr></table> | Value | Description | 0 | TIMERN_CC2_CCVB does not contain valid data | 1 | TIMERN_CC2_CCVB contains valid data which will be written to TIMERN_CC2_CCV on the next update event |
| Value | Description | | | | | | | | | |
| 0 | TIMERN_CC2_CCVB does not contain valid data | | | | | | | | | |
| 1 | TIMERN_CC2_CCVB contains valid data which will be written to TIMERN_CC2_CCV on the next update event | | | | | | | | | |
| 9 | CCVBV1 | 0 | R | CC1 CCVB Valid This field indicates that the TIMERN_CC1_CCVB registers contain data which have not been written to TIMERN_CC1_CCV. These bits are only used in output compare/pwm mode and are cleared when CCMODE is written to 0b00 (Off). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>TIMERN_CC1_CCVB does not contain valid data</td></tr><tr><td>1</td><td>TIMERN_CC1_CCVB contains valid data which will be written to TIMERN_CC1_CCV on the next update event</td></tr></table> | Value | Description | 0 | TIMERN_CC1_CCVB does not contain valid data | 1 | TIMERN_CC1_CCVB contains valid data which will be written to TIMERN_CC1_CCV on the next update event |
| Value | Description | | | | | | | | | |
| 0 | TIMERN_CC1_CCVB does not contain valid data | | | | | | | | | |
| 1 | TIMERN_CC1_CCVB contains valid data which will be written to TIMERN_CC1_CCV on the next update event | | | | | | | | | |
| 8 | CCVBV0 | 0 | R | CC0 CCVB Valid This field indicates that the TIMERN_CC0_CCVB registers contain data which have not been written to TIMERN_CC0_CCV. These bits are only used in output compare/pwm mode and are cleared when CCMODE is written to 0b00 (Off). <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>TIMERN_CC0_CCVB does not contain valid data</td></tr><tr><td>1</td><td>TIMERN_CC0_CCVB contains valid data which will be written to TIMERN_CC0_CCV on the next update event</td></tr></table> | Value | Description | 0 | TIMERN_CC0_CCVB does not contain valid data | 1 | TIMERN_CC0_CCVB contains valid data which will be written to TIMERN_CC0_CCV on the next update event |
| Value | Description | | | | | | | | | |
| 0 | TIMERN_CC0_CCVB does not contain valid data | | | | | | | | | |
| 1 | TIMERN_CC0_CCVB contains valid data which will be written to TIMERN_CC0_CCV on the next update event | | | | | | | | | |
| 7:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 2 | TOPBV | 0 | R | TOPB Valid This indicates that TIMERN_TOPB contains valid data that has not been written to TIMERN_TOP. This bit is also cleared when TIMERN_TOP is written. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>TIMERN_TOPB does not contain valid data</td></tr><tr><td>1</td><td>TIMERN_TOPB contains valid data which will be written to TIMERN_TOP on the next update event</td></tr></table> | Value | Description | 0 | TIMERN_TOPB does not contain valid data | 1 | TIMERN_TOPB contains valid data which will be written to TIMERN_TOP on the next update event |
| Value | Description | | | | | | | | | |
| 0 | TIMERN_TOPB does not contain valid data | | | | | | | | | |
| 1 | TIMERN_TOPB contains valid data which will be written to TIMERN_TOP on the next update event | | | | | | | | | |
| 1 | DIR | 0 | R | Direction Indicates count direction. <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>UP</td><td>Counting up</td></tr></table> | Value | Mode | Description | 0 | UP | Counting up |
| Value | Mode | Description | | | | | | | | |
| 0 | UP | Counting up | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---------------------------------------|---------|-------|--------|----------------|
| | Value | Mode | | Description |
| | 1 | DOWN | | Counting down |
| 0 | RUNNING | 0 | R | Running |
| Indicates if timer is running or not. | | | | |

17.5.4 TIMERN_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|--------|--------|----|---|---|---|---|---|---|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | | 0 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | ICBOF2 | ICBOF1 | ICBOF0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | ICBOF2 | 0 | RW | CC Channel 2 Input Capture Buffer Overflow Interrupt Enable Enable/disable Compare/Capture ch 2 input capture buffer overflow interrupt. |
| 9 | ICBOF1 | 0 | RW | CC Channel 1 Input Capture Buffer Overflow Interrupt Enable Enable/disable Compare/Capture ch 1 input capture buffer overflow interrupt. |
| 8 | ICBOF0 | 0 | RW | CC Channel 0 Input Capture Buffer Overflow Interrupt Enable Enable/disable Compare/Capture ch 0 input capture buffer overflow interrupt. |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | CC2 | 0 | RW | CC Channel 2 Interrupt Enable Enable/disable Compare/Capture ch 2 interrupt. |
| 5 | CC1 | 0 | RW | CC Channel 1 Interrupt Enable Enable/disable Compare/Capture ch 1 interrupt. |
| 4 | CC0 | 0 | RW | CC Channel 0 Interrupt Enable Enable/disable Compare/Capture ch 0 interrupt. |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | UF | 0 | RW | Underflow Interrupt Enable Enable/disable underflow interrupt. |
| 0 | OF | 0 | RW | Overflow Interrupt Enable Enable/disable overflow interrupt. |

17.5.5 TIMERN_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|--------|--------|---|-----|-----|-----|---|---|----|----|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | | 0 | 0 | 0 | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | R | R | R | | R | R | R | | | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | ICBOF2 | ICBOF1 | ICBOF0 | | CC2 | CC1 | CC0 | | | UF | OF |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | ICBOF2 | 0 | R | CC Channel 2 Input Capture Buffer Overflow Interrupt Flag This bit indicates that a new capture value has pushed an unread value out of the TIMERN_CC2_CC2V/TIMERN_CC2_CC2VB register pair. |
| 9 | ICBOF1 | 0 | R | CC Channel 1 Input Capture Buffer Overflow Interrupt Flag This bit indicates that a new capture value has pushed an unread value out of the TIMERN_CC1_CC1V/TIMERN_CC1_CC1VB register pair. |
| 8 | ICBOF0 | 0 | R | CC Channel 0 Input Capture Buffer Overflow Interrupt Flag This bit indicates that a new capture value has pushed an unread value out of the TIMERN_CC0_CC0V/TIMERN_CC0_CC0VB register pair. |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | CC2 | 0 | R | CC Channel 2 Interrupt Flag This bit indicates that there has been an interrupt event on Compare/Capture channel 2. |
| 5 | CC1 | 0 | R | CC Channel 1 Interrupt Flag This bit indicates that there has been an interrupt event on Compare/Capture channel 1. |
| 4 | CC0 | 0 | R | CC Channel 0 Interrupt Flag This bit indicates that there has been an interrupt event on Compare/Capture channel 0. |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | UF | 0 | R | Underflow Interrupt Flag This bit indicates that there has been an underflow. |
| 0 | OF | 0 | R | Overflow Interrupt Flag This bit indicates that there has been an overflow. |

17.5.6 TIMERN_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|--------|--------|----|---|---|---|---|---|----|----|----|----|--|--|--|--|--|--|---|---|---|---|--|--|--|--|----|----|----|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | | 0 | 0 | 0 | 0 | | | | | | | | | | | 0 | 0 | 0 | 0 | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | | | | | | W1 | W1 | W1 | W1 | | | | | | | | | | | | | | | W1 | W1 | 0 | 0 |
| Name | | | | | | | | | | | | | | | | | | | | | | ICBOF2 | ICBOF1 | ICBOF0 | | | | | | | | | | | | | | | | | | | | | | | | | | UF | OF | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | ICBOF2 | 0 | W1 | CC Channel 2 Input Capture Buffer Overflow Interrupt Flag Set Writing a 1 to this bit will set Compare/Capture channel 2 input capture buffer overflow interrupt flag. |
| 9 | ICBOF1 | 0 | W1 | CC Channel 1 Input Capture Buffer Overflow Interrupt Flag Set Writing a 1 to this bit will set Compare/Capture channel 1 input capture buffer overflow interrupt flag. |
| 8 | ICBOF0 | 0 | W1 | CC Channel 0 Input Capture Buffer Overflow Interrupt Flag Set Writing a 1 to this bit will set Compare/Capture channel 0 input capture buffer overflow interrupt flag. |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | CC2 | 0 | W1 | CC Channel 2 Interrupt Flag Set Writing a 1 to this bit will set Compare/Capture channel 2 interrupt flag. |
| 5 | CC1 | 0 | W1 | CC Channel 1 Interrupt Flag Set |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|--|
| Writing a 1 to this bit will set Compare/Capture channel 1 interrupt flag. | | | | |
| 4 | CC0 | 0 | W1 | CC Channel 0 Interrupt Flag Set |
| Writing a 1 to this bit will set Compare/Capture channel 0 interrupt flag. | | | | |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | UF | 0 | W1 | Underflow Interrupt Flag Set |
| Writing a 1 to this bit will set the underflow interrupt flag. | | | | |
| 0 | OF | 0 | W1 | Overflow Interrupt Flag Set |
| Writing a 1 to this bit will set the overflow interrupt flag. | | | | |

17.5.7 TIMERN_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|--------|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | |
| Name | | | | | | | | | | | | | | | | | | | | | | ICBOF2 | ICBOF1 | ICBOF0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|--|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10 | ICBOF2 | 0 | W1 | CC Channel 2 Input Capture Buffer Overflow Interrupt Flag Clear |
| Writing a 1 to this bit will clear Compare/Capture channel 2 input capture buffer overflow interrupt flag. | | | | |
| 9 | ICBOF1 | 0 | W1 | CC Channel 1 Input Capture Buffer Overflow Interrupt Flag Clear |
| Writing a 1 to this bit will clear Compare/Capture channel 1 input capture buffer overflow interrupt flag. | | | | |
| 8 | ICBOF0 | 0 | W1 | CC Channel 0 Input Capture Buffer Overflow Interrupt Flag Clear |
| Writing a 1 to this bit will clear Compare/Capture channel 0 input capture buffer overflow interrupt flag. | | | | |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | CC2 | 0 | W1 | CC Channel 2 Interrupt Flag Clear |
| Writing a 1 to this bit will clear Compare/Capture interrupt flag 2. | | | | |
| 5 | CC1 | 0 | W1 | CC Channel 1 Interrupt Flag Clear |
| Writing a 1 to this bit will clear Compare/Capture interrupt flag 1. | | | | |
| 4 | CC0 | 0 | W1 | CC Channel 0 Interrupt Flag Clear |
| Writing a 1 to this bit will clear Compare/Capture interrupt flag 0. | | | | |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | UF | 0 | W1 | Underflow Interrupt Flag Clear |
| Writing a 1 to this bit will clear the underflow interrupt flag. | | | | |
| 0 | OF | 0 | W1 | Overflow Interrupt Flag Clear |
| Writing a 1 to this bit will clear the overflow interrupt flag. | | | | |

17.5.8 TIMERN_TOP - Counter Top Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0xFFFF | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RWH | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | TOP | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|--------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | TOP | 0xFFFF | RWH | Counter Top Value |
| These bits hold the TOP value for the counter. | | | | |

17.5.9 TIMERN_TOPB - Counter Top Value Buffer Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | TOPB | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---------------------------------------|----------|---|--------|---------------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | TOPB | 0x0000 | RW | Counter Top Value Buffer |
| These bits hold the TOP buffer value. | | | | |

17.5.10 TIMERN_CNT - Counter Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RWH | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | CNT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|------------------------------------|---|--------|----------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | CNT | 0x0000 | RWH | Counter Value |
| | These bits hold the counter value. | | | |

17.5.11 TIMERN ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----------|---|----------|---|----------|---|---|---|---|---|---|---|--------|---|--------|---|--------|---|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | |
| Reset | | | | | | | | | | | | | | | 0x0 | | | | | | | | 0 | 0 | | | | | | | 0 | 0 | 0 | 0 | | | | | | |
| Access | | | | | | | | | | | | | | | RW | | | | | | | | RW | 0 | RW | 0 | RW | 0 | | | | | | | RW | 0 | RW | 0 | RW | 0 |
| Name | | | | | | | | | | | | | | | LOCATION | | | | | | | | CDTI2PEN | | CDTI1PEN | | CDTI0PEN | | | | | | | | CC2PEN | | CC1PEN | | CC0PEN | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | |
|-------|----------|---|--------|---|-------|------|-------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|---|------|------------|
| 31:19 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 18:16 | LOCATION | 0x0 | RW | I/O Location Decides the location of the CC pins. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr><tr><td>2</td><td>LOC2</td><td>Location 2</td></tr><tr><td>3</td><td>LOC3</td><td>Location 3</td></tr><tr><td>4</td><td>LOC4</td><td>Location 4</td></tr><tr><td>5</td><td>LOC5</td><td>Location 5</td></tr></table> | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 | 2 | LOC2 | Location 2 | 3 | LOC3 | Location 3 | 4 | LOC4 | Location 4 | 5 | LOC5 | Location 5 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | LOC2 | Location 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | LOC3 | Location 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | LOC4 | Location 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | LOC5 | Location 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 15:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | CDTI2PEN | 0 | RW | CC Channel 2 Complementary Dead-Time Insertion Pin Enable Enable/disable CC channel 2 complementary dead-time insertion output connection to pin. | | | | | | | | | | | | | | | | | | | | | |
| 9 | CDTI1PEN | 0 | RW | CC Channel 1 Complementary Dead-Time Insertion Pin Enable Enable/disable CC channel 1 complementary dead-time insertion output connection to pin. | | | | | | | | | | | | | | | | | | | | | |
| 8 | CDTI0PEN | 0 | RW | CC Channel 0 Complementary Dead-Time Insertion Pin Enable Enable/disable CC channel 0 complementary dead-time insertion output connection to pin. | | | | | | | | | | | | | | | | | | | | | |
| 7:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | CC2PEN | 0 | RW | CC Channel 2 Pin Enable Enable/disable CC channel 2 output/input connection to pin. | | | | | | | | | | | | | | | | | | | | | |
| 1 | CC1PEN | 0 | RW | CC Channel 1 Pin Enable Enable/disable CC channel 1 output/input connection to pin. | | | | | | | | | | | | | | | | | | | | | |
| 0 | CC0PEN | 0 | RW | CC Channel 0 Pin Enable Enable/disable CC Channel 0 output/input connection to pin. | | | | | | | | | | | | | | | | | | | | | |

17.5.12 TIMERNn_CCx_CTRL - CC Channel Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----------|----|--------|----|----|----|----|------|-------|----|--------|----|----|----|----|-------|----|-------|---|------|---|---|---|-------|---|---|-----|--------|----|------|--|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | | | | | 0x0 | | 0x0 | | | | | 0 | 0 | | 0x0 | | | | | 0x0 | | 0x0 | | 0x0 | | | | 0 | | 0 | 0x0 | | | | |
| Access | | | | | RW | | RW | | | | | RW | RW | | RW | | | | | RW | | RW | | RW | | | | RW | 0 | | RW | 0 | RW | | |
| Name | | | | | ICEVCTRL | | ICEDGE | | | | | FILT | INSEL | | PRSSEL | | | | | CUFOA | | COFOA | | CMOA | | | | COIST | | | | OUTINV | | MODE | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:28 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

27:26 ICEVCTRL 0x0 RW **Input Capture Event Control**

These bits control when a Compare/Capture PRS output pulse, interrupt flag and DMA request is set.

| Value | Mode | Description |
|-------|-----------------|--|
| 0 | EVERYEDGE | PRS output pulse, interrupt flag and DMA request set on every capture |
| 1 | EVERYSECONDEDGE | PRS output pulse, interrupt flag and DMA request set on every second capture |
| 2 | RISING | PRS output pulse, interrupt flag and DMA request set on rising edge only (if Icedge = BOTH) |
| 3 | FALLING | PRS output pulse, interrupt flag and DMA request set on falling edge only (if Icedge = BOTH) |

25:24 IEDGE 0x0 RW **Input Capture Edge Select**

These bits control which edges the edge detector triggers on. The output is used for input capture and external clock input.

| Value | Mode | Description |
|-------|---------|--|
| 0 | RISING | Rising edges detected |
| 1 | FALLING | Falling edges detected |
| 2 | BOTH | Both edges detected |
| 3 | NONE | No edge detection, signal is left as it is |

23:22 Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)

21 FILT 0 RW **Digital Filter**

Enable digital filter.

| Value | Mode | Description |
|-------|---------|-------------------------|
| 0 | DISABLE | Digital filter disabled |
| 1 | ENABLE | Digital filter enabled |

20 INSEL 0 RW **Input Selection**

Select Compare/Capture channel input.

| Value | Mode | Description |
|-------|------|--|
| 0 | PIN | TIMERNnCCx pin is selected |
| 1 | PRS | PRS input (selected by PRSSEL) is selected |

19 Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)

18:16 PRSSEL 0x0 RW **Compare/Capture Channel PRS Input Channel Selection**

Select PRS input channel for Compare/Capture channel.

| Value | Mode | Description |
|-------|--------|---------------------------------|
| 0 | PRSCH0 | PRS Channel 0 selected as input |
| 1 | PRSCH1 | PRS Channel 1 selected as input |
| 2 | PRSCH2 | PRS Channel 2 selected as input |
| 3 | PRSCH3 | PRS Channel 3 selected as input |
| 4 | PRSCH4 | PRS Channel 4 selected as input |
| 5 | PRSCH5 | PRS Channel 5 selected as input |
| 6 | PRSCH6 | PRS Channel 6 selected as input |

| Bit | Name | Reset | Access | Description |
|-------|---|---------------|--------|--|
| | Value | Mode | | Description |
| | 7 | PRSCH7 | | PRS Channel 7 selected as input |
| 15:14 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 13:12 | CUFOA | 0x0 | RW | Counter Underflow Output Action |
| | Select output action on counter underflow. | | | |
| | Value | Mode | | Description |
| | 0 | NONE | | No action on counter underflow |
| | 1 | TOGGLE | | Toggle output on counter underflow |
| | 2 | CLEAR | | Clear output on counter underflow |
| | 3 | SET | | Set output on counter underflow |
| 11:10 | COFOA | 0x0 | RW | Counter Overflow Output Action |
| | Select output action on counter overflow. | | | |
| | Value | Mode | | Description |
| | 0 | NONE | | No action on counter overflow |
| | 1 | TOGGLE | | Toggle output on counter overflow |
| | 2 | CLEAR | | Clear output on counter overflow |
| | 3 | SET | | Set output on counter overflow |
| 9:8 | CMOA | 0x0 | RW | Compare Match Output Action |
| | Select output action on compare match. | | | |
| | Value | Mode | | Description |
| | 0 | NONE | | No action on compare match |
| | 1 | TOGGLE | | Toggle output on compare match |
| | 2 | CLEAR | | Clear output on compare match |
| | 3 | SET | | Set output on compare match |
| 7:5 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 4 | COIST | 0 | RW | Compare Output Initial State |
| | This bit is only used in Output Compare and PWM mode. When this bit is set in compare mode, the output is set high when the counter is disabled. When counting resumes, this value will represent the initial value for the output. If the bit is cleared, the output will be cleared when the counter is disabled. In PWM mode, the output will always be low when disabled, regardless of this bit. However, this bit will represent the initial value of the output, once it is enabled. | | | |
| 3 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 2 | OUTINV | 0 | RW | Output Invert |
| | Setting this bit inverts the output from the CC channel (Output compare, PWM). | | | |
| 1:0 | MODE | 0x0 | RW | CC Channel Mode |
| | These bits select the mode for Compare/Capture channel. | | | |
| | Value | Mode | | Description |
| | 0 | OFF | | Compare/Capture channel turned off |
| | 1 | INPUTCAPTURE | | Input capture |
| | 2 | OUTPUTCOMPARE | | Output compare |
| | 3 | PWM | | Pulse-Width Modulation |

17.5.13 TIMERN_CCx_CCV - CC Channel Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RWH | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | CCV | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|-------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | CCV | 0x0000 | RWH | CC Channel Value |
| In input capture mode, this field holds the first unread capture value. When reading this register in input capture mode, then contents of the TIMERN_CCx_CCVB register will be written to TIMERN_CCx_CCV in the next cycle. In compare mode, this fields holds the compare value. | | | | |

17.5.14 TIMERN_CCx_CCVP - CC Channel Value Peek Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | CCVP | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|------------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | CCVP | 0x0000 | R | CC Channel Value Peek |
| This field is used to read the CC value without pulling data through the FIFO in capture mode. | | | | |

17.5.15 TIMERN_CCx_CCVB - CC Channel Buffer Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RWH | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | CCVB | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | CCVB | 0x0000 | RWH | CC Channel Value Buffer In Input Capture mode, this field holds the last capture value if the TIMERN_CCx_CCv register already contains an earlier unread capture value. In Output Compare or PWM mode, this field holds the CC buffer value which will be written to TIMERN_CCx_CCv on an update event if TIMERN_CCx_CCVB contains valid data. |

17.5.16 TIMERN_DTCTRL - DTI Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---------|---|----|--------|--------|-------|------|
| 0x070 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | 0 | | | | | | | | | | | | | | | | | | 0x0 | | 0 | 0 | 0 | 0 | |
| Access | | | | | | | | RW | | | | | | | | | | | | | | | | | | RW | | RW | RW | RW | RW | RW |
| Name | | | | | | | | DTPRSEN | | | | | | | | | | | | | | | | | | DTPRSEL | | | DTCINV | DTIPOL | DTDAS | DTEN |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-----------|---|--------|--|-------|------|-------------|---|-----------|---------------------------------|---|---------|---------------------------------|---|--------|---------------------------------|---|--------|---------------------------------|---|--------|---------------------------------|---|--------|---------------------------------|---|--------|---------------------------------|---|--------|---------------------------------|
| 31:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | DTPRSEN | 0 | RW | DTI PRS Source Enable Enable/disable PRS as DTI input. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6:4 | DTPRSEL | 0x0 | RW | DTI PRS Source Channel Select Select which PRS channel to listen to. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PRSCH0</td><td>PRS Channel 0 selected as input</td></tr><tr><td>1</td><td>PRSCH1</td><td>PRS Channel 1 selected as input</td></tr><tr><td>2</td><td>PRSCH2</td><td>PRS Channel 2 selected as input</td></tr><tr><td>3</td><td>PRSCH3</td><td>PRS Channel 3 selected as input</td></tr><tr><td>4</td><td>PRSCH4</td><td>PRS Channel 4 selected as input</td></tr><tr><td>5</td><td>PRSCH5</td><td>PRS Channel 5 selected as input</td></tr><tr><td>6</td><td>PRSCH6</td><td>PRS Channel 6 selected as input</td></tr><tr><td>7</td><td>PRSCH7</td><td>PRS Channel 7 selected as input</td></tr></table> | | | | | Value | Mode | Description | 0 | PRSCH0 | PRS Channel 0 selected as input | 1 | PRSCH1 | PRS Channel 1 selected as input | 2 | PRSCH2 | PRS Channel 2 selected as input | 3 | PRSCH3 | PRS Channel 3 selected as input | 4 | PRSCH4 | PRS Channel 4 selected as input | 5 | PRSCH5 | PRS Channel 5 selected as input | 6 | PRSCH6 | PRS Channel 6 selected as input | 7 | PRSCH7 | PRS Channel 7 selected as input |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PRSCH0 | PRS Channel 0 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PRSCH1 | PRS Channel 1 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PRSCH2 | PRS Channel 2 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PRSCH3 | PRS Channel 3 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PRSCH4 | PRS Channel 4 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PRSCH5 | PRS Channel 5 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | PRSCH6 | PRS Channel 6 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | PRSCH7 | PRS Channel 7 selected as input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | DTCINV | 0 | RW | DTI Complementary Output Invert. Set to invert complementary outputs. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | DTIPOL | 0 | RW | DTI Inactive Polarity Set inactive polarity for outputs. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | DTDAS | 0 | RW | DTI Automatic Start-up Functionality Configure DTI restart on debugger exit. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>NORESTART</td><td>No DTI restart on debugger exit</td></tr><tr><td>1</td><td>RESTART</td><td>DTI restart on debugger exit</td></tr></table> | | | | | Value | Mode | Description | 0 | NORESTART | No DTI restart on debugger exit | 1 | RESTART | DTI restart on debugger exit | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | NORESTART | No DTI restart on debugger exit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | RESTART | DTI restart on debugger exit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | DTEN | 0 | RW | DTI Enable Enable/disable DTI. | | | | | | | | | | | | | | | | | | | | | | | | | | | |

17.5.17 TIMERN_DTIME - DTI Time Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|---------|----|----|----|---|---|---|---|---------|---|---|---|---|---|
| 0x074 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | 0x00 | | | | | | | | 0x00 | | | | | | | | 0x0 | | | | | |
| Access | | | | | | | | | | | RW | | | | | | | | RW | | | | | | | | RW | | | | | |
| Name | | | | | | | | | | | DTFALLT | | | | | | | | DTRISET | | | | | | | | DTPRESC | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|--|---|--------|--|-------|-------------|-------------|--|------|---------------------------|---|------|------------------------------|---|------|------------------------------|---|------|------------------------------|---|-------|-------------------------------|---|-------|-------------------------------|---|-------|-------------------------------|---|--------|--------------------------------|---|--------|--------------------------------|---|--------|--------------------------------|----|---------|---------------------------------|
| 31:22 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 21:16 | DTFALLT | 0x00 | RW | DTI Fall-time Set time span for the falling edge. <table><tr><td>Value</td><td>Description</td></tr><tr><td>DTFALLT</td><td>Fall time of DTFALLT+1 prescaled HFPERCLK cycles</td></tr></table> | Value | Description | DTFALLT | Fall time of DTFALLT+1 prescaled HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DTFALLT | Fall time of DTFALLT+1 prescaled HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13:8 | DTRISET | 0x00 | RW | DTI Rise-time Set time span for the rising edge. <table><tr><td>Value</td><td>Description</td></tr><tr><td>DTRISET</td><td>Rise time of DTRISET+1 prescaled HFPERCLK cycles</td></tr></table> | Value | Description | DTRISET | Rise time of DTRISET+1 prescaled HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DTRISET | Rise time of DTRISET+1 prescaled HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3:0 | DTPRESC | 0x0 | RW | DTI Prescaler Setting Select prescaler for DTI. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>DIV1</td><td>The HFPERCLK is undivided</td></tr><tr><td>1</td><td>DIV2</td><td>The HFPERCLK is divided by 2</td></tr><tr><td>2</td><td>DIV4</td><td>The HFPERCLK is divided by 4</td></tr><tr><td>3</td><td>DIV8</td><td>The HFPERCLK is divided by 8</td></tr><tr><td>4</td><td>DIV16</td><td>The HFPERCLK is divided by 16</td></tr><tr><td>5</td><td>DIV32</td><td>The HFPERCLK is divided by 32</td></tr><tr><td>6</td><td>DIV64</td><td>The HFPERCLK is divided by 64</td></tr><tr><td>7</td><td>DIV128</td><td>The HFPERCLK is divided by 128</td></tr><tr><td>8</td><td>DIV256</td><td>The HFPERCLK is divided by 256</td></tr><tr><td>9</td><td>DIV512</td><td>The HFPERCLK is divided by 512</td></tr><tr><td>10</td><td>DIV1024</td><td>The HFPERCLK is divided by 1024</td></tr></table> | Value | Mode | Description | 0 | DIV1 | The HFPERCLK is undivided | 1 | DIV2 | The HFPERCLK is divided by 2 | 2 | DIV4 | The HFPERCLK is divided by 4 | 3 | DIV8 | The HFPERCLK is divided by 8 | 4 | DIV16 | The HFPERCLK is divided by 16 | 5 | DIV32 | The HFPERCLK is divided by 32 | 6 | DIV64 | The HFPERCLK is divided by 64 | 7 | DIV128 | The HFPERCLK is divided by 128 | 8 | DIV256 | The HFPERCLK is divided by 256 | 9 | DIV512 | The HFPERCLK is divided by 512 | 10 | DIV1024 | The HFPERCLK is divided by 1024 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | DIV1 | The HFPERCLK is undivided | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | DIV2 | The HFPERCLK is divided by 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | DIV4 | The HFPERCLK is divided by 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | DIV8 | The HFPERCLK is divided by 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | DIV16 | The HFPERCLK is divided by 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | DIV32 | The HFPERCLK is divided by 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | DIV64 | The HFPERCLK is divided by 64 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | DIV128 | The HFPERCLK is divided by 128 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | DIV256 | The HFPERCLK is divided by 256 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | DIV512 | The HFPERCLK is divided by 512 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | DIV1024 | The HFPERCLK is divided by 1024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

17.5.18 TIMERN_DTFC - DTI Fault Configuration Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|-------------|----------|-----------|-----------|----|----|----|----|----|----|----|------|----|----|----|----|----|----|---|------------|---|---|---|---|---|---|---|------------|--|--|
| 0x078 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | 0 | 0 | 0 | 0 | | | | | | | | 0x0 | | | | | | | | 0x0 | | | | | | | | 0x0 | | |
| Access | | | | | RW | RW | RW | RW | | | | | | | | RW | | | | | | | | RW | | | | | | | | RW | | |
| Name | | | | | DTLOCKUPFEN | DTDBGFEN | DTPRS1FEN | DTPRS0FEN | | | | | | | | DTFA | | | | | | | | DTPRS1FSEL | | | | | | | | DTPRS0FSEL | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------|---|--------|--|-------|------|-------------|---|--------|--|---|----------|--|---|--------|--|---|----------|--|---|--------|--|---|--------|--|---|--------|--|---|--------|--|
| 31:28 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | DTLOCKUPFEN | 0 | RW | DTI Lockup Fault Enable Set this bit to 1 to enable core lockup as a fault source | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 | DTDBGFEN | 0 | RW | DTI Debugger Fault Enable Set this bit to 1 to enable debugger as a fault source | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | DTPRS1FEN | 0 | RW | DTI PRS 1 Fault Enable Set this bit to 1 to enable PRS source 1(PRS channel determined by DTPRS1FSEL) as a fault source | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | DTPRS0FEN | 0 | RW | DTI PRS 0 Fault Enable Set this bit to 1 to enable PRS source 0(PRS channel determined by DTPRS0FSEL) as a fault source | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23:18 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17:16 | DTFA | 0x0 | RW | DTI Fault Action Select fault action. <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>NONE</td><td>No action on fault</td></tr><tr><td>1</td><td>INACTIVE</td><td>Set outputs inactive</td></tr><tr><td>2</td><td>CLEAR</td><td>Clear outputs</td></tr><tr><td>3</td><td>TRISTATE</td><td>Tristate outputs</td></tr></table> | Value | Mode | Description | 0 | NONE | No action on fault | 1 | INACTIVE | Set outputs inactive | 2 | CLEAR | Clear outputs | 3 | TRISTATE | Tristate outputs | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | NONE | No action on fault | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | INACTIVE | Set outputs inactive | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | CLEAR | Clear outputs | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | TRISTATE | Tristate outputs | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10:8 | DTPRS1FSEL | 0x0 | RW | DTI PRS Fault Source 1 Select Select PRS channel for fault source 1. <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PRSCH0</td><td>PRS Channel 0 selected as fault source 1</td></tr><tr><td>1</td><td>PRSCH1</td><td>PRS Channel 1 selected as fault source 1</td></tr><tr><td>2</td><td>PRSCH2</td><td>PRS Channel 2 selected as fault source 1</td></tr><tr><td>3</td><td>PRSCH3</td><td>PRS Channel 3 selected as fault source 1</td></tr><tr><td>4</td><td>PRSCH4</td><td>PRS Channel 4 selected as fault source 1</td></tr><tr><td>5</td><td>PRSCH5</td><td>PRS Channel 5 selected as fault source 1</td></tr><tr><td>6</td><td>PRSCH6</td><td>PRS Channel 6 selected as fault source 1</td></tr><tr><td>7</td><td>PRSCH7</td><td>PRS Channel 7 selected as fault source 1</td></tr></table> | Value | Mode | Description | 0 | PRSCH0 | PRS Channel 0 selected as fault source 1 | 1 | PRSCH1 | PRS Channel 1 selected as fault source 1 | 2 | PRSCH2 | PRS Channel 2 selected as fault source 1 | 3 | PRSCH3 | PRS Channel 3 selected as fault source 1 | 4 | PRSCH4 | PRS Channel 4 selected as fault source 1 | 5 | PRSCH5 | PRS Channel 5 selected as fault source 1 | 6 | PRSCH6 | PRS Channel 6 selected as fault source 1 | 7 | PRSCH7 | PRS Channel 7 selected as fault source 1 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PRSCH0 | PRS Channel 0 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PRSCH1 | PRS Channel 1 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PRSCH2 | PRS Channel 2 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PRSCH3 | PRS Channel 3 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PRSCH4 | PRS Channel 4 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PRSCH5 | PRS Channel 5 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | PRSCH6 | PRS Channel 6 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | PRSCH7 | PRS Channel 7 selected as fault source 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2:0 | DTPRS0FSEL | 0x0 | RW | DTI PRS Fault Source 0 Select Select PRS channel for fault source 0. <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PRSCH0</td><td>PRS Channel 0 selected as fault source 0</td></tr><tr><td>1</td><td>PRSCH1</td><td>PRS Channel 1 selected as fault source 0</td></tr><tr><td>2</td><td>PRSCH2</td><td>PRS Channel 2 selected as fault source 0</td></tr><tr><td>3</td><td>PRSCH3</td><td>PRS Channel 3 selected as fault source 0</td></tr><tr><td>4</td><td>PRSCH4</td><td>PRS Channel 4 selected as fault source 0</td></tr><tr><td>5</td><td>PRSCH5</td><td>PRS Channel 5 selected as fault source 0</td></tr><tr><td>6</td><td>PRSCH6</td><td>PRS Channel 6 selected as fault source 0</td></tr><tr><td>7</td><td>PRSCH7</td><td>PRS Channel 7 selected as fault source 0</td></tr></table> | Value | Mode | Description | 0 | PRSCH0 | PRS Channel 0 selected as fault source 0 | 1 | PRSCH1 | PRS Channel 1 selected as fault source 0 | 2 | PRSCH2 | PRS Channel 2 selected as fault source 0 | 3 | PRSCH3 | PRS Channel 3 selected as fault source 0 | 4 | PRSCH4 | PRS Channel 4 selected as fault source 0 | 5 | PRSCH5 | PRS Channel 5 selected as fault source 0 | 6 | PRSCH6 | PRS Channel 6 selected as fault source 0 | 7 | PRSCH7 | PRS Channel 7 selected as fault source 0 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PRSCH0 | PRS Channel 0 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PRSCH1 | PRS Channel 1 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PRSCH2 | PRS Channel 2 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PRSCH3 | PRS Channel 3 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PRSCH4 | PRS Channel 4 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PRSCH5 | PRS Channel 5 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | PRSCH6 | PRS Channel 6 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | PRSCH7 | PRS Channel 7 selected as fault source 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

17.5.19 TIMERN_DTOGEN - DTI Output Generation Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x07C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|---------|-------|--------|---|
| 0 | DTPRS0F | 0 | R | DTI PRS 0 Fault This bit is set to 1 if a PRS 0 fault has occurred and DTPRS0FEN is set to 1. The TIMER0_DTFAULTC register can be used to clear fault bits. |

17.5.21 TIMERN_DTFAULTC - DTI Fault Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|-----------|---------|
| 0x084 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | TLOCKUPFC | DTDBGFC |

| Bit | Name | Reset | Access | Description |
|------|-----------|---|--------|--|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | TLOCKUPFC | 0 | W1 | DTI Lockup Fault Clear Write 1 to this bit to clear core lockup fault. |
| 2 | DTDBGFC | 0 | W1 | DTI Debugger Fault Clear Write 1 to this bit to clear debugger fault. |
| 1 | DTPRS1FC | 0 | W1 | DTI PRS1 Fault Clear Write 1 to this bit to clear PRS 1 fault. |
| 0 | DTPRS0FC | 0 | W1 | DTI PRS0 Fault Clear Write 1 to this bit to clear PRS 0 fault. |

17.5.22 TIMERN_DTLOCK - DTI Configuration Lock Register


| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|
| 0x088 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | LOCKKEY | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | LOCKKEY | 0x0000 | RW | DTI Lock Key Write any other value than the unlock code to lock TIMER0_ROUTE, TIMER0_DTCTRL, TIMER0_DTTIME and TIMER0_DTFC from editing. Write the unlock code to unlock. When reading the register, bit 0 is set when the lock is enabled. |

| Mode | Value | Description |
|----------------|-------|----------------------------------|
| Read Operation | | |
| UNLOCKED | 0 | TIMER DTI registers are unlocked |
| LOCKED | 1 | TIMER DTI registers are locked |

| Bit | Name | Reset | Access | Description |
|-----|-----------------|--------|--------|----------------------------|
| | Mode | Value | | Description |
| | Write Operation | | | |
| | LOCK | 0 | | Lock TIMER DTI registers |
| | UNLOCK | 0xCE80 | | Unlock TIMER DTI registers |

18 RTC - Real Time Counter

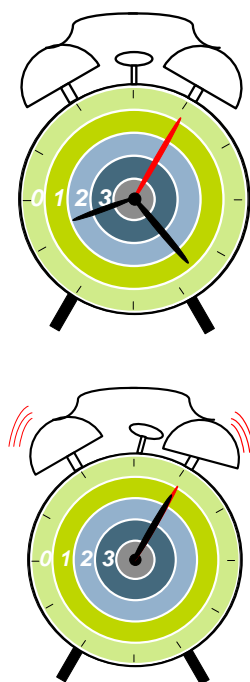

Quick Facts

What?

The Real Time Counter (RTC) ensures timekeeping in low energy modes. Combined with two low power oscillators (XTAL or RC), the RTC can run in EM2 with total current consumption less than 1.0 μ A, and in EM3 with total current consumption less than 0.6 μ A.

Why?

Timekeeping over long time periods is required in many applications, while using as little power as possible.

How?

Selectable 1 kHz and 32.768 Hz oscillators that can be used as clock source and two different compare registers that can trigger a wake-up. 24-bit resolution and selectable prescaling allow the system to stay in EM2 or EM3 for a long time and still maintain reliable timekeeping.

18.1 Introduction

The Real Time Counter (RTC) contains a 24-bit counter and is clocked either by a 32.768 Hz crystal oscillator, a 32.768 Hz RC oscillator, or a 1 kHz RC oscillator. In addition to energy modes EM0 and EM1, the RTC is also available in EM2. This makes it ideal for keeping track of time since the RTC is enabled in EM2 where most of the device is powered down. Using the 1 kHz ULFRCO as input clock, the RTC can be used for timekeeping all the way down to EM3.

Two compare channels are available in the RTC. These can be used to trigger interrupts and to wake the device up from a low energy mode. They can also be used with the LETIMER to generate various output waveforms.


18.2 Features

- 24-bit Real Time Counter.
- Prescaler
 - $32.768 \text{ kHz}/2^N$, $N = 0 - 15$.
 - Overflow @ 0.14 hours for prescaler setting = 0.
 - Overflow @ 4660 hours (194 days) for prescaler setting = 15 (1 s tick).
- Two compare registers
 - A compare match can potentially wake-up the device from low energy modes EM1 and EM2.
 - Second compare register can be top value for RTC.
 - Both compare channels can trigger LETIMER.
 - Compare match events are available to other peripherals through the Peripheral Reflex System (PRS).

18.3 Functional Description

The RTC is a 24-bit counter with two compare channels. The RTC is closely coupled with the LETIMER, and can be configured to trigger it on a compare match on one or both compare channels. An overview of the RTC module is shown in Figure 18.1 (p. 286) .

Figure 18.1. RTC Overview

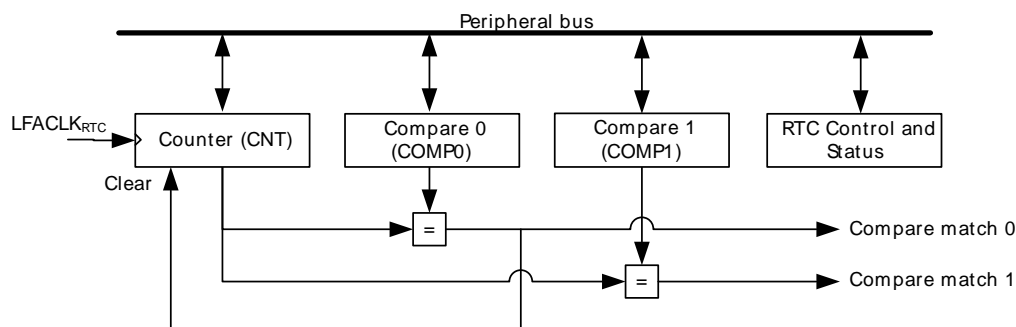

18.3.1 Counter

The RTC is enabled by setting the EN bit in the RTC_CTRL register. It counts up as long as it is enabled, and will on an overflow simply wrap around and continue counting. The RTC is cleared when it is disabled. The timer value is both readable and writable and the RTC always starts counting from 0 when enabled. The value of the counter can be read or modified using the RTC_CNT register.

18.3.1.1 Clock Source

The RTC clock source and its prescaler value are defined in the Register Description section of the Clock Management Unit (CMU). The clock used by the RTC has a frequency given by Equation 18.1 (p. 286) .

RTC Frequency Equation

$$f_{\text{RTC}} = f_{\text{LFACLK}} / 2^{\text{RTC_PRESC}} \quad (18.1)$$

where f_{LFACLK} is the LFACLK frequency (32.768 kHz) and RTC_PRESC is a 4 bit value. Table 18.1 (p. 287) shows the time of overflow and resolution of the RTC at the available prescaler values.

To use this module, the LE interface clock must be enabled in CMU_HFCORECLKEN0 in addition to the module clock

Table 18.1. RTC Resolution Vs Overflow

| RTC_PRESC | Resolution | Overflow |
|-----------|--------------|------------|
| 0 | 30,5 μ s | 512 s |
| 1 | 61,0 μ s | 1024 s |
| 2 | 122 μ s | 2048 s |
| 3 | 244 μ s | 1,14 hours |
| 4 | 488 μ s | 2,28 hours |
| 5 | 977 μ s | 4,55 hours |
| 6 | 1,95 ms | 9,10 hours |
| 7 | 3,91 ms | 18,2 hours |
| 8 | 7,81 ms | 1,52 days |
| 9 | 15,6 ms | 3,03 days |
| 10 | 31,25 ms | 6,07 days |
| 11 | 62,5 ms | 12,1 days |
| 12 | 0,125 s | 24,3 days |
| 13 | 0,25 s | 48,5 days |
| 14 | 0,5 s | 97,1 days |
| 15 | 1 s | 194 days |

18.3.2 Compare Channels

Two compare channels are available in the RTC. The compare values can be set by writing to the RTC compare channel registers RTC_COMPn, and when RTC_CNT is equal to one of these, the respective compare interrupt flag COMPn is set.

If COMP0TOP is set, the compare value set for compare channel 0 is used as a top value for the RTC, and the timer is cleared on a compare match with compare channel 0. If using the COMP0TOP setting, make sure to set this bit prior to or at the same time the EN bit is set. Setting COMP0TOP after the EN bit is set may cause unintended operation (i.e. if CNT > COMP0).

18.3.2.1 LETIMER Triggers

A compare event on either of the compare channels can start the LETIMER. See the LETIMER documentation for more information on this feature.

18.3.2.2 PRS Sources

Both the compare channels of the RTC can be used as PRS sources. They will generate a pulse lasting one RTC clock cycle on a compare match.

18.3.3 Interrupts

The interrupts generated by the RTC are combined into one interrupt vector. If interrupts for the RTC is enabled, an interrupt will be made if one or more of the interrupt flags in RTC_IF and their corresponding bits in RTC_IEN are set. Interrupt events are overflow and compare match on either compare channels. Clearing of an interrupt flag is performed by writing to the corresponding bit in the RTC_IFC register.

18.3.4 Debugrun

By default, the RTC is halted when code execution is halted from the debugger. By setting the DEBUGRUN bit in the RTC_CTRL register, the RTC will continue to run even when the debugger is halted.

18.3.5 Using the RTC in EM3

The RTC can be enabled all the way down to EM3 by using the ULFRCO as clock source. This is done by clearing CMU_LFCLKSEL_LFA and setting CMU_LFCLKSEL_LFAE to 1. This will make the RTC use the internal 1 kHz ultra low frequency RC oscillator (ULFRCO), consuming very little energy. Please note that the ULFRCO is not accurate over temperature and voltage, and it should be verified that the ULFRCO fulfills the timekeeping needs of the application before using this in the design.

18.3.6 Register access

This module is a Low Energy Peripheral, and supports immediate synchronization. For description regarding immediate synchronization, the reader is referred to Section 5.3.1.1 (p. 20) .

18.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|--------------|------|-------------------------------|
| 0x000 | RTC_CTRL | RW | Control Register |
| 0x004 | RTC_CNT | RWH | Counter Value Register |
| 0x008 | RTC_COMP0 | RW | Compare Value Register 0 |
| 0x00C | RTC_COMP1 | RW | Compare Value Register 1 |
| 0x010 | RTC_IF | R | Interrupt Flag Register |
| 0x014 | RTC_IFS | W1 | Interrupt Flag Set Register |
| 0x018 | RTC_IFC | W1 | Interrupt Flag Clear Register |
| 0x01C | RTC_IEN | RW | Interrupt Enable Register |
| 0x020 | RTC_FREEZE | RW | Freeze Register |
| 0x024 | RTC_SYNCBUSY | R | Synchronization Busy Register |

18.5 Register Description

18.5.1 RTC_CTRL - Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--|--|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | COMP0TOP | 0 | RW | Compare Channel 0 is Top Value When set, the counter is cleared in the clock cycle after a compare match with compare channel 0. |
| | Value | Mode | Description | |
| | 0 | DISABLE | The top value of the RTC is 16777215 (0xFFFFF) | |
| | 1 | ENABLE | The top value of the RTC is given by COMP0 | |
| 1 | DEBUGRUN | 0 | RW | Debug Mode Run Enable Set this bit to enable the RTC to keep running in debug. |
| | Value | Description | | |
| | 0 | RTC is frozen in debug mode | | |
| | 1 | RTC is running in debug mode | | |
| 0 | EN | 0 | RW | RTC Enable When this bit is set, the RTC is enabled and counts up. When cleared, the counter register CNT is reset. |

18.5.2 RTC_CNT - Counter Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RWH | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | CNT | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | CNT | 0x000000 | RWH | Counter Value Gives access to the counter value of the RTC. |

18.5.3 RTC_COMP0 - Compare Value Register 0 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | COMP0 | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | COMP0 | 0x000000 | RW | Compare Value 0 A compare match event occurs when CNT is equal to this value. This event sets the COMP0 interrupt flag, and can be used to start the LETIMER. It is also available as a PRS signal. |

18.5.4 RTC_COMP1 - Compare Value Register 1 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | COMP1 | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | COMP1 | 0x000000 | RW | Compare Value 1 A compare match event occurs when CNT is equal to this value. This event sets COMP1 interrupt flag, and can be used to start the LETIMER. It is also available as a PRS signal. |

18.5.5 RTC_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | COMP1 | 0 | R | Compare Match 1 Interrupt Flag Set on a compare match between CNT and COMP1. |
| 1 | COMP0 | 0 | R | Compare Match 0 Interrupt Flag Set on a compare match between CNT and COMP0. |
| 0 | OF | 0 | R | Overflow Interrupt Flag Set on a CNT value overflow. |

18.5.6 RTC_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|-------|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | COMP1 | COMP0 | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | COMP1 | 0 | W1 | Set Compare match 1 Interrupt Flag Write to 1 to set the COMP1 interrupt flag. |
| 1 | COMP0 | 0 | W1 | Set Compare match 0 Interrupt Flag Write to 1 to set the COMP0 interrupt flag. |
| 0 | OF | 0 | W1 | Set Overflow Interrupt Flag Write to 1 to set the OF interrupt flag. |

18.5.7 RTC_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|-------|----|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | COMP1 | COMP0 | OF | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | COMP1 | 0 | W1 | Clear Compare match 1 Interrupt Flag Write to 1 to clear the COMP1 interrupt flag. |
| 1 | COMP0 | 0 | W1 | Clear Compare match 0 Interrupt Flag Write to 1 to clear the COMP0 interrupt flag. |
| 0 | OF | 0 | W1 | Clear Overflow Interrupt Flag Write to 1 to clear the OF interrupt flag. |

18.5.8 RTC_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|-------|----|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | COMP1 | COMP0 | OF | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | COMP1 | 0 | RW | Compare Match 1 Interrupt Enable Enable interrupt on compare match 1. |
| 1 | COMP0 | 0 | RW | Compare Match 0 Interrupt Enable Enable interrupt on compare match 0. |
| 0 | OF | 0 | RW | Overflow Interrupt Enable |

| Bit | Name | Reset | Access | Description |
|-----|-------------------------------|-------|--------|-------------|
| | Enable interrupt on overflow. | | | |

18.5.9 RTC_FREEZE - Freeze Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-----------|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | REGFREEZE |



| Bit | Name | Reset | Access | Description |
|-------|-----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | REGFREEZE | 0 | RW | Register Update Freeze When set, the update of the RTC is postponed until this bit is cleared. Use this bit to update several registers simultaneously. |
| Value | | Mode | | Description |
| 0 | | UPDATE | | Each write access to an RTC register is updated into the Low Frequency domain as soon as possible. |
| 1 | | FREEZE | | The RTC is not updated with the new written value until the freeze bit is cleared. |

18.5.10 RTC_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|---|-------|---|------|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 0 | R | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | | R | | R | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | COMP1 | | COMP0 | | CTRL | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | COMP1 | 0 | R | COMP1 Register Busy Set when the value written to COMP1 is being synchronized. |
| 1 | COMP0 | 0 | R | COMP0 Register Busy Set when the value written to COMP0 is being synchronized. |
| 0 | CTRL | 0 | R | CTRL Register Busy Set when the value written to CTRL is being synchronized. |

19 LETIMER - Low Energy Timer

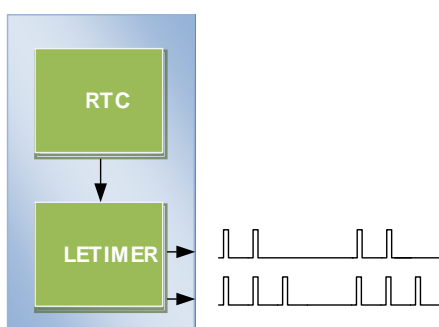

Quick Facts

What?

The LETIMER is a down-counter that can keep track of time and output configurable waveforms. Running on a 32.768 Hz clock the LETIMER is available in EM2, while using a 1 kHz clock the LETIMER is available also in EM3, all this with sub μ A current consumption.

Why?

The LETIMER can be used to provide repeatable waveforms to external components while remaining in EM2. It is well suited for e.g. metering systems or to provide more compare values than available in the RTC.

How?

With buffered repeat and top value registers, the LETIMER can provide glitch-free waveforms at frequencies up to 16 kHz. It is tightly coupled to the RTC, which allows advanced time-keeping and wake-up functions in EM2 and EM3.

19.1 Introduction

The unique LETIMER[™], the Low Energy Timer, is a 16-bit timer that is available in energy mode EM2 and EM3, in addition to EM1 and EM0. Because of this, it can be used for timing and output generation when most of the device is powered down, allowing simple tasks to be performed while the power consumption of the system is kept at an absolute minimum.

The LETIMER can be used to output a variety of waveforms with minimal software intervention. It is also connected to the Real Time Counter (RTC), and can be configured to start counting on compare matches from the RTC.

19.2 Features


- 16-bit down count timer
- 2 Compare match registers
- Compare register 0 can be top timer top value
- Compare registers can be double buffered
- Double buffered 8-bit Repeat Register
- Same clock source as the Real Time Counter
- LETIMER can be triggered (started) by an RTC event or by software
- 2 output pins can optionally be configured to provide different waveforms on timer underflow:
 - Toggle output pin
 - Apply a positive pulse (pulse width of one LFACLK_{LETIMER} period)
 - PWM

- Interrupt on:
 - Compare matches
 - Timer underflow
 - Repeat done
- Optionally runs during debug
- PRS Output

19.3 Functional Description

An overview of the LETIMER module is shown in Figure 19.1 (p. 295). The LETIMER is a 16-bit down-counter with two compare registers, LETIMERn_COMP0 and LETIMERn_COMP1. The LETIMERn_COMP0 register can optionally act as a top value for the counter. The repeat counter LETIMERn_REP0 allows the timer to count a specified number of times before it stops. Both the LETIMERn_COMP0 and LETIMERn_REP0 registers can be double buffered by the LETIMERn_COMP1 and LETIMERn_REP1 registers to allow continuous operation. The timer can generate a single pin output, or two linked outputs.

Figure 19.1. LETIMER Overview

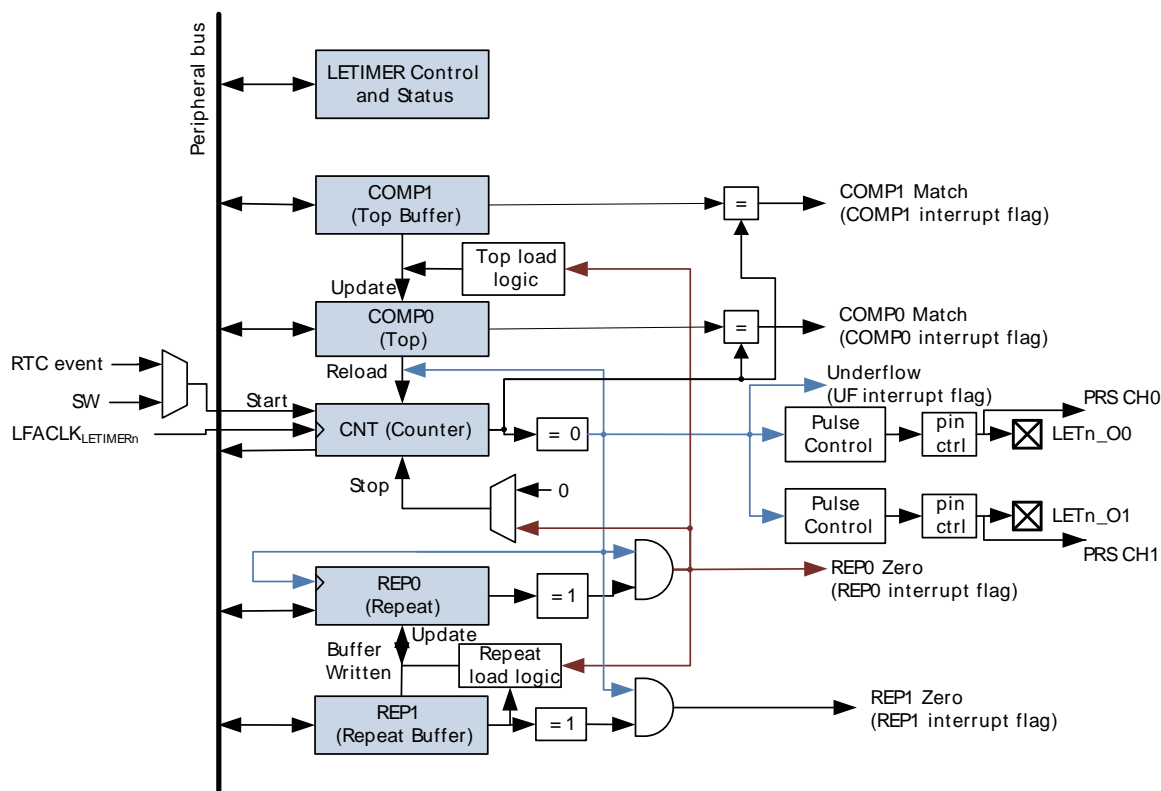

19.3.1 Timer

The timer is started by setting command bit START in LETIMERn_CMD, and stopped by setting the STOP command bit in the same register. RUNNING in LETIMERn_STATUS is set as long as the timer is running. The timer can also be started on external signals, such as a compare match from the Real Time Counter. If START and STOP are set at the same time, STOP has priority, and the timer will be stopped.

The timer value can be read using the LETIMERn_CNT register. The value cannot be written, but it can be cleared by setting the CLEAR command bit in LETIMERn_CMD. If the CLEAR and START commands are issued at the same time, the timer will be cleared, then start counting at the top value.

19.3.2 Compare Registers

The LETIMER has two compare match registers, LETIMERn_COMP0 and LETIMERn_COMP1. Each of these compare registers are capable of generating an interrupt when the counter value LETIMERn_CNT becomes equal to their value. When LETIMERn_CNT becomes equal to the value of LETIMERn_COMP0, the interrupt flag COMP0 in LETIMERn_IF is set, and when LETIMERn_CNT becomes equal to the value of LETIMERn_COMP1, the interrupt flag COMP1 in LETIMERn_IF is set.

19.3.3 Top Value

If COMP0TOP in LETIMERn_CTRL is set, the value of LETIMERn_COMP0 acts as the top value of the timer, and LETIMERn_COMP0 is loaded into LETIMERn_CNT on timer underflow. Else, the timer wraps around to 0xFFFF. The underflow interrupt flag UF in LETIMERn_IF is set when the timer reaches zero.

19.3.3.1 Buffered Top Value

If BUFTOP in LETIMERn_CTRL is set, the value of LETIMERn_COMP0 is buffered by LETIMERn_COMP1. In this mode, the value of LETIMERn_COMP1 is loaded into LETIMERn_COMP0 every time LETIMERn_REP0 is about to decrement to 0. This can for instance be used in conjunction with the buffered repeat mode to generate continually changing output waveforms.

Write operations to LETIMERn_COMP0 have priority over buffer loads.

19.3.3.2 Repeat Modes

By default, the timer wraps around to the top value or 0xFFFF on each underflow, and continues counting. The repeat counters can be used to get more control of the operation of the timer, including defining the number of times the counter should wrap around. Four different repeat modes are available, see Table 19.1 (p. 296) .

Table 19.1. LETIMER Repeat Modes


| REPMODE | Mode | Description |
|---------|----------|--|
| 00 | Free | The timer runs until it is stopped |
| 01 | One-shot | The timer runs as long as LETIMERn_REP0 != 0. LETIMERn_REP0 is decremented at each timer underflow. |
| 10 | Buffered | The timer runs as long as LETIMERn_REP0 != 0. LETIMERn_REP0 is decremented on each timer underflow. If LETIMERn_REP1 has been written, it is loaded into LETIMERn_REP0 when LETIMERn_REP0 is about to be decremented to 0. |
| 11 | Double | The timer runs as long as LETIMERn_REP0 != 0 or LETIMERn_REP1 != 0. Both LETIMERn_REP0 and LETIMERn_REP1 are decremented at each timer underflow. |

The interrupt flags REP0 and REP1 in LETIMERn_IF are set whenever LETIMERn_REP0 or LETIMERn_REP1 are decremented to 0 respectively. REP0 is also set when the value of LETIMERn_REP1 is loaded into LETIMERn_REP0 in buffered mode.

19.3.3.2.1 Free Mode

In the free running mode, the LETIMER acts as a regular timer, and the repeat counter is disabled. When started, the timer runs until it is stopped using the STOP command bit in LETIMERn_CMD. A state machine for this mode is shown in Figure 19.2 (p. 297) .

Figure 19.2. LETIMER State Machine for Free-running Mode

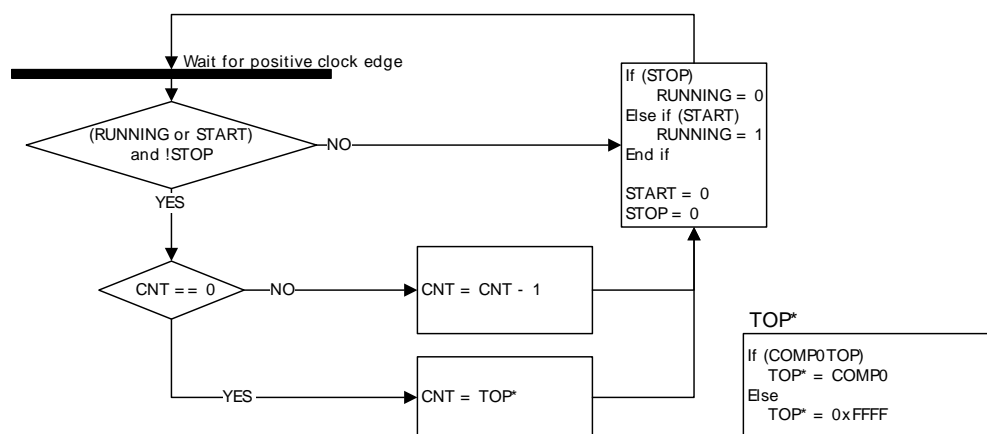

Note that the CLEAR command bit in LETIMERn_CMD always has priority over other changes to LETIMERn_CNT. When the clear command is used, LETIMERn_CNT is set to 0 and an underflow event will not be generated when LETIMERn_CNT wraps around to the top value or 0xFFFF. Since no underflow event is generated, no output action is performed. LETIMERn_REP0, LETIMERn_REP1, LETIMERn_COMP0 and LETIMERn_COMP1 are also left untouched.


19.3.3.2.2 One-shot Mode

The one-shot repeat mode is the most basic repeat mode. In this mode, the repeat register LETIMERn_REP0 is decremented every time the timer underflows, and the timer stops when LETIMERn_REP0 goes from 1 to 0. In this mode, the timer counts down LETIMERn_REP0 times, i.e. the timer underflows LETIMERn_REP0 times.

Note

Note that write operations to LETIMERn_REP0 have priority over the decrementation operation. So if LETIMERn_REP0 is assigned a new value in the same cycle it was supposed to be decremented, it is assigned the new value instead of being decremented.

LETIMERn_REP0 can be written while the timer is running to allow the timer to run for longer periods at a time without stopping. Figure 19.3 (p. 298) .

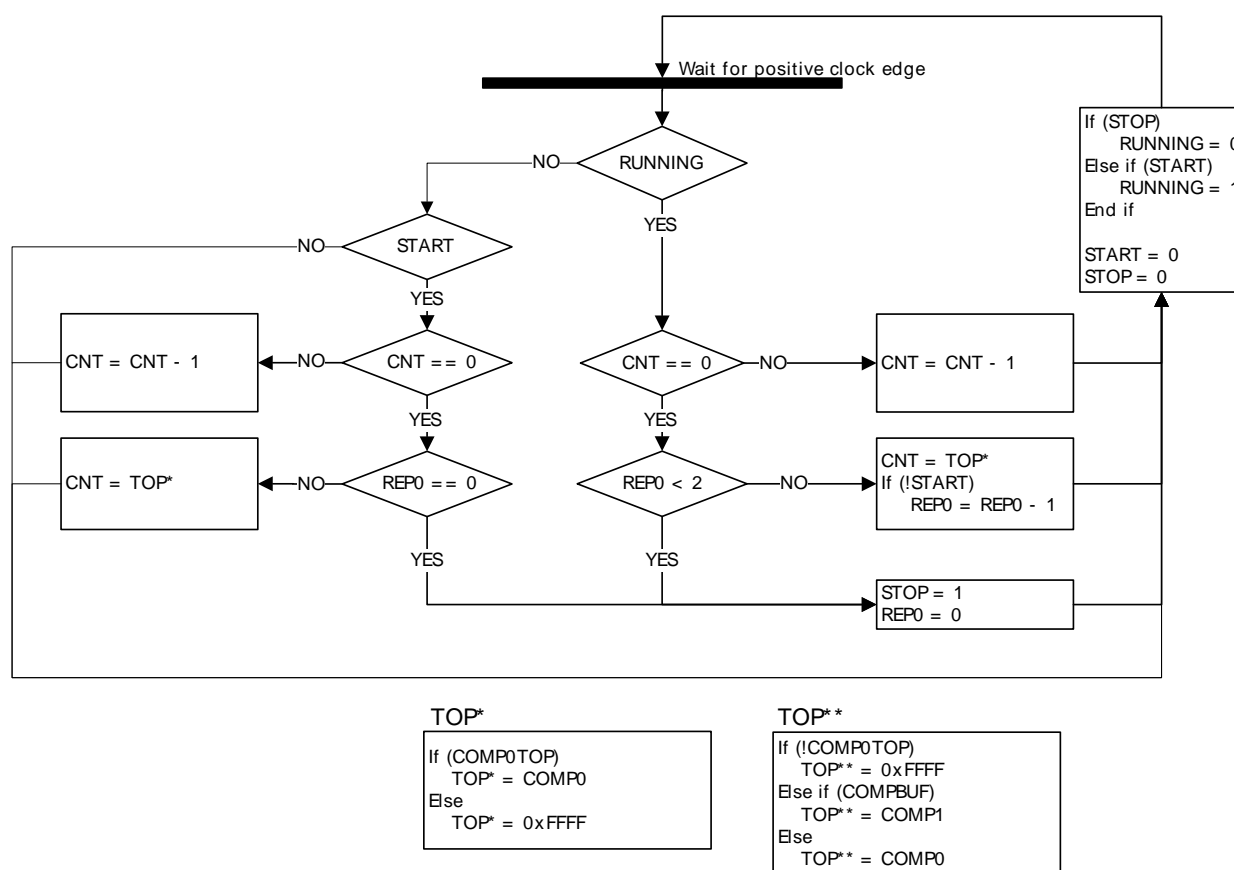Figure 19.3. LETIMER One-shot Repeat State Machine

19.3.3.2.3 Buffered Mode


The Buffered repeat mode allows buffered timer operation. When started, the timer runs LETIMERn_REP0 number of times. If LETIMERn_REP1 has been written since the last time it was used and it is nonzero, LETIMERn_REP1 is then loaded into LETIMERn_REP0, and counting continues the new number of times. The timer keeps going as long as LETIMERn_REP1 is updated with a nonzero value before LETIMERn_REP0 is finished counting down.

If the timer is started when both LETIMERn_CNT and LETIMERn_REP0 are zero but LETIMERn_REP1 is non-zero, LETIMERn_REP1 is loaded into LETIMERn_REP0, and the counter counts the loaded number of times. The state machine for the one-shot repeat mode is shown in Figure 19.3 (p. 298) .

Used in conjunction with a buffered top value, enabled by setting BUFTOP in LETIMERn_CTRL, the buffered mode allows buffered values of both the top and repeat values of the timer, and the timer can for instance be set to run 4 times with period 7 (top value 6), 6 times with period 200, then 3 times with period 50.


A state machine for the buffered repeat mode is shown in Figure 19.4 (p. 299) . REP1_{USED} shown in the state machine is an internal variable that keeps track of whether the value in LETIMERn_REP1 has been loaded into LETIMERn_REP0 or not. The purpose of this is that a value written to LETIMERn_REP1 should only be counted once. REP1_{USED} is cleared whenever LETIMERn_REP1 is written.

Figure 19.4. LETIMER Buffered Repeat State Machine

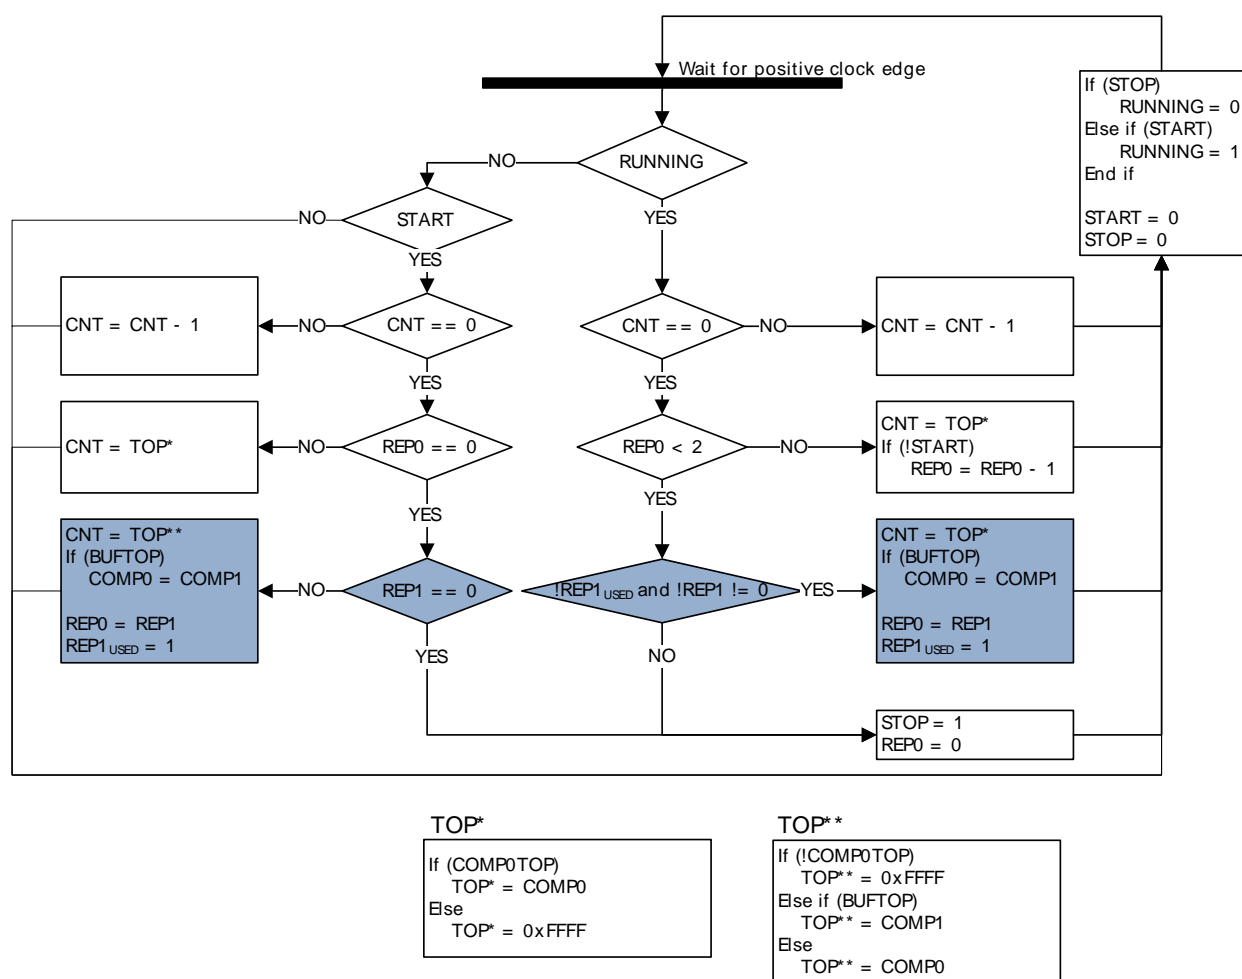

19.3.3.2.4 Double Mode

The Double repeat mode works much like the one-shot repeat mode. The difference is that, where the one-shot mode counts as long as LETIMERN_REP0 is larger than 0, the double mode counts as long as either LETIMERN_REP0 or LETIMERN_REP1 is larger than 0. As an example, say LETIMERN_REP0 is 3 and LETIMERN_REP1 is 10 when the timer is started. If no further interaction is done with the timer, LETIMERN_REP0 will now be decremented 3 times, and LETIMERN_REP1 will be decremented 10 times. The timer counts a total of 10 times, and LETIMERN_REP0 is 0 after the first three timer underflows and stays at 0. LETIMERN_REP0 and LETIMERN_REP1 can be written at any time. After a write to either of these, the timer is guaranteed to underflow at least the written number of times if the timer is running. Use the Double repeat mode to generate output on both the LETIMER outputs at the same time. The state machine for this repeat mode can be seen in Figure 19.5 (p. 300) .

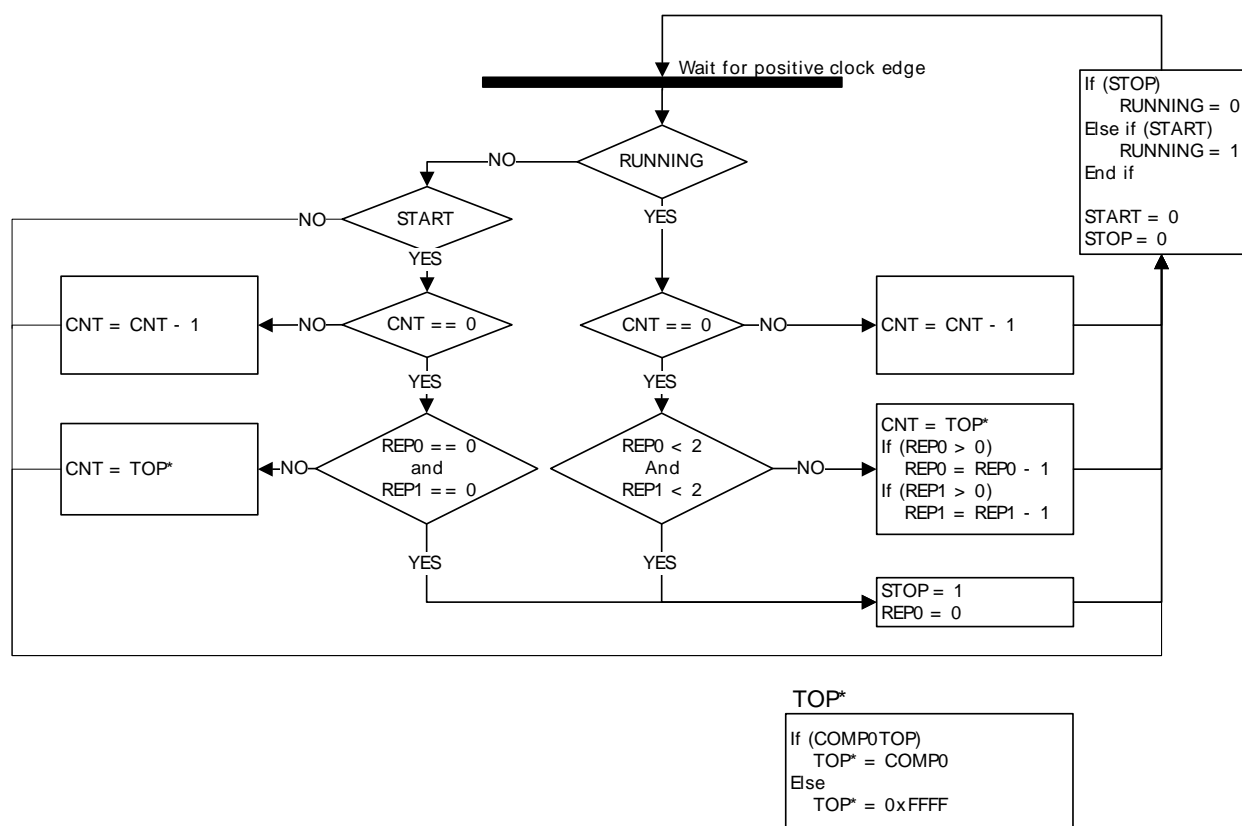Figure 19.5. LETIMER Double Repeat State Machine

19.3.3.3 Clock Source

The LETIMER clock source and its prescaler value are defined in the Clock Management Unit (CMU). The $f_{\text{LFACKL_LETIMERn}}$ has a frequency given by Equation 19.1 (p. 300) .

LETIMER Clock Frequency

$$f_{\text{LFACKL_LETIMERn}} = 32.768 / 2^{\text{LETIMERn}} \quad (19.1)$$

where the exponent LETIMERn is a 4 bit value in the CMU_LFAPRESC0 register.

To use this module, the LE interface clock must be enabled in CMU_HFCORECLKEN0, in addition to the module clock.

19.3.3.4 RTC Trigger

The LETIMER can be configured to start on compare match events from the Real Time Counter (RTC). If RTCC0TEN in LETIMERn_CTRL is set, the LETIMER will start on a compare match on RTC compare channel 0. In the same way, RTCC1TEN in LETIMERn_CTRL enables the LETIMER to start on a compare match with RTC compare channel 1.

Note

The LETIMER can only use compare match events from the RTC if the LETIMER runs at a higher than or equal frequency than the RTC. Also, if the LETIMER runs at twice the frequency of the RTC, a compare match event in the RTC will trigger the LETIMER twice. Four times the frequency gives four consecutive triggers, etc. The LETIMER will only

continue running if triggered while it is running, so the multiple-triggering will only have an effect if you try to disable the RTC when it is being triggered.

19.3.3.5 Debug

If DEBUGRUN in LETIMERn_CTRL is cleared, the LETIMER automatically stops counting when the CPU is halted during a debug session, and resumes operation when the CPU continues. Because of synchronization, the LETIMER is halted two clock cycles after the CPU is halted, and continues running two clock cycles after the CPU continues. RUNNING in LETIMERn_STATUS is not cleared when the LETIMER stops because of a debug-session.

Set DEBUGRUN in LETIMERn_CTRL to allow the LETIMER to continue counting even when the CPU is halted in debug mode.

19.3.4 Underflow Output Action

For each of the repeat registers, an underflow output action can be set. The configured output action is performed every time the counter underflows while the respective repeat register is nonzero. In PWM mode, the output is similarly only changed on COMP1 match if the repeat register is nonzero. As an example, the timer will perform 7 output actions if LETIMERn_REP0 is set to 7 when starting the timer in one-shot mode and leaving it untouched for a while.

The output actions can be set by configuring UFOA0 and UFOA1 in LETIMERn_CTRL. UFOA0 defines the action on output 0, and is connected to LETIMERn_REP0, while UFOA1 defines the action on output 1 and is connected to LETIMERn_REP1. The possible actions are defined in Table 19.2 (p. 301) .

Table 19.2. LETIMER Underflow Output Actions

| UFOA0/UFOA1 | Mode | Description |
|-------------|--------|--|
| 00 | Idle | The output is held at its idle value |
| 01 | Toggle | The output is toggled on LETIMERn_CNT underflow if LETIMERn_REPx is nonzero |
| 10 | Pulse | The output is held active for one clock cycle on LETIMERn_CNT underflow if LETIMERn_REPx is nonzero. It then returns to its idle value |
| 11 | PWM | The output is set idle on LETIMERn_CNT underflow and active on compare match with LETIMERn_COMP1 if LETIMERn_REPx is nonzero. |

Note


For the Pulse and PWM modes, the outputs will return to their idle states regardless of the state of the corresponding LETIMERn_REPx registers. They will only be set active if the LETIMERn_REPx registers are nonzero however.

The polarity of the outputs can be set individually by configuring OPOL0 and OPOL1 in LETIMERn_CTRL. When these are cleared, their respective outputs have a low idle value and a high active value. When they are set, the idle value is high, and the active value is low.

When using the toggle action, the outputs can be driven to their idle values by setting their respective CTO0/CTO1 command bits in LETIMERn_CTRL. This can be used to put the output in a well-defined state before beginning to generate toggle output, which may be important in some applications. The command bit can also be used while the timer is running.


Some simple waveforms generated with the different output modes are shown in Figure 19.6 (p. 302) . For the example, REPMODE in LETIMERn_CTRL has been cleared, COMP0TOP also in LETIMERn_CTRL has been set and LETIMERn_COMP0 has been written to 3. As seen in the figure, LETIMERn_COMP0 now decides the length of the signal periods. For the toggle mode, the period of the output signal is $2(\text{LETIMERn_COMP0} + 1)$, and for the pulse modes, the periods of the output signals are $\text{LETIMERn_COMP0} + 1$. Note that the pulse outputs are delayed by one period relative to the toggle output. The pulses come at the end of their periods.

Figure 19.6. LETIMER Simple Waveforms Output

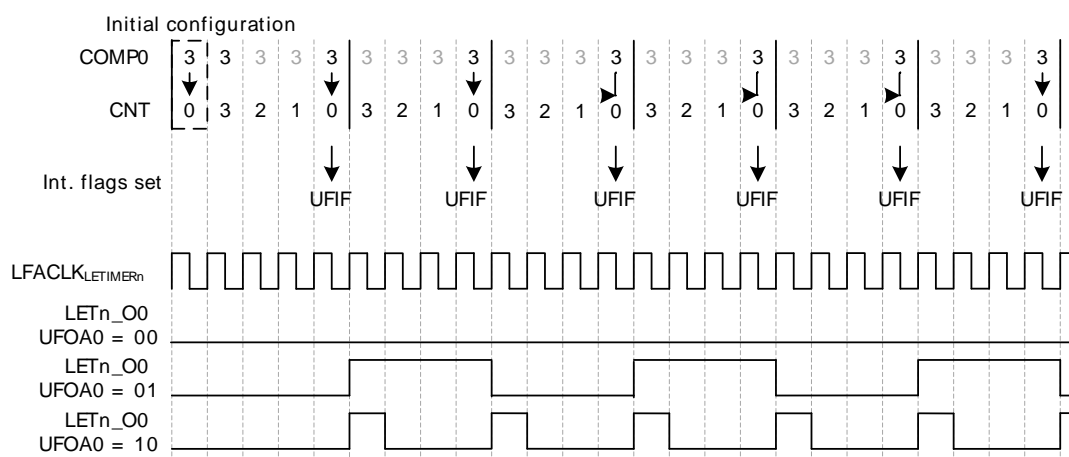


For the example in Figure 19.7 (p. 302) , the One-shot repeat mode has been selected, and LETIMERN_REP0 has been written to 3. The resulting behavior is pretty similar to that shown in Figure 6, but in this case, the timer stops after counting to zero LETIMERN_REP0 times. By using LETIMERN_REP0 the user has full control of the number of pulses/toggles generated on the output.

Figure 19.7. LETIMER Repeated Counting

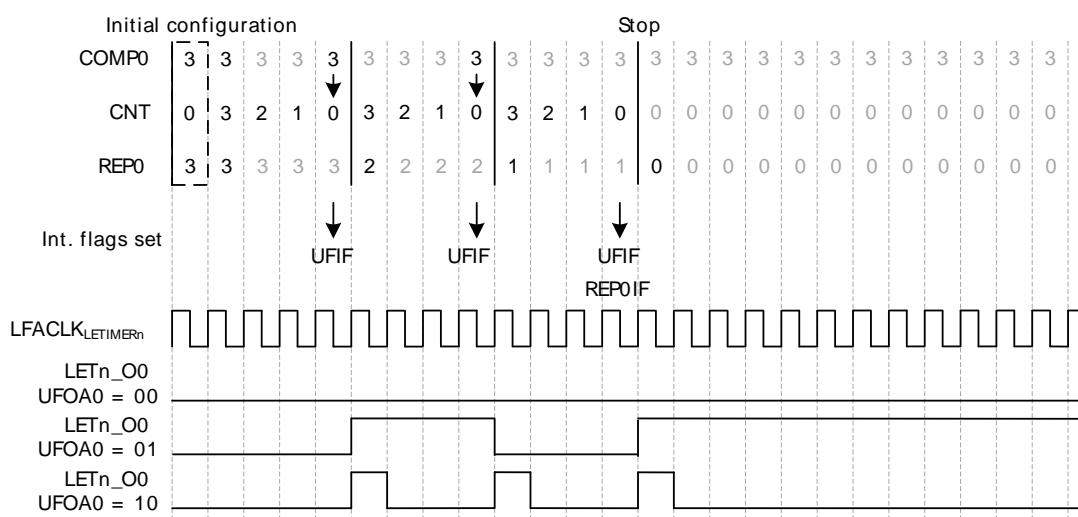

Using the Double repeat mode, output can be generated on both the LETIMER outputs. Figure 19.8 (p. 303) shows an example of this. UFOA0 and UFOA1 in LETIMERn_CTRL are configured for pulse output and the outputs are configured for low idle polarity. As seen in the figure, the number written to the repeat registers determine the number of pulses generated on each of the outputs.

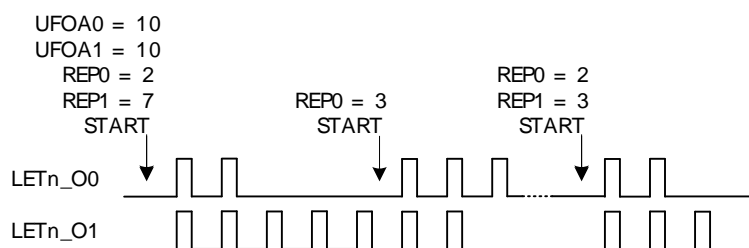Figure 19.8. LETIMER Dual Output

19.3.5 PRS Output

The LETIMER outputs can be routed out onto the PRS system. LETn_O0 can be routed to PRS channel 0, and LETn_O1 can be routed to PRS channel 1. Enabling the RRS connection can be done by setting SOURCESEL to LETIMERx and SIGSEL to LETIMERxCHn in PRS_CHx_CTRL. The PRS register description can be found in Section 13.5 (p. 140)

19.3.6 Examples

This section presents a couple of usage examples for the LETIMER.

19.3.6.1 Triggered Output Generation


Example 19.1. LETIMER Triggered Output Generation

If both LETIMERn_CNT and LETIMERn_REP0 are 0 in buffered mode, and COMP0TOP and BUFTOP in LETIMERn_CTRL are set, the values of LETIMERn_COMP1 and LETIMERn_REP1 are loaded into LETIMERn_CNT and LETIMERn_REP0 respectively when the timer is started. If no additional writes to LETIMERn_REP1 are done before the timer stops, LETIMERn_REP1 determines the number of pulses/toggles generated on the output, and LETIMERn_COMP1 determines the period lengths.

As the RTC can be used to start the LETIMER, the RTC and LETIMER can thus be combined to generate specific pulse-trains at given intervals. Software can update LETIMERn_COMP1 and LETIMERn_REP1 to change the number of pulses and pulse-period in each train, but if changes are not required, software does not have to update the registers between each pulse train.

For the example in Figure 19.9 (p. 304), the initial values cause the LETIMER to generate two pulses with 3 cycle periods, or a single pulse 3 cycles wide every time the LETIMER is started. After the output has been generated, the LETIMER stops, and is ready to be triggered again.

Figure 19.9. LETIMER Triggered Operation

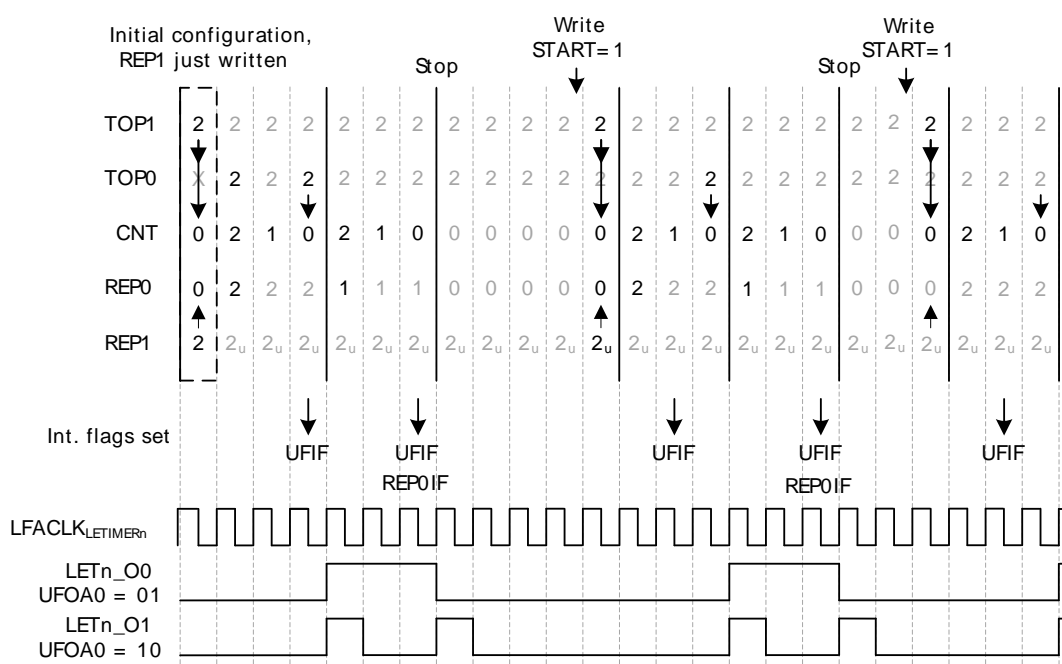

19.3.6.2 Continuous Output Generation


Example 19.2. LETIMER Continuous Output Generation

In some scenarios, it might be desired to make LETIMER generate a continuous waveform. Very simple constant waveforms can be generated without the repeat counter as shown in Figure 19.6 (p. 302), but to generate changing waveforms, using the repeat counter and buffer registers can prove advantageous.

For the example in Figure 19.10 (p. 305), the goal is to produce a pulse train consisting of 3 sequences with the following properties:

- 3 pulses with periods of 3 cycles
- 4 pulses with periods of 2 cycles
- 2 pulses with periods of 3 cycles

Figure 19.10. LETIMER Continuous Operation

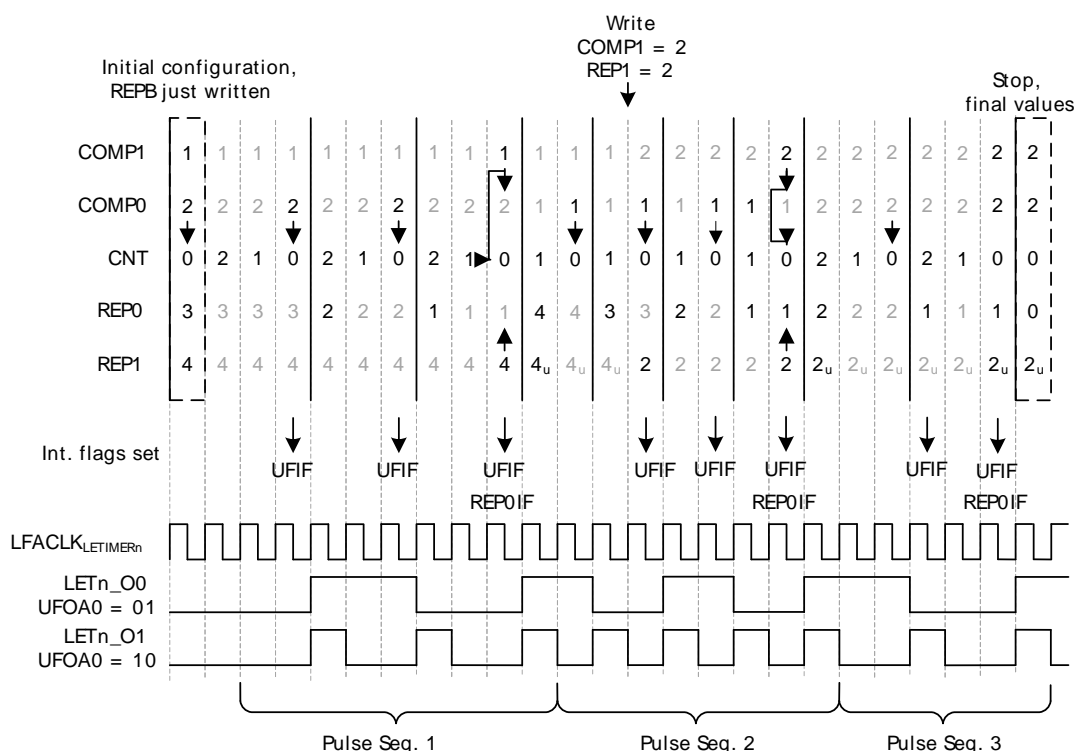

The first two sequences are loaded into the LETIMER before the timer is started.

LETIMERn_COMP0 is set to 2 (cycles – 1), and LETIMERn_REP0 is set to 3 for the first sequence, and the second sequence is loaded into the buffer registers, i.e. COMP1 is set to 1 and LETIMERn_REP1 is set to 4.

The LETIMER is set to trigger an interrupt when LETIMERn_REP0 is done by setting REP0 in LETIMERn_IEN. This interrupt is a good place to update the values of the buffers. Last but not least REPMODE in LETIMERn_CTRL is set to buffered mode, and the timer is started.

In the interrupt routine the buffers are updated with the values for the third sequence. If this had not been done, the timer would have stopped after the second sequence.


The final result is shown in Figure 19.10 (p. 305). The pulse output is grouped to show which sequence generated which output. Toggle output is also shown in the figure. Note that the toggle output is not aligned with the pulse outputs.

Note

Multiple LETIMER cycles are required to write a value to the LETIMER registers. The example in Figure 19.10 (p. 305) assumes that writes are done in advance so they arrive in the LETIMER as described in the figure.

Figure 19.11 (p. 306) shows an example where the LETIMER is started while LETIMERn_CNT is nonzero. In this case the length of the first repetition is given by the value in LETIMERn_CNT.

Figure 19.11. LETIMER LETIMERn_CNT Not Initialized to 0

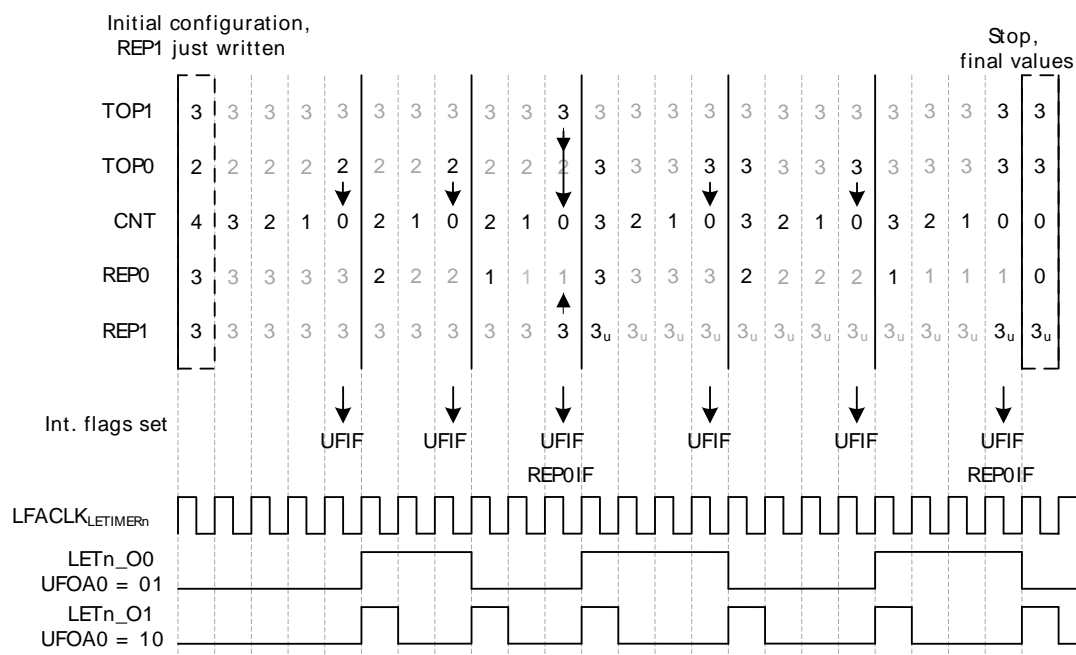

19.3.6.3 PWM Output

Example 19.3. LETIMER PWM Output

There are several ways of generating PWM output with the LETIMER, but the most straight-forward way is using the PWM output mode. This mode is enabled by setting UFOA0 or OFUA1 in LETIMERn_CTRL to 3. In PWM mode, the output is set idle on timer underflow, and active on LETIMERn_COMP1 match, so if for instance COMP0TOP = 1 and OPOL0 = 0 in LETIMERn_CTRL, LETIMERn_COMP0 determines the PWM period, and LETIMERn_LETIMERn_COMP1 determines the active period.

The PWM period in PWM mode is LETIMERn_COMP0 + 1. There is no special handling of the case where LETIMERn_COMP1 > LETIMERn_COMP0, so if LETIMERn_COMP1 > LETIMERn_COMP0, the PWM output is given by the idle output value. This means that for OPOLx = 0 in LETIMERn_CTRL, the PWM output will always be 0 for at least one clock cycle, and for OPOLx = 1 in LETIMERn_CTRL, the PWM output will always be 1 for at least one clock cycle.

To generate a PWM signal using the full PWM range, invert OPOLx when LETIMERn_COMP1 is set to a value larger than LETIMERn_COMP0.

19.3.6.4 Interrupts

Example 19.4. LETIMER PWM Output

The interrupts generated by the LETIMER are combined into one interrupt vector. If the interrupt for the LETIMER is enabled, an interrupt will be made if one or more of the interrupt flags in LETIMERn_IF and their corresponding bits in LETIMER_IEN are set.

19.3.7 Using the LETIMER in EM3

The LETIMER can be enabled all the way down to EM3 by using the ULFRCO as clock source. This is done by clearing CMU_LFCLKSEL_LFA and setting CMU_LFCLKSEL_LFAE to 1. This will make the RTC use the internal 1 kHz ultra low frequency RC oscillator (ULFRCO), consuming very little energy. Please note that the ULFRCO is not accurate over temperature and voltage, and it should be verified that the ULFRCO fulfills the timekeeping needs of the application before using this in the design.

19.3.8 Register access

This module is a Low Energy Peripheral, and supports immediate synchronization. For description regarding immediate synchronization, the reader is referred to Section 5.3.1.1 (p. 20) .

19.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|-------------------|------|-------------------------------|
| 0x000 | LETIMERn_CTRL | RW | Control Register |
| 0x004 | LETIMERn_CMD | W1 | Command Register |
| 0x008 | LETIMERn_STATUS | R | Status Register |
| 0x00C | LETIMERn_CNT | RWH | Counter Value Register |
| 0x010 | LETIMERn_COMP0 | RW | Compare Value Register 0 |
| 0x014 | LETIMERn_COMP1 | RW | Compare Value Register 1 |
| 0x018 | LETIMERn_REP0 | RW | Repeat Counter Register 0 |
| 0x01C | LETIMERn_REP1 | RW | Repeat Counter Register 1 |
| 0x020 | LETIMERn_IF | R | Interrupt Flag Register |
| 0x024 | LETIMERn_IFS | W1 | Interrupt Flag Set Register |
| 0x028 | LETIMERn_IFC | W1 | Interrupt Flag Clear Register |
| 0x02C | LETIMERn_IEN | RW | Interrupt Enable Register |
| 0x030 | LETIMERn_FREEZE | RW | Freeze Register |
| 0x034 | LETIMERn_SYNCBUSY | R | Synchronization Busy Register |
| 0x040 | LETIMERn_ROUTE | RW | I/O Routing Register |

19.5 Register Description

19.5.1 LETIMERn_CTRL - Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----------|----------|----------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | |
| Name | | | | | | | | | | | | | | | | | | | | | DEBUGRUN | RTCC1TEN | RTCC0TEN | COMP0TOP | BUFTOP | OPOL1 | OPOL0 | UFOA1 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | UFOA0 | REPMODE |

| Bit | Name | Reset | Access | Description | | | | | | |
|-------|--|---|--------|--|-------|-------------|---|--|---|----------------------------------|
| 31:13 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | |
| 12 | DEBUGRUN | 0 | RW | Debug Mode Run Enable Set to keep the LETIMER running in debug mode. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>LETIMER is frozen in debug mode</td></tr><tr><td>1</td><td>LETIMER is running in debug mode</td></tr></table> | Value | Description | 0 | LETIMER is frozen in debug mode | 1 | LETIMER is running in debug mode |
| Value | Description | | | | | | | | | |
| 0 | LETIMER is frozen in debug mode | | | | | | | | | |
| 1 | LETIMER is running in debug mode | | | | | | | | | |
| 11 | RTCC1TEN | 0 | RW | RTC Compare 1 Trigger Enable Allows the LETIMER to be started on a compare match on RTC compare channel 1. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>LETIMER is not affected by RTC compare channel 1</td></tr></table> | Value | Description | 0 | LETIMER is not affected by RTC compare channel 1 | | |
| Value | Description | | | | | | | | | |
| 0 | LETIMER is not affected by RTC compare channel 1 | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--|--|
| | Value | Description | | |
| | 1 | A compare match on RTC compare channel 1 starts the LETIMER if the LETIMER is not already started | | |
| 10 | RTCC0TEN | 0 | RW | RTC Compare 0 Trigger Enable Allows the LETIMER to be started on a compare match on RTC compare channel 0. |
| | Value | Description | | |
| | 0 | LETIMER is not affected by RTC compare channel 0 | | |
| | 1 | A compare match on RTC compare channel 0 starts the LETIMER if the LETIMER is not already started | | |
| 9 | COMP0TOP | 0 | RW | Compare Value 0 Is Top Value When set, the counter is cleared in the clock cycle after a compare match with compare channel 0. |
| | Value | Description | | |
| | 0 | The top value of the LETIMER is 65535 (0xFFFF) | | |
| | 1 | The top value of the LETIMER is given by COMP0 | | |
| 8 | BUFTOP | 0 | RW | Buffered Top Set to load COMP1 into COMP0 when REP0 reaches 0, allowing a buffered top value |
| | Value | Description | | |
| | 0 | COMP0 is only written by software | | |
| | 1 | COMP0 is set to COMP1 when REP0 reaches 0 | | |
| 7 | OPOL1 | 0 | RW | Output 1 Polarity Defines the idle value of output 1. |
| 6 | OPOL0 | 0 | RW | Output 0 Polarity Defines the idle value of output 0. |
| 5:4 | UFOA1 | 0x0 | RW | Underflow Output Action 1 Defines the action on LETn_O1 on a LETIMER underflow. |
| | Value | Mode | Description | |
| | 0 | NONE | LETn_O1 is held at its idle value as defined by OPOL1. | |
| | 1 | TOGGLE | LETn_O1 is toggled on CNT underflow. | |
| | 2 | PULSE | LETn_O1 is held active for one LFACLK _{LETIMER0} clock cycle on CNT underflow. The output then returns to its idle value as defined by OPOL1. | |
| | 3 | PWM | LETn_O1 is set idle on CNT underflow, and active on compare match with COMP1 | |
| 3:2 | UFOA0 | 0x0 | RW | Underflow Output Action 0 Defines the action on LETn_O0 on a LETIMER underflow. |
| | Value | Mode | Description | |
| | 0 | NONE | LETn_O0 is held at its idle value as defined by OPOL0. | |
| | 1 | TOGGLE | LETn_O0 is toggled on CNT underflow. | |
| | 2 | PULSE | LETn_O0 is held active for one LFACLK _{LETIMER0} clock cycle on CNT underflow. The output then returns to its idle value as defined by OPOL0. | |
| | 3 | PWM | LETn_O0 is set idle on CNT underflow, and active on compare match with COMP1 | |
| 1:0 | REPMODE | 0x0 | RW | Repeat Mode Allows the repeat counter to be enabled and disabled. |
| | Value | Mode | Description | |
| | 0 | FREE | When started, the LETIMER counts down until it is stopped by software. | |
| | 1 | ONESHOT | The counter counts REP0 times. When REP0 reaches zero, the counter stops. | |
| | 2 | BUFFERED | The counter counts REP0 times. If REP1 has been written, it is loaded into REP0 when REP0 reaches zero. Else the counter stops | |
| | 3 | DOUBLE | Both REP0 and REP1 are decremented when the LETIMER wraps around. The LETIMER counts until both REP0 and REP1 are zero | |

19.5.2 LETIMERn_CMD - Command Register

[illegible]

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 4 | CTO1 | 0 | W1 | Clear Toggle Output 1 Set to drive toggle output 1 to its idle value |
| 3 | CTO0 | 0 | W1 | Clear Toggle Output 0 Set to drive toggle output 0 to its idle value |
| 2 | CLEAR | 0 | W1 | Clear LETIMER Set to clear LETIMER |
| 1 | STOP | 0 | W1 | Stop LETIMER Set to stop LETIMER |
| 0 | START | 0 | W1 | Start LETIMER Set to start LETIMER |

19.5.3 LETIMERn_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---------|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RUNNING | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | RUNNING | 0 | R | LETIMER Running Set when LETIMER is running. |

19.5.4 LETIMERn_CNT - Counter Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RWH | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | CNT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | CNT | 0x0000 | RWH | Counter Value Use to read the current value of the LETIMER. |

19.5.5 LETIMERn_COMP0 - Compare Value Register 0 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | COMP0 | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | COMP0 | 0x0000 | RW | Compare Value 0 Compare and optionally top value for LETIMER |

19.5.6 LETIMERn_COMP1 - Compare Value Register 1 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | COMP1 | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | COMP1 | 0x0000 | RW | Compare Value 1 Compare and optionally buffered top value for LETIMER |

19.5.7 LETIMERn_REP0 - Repeat Counter Register 0 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x00 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | REP0 | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | REP0 | 0x00 | RW | Repeat Counter 0 Optional repeat counter. |

19.5.8 LETIMERn_REP1 - Repeat Counter Register 1 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x00 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | REP1 | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|-----|--|-------|--------|-------------------------|
| 7:0 | REP1 | 0x00 | RW | Repeat Counter 1 |
| | Optional repeat counter or buffer for REP0 | | | |

19.5.9 LETIMERn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|--|------|---|------|--|----|--|-------|--|-------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | REP1 | | REP0 | | UF | | COMP1 | | COMP0 | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|--|---|--------|--|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 4 | REP1 | 0 | R | Repeat Counter 1 Interrupt Flag |
| | Set when repeat counter 1 reaches zero. | | | |
| 3 | REP0 | 0 | R | Repeat Counter 0 Interrupt Flag |
| | Set when repeat counter 0 reaches zero or when the REP1 interrupt flag is loaded into the REP0 interrupt flag. | | | |
| 2 | UF | 0 | R | Underflow Interrupt Flag |
| | Set on LETIMER underflow. | | | |
| 1 | COMP1 | 0 | R | Compare Match 1 Interrupt Flag |
| | Set when LETIMER reaches the value of COMP1 | | | |
| 0 | COMP0 | 0 | R | Compare Match 0 Interrupt Flag |
| | Set when LETIMER reaches the value of COMP0 | | | |

19.5.10 LETIMERn_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|--|--|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|--|---|--------|--|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 4 | REP1 | 0 | W1 | Set Repeat Counter 1 Interrupt Flag |
| | Write to 1 to set the REP1 interrupt flag. | | | |
| 3 | REP0 | 0 | W1 | Set Repeat Counter 0 Interrupt Flag |
| | Write to 1 to set the REP0 interrupt flag. | | | |
| 2 | UF | 0 | W1 | Set Underflow Interrupt Flag |
| | Write to 1 to set the UF interrupt flag. | | | |

| Bit | Name | Reset | Access | Description |
|-----|-------|-------|--------|--|
| 1 | COMP1 | 0 | W1 | Set Compare Match 1 Interrupt Flag Write to 1 to set the COMP1 interrupt flag. |
| 0 | COMP0 | 0 | W1 | Set Compare Match 0 Interrupt Flag Write to 1 to set the COMP0 interrupt flag. |

19.5.11 LETIMERn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 4 | REP1 | 0 | W1 | Clear Repeat Counter 1 Interrupt Flag Write to 1 to clear the REP1 interrupt flag. |
| 3 | REP0 | 0 | W1 | Clear Repeat Counter 0 Interrupt Flag Write to 1 to clear the REP0 interrupt flag. |
| 2 | UF | 0 | W1 | Clear Underflow Interrupt Flag Write to 1 to clear the UF interrupt flag. |
| 1 | COMP1 | 0 | W1 | Clear Compare Match 1 Interrupt Flag Write to 1 to clear the COMP1 interrupt flag. |
| 0 | COMP0 | 0 | W1 | Clear Compare Match 0 Interrupt Flag Write to 1 to clear the COMP0 interrupt flag. |

19.5.12 LETIMERn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 4 | REP1 | 0 | RW | Repeat Counter 1 Interrupt Enable Set to enable interrupt on the REP1 interrupt flag. |
| 3 | REP0 | 0 | RW | Repeat Counter 0 Interrupt Enable Set to enable interrupt on the REP0 interrupt flag. |

| Bit | Name | Reset | Access | Description |
|-----|-------|-------|--------|---|
| 2 | UF | 0 | RW | Underflow Interrupt Enable Set to enable interrupt on the UF interrupt flag. |
| 1 | COMP1 | 0 | RW | Compare Match 1 Interrupt Enable Set to enable interrupt on the COMP1 interrupt flag. |
| 0 | COMP0 | 0 | RW | Compare Match 0 Interrupt Enable Set to enable interrupt on the COMP0 interrupt flag. |

19.5.13 LETIMERn_FREEZE - Freeze Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-----------|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | REGFREEZE |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|--|-----------|---|--------|---|-------|------|-------------|---|--------|---|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 0 | REGFREEZE | 0 | RW | Register Update Freeze When set, the update of the LETIMER is postponed until this bit is cleared. Use this bit to update several registers simultaneously. | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>UPDATE</td><td>Each write access to a LETIMER register is updated into the Low Frequency domain as soon as possible.</td></tr><tr><td>1</td><td>FREEZE</td><td>The LETIMER is not updated with the new written value.</td></tr></table> | | | | | Value | Mode | Description | 0 | UPDATE | Each write access to a LETIMER register is updated into the Low Frequency domain as soon as possible. | 1 | FREEZE | The LETIMER is not updated with the new written value. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | UPDATE | Each write access to a LETIMER register is updated into the Low Frequency domain as soon as possible. | | | | | | | | | | | |
| 1 | FREEZE | The LETIMER is not updated with the new written value. | | | | | | | | | | | |

19.5.14 LETIMERn_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|------|------|-------|-------|-----|------|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R | R | R | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | REP1 | REP0 | COMP1 | COMP0 | CMD | CTRL |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | REP1 | 0 | R | REP1 Register Busy Set when the value written to REP1 is being synchronized. |
| 4 | REP0 | 0 | R | REP0 Register Busy Set when the value written to REP0 is being synchronized. |
| 3 | COMP1 | 0 | R | COMP1 Register Busy Set when the value written to COMP1 is being synchronized. |
| 2 | COMP0 | 0 | R | COMP0 Register Busy |



| Bit | Name | Reset | Access | Description |
|-----|------|-------|--------|--|
| | | | | Set when the value written to COMP0 is being synchronized. |
| 1 | CMD | 0 | R | CMD Register Busy Set when the value written to CMD is being synchronized. |
| 0 | CTRL | 0 | R | CTRL Register Busy Set when the value written to CTRL is being synchronized. |

19.5.15 LETIMERn_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|---|---|---|---|---|---|---|---|---|---|---------|---------|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | LOCATION | | | | | | | | | | | | OUT1PEN | OUT0PEN |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | |
|---|-----------------------------|---|--------|--|-------|-------------|-------------|-----------------------------|------|----------------------------|---|------|------------|---|------|------------|---|------|------------|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | |
| 10:8 | LOCATION | 0x0 | RW | I/O Location Decides the location of the LETIMER I/O pins | | | | | | | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr><tr><td>2</td><td>LOC2</td><td>Location 2</td></tr><tr><td>3</td><td>LOC3</td><td>Location 3</td></tr></table> | | | | | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 | 2 | LOC2 | Location 2 | 3 | LOC3 | Location 3 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | | | | | | | |
| 2 | LOC2 | Location 2 | | | | | | | | | | | | | | | | | |
| 3 | LOC3 | Location 3 | | | | | | | | | | | | | | | | | |
| 7:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | |
| 1 | OUT1PEN | 0 | RW | Output 1 Pin Enable When set, output 1 of the LETIMER is enabled | | | | | | | | | | | | | | | |
| <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>The LETn_O1 pin is disabled</td></tr><tr><td>1</td><td>The LETn_O1 pin is enabled</td></tr></table> | | | | | Value | Description | 0 | The LETn_O1 pin is disabled | 1 | The LETn_O1 pin is enabled | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | The LETn_O1 pin is disabled | | | | | | | | | | | | | | | | | | |
| 1 | The LETn_O1 pin is enabled | | | | | | | | | | | | | | | | | | |
| 0 | OUT0PEN | 0 | RW | Output 0 Pin Enable When set, output 0 of the LETIMER is enabled | | | | | | | | | | | | | | | |
| <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>The LETn_O0 pin is disabled</td></tr><tr><td>1</td><td>The LETn_O0 pin is enabled</td></tr></table> | | | | | Value | Description | 0 | The LETn_O0 pin is disabled | 1 | The LETn_O0 pin is enabled | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | The LETn_O0 pin is disabled | | | | | | | | | | | | | | | | | | |
| 1 | The LETn_O0 pin is enabled | | | | | | | | | | | | | | | | | | |

20 PCNT - Pulse Counter

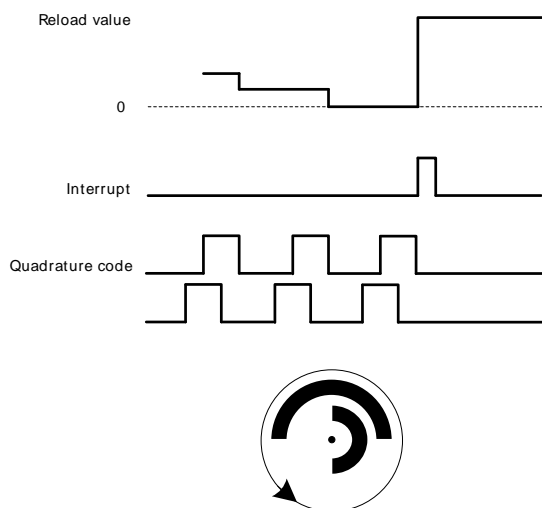

Quick Facts

What?

The Pulse Counter (PCNT) decodes incoming pulses. The module has a quadrature mode which may be used to decode the speed and direction of a mechanical shaft. PCNT can operate in EM0-EM3.

Why?

The PCNT generates an interrupt after a specific number of pulses (or rotations), eliminating the need for timing- or I/O interrupts and CPU processing to measure pulse widths, etc.

How?

PCNT uses the LFACLK or may be externally clocked from a pin. The module incorporates a 16-bit up/down-counter to keep track of incoming pulses or rotations.

20.1 Introduction


The Pulse Counter (PCNT) can be used for counting incoming pulses on a single input or to decode quadrature encoded inputs. It can run from the internal LFACLK (EM0-EM2) while counting pulses on the PCNTn_S0IN pin or using this pin as an external clock source (EM0-EM3) that runs both the PCNT counter and register access.

20.2 Features

- 16-bit counter with reload register
- Auxiliary counter for counting a single direction
- Single input oversampling up/down counter mode (EM0-EM2)
- Externally clocked single input pulse up/down counter mode (EM0-EM3)
- Externally clocked quadrature decoder mode (EM0-EM3)
- Interrupt on counter underflow and overflow
- Interrupt when a direction change is detected (quadrature decoder mode only)
- Optional pulse width filter
- Optional input inversion/edge detect select
- PRS S0IN and S1IN input

20.3 Functional Description

An overview of the PCNT module is shown in Figure 20.1 (p. 318) .

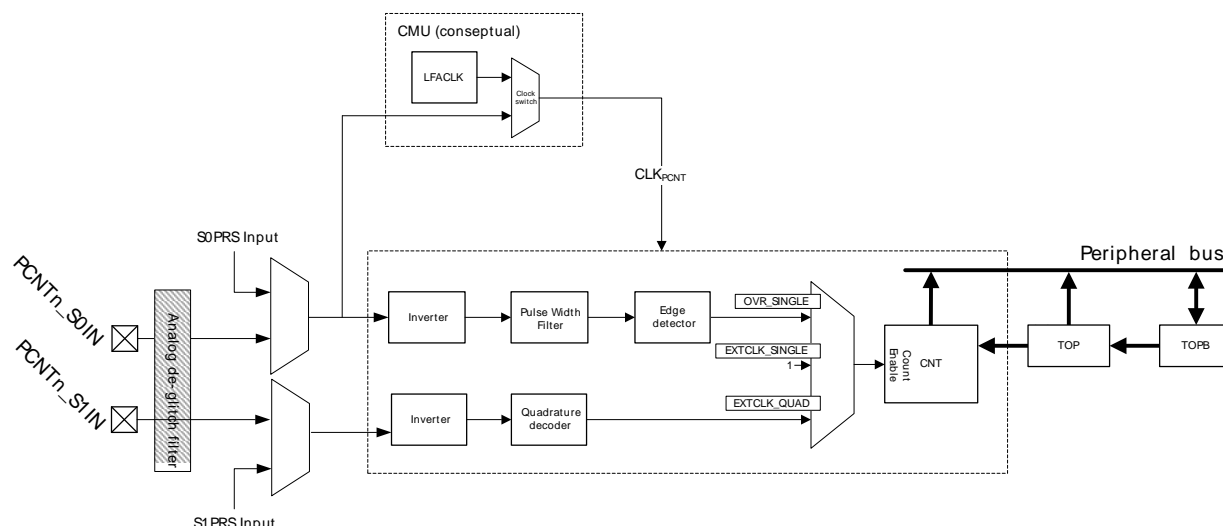Figure 20.1. PCNT Overview

20.3.1 Pulse Counter Modes

The pulse counter can operate in single input oversampling mode (OVSSINGLE), externally clocked single input counter mode (EXTCLKSINGLE) and externally clocked quadrature decoder mode (EXTCLKQUAD). The following sections describe operation of each of the three modes and how they are enabled. Input timing constraints are described in Section 20.3.5 (p. 321) and Section 20.3.6 (p. 321).

20.3.1.1 Single Input Oversampling Mode

This mode is enabled by writing OVSSINGLE to the MODE field in the PCNTn_CTRL register and disabled by writing DISABLE to the same field. LFACLK is configured from the registers in the Clock Management Unit (CMU), Chapter 11 (p. 99).

The optional pulse width filter is enabled by setting the FILT bit in the PCNTn_CTRL register. Additionally, the PCNTn_S0IN input may be inverted, so that falling edges are counted, by setting the EDGE bit in the PCNTn_CTRL register.

If S1CDIR is cleared, PCNTn_S0IN is the only observed input in this mode. The PCNTn_S0IN input is sampled by the LFACLK and the number of detected positive or negative edges on PCNTn_S0IN appears in PCNTn_CNT. The counter may be configured to count down by setting the CNTDIR bit in PCNTn_CTRL. Default is to count up.

The counting direction can also be controlled externally in this mode by setting S1CDIR in PCNTn_CTRL. This will make the input value on PCNTn_S1IN decide the direction counted on a PCNTn_S0IN edge. If PCNTn_S1IN is high, the count is done according to CNTDIR in PCNTn_CTRL. If low, the count direction is opposite.

20.3.1.2 Externally Clocked Single Input Counter Mode

This mode is enabled by writing EXTCLKSINGLE to the MODE field in the PCNTn_CTRL register and disabled by writing DISABLE to the same field. The external pin clock source must be configured from the registers in the CMU (Chapter 11 (p. 99)).

Positive edges on PCNTn_S0IN are used to clock the counter. Similar to the oversampled mode, PCNTn_S1IN is used to determine the count direction if S1CDIR in PCNTn_CTRL is set. If not, CNTDIR in PCNTn_CTRL solely defines count direction. As the LFACLK is not used in this mode, the PCNT module can operate in EM3.


The digital pulse width filter is not available in this mode. The analog de-glitch filter in the GPIO pads is capable of removing some unwanted noise. However, this mode may be susceptible to spikes and unintended pulses from devices such as mechanical switches, and is therefore most suited to take input from electronic sensors etc. that generate single wire pulses.

20.3.1.3 Externally Clocked Quadrature Decoder Mode

This mode is enabled by writing EXTCLKQUAD to the MODE field in PCNTn_CTRL and disabled by writing DISABLE to the same field. The external pin clock source must be configured from the registers in the CMU, (Chapter 11 (p. 99)).

Both edges on PCNTn_S0IN pin are used to sample PCNTn_S1IN pin to decode the quadrature code. Consequently, this mode does not depend on the internal LFACLK and may be operated in EM3. A quadrature coded signal contains information about the relative speed and direction of a rotating shaft as illustrated by Figure 20.2 (p. 319) , hence the direction of the counter register PCNTn_CNT is controlled automatically.

Figure 20.2. PCNT Quadrature Coding

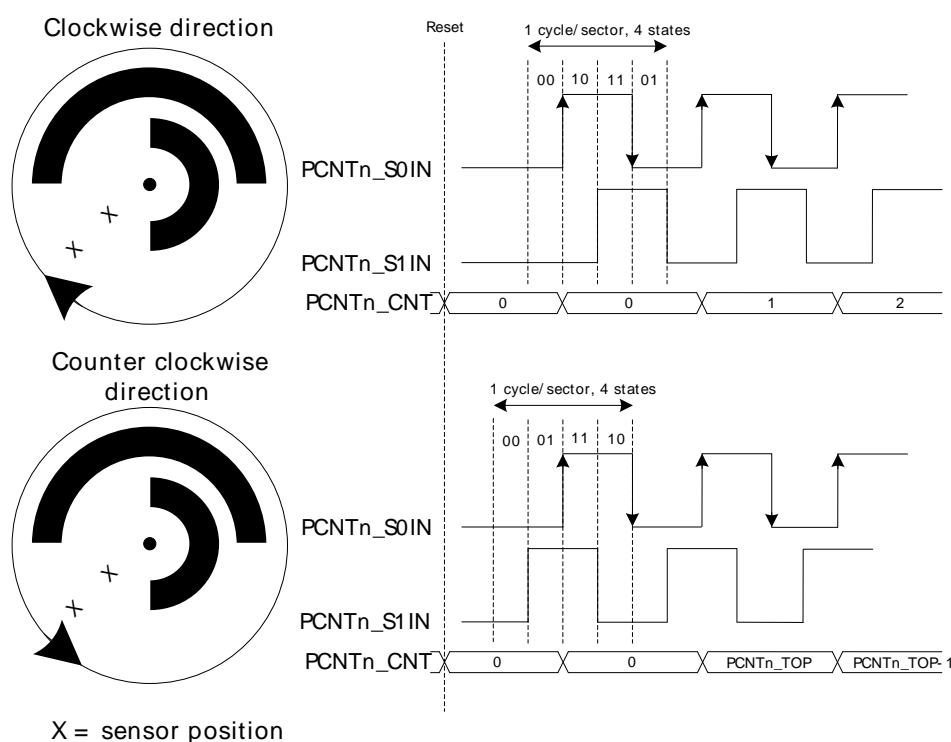

If PCNTn_S0IN leads PCNTn_S1IN in phase, the direction is clockwise, and if it lags in phase the direction is counter-clockwise. Although the direction is automatically detected, the detected direction may be inverted by writing 1 to the EDGE bit in the PCNTn_CTRL register. Default behavior is illustrated by Figure 20.2 (p. 319) .

The counter direction may be read from the DIR bit in the PCNTn_STATUS register. Additionally, the DIRCNG interrupt in the PCNTn_IF register is generated when a direction change is detected. When a change is detected, the DIR bit in the PCNTn_STATUS register must be read to determine the current new direction.

Note

The sector disc illustrated in the figure may be finer grained in some systems. Typically, they may generate 2-4 PCNTn_S0IN wave periods per 360° rotation.

The direction of the quadrature code and control of the counter is generated by the simple binary function outlined by Table 20.1 (p. 320). Note that this function also filters some invalid inputs that may occur when the shaft changes direction or temporarily toggles direction.

Table 20.1. PCNT QUAD Mode Counter Control Function

| Inputs | | Control/Status | |
|--------------|--------------|----------------|-------------------|
| S1IN posedge | S1IN negedge | Count Enable | CNTDIR status bit |
| 0 | 0 | 0 | 0 |
| 0 | 1 | 1 | 0 |
| 1 | 0 | 1 | 1 |
| 1 | 1 | 0 | 0 |

Note

PCNTn_S1IN is sampled on both edges of PCNTn_S0IN.

20.3.2 Hysteresis

By default the pulse counter wraps to 0 when passing the configured top value, and wraps to the top value when counting down from 0. On these events, a system will likely want to wake up to store and track the overflow count. This is fine if the pulse counter is tracking a monotonic value or a value that does not change directions frequently. If you have the latter however, and the counter changes directions around the overflow/underflow point, the system will have to wake up a lot to keep track of the rotations, causing high current consumptions

To solve this, the pulse counter has a way of introducing hysteresis to the counter. When HYST in PCNTn_CTRL is set, the pulse counter will always wrap to TOP/2 on underflows and overflows. This takes the counter away from the area where it might overflow or underflow, removing the problem.

Given a starting value of 0 for the counter, the absolute count value when hysteresis is enabled can be calculated with the equations Equation 20.1 (p. 320) or Equation 20.2 (p. 320), depending on whether the TOP value is even or odd.

Absolute position with hysteresis and even TOP value

$$CNT_{abs} = CNT - UF_{CNT} \times (TOP/2+1) + OF_{CNT} \times (TOP/2+1) \quad (20.1)$$

Absolute position with hysteresis and odd TOP value

$$CNT_{abs} = CNT - UF_{CNT} \times (TOP/2+1) + OF_{CNT} \times (TOP/2+2) \quad (20.2)$$

20.3.3 Auxiliary counter

To be able to keep explicit track of counting in one direction in addition to the regular counter which counts both up and down, the auxiliary counter can be used. The pulse counter can for instance be configured to keep track of the absolute rotation of the wheel, and at the same time the auxiliary counter can keep track of how much the wheel has reversed.

The auxiliary counter is enabled by configuring AUXCNTEV in PCNTn_CTRL. It will always count up, but it can be configured whether it should count up on up-events, down-events or both, keeping track of rotation either way or general movement. The value of the auxiliary counter can be read from the PCNTn_AUXCNT register.

Overflows on the auxiliary counter happen when the auxiliary counter passes the top value of the pulse counter, configured in PCNTn_TOP. In that event, the AUXOF interrupt flag is set, and the auxiliary counter wraps to 0.

As the auxiliary counter, the main counter can be configured to count only on certain events. This is done through CNTEV in PCNTn_CTRL, and it is possible like for the auxiliary counter, to make the main counter count on only up and down events. The difference between the counters is that where the auxiliary counter will only count up, the main counter will count up or down depending on the direction of the count event.

20.3.4 Register Access

The counter-clock domain may be clocked externally. To update the counter-clock domain registers from software in this mode, 2-3 clock pulses on the external clock are needed to synchronize accesses to the externally clocked domain. Clock source switching is controlled from the registers in the CMU (Chapter 11 (p. 99)).

When the RSTEN bit in the PCNTn_CTRL register is set to 1, the PCNT clock domain is asynchronously held in reset. The reset is synchronously released two PCNT clock edges after the RSTEN bit in the PCNTn_CTRL register is cleared by software. This asynchronous reset restores the reset values in PCNTn_TOP, PCNTn_CNT and other control registers in the PCNT clock domain.

Since this module is a Low Energy Peripheral, and runs off a clock which is asynchronous to the HFCORECLK, special considerations must be taken when accessing registers. Please refer to Section 5.3 (p. 20) for a description on how to perform register accesses to Low Energy Peripherals.

Note

PCNTn_TOP and PCNTn_CNT are read-only registers. When writing to PCNTn_TOPB, make sure that the counter value, PCNTn_CNT, can not exceed the value written to PCNTn_TOPB within two clock cycles.

20.3.5 Clock Sources

The 32 kHz LFACLK is one of two possible clock sources. The clock select register is described in Chapter 11 (p. 99) . The default clock source is the LFACLK.

This PCNT module may also use PCNTn_S0IN as an external clock to clock the counter (EXTCLKSINGLE mode) and to sample PCNTn_S1IN (EXTCLKQUAD mode). Setup, hold and max frequency constraints for PCNTn_S0IN and PCNTn_S1IN for these modes are specified in the device datasheet.

To use this module, the LE interface clock must be enabled in CMU_HFCORECLKEN0, in addition to the module clock.

Note

PCNT Clock Domain Reset, RSTEN, should be set when changing clock source for PCNT. If changing to an external clock source, the clock pin has to be enabled as input prior to de-asserting RSTEN. Changing clock source without asserting RSTEN results in undefined behaviour.

20.3.6 Input Filter

An optional pulse width filter is available in OVSSINGLE mode. The filter is enabled by writing 1 to the FILT bit in the PCNTn_CTRL register. When enabled, the high and low periods of PCNTn_S0IN must be stable for 5 consecutive clock cycles before the edge is passed to the edge detector.

In EXTCLKSINGLE and EXTCLKQUAD mode, there is no digital pulse width filter available.

20.3.7 Edge Polarity

The edge polarity can be set by configuring the EDGE bit in the PCNTn_CTRL register. When this bit is cleared, the pulse counter counts positive edges in OVSSINGLE mode and negative edges if the bit is set.

In EXTCLKQUAD mode, the EDGE bit in PCNTn_CTRL inverts the direction of the counter (which is automatically detected).

Note

The EDGE bit in PCNTn_CTRL has no effect in EXTCLKSINGLE mode.

20.3.8 PRS S0IN and S1IN Input

It is possible to receive input from PRS on both S0IN and S1IN by setting S0PRSEN or S1PRSEN in PCNTn_INPUT. The PRS channel used can be selected using S0PRSSEL in PCNTn_INPUT.

20.3.9 Interrupts

The interrupt generated by PCNT uses the PCNTn_INT interrupt vector. Software must read the PCNTn_IF register to determine which module interrupt that generated the vector invocation.

20.3.9.1 Underflow and Overflow Interrupts


The underflow interrupt flag (UF) is set when the counter counts down from 0. I.e. when the value of the counter is 0 and a new pulse is received. The PCNTn_CNT register is loaded with the PCNTn_TOP value after this event.

The overflow interrupt flag (OF) is set when the counter counts up from the PCNTn_TOP (reload) value. I.e. if PCNTn_CNT = PCNTn_TOP and a new pulse is received. The PCNTn_CNT register is loaded with the value 0 after this event.

20.3.9.2 Direction Change Interrupt

The PCNTn_PCNT module sets the DIRCNG interrupt flag (PCNTn_IF register) when the direction of the quadrature code changes. The behavior of this interrupt is illustrated by Figure 20.3 (p. 322).

Figure 20.3. PCNT Direction Change Interrupt (DIRCNG) Generation

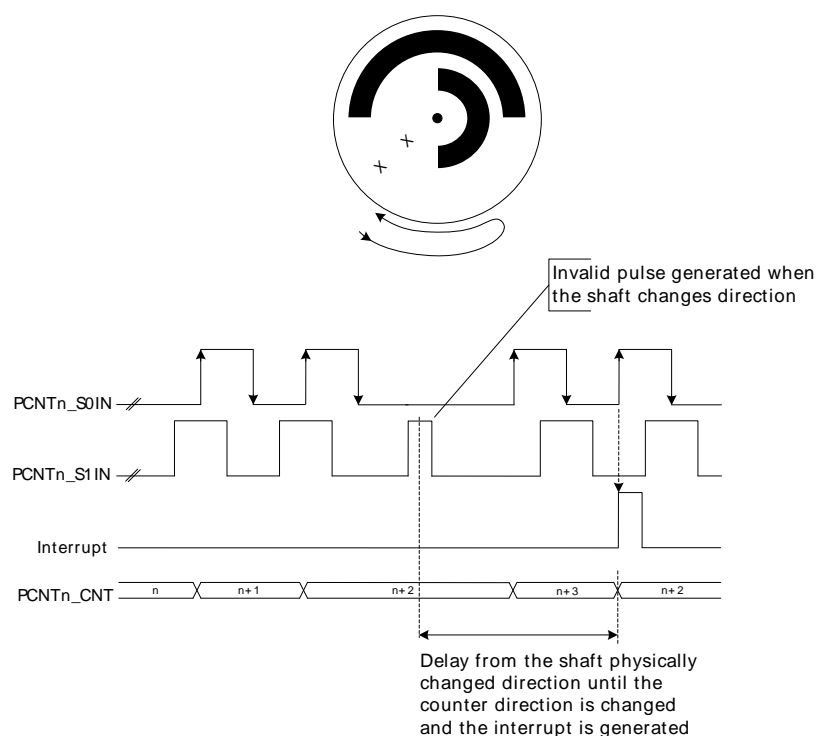

20.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|----------------|------|----------------------------------|
| 0x000 | PCNTn_CTRL | RW | Control Register |
| 0x004 | PCNTn_CMD | W1 | Command Register |
| 0x008 | PCNTn_STATUS | R | Status Register |
| 0x00C | PCNTn_CNT | R | Counter Value Register |
| 0x010 | PCNTn_TOP | R | Top Value Register |
| 0x014 | PCNTn_TOPB | RW | Top Value Buffer Register |
| 0x018 | PCNTn_IF | R | Interrupt Flag Register |
| 0x01C | PCNTn_IFS | W1 | Interrupt Flag Set Register |
| 0x020 | PCNTn_IFC | W1 | Interrupt Flag Clear Register |
| 0x024 | PCNTn_IEN | RW | Interrupt Enable Register |
| 0x028 | PCNTn_ROUTE | RW | I/O Routing Register |
| 0x02C | PCNTn_FREEZE | RW | Freeze Register |
| 0x030 | PCNTn_SYNCBUSY | R | Synchronization Busy Register |
| 0x038 | PCNTn_AUXCNT | RWH | Auxiliary Counter Value Register |
| 0x03C | PCNTn_INPUT | RW | PCNT Input Register |

20.5 Register Description

20.5.1 PCNTn_CTRL - Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|----|-------|--------|------|---|-------|------|------|--------|------|----|---|---|---|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0 | | | 0x0 | 0 | 0 | | 0 | 0 | 0 | 0 | 0x0 | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | RW | RW | RW | | RW | RW | RW | RW | RW | RW | | | |
| Name | | | | | | | | | | | | | | | | | AUXCNTEV | | | CNTEV | S1CDIR | HYST | | RSTEN | FILT | EDGE | CNTDIR | MODE | | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | |
|---|----------|---|--------|---|-------|------|-------------|---|------|---------------|---|----|-------------------------------|---|------|---------------------------------|---|------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | |
| 15:14 | AUXCNTEV | 0x0 | RW | Controls when the auxiliary counter counts Selects whether the auxiliary counter responds to up-count events, down-count events or both | | | | | | | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>NONE</td><td>Never counts.</td></tr><tr><td>1</td><td>UP</td><td>Counts up on up-count events.</td></tr><tr><td>2</td><td>DOWN</td><td>Counts up on down-count events.</td></tr><tr><td>3</td><td>BOTH</td><td>Counts up on both up-count and down-count events.</td></tr></table> | | | | | Value | Mode | Description | 0 | NONE | Never counts. | 1 | UP | Counts up on up-count events. | 2 | DOWN | Counts up on down-count events. | 3 | BOTH | Counts up on both up-count and down-count events. |
| Value | Mode | Description | | | | | | | | | | | | | | | | | |
| 0 | NONE | Never counts. | | | | | | | | | | | | | | | | | |
| 1 | UP | Counts up on up-count events. | | | | | | | | | | | | | | | | | |
| 2 | DOWN | Counts up on down-count events. | | | | | | | | | | | | | | | | | |
| 3 | BOTH | Counts up on both up-count and down-count events. | | | | | | | | | | | | | | | | | |
| 13:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | |

| | | | | |
|--|-------|-----|----|---|
| 11:10 | CNTEV | 0x0 | RW | Controls when the counter counts |
| Selects whether the regular counter responds to up-count events, down-count events or both | | | | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|---|
| | Value | Mode | | Description |
| | 0 | BOTH | | Counts up on up-count and down on down-count events. |
| | 1 | UP | | Only counts up on up-count events. |
| | 2 | DOWN | | Only counts down on down-count events. |
| | 3 | NONE | | Never counts. |
| 9 | S1CDIR | 0 | RW | Count direction determined by S1 S1 gives the direction of counting when in the OVSSINGLE or EXTCLKSINGLE modes. When S1 is high, the count direction is given by CNTDIR, and when S1 is low, the count direction is the opposite |
| 8 | HYST | 0 | RW | Enable Hysteresis When hysteresis is enabled, the PCNT will always overflow and underflow to TOP/2. |
| 7:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | RSTEN | 0 | RW | Enable PCNT Clock Domain Reset The PCNT clock domain is asynchronously held in reset when this bit is set. The reset is synchronously released two PCNT clock edges after this bit is cleared. If external clock used the reset should be performed by setting and clearing the bit without pending for SYNCBUSY bit. |
| 4 | FILT | 0 | RW | Enable Digital Pulse Width Filter The filter passes all high and low periods that are at least 5 clock cycles long. This filter is only available in OVSSINGLE mode. |
| 3 | EDGE | 0 | RW | Edge Select Determines the polarity of the incoming edges. This bit should be written when PCNT is in DISABLE mode, otherwise the behavior is unpredictable. This bit is ignored in EXTCLKSINGLE mode. |
| | Value | Mode | | Description |
| | 0 | POS | | Positive edges on the PCNTn_S0IN inputs are counted in OVSSINGLE mode. |
| | 1 | NEG | | Negative edges on the PCNTn_S0IN inputs are counted in OVSSINGLE mode, and the counter direction is inverted in EXTCLKQUAD mode. |
| 2 | CNTDIR | 0 | RW | Non-Quadrature Mode Counter Direction Control The direction of the counter must be set in the OVSSINGLE and EXTCLKSINGLE modes. This bit is ignored in EXTCLKQUAD mode as the direction is automatically detected. |
| | Value | Mode | | Description |
| | 0 | UP | | Up counter mode. |
| | 1 | DOWN | | Down counter mode. |
| 1:0 | MODE | 0x0 | RW | Mode Select Selects the mode of operation. The corresponding clock source must be selected from the CMU. |
| | Value | Mode | | Description |
| | 0 | DISABLE | | The module is disabled. |
| | 1 | OVSSINGLE | | Single input LFACLK oversampling mode (available in EM0-EM2). |
| | 2 | EXTCLKSINGLE | | Externally clocked single input counter mode (available in EM0-EM3). |
| | 3 | EXTCLKQUAD | | Externally clocked quadrature decoder mode (available in EM0-EM3). |

20.5.2 PCNTn_CMD - Command Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | LTOPBIM | 0 | W1 | Load TOPB Immediately This bit has no effect since TOPB is not buffered and it is loaded directly into TOP. |
| 0 | LCNTIM | 0 | W1 | Load CNT Immediately Load PCNTn_TOP into PCNTn_CNT on the next counter clock cycle. |

20.5.3 PCNTn_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|----|---|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | R | 0 | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | R | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | DIR | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|--|----------|---|--------|---|-------|------|-------------|---|----|---|---|------|--------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 0 | DIR | 0 | R | Current Counter Direction Current direction status of the counter. This bit is valid in EXTCLKQUAD mode only. | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>UP</td><td>Up counter mode (clockwise in EXTCLKQUAD mode with the NEDGE bit in PCNTn_CTRL set to 0).</td></tr><tr><td>1</td><td>DOWN</td><td>Down counter mode.</td></tr></table> | | | | | Value | Mode | Description | 0 | UP | Up counter mode (clockwise in EXTCLKQUAD mode with the NEDGE bit in PCNTn_CTRL set to 0). | 1 | DOWN | Down counter mode. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | UP | Up counter mode (clockwise in EXTCLKQUAD mode with the NEDGE bit in PCNTn_CTRL set to 0). | | | | | | | | | | | |
| 1 | DOWN | Down counter mode. | | | | | | | | | | | |

20.5.4 PCNTn_CNT - Counter Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | CNT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | CNT | 0x0000 | R | Counter Value Gives read access to the counter. |

20.5.5 PCNTn_TOP - Top Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | 0x00FF | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | TOP | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | TOP | 0x00FF | R | Counter Top Value When counting down, this value is reloaded into PCNTn_CNT when counting past 0. When counting up, 0 is written to the PCNTn_CNT register when counting past this value. |

20.5.6 PCNTn_TOPB - Top Value Buffer Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | 0x00FF | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | TOPB | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | TOPB | 0x00FF | RW | Counter Top Buffer Loaded automatically to TOP when written. |

20.5.7 PCNTn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|--------|----|----|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | AUXOF | DIRCNG | OF | UF |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | AUXOF | 0 | R | Overflow Interrupt Read Flag Set when an Auxiliary CNT overflow occurs |
| 2 | DIRCNG | 0 | R | Direction Change Detect Interrupt Flag Set when the count direction changes. Set in EXTCLKQUAD mode only. |
| 1 | OF | 0 | R | Overflow Interrupt Read Flag Set when a CNT overflow occurs |
| 0 | UF | 0 | R | Underflow Interrupt Read Flag Set when a CNT underflow occurs |

20.5.8 PCNTn_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | AUXOF |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | AUXOF | 0 | W1 | Auxiliary Overflow Interrupt Set Write to 1 to set the auxiliary overflow interrupt flag |
| 2 | DIRCNG | 0 | W1 | Direction Change Detect Interrupt Set Write to 1 to set the direction change interrupt flag |
| 1 | OF | 0 | W1 | Overflow Interrupt Set Write to 1 to set the overflow interrupt flag |
| 0 | UF | 0 | W1 | Underflow interrupt set Write to 1 to set the underflow interrupt flag |

20.5.9 PCNTn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|--------|----|----|---|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 2 | 1 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | W1 | 0 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | AUXOF | DIRCNG | OF | UF | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | AUXOF | 0 | W1 | Auxiliary Overflow Interrupt Clear |

| Bit | Name | Reset | Access | Description |
|-----|--|-------|--------|--|
| | Write to 1 to clear the auxiliary overflow interrupt flag | | | |
| 2 | DIRCNG | 0 | W1 | Direction Change Detect Interrupt Clear |
| | Write to 1 to clear the direction change detect interrupt flag | | | |
| 1 | OF | 0 | W1 | Overflow Interrupt Clear |
| | Write to 1 to clear the overflow interrupt flag | | | |
| 0 | UF | 0 | W1 | Underflow Interrupt Clear |
| | Write to 1 to clear the underflow interrupt flag | | | |

20.5.10 PCNTn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|---|--|--------|---|
| 31:4 | <i>Reserved</i> | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | |
| 3 | AUXOF | 0 | RW | Auxiliary Overflow Interrupt Enable |
| | Enable the auxiliary overflow interrupt | | | |
| 2 | DIRCNG | 0 | RW | Direction Change Detect Interrupt Enable |
| | Enable the direction change detect interrupt. | | | |
| 1 | OF | 0 | RW | Overflow Interrupt Enable |
| | Enable the overflow interrupt | | | |
| 0 | UF | 0 | RW | Underflow Interrupt Enable |
| | Enable the underflow interrupt | | | |

20.5.11 PCNTn_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|---|--|-------------|---------------------|
| 31:11 | <i>Reserved</i> | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | |
| 10:8 | LOCATION | 0x0 | RW | I/O Location |
| | Defines the location of the PCNT input pins. E.g. PCNTn_S0#0, #1 or #2. | | | |
| | Value | Mode | Description | |
| | 0 | LOC0 | Location 0 | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|-------------|
| | Value | Mode | | Description |
| 1 | LOC1 | | | Location 1 |
| 2 | LOC2 | | | Location 2 |
| 3 | LOC3 | | | Location 3 |
| 7:0 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

20.5.12 PCNTn_FREEZE - Freeze Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-----------|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | REGFREEZE |

| Bit | Name | Reset | Access | Description |
|--|-----------|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | REGFREEZE | 0 | RW | Register Update Freeze |
| When set, the update of the PCNT clock domain is postponed until this bit is cleared. Use this bit to update several registers simultaneously. | | | | |
| | Value | Mode | | Description |
| | 0 | UPDATE | | Each write access to a PCNT register is updated into the Low Frequency domain as soon as possible. |
| | 1 | FREEZE | | The PCNT clock domain is not updated with the new written value. |

20.5.13 PCNTn_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|---------------------------|
| 31:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | TOPB | 0 | R | TOPB Register Busy |
| Set when the value written to TOPB is being synchronized. | | | | |
| 1 | CMD | 0 | R | CMD Register Busy |
| Set when the value written to CMD is being synchronized. | | | | |
| 0 | CTRL | 0 | R | CTRL Register Busy |
| Set when the value written to CTRL is being synchronized. | | | | |

20.5.14 PCNTn_AUXCNT - Auxiliary Counter Value Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RWH | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | AUXCNT | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | AUXCNT | 0x0000 | RWH | Auxiliary Counter Value Gives read access to the auxiliary counter. |

20.5.15 PCNTn_INPUT - PCNT Input Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|---|---|---------|---|---|---------|---|---|---------|--|--|--|--|--|--|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | 0 | | | 0x0 | | | 0 | | | 0x0 | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | RW | | | RW | | | RW | | | RW | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | S1PRSEN | | | S1PRSEL | | | S0PRSEN | | | S0PRSEL | | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|----------|---|--------|---|-------|------|-------------|---|--------|-------------------------|---|--------|-------------------------|---|--------|-------------------------|---|--------|-------------------------|---|--------|-------------------------|---|--------|-------------------------|---|--------|-------------------------|---|--------|-------------------------|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | S1PRSEN | 0 | RW | S1IN PRS Enable When set, the PRS channel is selected as input to S1IN. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8:6 | S1PRSEL | 0x0 | RW | S1IN PRS Channel Select Select PRS channel as input to S1IN. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PRSCH0</td><td>PRS Channel 0 selected.</td></tr><tr><td>1</td><td>PRSCH1</td><td>PRS Channel 1 selected.</td></tr><tr><td>2</td><td>PRSCH2</td><td>PRS Channel 2 selected.</td></tr><tr><td>3</td><td>PRSCH3</td><td>PRS Channel 3 selected.</td></tr><tr><td>4</td><td>PRSCH4</td><td>PRS Channel 4 selected.</td></tr><tr><td>5</td><td>PRSCH5</td><td>PRS Channel 5 selected.</td></tr><tr><td>6</td><td>PRSCH6</td><td>PRS Channel 6 selected.</td></tr><tr><td>7</td><td>PRSCH7</td><td>PRS Channel 7 selected.</td></tr></table> | | | | | Value | Mode | Description | 0 | PRSCH0 | PRS Channel 0 selected. | 1 | PRSCH1 | PRS Channel 1 selected. | 2 | PRSCH2 | PRS Channel 2 selected. | 3 | PRSCH3 | PRS Channel 3 selected. | 4 | PRSCH4 | PRS Channel 4 selected. | 5 | PRSCH5 | PRS Channel 5 selected. | 6 | PRSCH6 | PRS Channel 6 selected. | 7 | PRSCH7 | PRS Channel 7 selected. |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PRSCH0 | PRS Channel 0 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PRSCH1 | PRS Channel 1 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PRSCH2 | PRS Channel 2 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PRSCH3 | PRS Channel 3 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PRSCH4 | PRS Channel 4 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PRSCH5 | PRS Channel 5 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | PRSCH6 | PRS Channel 6 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | PRSCH7 | PRS Channel 7 selected. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | S0PRSEN | 0 | RW | S0IN PRS Enable When set, the PRS channel is selected as input to S0IN. | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|-------------|
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

2:0 S0PRSEL 0x0 RW **S0IN PRS Channel Select**

Select PRS channel as input to S0IN.

| Value | Mode | Description |
|-------|--------|-------------------------|
| 0 | PRSCH0 | PRS Channel 0 selected. |
| 1 | PRSCH1 | PRS Channel 1 selected. |
| 2 | PRSCH2 | PRS Channel 2 selected. |
| 3 | PRSCH3 | PRS Channel 3 selected. |
| 4 | PRSCH4 | PRS Channel 4 selected. |
| 5 | PRSCH5 | PRS Channel 5 selected. |
| 6 | PRSCH6 | PRS Channel 6 selected. |
| 7 | PRSCH7 | PRS Channel 7 selected. |

21 LESENSE - Low Energy Sensor Interface

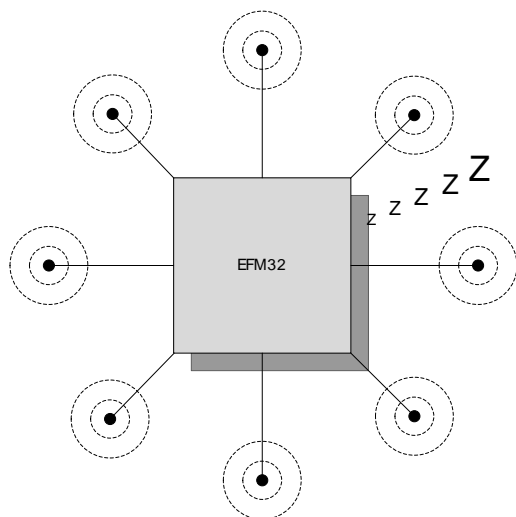

Quick Facts

What?

LESENSE is a low energy sensor interface capable of autonomously collecting and processing data from multiple sensors even when in EM2. Flexible configuration makes LESENSE a versatile sensor interface compatible with a wide range of sensors and measurement schemes.

Why?

Capability to autonomously monitor sensors allows the EFM32TG to reside in a low energy mode for long periods of time while keeping track of sensor status and sensor events.

How?

LESENSE is highly configurable and is capable of collecting data from a wide range of sensor types. Once the data is collected, the programmable state machine, LESENSE decoder, is capable of processing sensor data without CPU intervention. A large result buffer allows the chip to remain in EM2 for long periods of time while autonomously collecting data.

21.1 Introduction

LESENSE is a low energy sensor interface which utilizes on-chip peripherals to perform measurement of a configurable set of sensors. The results from sensor measurements can be processed by the LESENSE decoder, which is a configurable state machine with up to 16 states. The results can also be stored in a result buffer to be collected by CPU or DMA for further processing.

LESENSE operates in EM2, in addition to EM1 and EM0, and can wake up the CPU on configurable events.


21.2 Features

- Up to 16 sensors
- Autonomous sensor monitoring in EM0, EM1, and EM2
- Highly configurable decoding of sensor results
- Interrupt on sensor events
- Configurable enable signals to external sensors
- Circular buffer for storage of up to 16 sensor results.
- Support for multiple sensor types
 - LC sensors
 - Capacitive sensing
 - General analog sensors

21.3 Functional description

LESENSE is a module capable of controlling on-chip peripherals in order to perform monitoring of different sensors with little or no CPU intervention. LESENSE uses the analog comparators, ACMP, for measurement of sensor signals. LESENSE can also control the DAC to generate accurate reference voltages. Figure 21.1 (p. 333) shows an overview of the LESENSE module. LESENSE consists of a sequencer, count and compare block, a decoder, and a RAM block used for configuration and result storage. The sequencer handles interaction with other peripherals as well as timing of sensor measurements. The count and compare block is used to count pulses from ACMP outputs before comparing with a configurable threshold. To autonomously analyze sensor results, the LESENSE decoder provides possibility to define a finite state machine with up to 16 states, and programmable actions upon state transitions. This allows the decoder to implement a wide range of decoding schemes, for instance quadrature decoding. A RAM block is used for storage of configuration and measurement results. This allows LESENSE to have a relatively large result buffer enabling the chip to remain in a low energy mode for long periods of time while collecting sensor data.

Figure 21.1. LESENSE block diagram

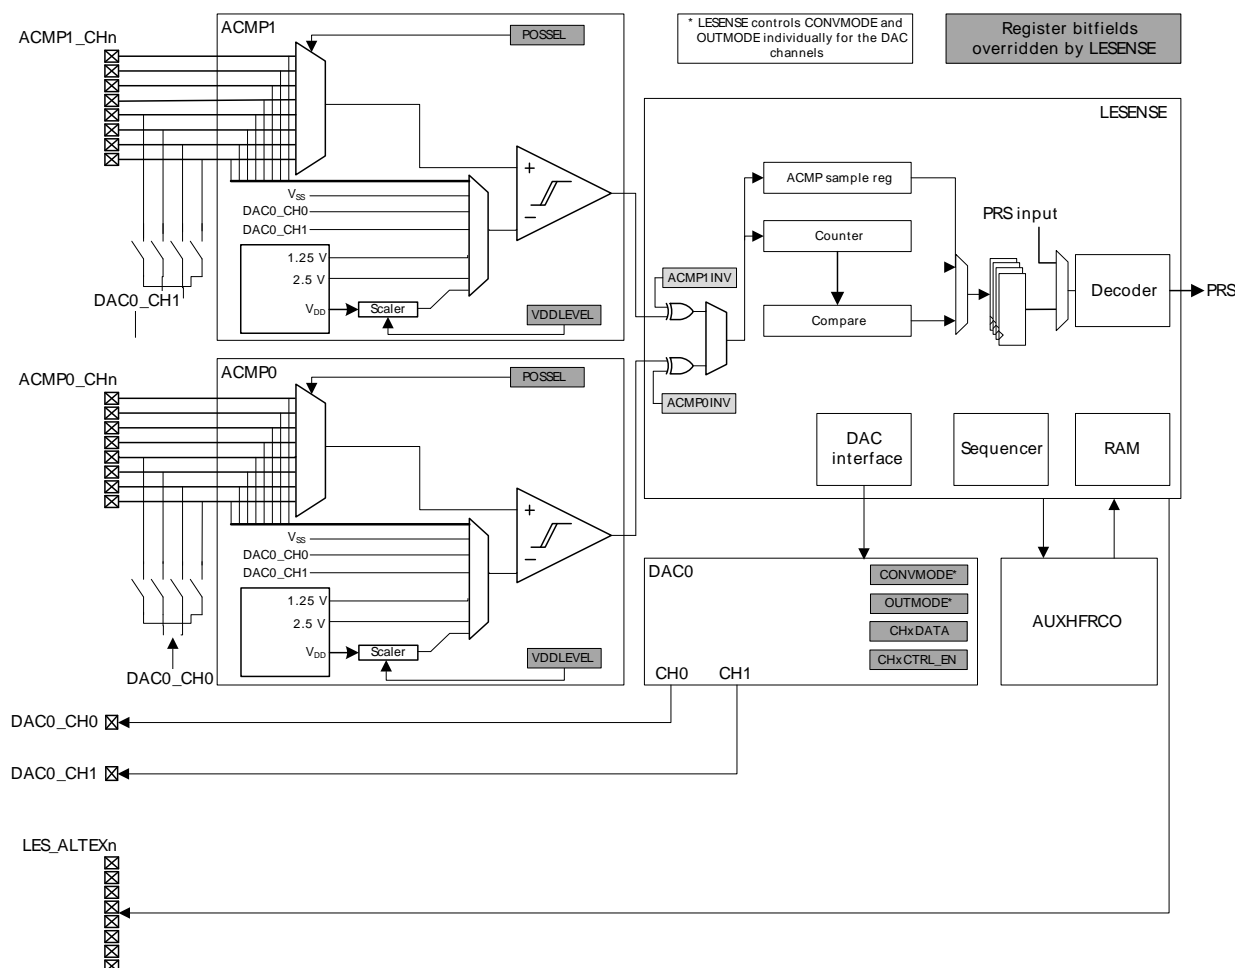

21.3.1 Channel configuration

LESENSE has 16 individually configurable channels, the first eight are mapped to the channels of ACMP0, while the last eight are mapped to the channels of ACMP1. Each LESENSE channel has its own set of configuration registers. Channel configuration is split into three registers; CHx_TIMING, CHx_INTERACT, and CHx_EVAL. Individual timing for each sensor is configured in CHx_TIMING, sensor interaction is configured in CHx_INTERACT, and configurations regarding evaluation of the measurements are done in CHx_EVAL. For improved readability, CHx_CONF will be used to address

the channel configuration registers, CHx_TIMING, CHx_INTERACT, and CHx_EVAL, throughout this chapter.

By default, the channel configuration registers are directly mapped to the channel number. Configuring SCANCONF in CTRL makes it possible to alter this mapping.

Configuring SCANCONF to INVMAP will make channels 0-7 use the channel configuration registers for channels 8-15, and vice versa. This feature allows an application to quickly and easily switch configuration set for the channels.

Setting SCANCONF to TOGGLE will make channel x alternate between using CH_x_CONF and CH_{x+8}_CONF. The configuration used is decided by the state of the corresponding bit in SCANRES. For instance, if channel 3 is performing a scan and bit 3 in SCANRES is set, CH₁₁_CONF will be used. Channels 8 through 15 will toggle between CH_x_CONF and CH_{x-8}_CONF. This mode provides an easy way for implementation of hysteresis on channel events as threshold values can be changed depending on sensor status.

Setting SCANCONF to DECDEF will make the state of the decoder define which scan configuration to be used. If the decoder state is at index 8 or higher, channel x will use CH_{x+8}_CONF, otherwise it will use CH_x configuration. Similarly, channels 8 through 15 will use CH_x configuration when decoder state index is less than 8 and CH_{x-8}_CONF when decoder state index is higher than 7. Allowing the decoder state to define which configuration to use, enables easy implementation of for instance hysteresis, as different threshold values can be used for the same channel, depending on the state of the application. Table 21.1 (p. 334) summarizes how channel configuration is selected for different setting of SCANCONF.

Table 21.1. LESENSE scan configuration selection

| LESENSE channel x | SCANCONF | | | | | |
|----------------------|-----------------------|-------------------------|-----------------------|-------------------------|-----------------------|-------------------------|
| | DIRMAP | INVMAP | TOGGLE | | DECDEF | |
| | | | SCANRES[n] = 0 | SCANRES[n] = 1 | DECSTATE < 8 | DECSTATE ≥ 8 |
| 0 ≤ x < 8 | CH _x _CONF | CH _{x+8} _CONF | CH _x _CONF | CH _{x+8} _CONF | CH _x _CONF | CH _{x+8} _CONF |
| 8 ≤ x < 16 | CH _x _CONF | CH _{x-8} _CONF | CH _x _CONF | CH _{x-8} _CONF | CH _x _CONF | CH _{x-8} _CONF |

Channels are enabled in the CHEN register, where bit x enables channel x. During a scan, all enabled channels are measured, starting with the lowest indexed channel. Figure 21.2 (p. 335) illustrates a scan sequence with channels 3, 5, and 9 enabled.

21.3.2 Scan sequence

LESENSE runs on LFACLK_{LESENSE}, which is a prescaled version of LFACLK. The prescaling factor for LFACLK_{LESENSE} is selected in the CMU, available prescaling factors are:

- DIV1: LFACLK_{LESENSE} = LFACLK/1
- DIV2: LFACLK_{LESENSE} = LFACLK/2
- DIV4: LFACLK_{LESENSE} = LFACLK/4
- DIV8: LFACLK_{LESENSE} = LFACLK/8

Note

LFACLK_{LESENSE} should not exceed 50kHz.

All enabled channels are scanned each scan period. How a new scan is started is configured in the SCANMODE bit field in CTRL. If set to PERIODIC, the scan frequency is generated using a counter which is clocked by LFACLK_{LESENSE}. This counter has its own prescaler. This prescaling factor is configured in PCPRESC in TIMCTRL. A new scan sequence is started each time the counter reaches the top value, PCTOP. The scan frequency is calculated using Equation 21.1 (p. 335). If SCANMODE is set to


ONESHOT, a single scan will be made when START in CMD is set. To start a new scan on a PRS event, set START in CMD, set SCANMODE to PRS and configure PRS channel in PRSSEL. The PRS start signal needs to be active for at least one $\text{LFACLK}_{\text{LESENSE}}$ cycle to make sure LESENSE is able to register it.

Scan frequency

$$F_{\text{scan}} = \text{LFACLK}_{\text{LESENSE}} / ((1 + \text{PCTOP}) * 2^{\text{PCPRESC}}) \quad (21.1)$$

It is possible to interleave additional sensor measurements in between the periodic scans. Issuing a start command when LESENSE is idle will immediately start a new scan, without disrupting the frequency of the periodic scans. If the period counter overflows during the interleaved scan, the periodically scheduled scan will start immediately after the interleaved scan completes.


Figure 21.2. Scan sequence

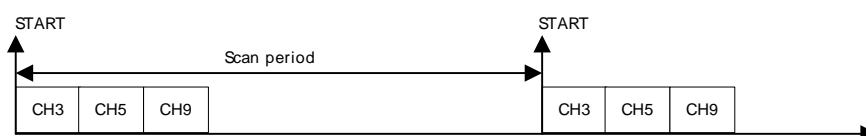

21.3.3 Sensor timing

For each channel in the scan sequence, the LESENSE interface goes through three phases: Idle phase, excite phase, and measure phase. The durations of the excite and measure phases are configured in the CHx_TIMING registers. LESENSE includes two timers: A low frequency timer, running on $\text{LFACLK}_{\text{LESENSE}}$, and a high frequency timer, running on AUXHFRCO. Timing of the excite phase is done using these timers and can be either a number of prescaled AUXHFRCO cycles or a number of prescaled $\text{LFACLK}_{\text{LESENSE}}$ cycles, depending on which one is selected in EXCLK. The prescaling can be done by configuring LFPRESC in TIMCTRL for the low frequency timer, and the high frequency timer prescaling factor is configured in AUXPRESC in the same register. The duration of the measure phase is programmed via MEASUREDLY and SAMPLEDLY. The output of the ACMP will be inactive for MEASUREDLY EXCLK cycles after start of the sensor measurement. Sampling of the sensor will happen after SAMPLEDLY $\text{LFACLK}_{\text{LESENSE}}$, or AUXHFRCO cycles, depending on the configuration of SAMPLECLK. Figure 21.3 (p. 335) depicts a sensor sequence where excitation and measure delay is timed using AUXHFRCO and the sample delay is timed using $\text{LFACLK}_{\text{LESENSE}}$. The configurable measure- and sample delays enables LESENSE to easily define exact time windows for sensor measurements. A start delay can be inserted before sensor measurement begin by configuring STARTDLY in TIMCTRL. This delay can be used to ensure that the DAC is done and voltages have stabilized before sensor measurement begins.

Figure 21.3. Timing diagram, short excitation

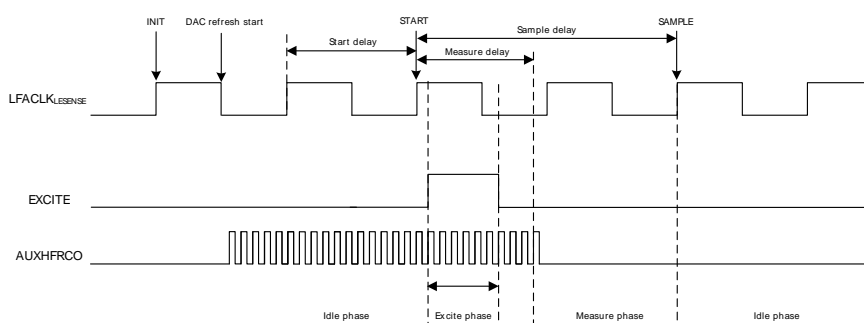

21.3.4 Sensor interaction

Many sensor types require some type of excitation in order to work. LESENSE can generate a variety of sensor stimuli, both on the same pin as the measurement is to be made on, and on alternative pins.

By default, excitation is performed on the pin associated with the channel, i.e. excitation and sensor measurement is performed on the same pin. The mode of the pin during the excitation phase is configured in EXMODE in CHx_INTERACT. The available modes during the excite phase are:

- **DISABLED:** The pin is disabled.
- **HIGH:** The pin is driven high.
- **LOW:** The pin is driven low.
- **DACOUT:** The pin is connected to the output of a DAC channel.

Note

Excitation with DAC output is only available on channels 0, 1, 2, and 3 (DAC0_CH0) and channels 12, 13, 14, and 15 (DAC0_CH1).

If the DAC is in opamp-mode, setting EXMODE to DACOUT will result in excitation with output from the opamp.


LESENSE is able to perform sensor excitation on another pin than the one to be measured. When ALTEX in CHx_INTERACT is set, the excitation will occur on the alternative excite pin associated with the given channel. All LESENSE channels mapped to ACMP0 have their alternative channel mapped to the corresponding channel on ACMP1, and vice versa. Alternatively, the alternative excite pins can be routed to the LES_ALTEX pins. Mapping of the alternative excite pins is configured in ALTEXMAP in CTRL. Table 21.2 (p. 336) summarizes the mapping of excitation pins for different configurations.

Table 21.2. LESENSE excitation pin mapping

| LESENSE channel | ALTEX = 0 | ALTEX = 1 | |
|-----------------|-----------|-----------------|------------------|
| | | ALTEXMAP = ACMP | ALTEXMAP = ALTEX |
| 0 | ACMP0_CH0 | ACMP1_CH0 | LES_ALTEX0 |
| 1 | ACMP0_CH1 | ACMP1_CH1 | LES_ALTEX1 |
| 2 | ACMP0_CH2 | ACMP1_CH2 | LES_ALTEX2 |
| 3 | ACMP0_CH3 | ACMP1_CH3 | LES_ALTEX3 |
| 4 | ACMP0_CH4 | ACMP1_CH4 | LES_ALTEX4 |
| 5 | ACMP0_CH5 | ACMP1_CH5 | LES_ALTEX5 |
| 6 | ACMP0_CH6 | ACMP1_CH6 | LES_ALTEX6 |
| 7 | ACMP0_CH7 | ACMP1_CH7 | LES_ALTEX7 |
| 8 | ACMP1_CH0 | ACMP0_CH0 | LES_ALTEX0 |
| 9 | ACMP1_CH1 | ACMP0_CH1 | LES_ALTEX1 |
| 10 | ACMP1_CH2 | ACMP0_CH2 | LES_ALTEX2 |
| 11 | ACMP1_CH3 | ACMP0_CH3 | LES_ALTEX3 |
| 12 | ACMP1_CH4 | ACMP0_CH4 | LES_ALTEX4 |
| 13 | ACMP1_CH5 | ACMP0_CH5 | LES_ALTEX5 |
| 14 | ACMP1_CH6 | ACMP0_CH6 | LES_ALTEX6 |
| 15 | ACMP1_CH7 | ACMP0_CH7 | LES_ALTEX7 |

Figure 21.4 (p. 337) illustrates the sequencing of the pin associated with the active channel and its alternative excite pin.

Figure 21.4. Pin sequencing

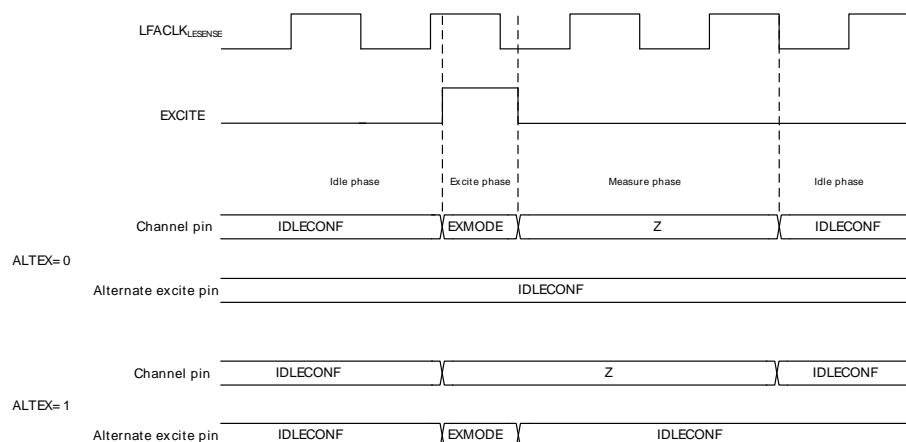

The alternative excite pins, LES_ALTEXn, have the possibility to excite regardless of what channel is active. Setting AEXn in ALTEXCONF will make LES_ALTEXn excite for all channels using alternative excitation, i.e. ALTEX in CHx_INTERACT is set.

Note


When exciting on the pin associated with the active channel, the pin will go through a tri-stated phase before returning to the idle configuration. This will not happen on pins used as alternative excitation pins.

The pin configuration for the idle phase can be configured individually for each LESENSE channel and alternative excite pin in the IDLECONF and ALTEXCONF registers. The modes available are the same as the modes available in the excitation phase. In the measure phase, the pin mode on the active channel is always disabled (analog input).

To enable LESENSE to control GPIO, the pin has to be enabled in the ROUTE register. In addition, the given pin must be configured as push-pull. IDLECONF configuration should not be altered when pin enable for the given pin is set in ROUTE.

21.3.5 Sensor evaluation


Sensor evaluation can be based on either analog comparator outputs, or the counter output. This is configured in the SAMPLE bit-field in CHx_INTERACT. The LESENSE counter is used to count pulses on the ACMP output in the measurement phase. When a measurement phase is completed, the counter value is compared to the value configured in COMPTHRES in CHx_EVAL. By configuring COMP, it is possible to choose comparison mode: Less than, or greater than or equal. If a comparison for a channel triggers, the corresponding bit in the result register, SCANRES, is set. To set an interrupt flag on a sensor event, configure SETIF in CHx_INTERACT. Figure 21.5 (p. 338) illustrates how the counter value or ACMP sample is used for evaluation and interrupt generation.

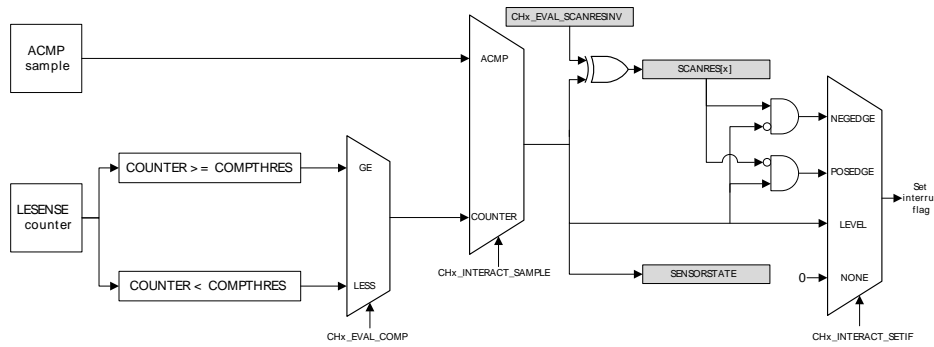Figure 21.5. Scan result and interrupt generation

LESENSE includes the possibility to sample both analog comparators simultaneously, effectively cutting the time spent on sensor interaction in some applications in half. Setting DUALSAMPLE in CTRL enables this mode. In dual sample mode, the channels of ACMP0 are paired together with the corresponding channel on ACMP1, i.e. channel x on ACMP0 and channel x on ACMP1 are sampled simultaneously. The results from sensor measurements can be fed into the decoder register and/or stored in the result buffer. In this mode, the samples from the AMCPs are placed in the two LSBs of the result stored in the result buffer. Results from both ACMPs will be evaluated for interrupt generation.

21.3.6 Decoder

Many applications require some sort of processing of the sensor readings, for instance in the case of quadrature decoding. In quadrature decoding, the sensors repeatedly pass through a set of states which corresponds to the position of the sensors. This sequence, and many other decoding schemes, can be described as a finite state machine. To support this type of decoding without CPU intervention, LESENSE includes a highly configurable decoder, capable of decoding input from up to four sensors. The decoder is implemented as a programmable state machine with up to 16 states. When doing a sensor scan, the results from the sensors are placed in the decoder input register, SENSORSTATE, if DECODE in CHx_INTERACT is set. The resulting position after a scan is illustrated in Figure 21.6 (p. 338), where the bottom blocks show how the SENSORSTATE register is filled. When the scan sequence is complete, the decoder evaluates the state of the sensors chosen for decoding, as depicted in Figure 21.6 (p. 338).

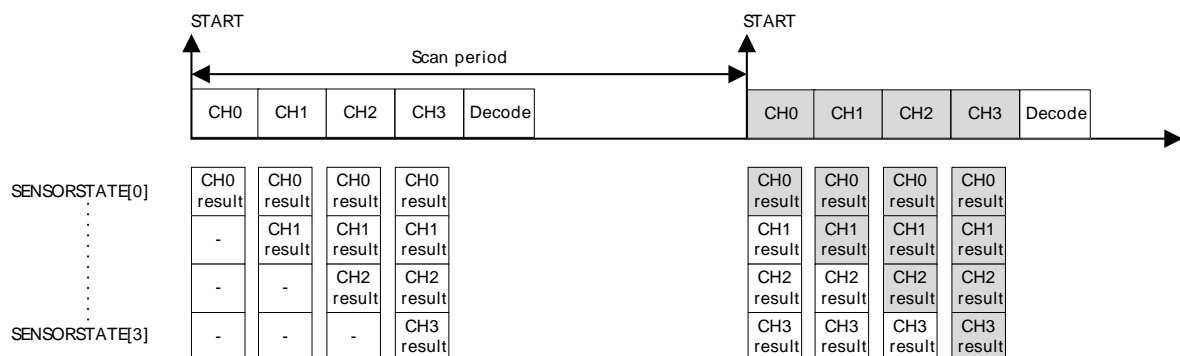Figure 21.6. Sensor scan and decode sequence


The decoder is a programmable state machine with support for up to 16 states. The behavior of each state is individually configured in the STx_TCONFA and STx_TCONFB registers. The registers define possible transitions from the present state. If the sensor state matches COMP in either STx_TCONFA or STx_TCONFB, a transition to the state defined in NEXTSTATE will be made. It is also possible to

mask out one or more sensors using the MASK bit field. The state of a masked sensor is interpreted as don't care.

Upon a state transition, LESENSE can generate a pulse on one or more of the decoder PRS channels. Which channel to generate a pulse on is configured in the PRSACT bit field. If PRSCNT in DECCTRL is set, count signals will be generated on decoder PRS channels 0 and 1 according to the PRSACT configuration. In this mode, channel 0 will pulse each time a count event occurs while channel 1 indicates the count direction, 1 being up and 0 being down. The count direction will be kept at its previous state in between count events. The EFM32TG pulse counter may be used to keep track of events based on these PRS outputs.


If SETIF is set, the DECODER interrupt flag will be set when the transition occurs. If INTMAP in DECCTRL and SETIF is set, a transition from state x will set the CHx interrupt flag in addition to the DECODER flag.

Setting CHAIN in STx_TCONFA enables the decoder to evaluate more than two possible transitions for each state. If none of the transitions defined in STx_TCONFA or STx_TCONFB matches, the decoder will jump to the next descriptor pair and evaluate the transitions defined there. The decoder uses two LFACLK_{LESENSE} cycles for each descriptor pair to be evaluated. If ERRCHK in CTRL is set, the decoder will check that the sensor state has not changed if none of the defined transitions match. The DECERR interrupt flag will be set if none of the transitions match and the sensor state has changed. Figure 21.7 (p. 340) illustrates state transitions. The "Generate PRS signals and set interrupt flag" blocks will perform actions according to the configuration in STx_TCONFA and STx_TCONFB.

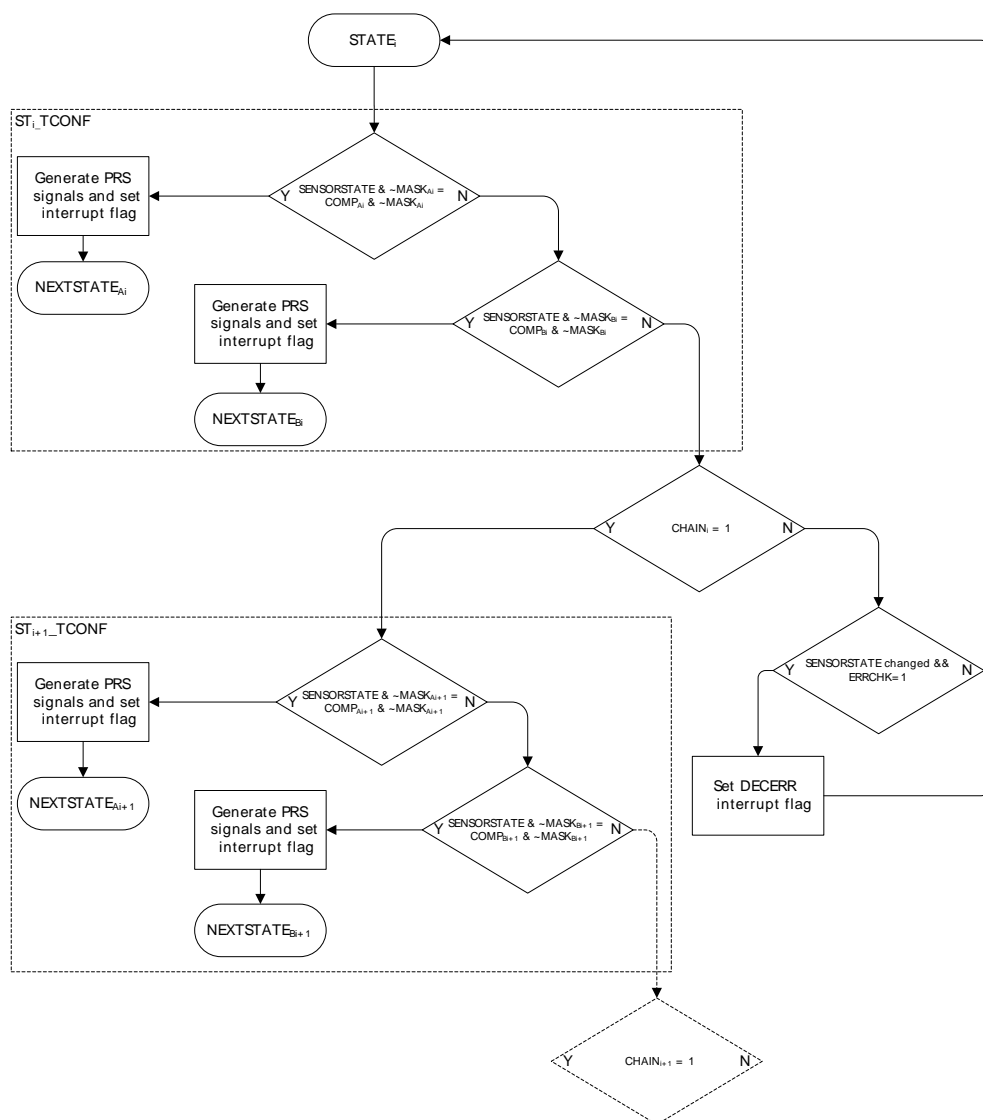Figure 21.7. Decoder state transition evaluation**Note**

If only one transition from a state is used, STx_TCONFA and STx_TCONFB should be configured equally.

To prevent unnecessary interrupt requests or PRS outputs when the decoder toggles back and forth between two states, a hysteresis option is available. The hysteresis function is triggered if a type A transition is preceded by a type B transition, and vice versa. A type A transition is a transition defined in STx_TCONFA, and a type B transition is a transition defined in STx_TCONFB. When descriptor chaining is used, a jump to another descriptor will cancel out the hysteresis effect. Figure 21.8 (p. 341) illustrates how the hysteresis triggers upon state transitions.

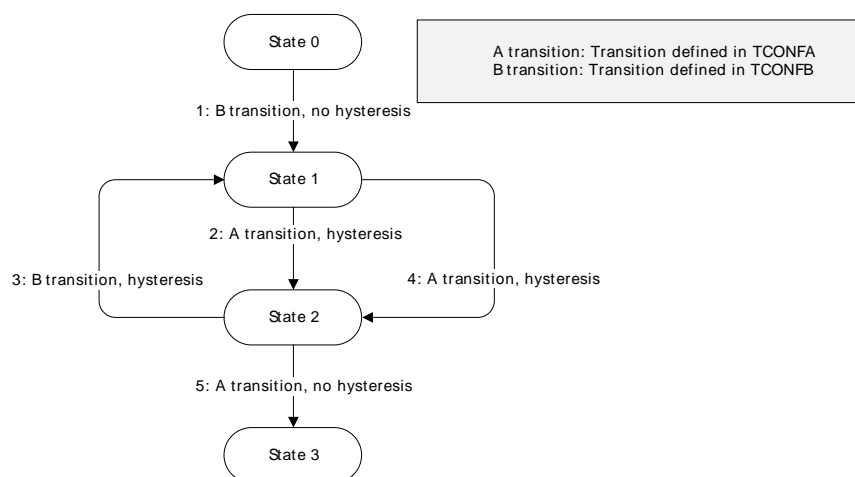Figure 21.8. Decoder hysteresis

The events suppressed by the hysteresis are configured in bit fields HYSTPRS0-2 and HYSTIRQ in DECCTRL.

- When HYSTPRSx is set, PRS signal x is suppressed when the hysteresis triggers.
- When HYSTIRQ is set, interrupt requests are suppressed when the hysteresis triggers.


Note

The decoder error interrupt flag, DECERR, is not affected by the hysteresis.

21.3.7 Measurement results

Part of the LESENSE RAM is treated as a circular buffer for storage of up to 16 results from sensor measurements. Each time LESENSE writes data to the result buffer, the result write pointer, PTR_WR, is incremented. Each time a new result is read through the BUFDATA register, the result read pointer, PTR_RD, is incremented. The read pointer will not be incremented if there is no valid, unread data in the result buffer. By default LESENSE will not write additional data to a full result buffer until the data is read by software or DMA. Setting BUFWO in CTRL enables LESENSE to write to the result buffer, even if it is full. In this mode, the result read pointer will follow the write pointer if the buffer is full. The result of this is that data read from the result read register, BUFDATA, is the oldest unread result. The location pointers are available in PTR. The result buffer has three status flags; BUFDATAV, BUFHALFFULL, and BUFFULL. The flags indicate when new data is available, when the buffer is half full, and when it is full, respectively. The interrupt flag BUFDATAV is set when data is available in the buffer. BUFLEVEL is set when the buffer is either full or half-full, depending on the configuration of BUFIDL in CTRL. If the result buffer overflows, the BUFOF interrupt flag will be set.

During a scan, the state of each sensor is stored in SCANRES. If a sensor triggers, a 1 is stored in SCANRES, else a 0 is stored in SCANRES. Whether or not a sensor is said to be triggered depends of the configuration for the given channel. If SAMPLE is set to ACMP, the sensor is said to be triggered if the output from the analog comparator is 1 when sensor sampling is performed. If SAMPLE is set to COUNTER, a sensor is said to be triggered if the LESENSE counter value is greater than or equal, or less than COMPTHRES, depending on the configuration of COMP. If STRSAMPLE in CHx_EVAL is set, the counter value or ACMP sample for each channel will be stored in the LESENSE result buffer. If STRSCANRES in CTRL is set, the result vector, SCANRES, will also be stored in the result buffer. This will be stored after each scan and will be interleaved with the counter values. The contents of the result buffer can be read from BUFDATA or from BUF[x]_DATA. When reading from BUF[x]_DATA, neither the result read pointer or the status flags BUFDATAV, BUFHALFFULL, or BUFFULL will be updated. When reading through the BUFDATA register, the oldest unread result will be read.

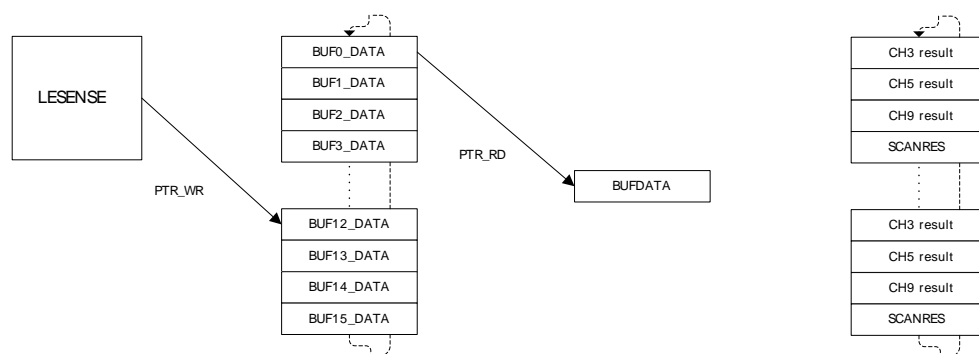Figure 21.9. Circular result buffer

The right hand side of Figure 21.9 (p. 342) illustrates how the result buffer would be filled when channels 3,5, and 9 are enabled and have STRSAMPLE in CHx_EVAL set, in addition to STRSCANRES in CTRL. The measurement result from the three channels will be sequentially written during the scan, while SCANRES is written to the result buffer upon scan completion.

21.3.8 DAC interface

LESENSE is able to drive the DAC for generation of accurate reference voltages. DAC channels 0 and 1 are individually configured in the PERCTRL register. The conversion mode can be set to either continuous, sample/hold or sample/off. For further details about these modes, refer to Section 25.3.1 (p. 422). Both DAC channels are refreshed prior to each sensor measurement, as depicted in Figure 21.3 (p. 335). The conversion data is either taken from the data registers in the EFM32TG DAC interface (DAC0_CH0DATA and DAC0_CH1DATA) or from the ACMPTHRES bit-field in the CHx_INTERACT register for the active LESENSE channel. DAC data used is configured in DACCHxDATA in PERCTRL.

The DAC interface runs on AUXHFRCO and will enable this when it is needed. The DACPRESC bit-field in PERCTRL is used to prescale the AUXHFRCO to achieve wanted clock frequency for the LESENSE DAC interface. The frequency should not exceed 500kHz, i.e. DACPRESC has to be set to at least 1. The prescaler may also be used to tune how long the DAC should drive its outputs in sample/off mode.

Bias configuration, calibration and reference selection is done in the EFM32TG DAC module and LESENSE will not override these configurations. If a bandgap reference is selected for the DAC, the DACREF bit in PERCTRL should be set to BANDGAP.

LESENSE has the possibility to control switches that connect the DAC outputs to the pins associated with ACMP0_CH0-3 and ACMP1_CH12-15. This makes LESENSE able to excite sensors with output from the DAC channels.

The DAC may be chosen as reference to the analog comparators for accurate reference generation. If the DAC is configured in continuous or sample/hold mode this does not require any external components. If sample/off mode is used, an external capacitor is needed to keep the voltage in between samples. To connect the input from the DAC to the ACMP to this external capacitor, connect the capacitor to the DAC pin for the given channel and set OPAXSHORT in DAC_OPACTRL.

Note

The DAC mode should not be altered while DACACTIVE in STATUS is set

21.3.9 ACMP interface

The ACMPs are used to measure the sensors, and have to be configured according to the application in order for LESENSE to work properly. Depending on the configuration in the ACMP0MODE and

ACMP1MODE bit-fields in PERCTRL, LESENSE will take control of the positive input mux and the Vdd scaling factor (VDDLEVEL) for ACMP0 and ACMP1. The remaining configuration of the analog comparators are done in the ACMP register interface. It is recommended to set the MUXEN bit in ACMPn_CTRL for the ACMPs used by LESENSE. Each channel has the possibility to control the value of the Vdd scaling factor on the negative input of the ACMP, VDDLEVEL in ACMP_INPUTSEL. This is done in the 6 LSBs of ACMPTHRES in CHx_INTERACT. LESENSE automatically controls the ACMP mux to connect the correct channel.

21.3.10 ACMP and DAC duty cycling

By default, the analog comparators and DAC are shut down in between LESENSE scans to save energy. If this is not wanted, WARMUPMODE in PERCTRL can be configured to prevent them from being shut down.

Both the DAC and analog comparators rely on a bias module for correct operation. This bias module has a low power mode which consumes less energy at the cost of reduced accuracy. BIASMODE in BIASCTRL configures how the bias module is controlled by LESENSE. When set to DUTYCYCLE, LESENSE will set the bias module in high accuracy mode whenever LESENSE is active, and keep it in the low power mode otherwise. When BIASMODE is set to HIGHACC, the high accuracy mode is always selected. When set to DONTTOUCH, LESENSE will not control the bias module.

21.3.11 DMA requests

LESENSE issues a DMA request when the result buffer is either full or half full, depending on the configuration of BUFIDL in CTRL. The request is cleared when the buffer level drops below the threshold defined in BUFIDL. A single DMA request is also set whenever there is unread data in the buffer. DMAWU in CTRL configures at which buffer level LESENSE should wake-up the DMA when in EM2.

Note

The DMA controller should always fetch data from the BUFDATA register.

21.3.12 PRS output

LESENSE is an asynchronous PRS producer and has nineteen PRS outputs. The decoder has three outputs and in addition, all bits in the SCANRES register are available as PRS outputs. For further information on the decoder PRS output, refer to Section 21.3.6 (p. 338) .

21.3.13 RAM

LESENSE includes a RAM block used for storage of configuration and results. If LESENSE is not used, this RAM block can be powered down eliminating its current consumption due to leakage. The RAM is powered down by setting the RAM bit in the POWERDOWN register. Once the RAM has been shut down it cannot be turned back on without a reset of the chip. Registers mapped to the RAM include: STx_TCONFA, STx_TCONFB, BUFx_DATA, BUFDATA, CHx_TIMING, CHx_INTERACT, and CHx_EVAL. These registers have unknown value out of reset and have to be initialized before use.


Note

Read-modify-write operations on uninitialized RAM register produces undefined values.

21.3.14 Application examples

21.3.14.1 Capacitive sense

Figure 21.10 (p. 344) illustrates how the EFM32TG can be configured to monitor four capacitive buttons.

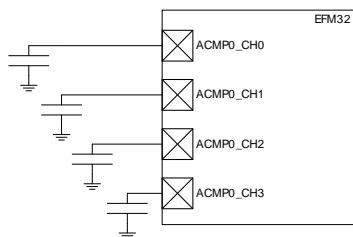Figure 21.10. Capacitive sense setup



The following steps show how to configure LESENSE to scan through the four buttons 100 times per second, issuing an interrupt if one of them is pressed.

1. Assuming $LFCLK_{LESENSE}$ is 32kHz, set PCPRESC to 3 and PCTOP to 39 in CTRL. This will make the LESENSE scan frequency 100Hz.
2. Enable channels 0 through 3 in CHEN and set IDLECONF for these channels to DISABLED. In capacitive sense mode, the GPIO should always be disabled (analog input).
3. Configure the ACMP to operate in CAPSENSE mode, refer to Section 22.3.5 (p. 381) for details.
4. Configure the following bit fields in CHx_CONF, for channels 0 through 3:
 - a. Set EXTIME to 0. No excitation is needed in this mode.
 - b. Set SAMPLE to COUNTER and COMP to LESS. This makes LESENSE interpret a sensor as active if the frequency on a channel drops below the threshold, i.e. the button is pressed.
 - c. Set SAMPLEDLY to an appropriate value, each sensor will be measured for SAMPLEDLY/ $LFCLK_{LESENSE}$ seconds. MEASUREDLY should be set to 0
5. Set CTRTHRESHOLD to an appropriate value. An interrupt will be issued if the counter value for a sensor is below this threshold after the measurement phase.
6. Enable interrupts on channels 0 through 3.
7. Start scan sequence by writing a 1 to START in CMD.

In a capacitive sense application, it might be required to calibrate the threshold values on a periodic basis, this is done in order to compensate for humidity and other physical variations. LESENSE is able to store up to 16 counter values from a configurable number of channels, making it possible to collect sample data while in EM2. When calibration is to be performed, the CPU only has to be woken up for a short period of time as the data to be processed already lies in the result registers. To enable storing of the count value for a channel, set STRSAMPLE in the CHx_INTERACT register.

21.3.14.2 LC sensor


Figure 21.11 (p. 344) below illustrates how the EFM32TG can be set up to monitor four LC sensors.

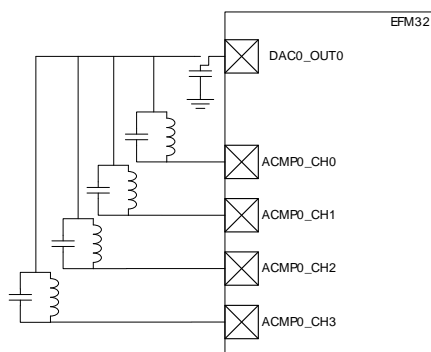Figure 21.11. LC sensor setup

LESENSE can be used to excite and measure the damping factor in LC sensor oscillations. To measure the damping factor, the ACMP can be used to generate a high output each time the sensor voltage

exceeds a certain level. These pulses are counted using an asynchronous counter and compared with the threshold in COMPTHRES in the CHx_EVAL register. If the number of pulses exceeds the threshold level, the sensor is said to be active, otherwise it is inactive. Figure 21.12 (p. 345) illustrates how the output pulses from the ACMP correspond to damping of the oscillations. The results from sensor evaluation can automatically be fed into the decoder in order to keep track of rotations.

Figure 21.12. LC sensor oscillations

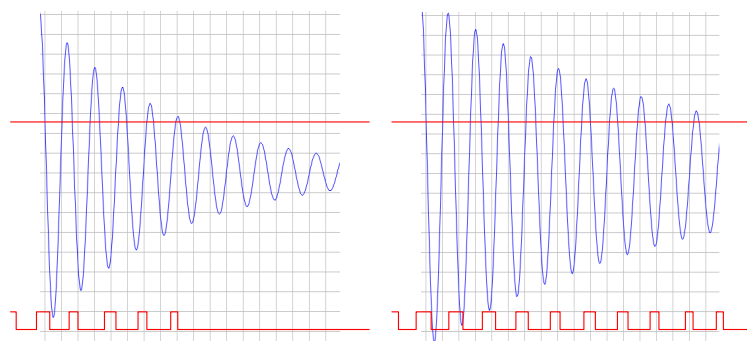


The following steps show how to configure LESENSE to scan through the four LC sensors 100 times per second.

1. Assuming $\text{LFACLK}_{\text{LESENSE}}$ is 32kHz, set PCPRESC to 3 and PCTOP to 39 in CTRL. This will make the LESENSE scan frequency 100Hz.
2. Enable the DAC and configure it to produce a voltage of $V_{\text{dd}}/2$.
3. Enable channels 0 through 3 in CHEN. Set IDLECONF for the active channels to DACOUT. The channel pins should be set to $V_{\text{dd}}/2$ in the idle phase to damp the oscillations.
4. Configure the ACMP to use scaled V_{dd} as negative input, refer to ACMP chapter for details.
5. Enable and configure PCNT and asynchronous PRS.
6. Configure the GPIOs used as PUSH/PULL.
7. Configure the following bit fields in CHx_CONF, for channels 0 through 3:
 - a. Set EXCLK to AUXHFRCO. AUXHFRCO is needed to achieve short excitation time.
 - b. Set EXTIME to an appropriate value. Excitation will last for $\text{EXTIME}/\text{AUXHFRCO}$ seconds (prescaler value in AUXPRESC in TIMCTRL is 0).
 - c. Set EXMODE to LOW. The LC sensors are excited by pulling the excitation pin low.
 - d. Set SAMPLE to COUNTER and COMP to LESS. Status of each sensor is evaluated based on the number of pulses generated by the ACMP. If they are less than the threshold value, the sensor is said to be active.
 - e. Set SAMPLEDLY to an appropriate value, each sensor will be measured for $\text{SAMPLEDLY}/\text{LFACLK}_{\text{LESENSE}}$ seconds.
8. Set CTRTHRESHOLD to an appropriate value. If the sensor is active, the counter value after the measurement phase should be less than the threshold. If it is inactive, the counter value should be greater than the threshold.
9. Start scan sequence by writing a 1 to START in CMD.

21.3.14.3 LESENSE decoder 1

The example below illustrates how the LESENSE module can be used for decoding using three sensors

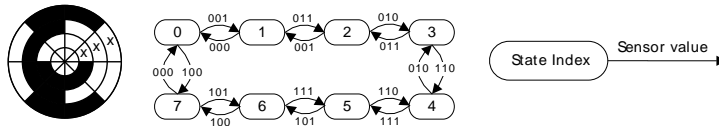Figure 21.13. FSM example 1

To set up the decoder to decode rotation using the encoding scheme seen in Figure 21.13 (p. 346) , configure the following LESENSE registers:

1. Configure the channels to be used, be sure to set DECODE in CHx_EVAL.
2. Set PRSCNT to enable generation of count waveforms on PRS. Also configure a PCNT to listen to the PRS channels and count accordingly.
3. Configure the following in STx_TCONFA and STx_TCONFB:
 - a. Set MASK = 0b1000 in STx_TCONFA and STx_TCONFB for all used states. This enables three sensors to be evaluated by the decoder.
 - b. Configure the remaining bit fields in STx_TCONFA and STx_TCONFB as described in Table 21.3 (p. 346) .


Table 21.3. LESENSE decoder configuration

| Register | TCONFA_NEXT | TCONFA_COMP | TCONFA_PRSACT | TCONFB_NEXT | TCONFB_COMP | TCONFB_PRSACT |
|----------|-------------|-------------|---------------|-------------|-------------|---------------|
| ST0 | 1 | 0b001 | UP | 7 | 0b100 | DOWN |
| ST1 | 2 | 0b011 | UP | 0 | 0b000 | DOWN |
| ST2 | 3 | 0b010 | UP | 1 | 0b001 | DOWN |
| ST3 | 4 | 0b110 | UP | 2 | 0b011 | DOWN |
| ST4 | 5 | 0b111 | UP | 3 | 0b010 | DOWN |
| ST5 | 6 | 0b101 | UP | 4 | 0b110 | DOWN |
| ST6 | 7 | 0b100 | UP | 5 | 0b111 | DOWN |
| ST7 | 0 | 0b000 | UP | 6 | 0b101 | DOWN |

4. To initialize the decoder, run one scan, and read the present sensor status from SENSORSTATE. Then write the index of this state to DECSTATE.
5. Write to START in CMD to start scanning of sensors and decoding.

21.3.14.4 LESENSE decoder 2

The example below illustrates how the LESENSE decoder can be used to implement the state machine seen in Figure 21.14 (p. 346) .

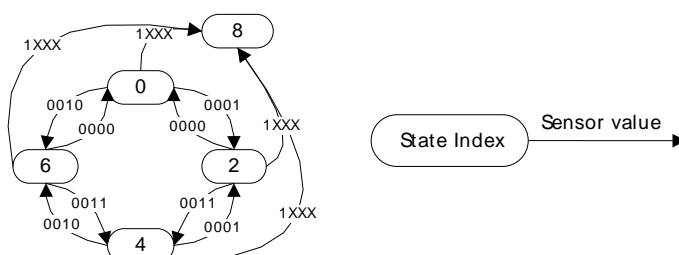Figure 21.14. FSM example 2

1. Configure STx_TCONFA and STx_TCONFB as described in Table 21.4 (p. 347) .

Table 21.4. LESENSE decoder configuration

| Register | NEXTSTATE | COMP | MASK | CHAIN |
|------------|-----------|--------|--------|-------|
| ST0_TCONFA | 8 | 0b1000 | 0b0111 | 1 |
| ST0_TCONFB | 2 | 0b0001 | 0b1000 | - |
| ST1_TCONFA | 6 | 0b0010 | 0b1000 | 0 |
| ST1_TCONFB | 6 | 0b0010 | 0b1000 | - |
| ST2_TCONFA | 8 | 0b1000 | 0b0111 | 1 |
| ST2_TCONFB | 4 | 0b0011 | 0b1000 | - |
| ST3_TCONFA | 0 | 0b0000 | 0b1000 | 0 |
| ST3_TCONFB | 0 | 0b0000 | 0b1000 | - |
| ST4_TCONFA | 8 | 0b1000 | 0b0111 | 1 |
| ST4_TCONFB | 6 | 0b0010 | 0b1000 | - |
| ST5_TCONFA | 2 | 0b0001 | 0b1000 | 0 |
| ST5_TCONFB | 2 | 0b0001 | 0b1000 | - |
| ST6_TCONFA | 8 | 0b1000 | 0b0111 | 1 |
| ST6_TCONFB | 0 | 0b0000 | 0b1000 | - |
| ST7_TCONFA | 4 | 0b0011 | 0b1000 | 0 |
| ST7_TCONFB | 4 | 0b0011 | 0b1000 | - |

2. To initialize the decoder, run one scan, and read the present sensor status from SENSORSTATE. Then write the index of this state to DECSTATE.
3. Write to START in CMD to start scanning of sensors and decoding.

21.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|-----------------------|------|--------------------------------------|
| 0x000 | LESENSE_CTRL | RW | Control Register |
| 0x004 | LESENSE_TIMCTRL | RW | Timing Control Register |
| 0x008 | LESENSE_PERCTRL | RW | Peripheral Control Register |
| 0x00C | LESENSE_DECCTRL | RW | Decoder control Register |
| 0x010 | LESENSE_BIASCTRL | RW | Bias Control Register |
| 0x014 | LESENSE_CMD | W1 | Command Register |
| 0x018 | LESENSE_CHEN | RW | Channel enable Register |
| 0x01C | LESENSE_SCANRES | R | Scan result register |
| 0x020 | LESENSE_STATUS | R | Status Register |
| 0x024 | LESENSE_PTR | R | Result buffer pointers |
| 0x028 | LESENSE_BUFDATA | R | Result buffer data register |
| 0x02C | LESENSE_CURCH | R | Current channel index |
| 0x030 | LESENSE_DECSTATE | RWH | Current decoder state |
| 0x034 | LESENSE_SENSORSTATE | RWH | Decoder input register |
| 0x038 | LESENSE_IDLECONF | RW | GPIO Idle phase configuration |
| 0x03C | LESENSE_ALTEXCONF | RW | Alternative excite pin configuration |
| 0x040 | LESENSE_IF | R | Interrupt Flag Register |
| 0x044 | LESENSE_IFC | W1 | Interrupt Flag Clear Register |
| 0x048 | LESENSE_IFS | W1 | Interrupt Flag Set Register |
| 0x04C | LESENSE_IEN | RW | Interrupt Enable Register |
| 0x050 | LESENSE_SYNCBUSY | R | Synchronization Busy Register |
| 0x054 | LESENSE_ROUTE | RW | I/O Routing Register |
| 0x058 | LESENSE_POWERDOWN | RW | LESENSE RAM power-down register |
| 0x200 | LESENSE_ST0_TCONFA | RW | State transition configuration A |
| 0x204 | LESENSE_ST0_TCONFB | RW | State transition configuration B |
| ... | LESENSE_STx_TCONFA | RW | State transition configuration A |
| ... | LESENSE_STx_TCONFB | RW | State transition configuration B |
| 0x278 | LESENSE_ST15_TCONFA | RW | State transition configuration A |
| 0x27C | LESENSE_ST15_TCONFB | RW | State transition configuration B |
| 0x280 | LESENSE_BUF0_DATA | RW | Scan results |
| ... | LESENSE_BUFx_DATA | RW | Scan results |
| 0x2BC | LESENSE_BUF15_DATA | RW | Scan results |
| 0x2C0 | LESENSE_CH0_TIMING | RW | Scan configuration |
| 0x2C4 | LESENSE_CH0_INTERACT | RW | Scan configuration |
| 0x2C8 | LESENSE_CH0_EVAL | RW | Scan configuration |
| ... | LESENSE_CHx_TIMING | RW | Scan configuration |
| ... | LESENSE_CHx_INTERACT | RW | Scan configuration |
| ... | LESENSE_CHx_EVAL | RW | Scan configuration |
| 0x3B0 | LESENSE_CH15_TIMING | RW | Scan configuration |
| 0x3B4 | LESENSE_CH15_INTERACT | RW | Scan configuration |

| Offset | Name | Type | Description |
|--------|-------------------|------|--------------------|
| 0x3B8 | LESENSE_CH15_EVAL | RW | Scan configuration |

21.5 Register Description

21.5.1 LESENSE_CTRL - Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----------|-------|----|--------|------------|-------|----|----|----|------------|----|----------|----------|----------|----|----------|----|---|--------|-----|----|----------|-----|----|--|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | | | | | | | | | | | 0 | 0x0 | | 0 | 0 | 0 | 0 | | 0 | | | 0 | 0 | 0 | | 0x0 | | | | 0x0 | | | 0x0 | | |
| Access | | | | | | | | | | | RW | RW | | RW | RW | RW | | | | RW | | | RW | RW | RW | | RW | | | | RW | | | RW | |
| Name | | | | | | | | | | | DEBUGRUN | DMAWU | | BUFIDL | STRSCANRES | BUFOW | | | | DUALSAMPLE | | ALTEXMAP | ACMP1INV | ACMP0INV | | SCANCONF | | | PRSSEL | | | SCANMODE | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | |
|-------|---|---|--------|---|-------|-------------|-------------|---|----------|---|---|----------|--|---|----------|---|
| 31:23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | |
| 22 | DEBUGRUN | 0 | RW | Debug Mode Run Enable Set to keep LESENSE running in debug mode. <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>LESENSE can not start new scans in debug mode</td></tr><tr><td>1</td><td>LESENSE can start new scans in debug mode</td></tr></table> | Value | Description | 0 | LESENSE can not start new scans in debug mode | 1 | LESENSE can start new scans in debug mode | | | | | | |
| Value | Description | | | | | | | | | | | | | | | |
| 0 | LESENSE can not start new scans in debug mode | | | | | | | | | | | | | | | |
| 1 | LESENSE can start new scans in debug mode | | | | | | | | | | | | | | | |
| 21:20 | DMAWU | 0x0 | RW | DMA wake-up from EM2 <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>DISABLE</td><td>No DMA wake-up from EM2</td></tr><tr><td>1</td><td>BUFDATAV</td><td>DMA wake-up from EM2 when data is valid in the result buffer</td></tr><tr><td>2</td><td>BUFLEVEL</td><td>DMA wake-up from EM2 when the result buffer is full/half-full depending on BUFIDL configuration</td></tr></table> | Value | Mode | Description | 0 | DISABLE | No DMA wake-up from EM2 | 1 | BUFDATAV | DMA wake-up from EM2 when data is valid in the result buffer | 2 | BUFLEVEL | DMA wake-up from EM2 when the result buffer is full/half-full depending on BUFIDL configuration |
| Value | Mode | Description | | | | | | | | | | | | | | |
| 0 | DISABLE | No DMA wake-up from EM2 | | | | | | | | | | | | | | |
| 1 | BUFDATAV | DMA wake-up from EM2 when data is valid in the result buffer | | | | | | | | | | | | | | |
| 2 | BUFLEVEL | DMA wake-up from EM2 when the result buffer is full/half-full depending on BUFIDL configuration | | | | | | | | | | | | | | |
| 19 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | |
| 18 | BUFIDL | 0 | RW | Result buffer interrupt and DMA trigger level <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>HALFFULL</td><td>DMA and interrupt flags set when result buffer is half-full</td></tr><tr><td>1</td><td>FULL</td><td>DMA and interrupt flags set when result buffer is full</td></tr></table> | Value | Mode | Description | 0 | HALFFULL | DMA and interrupt flags set when result buffer is half-full | 1 | FULL | DMA and interrupt flags set when result buffer is full | | | |
| Value | Mode | Description | | | | | | | | | | | | | | |
| 0 | HALFFULL | DMA and interrupt flags set when result buffer is half-full | | | | | | | | | | | | | | |
| 1 | FULL | DMA and interrupt flags set when result buffer is full | | | | | | | | | | | | | | |
| 17 | STRSCANRES | 0 | RW | Enable storing of SCANRES When set, SCANRES will be stored in the result buffer after each scan | | | | | | | | | | | | |
| 16 | BUFOW | 0 | RW | Result buffer overwrite If set, LESENSE will always write to the result buffer, even if it is full | | | | | | | | | | | | |
| 15:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | |
| 13 | DUALSAMPLE | 0 | RW | Enable dual sample mode When set, both ACMPs will be sampled simultaneously. | | | | | | | | | | | | |
| 12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | |
| 11 | ALTEXMAP | 0 | RW | Alternative excitation map | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|--|----------|--------|---|
| | Value | Mode | | Description |
| | 0 | ALTEX | | Alternative excitation is mapped to the LES_ALTEX pins. |
| | 1 | ACMP | | Alternative excitation is mapped to the pins of the other ACMP. |
| 10 | ACMP1INV | 0 | RW | Invert analog comparator 1 output |
| 9 | ACMP0INV | 0 | RW | Invert analog comparator 0 output |
| 8 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 7:6 | SCANCONF | 0x0 | RW | Select scan configuration |
| These bits control which CHx_CONF registers to be used. | | | | |
| | Value | Mode | | Description |
| | 0 | DIRMAP | | The channel configuration register registers used are directly mapped to the channel number. |
| | 1 | INVMAP | | The channel configuration register registers used are CH _{x+8} _CONF for channels 0-7 and CH _{x-8} _CONF for channels 8-15. |
| | 2 | TOGGLE | | The channel configuration register registers used toggles between CHx_CONF and CH _{x+8} _CONF when channel x triggers |
| | 3 | DECDEF | | The decoder state defines the CONF registers to be used. |
| 5 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 4:2 | PRSSEL | 0x0 | RW | Scan start PRS select |
| Select PRS source for scan start if SCANMODE is set to PRS. | | | | |
| | Value | Mode | | Description |
| | 0 | PRSCH0 | | PRS Channel 0 selected as input |
| | 1 | PRSCH1 | | PRS Channel 1 selected as input |
| | 2 | PRSCH2 | | PRS Channel 2 selected as input |
| | 3 | PRSCH3 | | PRS Channel 3 selected as input |
| | 4 | PRSCH4 | | PRS Channel 4 selected as input |
| | 5 | PRSCH5 | | PRS Channel 5 selected as input |
| | 6 | PRSCH6 | | PRS Channel 6 selected as input |
| | 7 | PRSCH7 | | PRS Channel 7 selected as input |
| 1:0 | SCANMODE | 0x0 | RW | Configure scan mode |
| These bits control how the scan frequency is decided | | | | |
| | Value | Mode | | Description |
| | 0 | PERIODIC | | A new scan is started each time the period counter overflows |
| | 1 | ONESHOT | | A single scan is performed when START in CMD is set |
| | 2 | PRS | | Pulse on PRS channel |

21.5.2 LESENSE_TIMCTRL - Timing Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|-------|----|----|----|----|----|----|----|----|---------|---|---|---|---|---------|---|---|---|---|----------|--|--|--|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | | | | | | | 0x0 | | | | | 0x00 | | | | | | | | | 0x0 | | | | | 0x0 | | | | | 0x0 | | | |
| Access | | | | | | | | | RW | | | | | RW | | | | | | | | | RW | | | | | RW | | | | | RW | | | |
| Name | | | | | | | | | STARTDLY | | | | | PCTOP | | | | | | | | | PCPRESC | | | | | LFPRESC | | | | | AUXPRESC | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|----------|---|--------|---|-------|------|-------------|---|------|--|---|------|--|---|------|--|---|------|--|---|-------|---|---|-------|---|---|-------|---|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23:22 | STARTDLY | 0x0 | RW | Start delay configuration Delay sensor interaction STARTDELAY LFACLK _{LESENSE} cycles for each channel | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 21:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19:12 | PCTOP | 0x00 | RW | Period counter top value These bits contain the top value for the period counter. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10:8 | PCPRESC | 0x0 | RW | Period counter prescaling | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>DIV1</td><td>The period counter clock frequency is LFACLK_{LESENSE}/1</td></tr><tr><td>1</td><td>DIV2</td><td>The period counter clock frequency is LFACLK_{LESENSE}/2</td></tr><tr><td>2</td><td>DIV4</td><td>The period counter clock frequency is LFACLK_{LESENSE}/4</td></tr><tr><td>3</td><td>DIV8</td><td>The period counter clock frequency is LFACLK_{LESENSE}/8</td></tr><tr><td>4</td><td>DIV16</td><td>The period counter clock frequency is LFACLK_{LESENSE}/16</td></tr><tr><td>5</td><td>DIV32</td><td>The period counter clock frequency is LFACLK_{LESENSE}/32</td></tr><tr><td>6</td><td>DIV64</td><td>The period counter clock frequency is LFACLK_{LESENSE}/64</td></tr><tr><td>7</td><td>DIV128</td><td>The period counter clock frequency is LFACLK_{LESENSE}/128</td></tr></table> | | | | | Value | Mode | Description | 0 | DIV1 | The period counter clock frequency is LFACLK _{LESENSE} /1 | 1 | DIV2 | The period counter clock frequency is LFACLK _{LESENSE} /2 | 2 | DIV4 | The period counter clock frequency is LFACLK _{LESENSE} /4 | 3 | DIV8 | The period counter clock frequency is LFACLK _{LESENSE} /8 | 4 | DIV16 | The period counter clock frequency is LFACLK _{LESENSE} /16 | 5 | DIV32 | The period counter clock frequency is LFACLK _{LESENSE} /32 | 6 | DIV64 | The period counter clock frequency is LFACLK _{LESENSE} /64 | 7 | DIV128 | The period counter clock frequency is LFACLK _{LESENSE} /128 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | DIV1 | The period counter clock frequency is LFACLK _{LESENSE} /1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | DIV2 | The period counter clock frequency is LFACLK _{LESENSE} /2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | DIV4 | The period counter clock frequency is LFACLK _{LESENSE} /4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | DIV8 | The period counter clock frequency is LFACLK _{LESENSE} /8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | DIV16 | The period counter clock frequency is LFACLK _{LESENSE} /16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | DIV32 | The period counter clock frequency is LFACLK _{LESENSE} /32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | DIV64 | The period counter clock frequency is LFACLK _{LESENSE} /64 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | DIV128 | The period counter clock frequency is LFACLK _{LESENSE} /128 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6:4 | LFPRESC | 0x0 | RW | Prescaling factor for low frequency timer | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>DIV1</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/1</td></tr><tr><td>1</td><td>DIV2</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/2</td></tr><tr><td>2</td><td>DIV4</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/4</td></tr><tr><td>3</td><td>DIV8</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/8</td></tr><tr><td>4</td><td>DIV16</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/16</td></tr><tr><td>5</td><td>DIV32</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/32</td></tr><tr><td>6</td><td>DIV64</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/64</td></tr><tr><td>7</td><td>DIV128</td><td>Low frequency timer is clocked with LFACLK_{LESENSE}/128</td></tr></table> | | | | | Value | Mode | Description | 0 | DIV1 | Low frequency timer is clocked with LFACLK _{LESENSE} /1 | 1 | DIV2 | Low frequency timer is clocked with LFACLK _{LESENSE} /2 | 2 | DIV4 | Low frequency timer is clocked with LFACLK _{LESENSE} /4 | 3 | DIV8 | Low frequency timer is clocked with LFACLK _{LESENSE} /8 | 4 | DIV16 | Low frequency timer is clocked with LFACLK _{LESENSE} /16 | 5 | DIV32 | Low frequency timer is clocked with LFACLK _{LESENSE} /32 | 6 | DIV64 | Low frequency timer is clocked with LFACLK _{LESENSE} /64 | 7 | DIV128 | Low frequency timer is clocked with LFACLK _{LESENSE} /128 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | DIV1 | Low frequency timer is clocked with LFACLK _{LESENSE} /1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | DIV2 | Low frequency timer is clocked with LFACLK _{LESENSE} /2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | DIV4 | Low frequency timer is clocked with LFACLK _{LESENSE} /4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | DIV8 | Low frequency timer is clocked with LFACLK _{LESENSE} /8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | DIV16 | Low frequency timer is clocked with LFACLK _{LESENSE} /16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | DIV32 | Low frequency timer is clocked with LFACLK _{LESENSE} /32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | DIV64 | Low frequency timer is clocked with LFACLK _{LESENSE} /64 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | DIV128 | Low frequency timer is clocked with LFACLK _{LESENSE} /128 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1:0 | AUXPRESC | 0x0 | RW | Prescaling factor for high frequency timer | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>DIV1</td><td>High frequency timer is clocked with AUXHFRCO/1</td></tr><tr><td>1</td><td>DIV2</td><td>High frequency timer is clocked with AUXHFRCO/2</td></tr><tr><td>2</td><td>DIV4</td><td>High frequency timer is clocked with AUXHFRCO/4</td></tr><tr><td>3</td><td>DIV8</td><td>High frequency timer is clocked with AUXHFRCO/8</td></tr></table> | | | | | Value | Mode | Description | 0 | DIV1 | High frequency timer is clocked with AUXHFRCO/1 | 1 | DIV2 | High frequency timer is clocked with AUXHFRCO/2 | 2 | DIV4 | High frequency timer is clocked with AUXHFRCO/4 | 3 | DIV8 | High frequency timer is clocked with AUXHFRCO/8 | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | DIV1 | High frequency timer is clocked with AUXHFRCO/1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | DIV2 | High frequency timer is clocked with AUXHFRCO/2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | DIV4 | High frequency timer is clocked with AUXHFRCO/4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | DIV8 | High frequency timer is clocked with AUXHFRCO/8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

21.5.3 LESENSE_PERCTRL - Peripheral Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|------------|----|----|----|----|-----------|----|-----------|----|----|--------|----|----|----|----|----------|----|----|-----------|---|-----------|---|------------|---|------------|---|------------|---|------------|--|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | 0x0 | | | | | 0x0 | | 0x0 | | | 0 | | | | | 0x00 | | | 0x0 | | 0x0 | | 0x0 | | 0x0 | | 0 | | 0 | |
| Access | | | | | RW | | | | | RW | | RW | | | RW | | | | | RW | | | RW | | RW | | RW | | RW | | RW | | RW | |
| Name | | | | | WARMUPMODE | | | | | ACMP1MODE | | ACMP0MODE | | | DACREF | | | | | DACPRESC | | | DACCH0OUT | | DACCH0OUT | | DACCH1CONV | | DACCH0CONV | | DACCH1DATA | | DACCH0DATA | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:28 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|-------|------------|-----|----|-------------------------------------|
| 27:26 | WARMUPMODE | 0x0 | RW | ACMP and DAC duty cycle mode |
|-------|------------|-----|----|-------------------------------------|

| Value | Mode | Description |
|-------|-----------------|---|
| 0 | NORMAL | The analog comparators and DAC are shut down when LESENSE is idle |
| 1 | KEEPACMPWARM | The analog comparators are kept powered up when LESENSE is idle |
| 2 | KEEPDACWARM | The DAC is kept powered up when LESENSE is idle |
| 3 | KEEPACMPDACWARM | The analog comparators and DAC are kept powered up when LESENSE is idle |

| | | |
|-------|----------|---|
| 25:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) |
|-------|----------|---|

| | | | | |
|-------|-----------|-----|----|-------------------|
| 23:22 | ACMP1MODE | 0x0 | RW | ACMP1 mode |
|-------|-----------|-----|----|-------------------|

Configure how LESENSE controls ACMP1

| Value | Mode | Description |
|-------|----------|--|
| 0 | DISABLE | LESENSE does not control ACMP1 |
| 1 | MUX | LESENSE controls the input mux (POSSEL) of ACMP1 |
| 2 | MUXTHRES | LESENSE controls the input mux and the threshold value (VDDLEVEL) of ACMP1 |

| | | | | |
|-------|-----------|-----|----|-------------------|
| 21:20 | ACMP0MODE | 0x0 | RW | ACMP0 mode |
|-------|-----------|-----|----|-------------------|

Configure how LESENSE controls ACMP0

| Value | Mode | Description |
|-------|----------|---|
| 0 | DISABLE | LESENSE does not control ACMP0 |
| 1 | MUX | LESENSE controls the input mux (POSSEL) of ACMP0 |
| 2 | MUXTHRES | LESENSE controls the input mux (POSSEL) and the threshold value (VDDLEVEL) of ACMP0 |

| | | |
|----|----------|---|
| 19 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) |
|----|----------|---|

| | | | | |
|----|--------|---|----|----------------------------|
| 18 | DACREF | 0 | RW | DAC bandgap reference used |
|----|--------|---|----|----------------------------|

Set to BANDGAP if the DAC is configured to use bandgap reference

| Value | Mode | Description |
|-------|---------|----------------------------|
| 0 | VDD | DAC uses VDD reference |
| 1 | BANDGAP | DAC uses bandgap reference |

| | | |
|-------|----------|---|
| 17:15 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) |
|-------|----------|---|

| | | | | |
|-------|----------|------|----|-------------------------------------|
| 14:10 | DACPRESC | 0x00 | RW | DAC prescaler configuration. |
|-------|----------|------|----|-------------------------------------|

Prescaling factor of DACPRESC+1 for the LESENSE DAC interface

| | | | | |
|-----|-----------|-----|----|----------------------------------|
| 9:8 | DACCH1OUT | 0x0 | RW | DAC channel 1 output mode |
|-----|-----------|-----|----|----------------------------------|

| Value | Mode | Description |
|-------|------------|--|
| 0 | DISABLE | DAC CH1 output to pin and ACMP/ADC disabled |
| 1 | PIN | DAC CH1 output to pin enabled, output to ADC and ACMP disabled |
| 2 | ADCACMP | DAC CH1 output to pin disabled, output to ADC and ACMP enabled |
| 3 | PINADCACMP | DAC CH1 output to pin, ADC, and ACMP enabled. |

| Bit | Name | Reset | Access | Description |
|-----|------------|------------|--------|--|
| 7:6 | DACCH0OUT | 0x0 | RW | DAC channel 0 output mode |
| | Value | Mode | | Description |
| | 0 | DISABLE | | DAC CH0 output to pin and ACMP/ADC disabled |
| | 1 | PIN | | DAC CH0 output to pin enabled, output to ADC and ACMP disabled |
| | 2 | ADCACMP | | DAC CH0 output to pin disabled, output to ADC and ACMP enabled |
| | 3 | PINADCACMP | | DAC CH0 output to pin, ADC, and ACMP enabled. |
| 5:4 | DACCH1CONV | 0x0 | RW | DAC channel 1 conversion mode |
| | Value | Mode | | Description |
| | 0 | DISABLE | | LESENSE does not control DAC CH1. |
| | 1 | CONTINUOUS | | DAC channel 1 is driven in continuous mode. |
| | 2 | SAMPLEHOLD | | DAC channel 1 is driven in sample hold mode. |
| | 3 | SAMPLEOFF | | DAC channel 1 is driven in sample off mode. |
| 3:2 | DACCH0CONV | 0x0 | RW | DAC channel 0 conversion mode |
| | Value | Mode | | Description |
| | 0 | DISABLE | | LESENSE does not control DAC CH0. |
| | 1 | CONTINUOUS | | DAC channel 0 is driven in continuous mode. |
| | 2 | SAMPLEHOLD | | DAC channel 0 is driven in sample hold mode. |
| | 3 | SAMPLEOFF | | DAC channel 0 is driven in sample off mode. |
| 1 | DACCH1DATA | 0 | RW | DAC CH1 data selection. Configure DAC data control. |
| | Value | Mode | | Description |
| | 0 | DACDATA | | DAC data is defined by CH1DATA in the DAC interface. |
| | 1 | ACMPHRES | | DAC data is defined by ACMPHRES in CHx_INTERACT. |
| 0 | DACCH0DATA | 0 | RW | DAC CH0 data selection. |
| | Value | Mode | | Description |
| | 0 | DACDATA | | DAC data is defined by CH0DATA in the DAC interface. |
| | 1 | ACMPHRES | | DAC data is defined by ACMPHRES in CHx_INTERACT. |

21.5.4 LESENSE_DECCTRL - Decoder control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|--------|----|----|-----|--------|----|-----|----|--------|-----|----|----|----|--------|----|---|---|-------|--------|---------|----------|----------|----------|--------|--------|---------|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | 0x0 | | | 0x0 | | | 0x0 | | | 0x0 | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | RW | | | RW | | | RW | | | RW | | | RW | | | | | | | | | RW | RW | RW | RW | RW |
| Name | | | | | | | | PRSEL3 | | | | PRSEL2 | | | | PRSEL1 | | | | | PRSEL0 | | | | INPUT | PRSCNT | HYSTIRQ | HYSTPRS2 | HYSTPRS1 | HYSTPRS0 | INTMAP | ERRCHK | DISABLE |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 24:22 | PRSEL3 | 0x0 | RW | Select PRS input for bit 3 of the LESENSE decoder |

| Bit | Name | Reset | Access | Description |
|-------|----------|-------------|---|---|
| | Value | Mode | Description | |
| | 0 | PRSCH0 | PRS Channel 0 selected as input | |
| | 1 | PRSCH1 | PRS Channel 1 selected as input | |
| | 2 | PRSCH2 | PRS Channel 2 selected as input | |
| | 3 | PRSCH3 | PRS Channel 3 selected as input | |
| | 4 | PRSCH4 | PRS Channel 4 selected as input | |
| | 5 | PRSCH5 | PRS Channel 5 selected as input | |
| | 6 | PRSCH6 | PRS Channel 6 selected as input | |
| | 7 | PRSCH7 | PRS Channel 7 selected as input | |
| 21 | Reserved | | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | |
| 20:18 | PRSEL2 | 0x0 | RW | Select PRS input for bit 2 of the LESENSE decoder |
| | Value | Mode | Description | |
| | 0 | PRSCH0 | PRS Channel 0 selected as input | |
| | 1 | PRSCH1 | PRS Channel 1 selected as input | |
| | 2 | PRSCH2 | PRS Channel 2 selected as input | |
| | 3 | PRSCH3 | PRS Channel 3 selected as input | |
| | 4 | PRSCH4 | PRS Channel 4 selected as input | |
| | 5 | PRSCH5 | PRS Channel 5 selected as input | |
| | 6 | PRSCH6 | PRS Channel 6 selected as input | |
| | 7 | PRSCH7 | PRS Channel 7 selected as input | |
| 17 | Reserved | | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | |
| 16:14 | PRSEL1 | 0x0 | RW | Select PRS input for the bit 1 of the LESENSE decoder |
| | Value | Mode | Description | |
| | 0 | PRSCH0 | PRS Channel 0 selected as input | |
| | 1 | PRSCH1 | PRS Channel 1 selected as input | |
| | 2 | PRSCH2 | PRS Channel 2 selected as input | |
| | 3 | PRSCH3 | PRS Channel 3 selected as input | |
| | 4 | PRSCH4 | PRS Channel 4 selected as input | |
| | 5 | PRSCH5 | PRS Channel 5 selected as input | |
| | 6 | PRSCH6 | PRS Channel 6 selected as input | |
| | 7 | PRSCH7 | PRS Channel 7 selected as input | |
| 13 | Reserved | | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | |
| 12:10 | PRSEL0 | 0x0 | RW | Select PRS input for the bit 0 of the LESENSE decoder |
| | Value | Mode | Description | |
| | 0 | PRSCH0 | PRS Channel 0 selected as input | |
| | 1 | PRSCH1 | PRS Channel 1 selected as input | |
| | 2 | PRSCH2 | PRS Channel 2 selected as input | |
| | 3 | PRSCH3 | PRS Channel 3 selected as input | |
| | 4 | PRSCH4 | PRS Channel 4 selected as input | |
| | 5 | PRSCH5 | PRS Channel 5 selected as input | |
| | 6 | PRSCH6 | PRS Channel 6 selected as input | |
| | 7 | PRSCH7 | PRS Channel 7 selected as input | |
| 9 | Reserved | | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | |
| 8 | INPUT | 0 | RW | Select input to the LESENSE decoder |
| | Value | Mode | Description | |
| | 0 | SENSORSTATE | The SENSORSTATE register is used as input to the decoder. | |

| Bit | Name | Reset | Access | Description |
|-----|----------|-------|--------|---|
| | Value | Mode | | Description |
| | 1 | PRS | | PRS channels are used as input to the decoder. |
| 7 | PRSCNT | 0 | RW | Enable count mode on decoder PRS channels 0 and 1 When set, decoder PRS0 and PRS1 will be used to produce output which can be used by a PCNT to count up or down. |
| 6 | HYSTIRQ | 0 | RW | Enable decoder hysteresis on interrupt requests When set, hysteresis is enabled in the decoder, suppressing interrupt requests. |
| 5 | HYSTPRS2 | 0 | RW | Enable decoder hysteresis on PRS2 output When set, hysteresis is enabled in the decoder, suppressing changes on PRS channel 2 |
| 4 | HYSTPRS1 | 0 | RW | Enable decoder hysteresis on PRS1 output When set, hysteresis is enabled in the decoder, suppressing changes on PRS channel 1 |
| 3 | HYSTPRS0 | 0 | RW | Enable decoder hysteresis on PRS0 output When set, hysteresis is enabled in the decoder, suppressing changes on PRS channel 0 |
| 2 | INTMAP | 0 | RW | Enable decoder to channel interrupt mapping When set, a transition from state x in the decoder will set interrupt flag CHx |
| 1 | ERRCHK | 0 | RW | Enable check of current state When set, the decoder checks the current state in addition to the states defined in TCONF |
| 0 | DISABLE | 0 | RW | Disable the decoder When set, the decoder is disabled. When disabled the decoder will keep its current state |

21.5.5 LESENSE_BIASCTRL - Bias Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|----------|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | BIASMODE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|-------------------------|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1:0 | BIASMODE | 0x0 | RW | Select bias mode |

| Value | Mode | Description |
|-------|-----------|--|
| 0 | DUTYCYCLE | Bias module duty cycled between low power and high accuracy mode |
| 1 | HIGHACC | Bias module always in high accuracy mode |
| 2 | DONTTOUCH | Bias module is controlled by the EMU and not affected by LESENSE |

21.5.6 LESENSE_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|----------|--------|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 3 | 2 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | CLEARBUF | DECODE |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | STOP | START |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | CLEARBUF | 0 | W1 | Clear result buffer |
| 2 | DECODE | 0 | W1 | Start decoder |
| 1 | STOP | 0 | W1 | Stop scanning of sensors If issued during a scan, the command will take effect after scan completion. |
| 0 | START | 0 | W1 | Start scanning of sensors. |

21.5.7 LESENSE_CHEN - Channel enable Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | CHEN | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | CHEN | 0x0000 | RW | Enable scan channel Set bit X to enable channel X |

21.5.8 LESENSE_SCANRES - Scan result register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | SCANRES | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | SCANRES | 0x0000 | R | Scan results Bit X will be set depending on channel X evaluation |

21.5.9 LESENSE_STATUS - Status Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|--|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | DACACTIVE | 0 | R | LESENSE DAC interface is active |
| 4 | SCANACTIVE | 0 | R | LESENSE is currently interfacing sensors. |
| 3 | RUNNING | 0 | R | LESENSE is active |
| 2 | BUFFULL | 0 | R | Result buffer full Set when the result buffer is full |
| 1 | BUFHALFFULL | 0 | R | Result buffer half full Set when the result buffer is half full |
| 0 | BUFDATAV | 0 | R | Result data valid Set when data is available in the result buffer. Cleared when the buffer is empty. |

21.5.10 LESENSE_PTR - Result buffer pointers (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|----|----|-----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0 | | | 0x0 | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | R | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | WR | | | RD | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8:5 | WR | 0x0 | R | Result buffer write pointer. These bits show the next index in the result buffer to be written to. Incremented when LESENSE writes to result buffer |
| 4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:0 | RD | 0x0 | R | Result buffer read pointer. These bits show the index of the oldest unread data in the result buffer. Incremented on read from BUFDATA. |

21.5.11 LESENSE_BUFDATA - Result buffer data register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0XXXXX | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | BUFDATA | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | BUFDATA | 0xFFFF | R | Result data This register can be used to read the oldest unread data from the result buffer. |

21.5.12 LESENSE_CURCH - Current channel index (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|---|---|---|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | CURCH | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:0 | CURCH | 0x0 | R | Shows the index of the current channel |

21.5.13 LESENSE_DECSTATE - Current decoder state (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|----------|---|---|---|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RWH | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | DECSTATE | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---------------------------------|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:0 | DECSTATE | 0x0 | RWH | Shows the current decoder state |

21.5.14 LESENSE_SENSORSTATE - Decoder input register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------------|---|---|---|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RWH | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | SENSORSTATE | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|--|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:0 | SENSORSTATE | 0x0 | RWH | Shows the status of sensors chosen as input to the decoder |

21.5.15 LESENSE_IDLECONF - GPIO Idle phase configuration (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | |
|--------|--------------|----|------|----|------|----|------|----|------|----|------|----|-----|----|-----|----|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| Reset | 0x0 | | 0x0 | | 0x0 | | 0x0 | | 0x0 | | 0x0 | | 0x0 | | 0x0 | |
| Access | RW | | RW | | RW | | RW | | RW | | RW | | RW | | RW | |
| Name | CH15 | | CH14 | | CH13 | | CH12 | | CH11 | | CH10 | | CH9 | | CH8 | |

| Bit | Name | Reset | Access | Description |
|-------|------|-------|--------|--|
| 31:30 | CH15 | 0x0 | RW | Channel 15 idle phase configuration |

| Value | Mode | Description |
|-------|---------|--|
| 0 | DISABLE | CH15 output is disabled in idle phase |
| 1 | HIGH | CH15 output is high in idle phase |
| 2 | LOW | CH15 output is low in idle phase |
| 3 | DACCH1 | CH15 output is connected to DAC CH1 output in idle phase |

| | | | | |
|-------|------|-----|----|--|
| 29:28 | CH14 | 0x0 | RW | Channel 14 idle phase configuration |
|-------|------|-----|----|--|

| Value | Mode | Description |
|-------|---------|--|
| 0 | DISABLE | CH14 output is disabled in idle phase |
| 1 | HIGH | CH14 output is high in idle phase |
| 2 | LOW | CH14 output is low in idle phase |
| 3 | DACCH1 | CH14 output is connected to DAC CH1 output in idle phase |

| | | | | |
|-------|------|-----|----|--|
| 27:26 | CH13 | 0x0 | RW | Channel 13 idle phase configuration |
|-------|------|-----|----|--|

| Value | Mode | Description |
|-------|---------|--|
| 0 | DISABLE | CH13 output is disabled in idle phase |
| 1 | HIGH | CH13 output is high in idle phase |
| 2 | LOW | CH13 output is low in idle phase |
| 3 | DACCH1 | CH13 output is connected to DAC CH1 output in idle phase |

| | | | | |
|-------|------|-----|----|--|
| 25:24 | CH12 | 0x0 | RW | Channel 12 idle phase configuration |
|-------|------|-----|----|--|

| Value | Mode | Description |
|-------|---------|--|
| 0 | DISABLE | CH12 output is disabled in idle phase |
| 1 | HIGH | CH12 output is high in idle phase |
| 2 | LOW | CH12 output is low in idle phase |
| 3 | DACCH1 | CH12 output is connected to DAC CH1 output in idle phase |

| | | | | |
|-------|------|-----|----|--|
| 23:22 | CH11 | 0x0 | RW | Channel 11 idle phase configuration |
|-------|------|-----|----|--|

| Value | Mode | Description |
|-------|---------|---------------------------------------|
| 0 | DISABLE | CH11 output is disabled in idle phase |
| 1 | HIGH | CH11 output is high in idle phase |
| 2 | LOW | CH11 output is low in idle phase |

| | | | | |
|-------|------|-----|----|--|
| 21:20 | CH10 | 0x0 | RW | Channel 10 idle phase configuration |
|-------|------|-----|----|--|

| Value | Mode | Description |
|-------|---------|---------------------------------------|
| 0 | DISABLE | CH10 output is disabled in idle phase |
| 1 | HIGH | CH10 output is high in idle phase |
| 2 | LOW | CH10 output is low in idle phase |

| | | | | |
|-------|-----|-----|----|---|
| 19:18 | CH9 | 0x0 | RW | Channel 9 idle phase configuration |
|-------|-----|-----|----|---|

| Bit | Name | Reset | Access | Description |
|-------|-------|---------|---|---|
| | Value | Mode | Description | |
| | 0 | DISABLE | CH9 output is disabled in idle phase | |
| | 1 | HIGH | CH9 output is high in idle phase | |
| | 2 | LOW | CH9 output is low in idle phase | |
| 17:16 | CH8 | 0x0 | RW | Channel 8 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH8 output is disabled in idle phase | |
| | 1 | HIGH | CH8 output is high in idle phase | |
| | 2 | LOW | CH8 output is low in idle phase | |
| 15:14 | CH7 | 0x0 | RW | Channel 7 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH7 output is disabled in idle phase | |
| | 1 | HIGH | CH7 output is high in idle phase | |
| | 2 | LOW | CH7 output is low in idle phase | |
| 13:12 | CH6 | 0x0 | RW | Channel 6 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH6 output is disabled in idle phase | |
| | 1 | HIGH | CH6 output is high in idle phase | |
| | 2 | LOW | CH6 output is low in idle phase | |
| 11:10 | CH5 | 0x0 | RW | Channel 5 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH5 output is disabled in idle phase | |
| | 1 | HIGH | CH5 output is high in idle phase | |
| | 2 | LOW | CH5 output is low in idle phase | |
| 9:8 | CH4 | 0x0 | RW | Channel 4 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH4 output is disabled in idle phase | |
| | 1 | HIGH | CH4 output is high in idle phase | |
| | 2 | LOW | CH4 output is low in idle phase | |
| 7:6 | CH3 | 0x0 | RW | Channel 3 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH3 output is disabled in idle phase | |
| | 1 | HIGH | CH3 output is high in idle phase | |
| | 2 | LOW | CH3 output is low in idle phase | |
| | 3 | DACCH0 | CH3 output is connected to DAC CH0 output in idle phase | |
| 5:4 | CH2 | 0x0 | RW | Channel 2 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH2 output is disabled in idle phase | |
| | 1 | HIGH | CH2 output is high in idle phase | |
| | 2 | LOW | CH2 output is low in idle phase | |
| | 3 | DACCH0 | CH2 output is connected to DAC CH0 output in idle phase | |

| Bit | Name | Reset | Access | Description |
|-----|-------|---------|---|---|
| 3:2 | CH1 | 0x0 | RW | Channel 1 idle phase configuration |
| | | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH1 output is disabled in idle phase | |
| | 1 | HIGH | CH1 output is high in idle phase | |
| | 2 | LOW | CH1 output is low in idle phase | |
| | 3 | DACCH0 | CH1 output is connected to DAC CH0 output in idle phase | |
| 1:0 | CH0 | 0x0 | RW | Channel 0 idle phase configuration |
| | | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | CH0 output is disabled in idle phase | |
| | 1 | HIGH | CH0 output is high in idle phase | |
| | 2 | LOW | CH0 output is low in idle phase | |
| | 3 | DACCH0 | CH0 output is connected to DAC CH0 output in idle phase | |

21.5.16 LESENSE_ALTEXCONF - Alternative excite pin configuration (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|------|------|------|------|------|------|------|------|----------|-----|----------|-----|----------|-----|----------|-----|----------|-----|----------|-----|----------|-----|----------|-----|-----|----|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | 0x0 | |
| Access | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW |
| Name | | | | | | | | | AEX7 | AEX6 | AEX5 | AEX4 | AEX3 | AEX2 | AEX1 | AEX0 | DLECONF7 | | DLECONF6 | | DLECONF5 | | DLECONF4 | | DLECONF3 | | DLECONF2 | | DLECONF1 | | DLECONF0 | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|------------------------------------|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23 | AEX7 | 0 | RW | ALTEX7 always excite enable |
| 22 | AEX6 | 0 | RW | ALTEX6 always excite enable |
| 21 | AEX5 | 0 | RW | ALTEX5 always excite enable |
| 20 | AEX4 | 0 | RW | ALTEX4 always excite enable |
| 19 | AEX3 | 0 | RW | ALTEX3 always excite enable |
| 18 | AEX2 | 0 | RW | ALTEX2 always excite enable |
| 17 | AEX1 | 0 | RW | ALTEX1 always excite enable |
| 16 | AEX0 | 0 | RW | ALTEX0 always excite enable |

| Bit | Name | Reset | Access | Description |
|-------|-----------|---------|---|--|
| 15:14 | IDLECONF7 | 0x0 | RW | ALTEX7 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX7 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX7 output is high in idle phase | |
| | 2 | LOW | ALTEX7 output is low in idle phase | |
| 13:12 | IDLECONF6 | 0x0 | RW | ALTEX6 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX6 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX6 output is high in idle phase | |
| | 2 | LOW | ALTEX6 output is low in idle phase | |
| 11:10 | IDLECONF5 | 0x0 | RW | ALTEX5 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX5 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX5 output is high in idle phase | |
| | 2 | LOW | ALTEX5 output is low in idle phase | |
| 9:8 | IDLECONF4 | 0x0 | RW | ALTEX4 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX4 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX4 output is high in idle phase | |
| | 2 | LOW | ALTEX4 output is low in idle phase | |
| 7:6 | IDLECONF3 | 0x0 | RW | ALTEX3 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX3 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX3 output is high in idle phase | |
| | 2 | LOW | ALTEX3 output is low in idle phase | |
| 5:4 | IDLECONF2 | 0x0 | RW | ALTEX2 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX2 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX2 output is high in idle phase | |
| | 2 | LOW | ALTEX2 output is low in idle phase | |
| 3:2 | IDLECONF1 | 0x0 | RW | ALTEX1 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX1 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX1 output is high in idle phase | |
| | 2 | LOW | ALTEX1 output is low in idle phase | |
| 1:0 | IDLECONF0 | 0x0 | RW | ALTEX0 idle phase configuration |
| | Value | Mode | Description | |
| | 0 | DISABLE | ALTEX0 output is disabled in idle phase | |
| | 1 | HIGH | ALTEX0 output is high in idle phase | |
| | 2 | LOW | ALTEX0 output is low in idle phase | |

21.5.17 LESENSE_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|-------|-------|----------|----------|--------|-----|--------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|---|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R | R |
| Name | | | | | | | | | | | CNTOF | BUFOF | BUFLEVEL | BUFDATAV | DECERR | DEC | SCANCOMPLETE | CH15 | CH14 | CH13 | CH12 | CH11 | CH10 | CH9 | CH8 | CH7 | CH6 | CH5 | CH4 | CH3 | CH2 | CH1 | CH0 | | |

| Bit | Name | Reset | Access | Description |
|-------|--------------|---|--------|--|
| 31:23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 22 | CNTOF | 0 | R | Set when the LESENSE counter overflows. |
| 21 | BUFOF | 0 | R | Set when the result buffer overflows |
| 20 | BUFLEVEL | 0 | R | Set when the data buffer is full. |
| 19 | BUFDATAV | 0 | R | Set when data is available in the result buffer. |
| 18 | DECERR | 0 | R | Set when the decoder detects an error |
| 17 | DEC | 0 | R | Set when the decoder has issued an interrupt request |
| 16 | SCANCOMPLETE | 0 | R | Set when a scan sequence is completed |
| 15 | CH15 | 0 | R | Set when channel 15 triggers |
| 14 | CH14 | 0 | R | Set when channel 14 triggers |
| 13 | CH13 | 0 | R | Set when channel 13 triggers |
| 12 | CH12 | 0 | R | Set when channel 12 triggers |
| 11 | CH11 | 0 | R | Set when channel 11 triggers |
| 10 | CH10 | 0 | R | Set when channel 10 triggers |
| 9 | CH9 | 0 | R | Set when channel 9 triggers |
| 8 | CH8 | 0 | R | Set when channel 8 triggers |
| 7 | CH7 | 0 | R | Set when channel 7 triggers |
| 6 | CH6 | 0 | R | |

| Bit | Name | Reset | Access | Description |
|-----|-----------------------------|-------|--------|-------------|
| | Set when channel 6 triggers | | | |
| 5 | CH5 | 0 | R | |
| | Set when channel 5 triggers | | | |
| 4 | CH4 | 0 | R | |
| | Set when channel 4 triggers | | | |
| 3 | CH3 | 0 | R | |
| | Set when channel 3 triggers | | | |
| 2 | CH2 | 0 | R | |
| | Set when channel 2 triggers | | | |
| 1 | CH1 | 0 | R | |
| | Set when channel 1 triggers | | | |
| 0 | CH0 | 0 | R | |
| | Set when channel 0 triggers | | | |

21.5.18 LESENSE_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|-------|-------|----------|----------|--------|-----|--------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 0x044 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | CNTOF | BUFOF | BUFLEVEL | BUFDATAV | DECERR | DEC | SCANCOMPLETE | CH15 | CH14 | CH13 | CH12 | CH11 | CH10 | CH9 | CH8 | CH7 | CH6 | CH5 | CH4 | CH3 | CH2 | CH1 | CH0 | | |

| Bit | Name | Reset | Access | Description |
|-------|--------------|---|--------|---|
| 31:23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 22 | CNTOF | 0 | W1 | Write to 1 to clear CNTOF interrupt flag |
| 21 | BUFOF | 0 | W1 | Write to 1 to clear BUFOF interrupt flag |
| 20 | BUFLEVEL | 0 | W1 | Write to 1 to clear BUFLEVEL interrupt flag |
| 19 | BUFDATAV | 0 | W1 | Write to 1 to clear BUFDATAV interrupt flag |
| 18 | DECERR | 0 | W1 | Write to 1 to clear DECERR interrupt flag |
| 17 | DEC | 0 | W1 | Write to 1 to clear DEC interrupt flag |
| 16 | SCANCOMPLETE | 0 | W1 | Write to 1 to clear SCANCOMPLETE interrupt flag |
| 15 | CH15 | 0 | W1 | Write to 1 to clear CH15 interrupt flag |
| 14 | CH14 | 0 | W1 | |

| Bit | Name | Reset | Access | Description |
|-----|---|-------|--------|-------------|
| | Write to 1 to clear CH14 interrupt flag | | | |
| 13 | CH13 | 0 | W1 | |
| | Write to 1 to clear CH13 interrupt flag | | | |
| 12 | CH12 | 0 | W1 | |
| | Write to 1 to clear CH12 interrupt flag | | | |
| 11 | CH11 | 0 | W1 | |
| | Write to 1 to clear CH11 interrupt flag | | | |
| 10 | CH10 | 0 | W1 | |
| | Write to 1 to clear CH10 interrupt flag | | | |
| 9 | CH9 | 0 | W1 | |
| | Write to 1 to clear CH9 interrupt flag | | | |
| 8 | CH8 | 0 | W1 | |
| | Write to 1 to clear CH8 interrupt flag | | | |
| 7 | CH7 | 0 | W1 | |
| | Write to 1 to clear CH7 interrupt flag | | | |
| 6 | CH6 | 0 | W1 | |
| | Write to 1 to clear CH6 interrupt flag | | | |
| 5 | CH5 | 0 | W1 | |
| | Write to 1 to clear CH5 interrupt flag | | | |
| 4 | CH4 | 0 | W1 | |
| | Write to 1 to clear CH4 interrupt flag | | | |
| 3 | CH3 | 0 | W1 | |
| | Write to 1 to clear CH3 interrupt flag | | | |
| 2 | CH2 | 0 | W1 | |
| | Write to 1 to clear CH2 interrupt flag | | | |
| 1 | CH1 | 0 | W1 | |
| | Write to 1 to clear CH1 interrupt flag | | | |
| 0 | CH0 | 0 | W1 | |
| | Write to 1 to clear CH0 interrupt flag | | | |

21.5.19 LESENSE_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|-------|-------|----------|----------|--------|-----|--------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 0x048 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Access | | | | | | | | | | | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 | W1 |
| Name | | | | | | | | | | | CNTOF | BUFOF | BUFLEVEL | BUFDATAV | DECERR | DEC | SCANCOMPLETE | CH15 | CH14 | CH13 | CH12 | CH11 | CH10 | CH9 | CH8 | CH7 | CH6 | CH5 | CH4 | CH3 | CH2 | CH1 | CH0 | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 22 | CNTOF | 0 | W1 | |

| Bit | Name | Reset | Access | Description |
|-----|---|-------|--------|-------------|
| | Write to 1 to set the CNTOF interrupt flag | | | |
| 21 | BUFOF | 0 | W1 | |
| | Write to 1 to set the BUFOF interrupt flag | | | |
| 20 | BUFLEVEL | 0 | W1 | |
| | Write to 1 to set the BUFLEVEL interrupt flag | | | |
| 19 | BUFDATAV | 0 | W1 | |
| | Write to 1 to set the BUFDATAV interrupt flag | | | |
| 18 | DECERR | 0 | W1 | |
| | Write to 1 to set the DECERR interrupt flag | | | |
| 17 | DEC | 0 | W1 | |
| | Write to 1 to set the DEC interrupt flag | | | |
| 16 | SCANCOMPLETE | 0 | W1 | |
| | Write to 1 to set the SCANCOMPLETE interrupt flag | | | |
| 15 | CH15 | 0 | W1 | |
| | Write to 1 to set the CH15 interrupt flag | | | |
| 14 | CH14 | 0 | W1 | |
| | Write to 1 to set the CH14 interrupt flag | | | |
| 13 | CH13 | 0 | W1 | |
| | Write to 1 to set the CH13 interrupt flag | | | |
| 12 | CH12 | 0 | W1 | |
| | Write to 1 to set the CH12 interrupt flag | | | |
| 11 | CH11 | 0 | W1 | |
| | Write to 1 to set the CH11 interrupt flag | | | |
| 10 | CH10 | 0 | W1 | |
| | Write to 1 to set the CH10 interrupt flag | | | |
| 9 | CH9 | 0 | W1 | |
| | Write to 1 to set the CH9 interrupt flag | | | |
| 8 | CH8 | 0 | W1 | |
| | Write to 1 to set the CH8 interrupt flag | | | |
| 7 | CH7 | 0 | W1 | |
| | Write to 1 to set the CH7 interrupt flag | | | |
| 6 | CH6 | 0 | W1 | |
| | Write to 1 to set the CH6 interrupt flag | | | |
| 5 | CH5 | 0 | W1 | |
| | Write to 1 to set the CH5 interrupt flag | | | |
| 4 | CH4 | 0 | W1 | |
| | Write to 1 to set the CH4 interrupt flag | | | |
| 3 | CH3 | 0 | W1 | |
| | Write to 1 to set the CH3 interrupt flag | | | |
| 2 | CH2 | 0 | W1 | |
| | Write to 1 to set the CH2 interrupt flag | | | |
| 1 | CH1 | 0 | W1 | |
| | Write to 1 to set the CH1 interrupt flag | | | |
| 0 | CH0 | 0 | W1 | |
| | Write to 1 to set the CH0 interrupt flag | | | |

21.5.20 LESENSE_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|-------|-------|----------|----------|--------|------|--------------|
| 0x04C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| Reset | | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW |
| Name | | | | | | | | | | CNTOF | BUFOF | BUFLEVEL | BUFDATAV | DECERR | DEC | SCANCOMPLETE |
| | | | | | | | | | | | | CH15 | CH14 | CH13 | CH12 | CH11 |
| | | | | | | | | | | | | CH10 | CH9 | CH8 | CH7 | CH6 |
| | | | | | | | | | | | | | CH5 | CH4 | CH3 | CH2 |
| | | | | | | | | | | | | | | CH1 | CH0 | |

| Bit | Name | Reset | Access | Description |
|-------|--------------|---|--------|--|
| 31:23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 22 | CNTOF | 0 | RW | Set to enable interrupt on the CNTOF interrupt flag |
| 21 | BUFOF | 0 | RW | Set to enable interrupt on the BUFOF interrupt flag |
| 20 | BUFLEVEL | 0 | RW | Set to enable interrupt on the BUFLEVEL interrupt flag |
| 19 | BUFDATAV | 0 | RW | Set to enable interrupt on the BUFDATAV interrupt flag |
| 18 | DECERR | 0 | RW | Set to enable interrupt on the DECERR interrupt flag |
| 17 | DEC | 0 | RW | Set to enable interrupt on the DEC interrupt flag |
| 16 | SCANCOMPLETE | 0 | RW | Set to enable interrupt on the SCANCOMPLETE interrupt flag |
| 15 | CH15 | 0 | RW | Set to enable interrupt on the CH15 interrupt flag |
| 14 | CH14 | 0 | RW | Set to enable interrupt on the CH14 interrupt flag |
| 13 | CH13 | 0 | RW | Set to enable interrupt on the CH13 interrupt flag |
| 12 | CH12 | 0 | RW | Set to enable interrupt on the CH12 interrupt flag |
| 11 | CH11 | 0 | RW | Set to enable interrupt on the CH11 interrupt flag |
| 10 | CH10 | 0 | RW | Set to enable interrupt on the CH10 interrupt flag |
| 9 | CH9 | 0 | RW | Set to enable interrupt on the CH9 interrupt flag |
| 8 | CH8 | 0 | RW | Set to enable interrupt on the CH8 interrupt flag |
| 7 | CH7 | 0 | RW | Set to enable interrupt on the CH7 interrupt flag |
| 6 | CH6 | 0 | RW | Set to enable interrupt on the CH6 interrupt flag |

| Bit | Name | Reset | Access | Description |
|-----|------|-------|--------|---|
| 5 | CH5 | 0 | RW | Set to enable interrupt on the CH5 interrupt flag |
| 4 | CH4 | 0 | RW | Set to enable interrupt on the CH4 interrupt flag |
| 3 | CH3 | 0 | RW | Set to enable interrupt on the CH3 interrupt flag |
| 2 | CH2 | 0 | RW | Set to enable interrupt on the CH2 interrupt flag |
| 1 | CH1 | 0 | RW | Set to enable interrupt on the CH1 interrupt flag |
| 0 | CH0 | 0 | RW | Set to enable interrupt on the CH0 interrupt flag |

21.5.21 LESENSE_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|------|----|----------|----|--------|----|------|----|--------|----|--------|----|----|----|-----------|----|-------|---|-----------|---|----------|---|-------------|---|----------|---|-------|---|---------|---|-----|--|--------|--|---------|--|------|--|-----|--|----------|--|---------|--|---------|--|---------|--|------|
| 0x050 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | | | |
| Reset | | | | | | R | 0 | R | 0 | R | 0 | R | 0 | | | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | R | | R | | R | | R | | | | R | | R | | R | | R | | R | | R | | R | | R | | R | | R | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | EVAL | | INTERACT | | TIMING | | DATA | | TCONFB | | TCONFA | | | | POWERDOWN | | ROUTE | | ALTEXCONF | | IDLECONF | | SENSORSTATE | | DECSTATE | | CURCH | | BUFDATA | | PTR | | STATUS | | SCANRES | | CHEN | | CMD | | BIASCTRL | | DECCTRL | | PERCTRL | | TIMCTRL | | CTRL |

| Bit | Name | Reset | Access | Description |
|-------|-----------|---|--------|--|
| 31:27 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 26 | EVAL | 0 | R | LESENSE_CHx_EVAL Register Busy Set when the value written to LESENSE_CHx_EVAL is being synchronized. |
| 25 | INTERACT | 0 | R | LESENSE_CHx_INTERACT Register Busy Set when the value written to LESENSE_CHx_INTERACT is being synchronized. |
| 24 | TIMING | 0 | R | LESENSE_CHx_TIMING Register Busy Set when the value written to LESENSE_CHx_TIMING is being synchronized. |
| 23 | DATA | 0 | R | LESENSE_BUFx_DATA Register Busy Set when the value written to LESENSE_BUFx_DATA is being synchronized. |
| 22 | TCONFB | 0 | R | LESENSE_STx_TCONFB Register Busy Set when the value written to LESENSE_STx_TCONFB is being synchronized. |
| 21 | TCONFA | 0 | R | LESENSE_STx_TCONFA Register Busy Set when the value written to LESENSE_STx_TCONFA is being synchronized. |
| 20:18 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 17 | POWERDOWN | 0 | R | LESENSE_POWERDOWN Register Busy Set when the value written to LESENSE_POWERDOWN is being synchronized. |
| 16 | ROUTE | 0 | R | LESENSE_ROUTE Register Busy Set when the value written to LESENSE_ROUTE is being synchronized. |
| 15 | ALTEXCONF | 0 | R | LESENSE_ALTEXCONF Register Busy Set when the value written to LESENSE_ALTEXCONF is being synchronized. |
| 14 | IDLECONF | 0 | R | LESENSE_IDLECONF Register Busy |

| Bit | Name | Reset | Access | Description |
|-----|-------------|-------|--------|--|
| | | | | Set when the value written to LESENSE_IDLECONF is being synchronized. |
| 13 | SENSORSTATE | 0 | R | LESENSE_SENSORSTATE Register Busy Set when the value written to LESENSE_SENSORSTATE is being synchronized. |
| 12 | DECSTATE | 0 | R | LESENSE_DECSTATE Register Busy Set when the value written to LESENSE_DECSTATE is being synchronized. |
| 11 | CURCH | 0 | R | LESENSE_CURCH Register Busy Set when the value written to LESENSE_CURCH is being synchronized. |
| 10 | BUFDATA | 0 | R | LESENSE_BUFDATA Register Busy Set when the value written to LESENSE_BUFDATA is being synchronized. |
| 9 | PTR | 0 | R | LESENSE_PTR Register Busy Set when the value written to LESENSE_PTR is being synchronized. |
| 8 | STATUS | 0 | R | LESENSE_STATUS Register Busy Set when the value written to LESENSE_STATUS is being synchronized. |
| 7 | SCANRES | 0 | R | LESENSE_SCANRES Register Busy Set when the value written to LESENSE_SCANRES is being synchronized. |
| 6 | CHEN | 0 | R | LESENSE_CHEN Register Busy Set when the value written to LESENSE_CHEN is being synchronized. |
| 5 | CMD | 0 | R | LESENSE_CMD Register Busy Set when the value written to LESENSE_CMD is being synchronized. |
| 4 | BIASCTRL | 0 | R | LESENSE_BIASCTRL Register Busy Set when the value written to LESENSE_BIASCTRL is being synchronized. |
| 3 | DECCTRL | 0 | R | LESENSE_DECCTRL Register Busy Set when the value written to LESENSE_DECCTRL is being synchronized. |
| 2 | PERCTRL | 0 | R | LESENSE_PERCTRL Register Busy Set when the value written to LESENSE_PERCTRL is being synchronized. |
| 1 | TIMCTRL | 0 | R | LESENSE_TIMCTRL Register Busy Set when the value written to LESENSE_TIMCTRL is being synchronized. |
| 0 | CTRL | 0 | R | LESENSE_CTRL Register Busy Set when the value written to LESENSE_CTRL is being synchronized. |

21.5.22 LESENSE_ROUTE - I/O Routing Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----|
| 0x054 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Access | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW | RW |
| Name | | | | | | | | | ALTEX7PEN | ALTEX6PEN | ALTEX5PEN | ALTEX4PEN | ALTEX3PEN | ALTEX2PEN | ALTEX1PEN | ALTEX0PEN | CH15PEN | CH14PEN | CH13PEN | CH12PEN | CH11PEN | CH10PEN | CH9PEN | CH8PEN | CH7PEN | CH6PEN | CH5PEN | CH4PEN | CH3PEN | CH2PEN | CH1PEN | CH0PEN | |

| Bit | Name | Reset | Access | Description |
|-------|-----------|---|--------|--------------------------|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23 | ALTEX7PEN | 0 | RW | ALTEX7 Pin Enable |

| Bit | Name | Reset | Access | Description |
|-----|-----------|-------|--------|--------------------------|
| 22 | ALTEX6PEN | 0 | RW | ALTEX6 Pin Enable |
| 21 | ALTEX5PEN | 0 | RW | ALTEX5 Pin Enable |
| 20 | ALTEX4PEN | 0 | RW | ALTEX4 Pin Enable |
| 19 | ALTEX3PEN | 0 | RW | ALTEX3 Pin Enable |
| 18 | ALTEX2PEN | 0 | RW | ALTEX2 Pin Enable |
| 17 | ALTEX1PEN | 0 | RW | ALTEX1 Pin Enable |
| 16 | ALTEX0PEN | 0 | RW | ALTEX0 Pin Enable |
| 15 | CH15PEN | 0 | RW | CH15 Pin Enable |
| 14 | CH14PEN | 0 | RW | CH14 Pin Enable |
| 13 | CH13PEN | 0 | RW | CH13 Pin Enable |
| 12 | CH12PEN | 0 | RW | CH12 Pin Enable |
| 11 | CH11PEN | 0 | RW | CH11 Pin Enable |
| 10 | CH10PEN | 0 | RW | CH10 Pin Enable |
| 9 | CH9PEN | 0 | RW | CH9 Pin Enable |
| 8 | CH8PEN | 0 | RW | CH8 Pin Enable |
| 7 | CH7PEN | 0 | RW | CH7 Pin Enable |
| 6 | CH6PEN | 0 | RW | CH6 Pin Enable |
| 5 | CH5PEN | 0 | RW | CH5 Pin Enable |
| 4 | CH4PEN | 0 | RW | CH4 Pin Enable |
| 3 | CH3PEN | 0 | RW | CH3 Pin Enable |
| 2 | CH2PEN | 0 | RW | CH2 Pin Enable |
| 1 | CH1PEN | 0 | RW | CH0 Pin Enable |
| 0 | CH0PEN | 0 | RW | CH0 Pin Enable |

| Bit | Name | Reset | Access | Description |
|-----|------|-------|--------|-------------|
|-----|------|-------|--------|-------------|

21.5.23 LESENSE_POWERDOWN - LESENSE RAM power-down register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-----|
| 0x058 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RAM |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | RAM | 0 | RW | LESENSE RAM power-down Shut off power to the LESENSE RAM. Once it is powered down, it cannot be powered up again |

21.5.24 LESENSE_STx_TCONFA - State transition configuration A (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|-------|----|----|--------|----|----|-----------|---|---|------|---|----|------|---|---|-----|---|--|
| 0x200 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | X | | X | | | 0xX | | | 0xX | | | 0xX | | | 0xX | | | 0xX | | |
| Access | | | | | | | | | | | | | | RW | | | | RW | | | | RW | | | | | RW | | | | RW | | |
| Name | | | | | | | | | | | | | | CHAIN | | SETIF | | | PRSACT | | | NEXTSTATE | | | MASK | | | COMP | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:19 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 18 | CHAIN | X | RW | Enable state descriptor chaining When set, descriptor in the next location will also be evaluated |
| 17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 16 | SETIF | X | RW | Set interrupt flag enable Set interrupt flag when sensor state equals COMP |
| 15 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 14:12 | PRSACT | 0xX | RW | Configure transition action Configure which action to perform when sensor state equals COMP |

| | | |
|--------------------|-------|---------------------------|
| DECCTRL_PRSCNT = 0 | | |
| Mode | Value | Description |
| NONE | 0 | No PRS pulses generated |
| PRS0 | 1 | Generate pulse on LESPRS0 |

| Bit | Name | Reset | Access | Description |
|------|--------------------|-------|--------|--|
| | DECCTRL_PRSCNT = 0 | | | |
| | PRS1 | 2 | | Generate pulse on LESPRS1 |
| | PRS01 | 3 | | Generate pulse on LESPRS0 and LESPRS1 |
| | PRS2 | 4 | | Generate pulse on LESPRS2 |
| | PRS02 | 5 | | Generate pulse on LESPRS0 and LESPRS2 |
| | PRS12 | 6 | | Generate pulse on LESPRS1 and LESPRS2 |
| | PRS012 | 7 | | Generate pulse on LESPRS0, LESPRS1 and LESPRS2 |
| | DECCTRL_PRSCNT = 1 | | | |
| | NONE | 0 | | Do not count |
| | UP | 1 | | Count up |
| | DOWN | 2 | | Count down |
| | PRS2 | 4 | | Generate pulse on LESPRS2 |
| | UPANDPRS2 | 5 | | Count up and generate pulse on LESPRS2. |
| | DOWNANDPRS2 | 6 | | Count down and generate pulse on LESPRS2. |
| 11:8 | NEXTSTATE | 0xX | RW | Next state index Index of next state to be entered if the sensor state equals COMP |
| 7:4 | MASK | 0xX | RW | Sensor mask Set bit X to exclude sensor X from evaluation. |
| 3:0 | COMP | 0xX | RW | Sensor compare value State transition is triggered when sensor state equals COMP |

21.5.25 LESENSE_STx_TCONFB - State transition configuration B (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|----|--------|----|----|-----------|---|---|------|---|---|------|---|---|----|--|--|--|--|--|--|
| 0x204 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | X | | | 0xX | | | 0xX | | | 0xX | | | 0xX | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | RW | | | RW | | | RW | | | RW | | | RW | | | | | | |
| Name | | | | | | | | | | | | | | | | | SETIF | | | PRSACT | | | NEXTSTATE | | | MASK | | | COMP | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:17 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 16 | SETIF | X | RW | Set interrupt flag Set interrupt flag when sensor state equals COMP |
| 15 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 14:12 | PRSACT | 0xX | RW | Configure transition action Configure which action to perform when sensor state equals COMP |

| | | |
|--------------------|-------|---------------------------------|
| DECCTRL_PRSCNT = 0 | | |
| Mode | Value | Description |
| NONE | 0 | No PRS pulses generated |
| PRS0 | 1 | Generate pulse on PRS0 |
| PRS1 | 2 | Generate pulse on PRS1 |
| PRS01 | 3 | Generate pulse on PRS0 and PRS1 |
| PRS2 | 4 | Generate pulse on PRS2 |
| PRS02 | 5 | Generate pulse on PRS0 and PRS2 |

| Bit | Name | Reset | Access | Description |
|------|--------------------|-------|--------|--|
| | DECCTRL_PRSCNT = 0 | | | |
| | PRS12 | 6 | | Generate pulse on PRS1 and PRS2 |
| | PRS012 | 7 | | Generate pulse on PRS0, PRS1 and PRS2 |
| | DECCTRL_PRSCNT = 1 | | | |
| | NONE | 0 | | Do not count |
| | UP | 1 | | Count up |
| | DOWN | 2 | | Count down |
| | PRS2 | 4 | | Generate pulse on PRS2 |
| | UPANDPRS2 | 5 | | Count up and generate pulse on PRS2. |
| | DOWNANDPRS2 | 6 | | Count down and generate pulse on PRS2. |
| 11:8 | NEXTSTATE | 0xX | RW | Next state index Index of next state to be entered if the sensor state equals COMP |
| 7:4 | MASK | 0xX | RW | Sensor mask Set bit X to exclude sensor X from evaluation. |
| 3:0 | COMP | 0xX | RW | Sensor compare value State transition is triggered when sensor state equals COMP |

21.5.26 LESENSE_BUFx_DATA - Scan results (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x280 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0XXXXX | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | DATA | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | DATA | 0xFFFF | RW | Scan result buffer |

21.5.27 LESENSE_CHx_TIMING - Scan configuration (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|------------|----|----|----|-----------|----|----|----|----|----|---|---|--------|---|---|---|---|---|---|---|
| 0x2C0 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | 0xFF | | | | 0xFF | | | | | | | | 0xFF | | | | | | | |
| Access | | | | | | | | | | | | | RW | | | | RW | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | MEASUREDLY | | | | SAMPLEDLY | | | | | | | | EXTIME | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|------------|---|--------|---|
| 31:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 19:13 | MEASUREDLY | 0xXX | RW | Set measure delay Configure measure delay. Sensor measuring is delayed for MEASUREDLY+1 EXCLK cycles. |
| 12:6 | SAMPLEDLY | 0xXX | RW | Set sample delay Configure sample delay. Sampling will occur after SAMPLEDLY+1 SAMPLECLK cycles. |
| 5:0 | EXTIME | 0xXX | RW | Set excitation time Configure excitation time. Excitation will last EXTIME+1 EXCLK cycles. |

21.5.28 LESENSE_CHx_INTERACT - Scan configuration (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|-------|-----------|-------|--------|-------|--------|----------|----|----|----|---|---|---|---|---|---|---|---|---|---|--|--|
| 0x2C4 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | X | X | X | 0xX | 0xX | X | 0xxxX | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | ALTEX | SAMPLECLK | EXCLK | EXMODE | SETIF | SAMPLE | ACMPHRES | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|-----------|---|--------|---|
| 31:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 19 | ALTEX | X | RW | Use alternative excite pin If set, alternative excite pin will be used for excitation |
| 18 | SAMPLECLK | X | RW | Select clock used for timing of sample delay |

| Value | Mode | Description |
|-------|----------|----------------------------------|
| 0 | LFACLK | LFACLK will be used for timing |
| 1 | AUXHFRCO | AUXHFRCO will be used for timing |

| | | | | |
|----|-------|---|----|--|
| 17 | EXCLK | X | RW | Select clock used for excitation timing |
|----|-------|---|----|--|

| Value | Mode | Description |
|-------|----------|----------------------------------|
| 0 | LFACLK | LFACLK will be used for timing |
| 1 | AUXHFRCO | AUXHFRCO will be used for timing |

| | | | | |
|-------|--------|-----|----|---|
| 16:15 | EXMODE | 0xX | RW | Set GPIO mode GPIO mode for the excitation phase of the scan sequence. Note that DACOUT is only available on channels 0, 1, 2, 3, 12, 13, 14, and 15. |
|-------|--------|-----|----|---|

| Value | Mode | Description |
|-------|---------|--------------------------------|
| 0 | DISABLE | Disabled |
| 1 | HIGH | Push Pull, GPIO is driven high |
| 2 | LOW | Push Pull, GPIO is driven low |
| 3 | DACOUT | DAC output |

| | | | | |
|-------|-------|-----|----|--|
| 14:13 | SETIF | 0xX | RW | Enable interrupt generation Select interrupt generation mode for CHx interrupt flag. |
|-------|-------|-----|----|--|

| Value | Mode | Description |
|-------|------|---------------------------|
| 0 | NONE | No interrupt is generated |

| Bit | Name | Reset | Access | Description |
|------|----------|---------|--------|---|
| | Value | Mode | | Description |
| | 1 | LEVEL | | Set interrupt flag if the sensor triggers. |
| | 2 | POSEDGE | | Set interrupt flag on positive edge on the sensor state |
| | 3 | NEGEDGE | | Set interrupt flag on negative edge on the sensor state |
| 12 | SAMPLE | X | RW | Select sample mode Select if ACMP output or counter output should be used in comparison |
| | Value | Mode | | Description |
| | 0 | COUNTER | | Counter output will be used in comparison |
| | 1 | ACMP | | ACMP output will be used in comparison |
| 11:0 | ACMPHRES | 0xFFFF | RW | Set ACMP threshold Select ACMP threshold. |



21.5.29 LESENSE_CHx_EVAL - Scan configuration (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|------------|-----------|--------|------|-----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x2C8 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | X | X | X | X | 0xFFFF | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | RW | RW | RW | RW | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | SCANRESINV | STRSAMPLE | DECODE | COMP | COMPTHRES | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|-------------------------------|---|--------|---|
| 31:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 19 | SCANRESINV | X | RW | Enable inversion of result If set, the bit stored in SCANRES will be inverted. |
| 18 | STRSAMPLE | X | RW | Select if counter result should be stored If set, the counter value will be stored and available in the result buffer |
| 17 | DECODE | X | RW | Send result to decoder If set, the result from this channel will be shifted into the decoder register. |
| 16 | COMP | X | RW | Select mode for counter comparison Set compare mode |
| | CH_INTERACT_SAMPLE COUNTER | = | | |
| | Mode | Value | | Description |
| | LESS | 0 | | Comparison evaluates to 1 if counter value is less than COMPTHRES. |
| | GE | 1 | | Comparison evaluates to 1 if counter value is greater than, or equal to COMPTHRES. |
| | CH_INTERACT_SAMPLE ACMP | = | | |
| | LESS | 0 | | Comparison evaluates to 1 if the ACMP output is 0. |
| | GE | 1 | | Comparison evaluates to 1 if the ACMP output is 1. |
| 15:0 | COMPTHRES | 0xFFFF | RW | Decision threshold for counter Set counter threshold |

22 ACMP - Analog Comparator

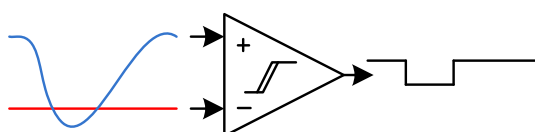

Quick Facts

What?

The ACMP (Analog Comparator) compares two analog signals and returns a digital value telling which is greater.

Why?

Applications often do not need to know the exact value of an analog signal, only if it has passed a certain threshold. Often the voltage must be monitored continuously, which requires extremely low power consumption.

How?

Available down to Energy Mode 3 and using as little as 100 nA, the ACMP can wake up the system when input signals pass the threshold. The analog comparator can compare two analog signals or one analog signal and a highly configurable internal reference.

22.1 Introduction

The Analog Comparator is used to compare the voltage of two analog inputs, with a digital output indicating which input voltage is higher. Inputs can either be one of the selectable internal references or from external pins. Response time and thereby also the current consumption can be configured by altering the current supply to the comparator.

22.2 Features


- 8 selectable external positive inputs
- 8 selectable external negative inputs
- 5 selectable internal negative inputs
 - Internal 1.25 V bandgap
 - Internal 2.5 V bandgap
 - V_{DD} scaled by 64 selectable factors
 - DAC channel 0 and 1
- Low power mode for internal V_{DD} and bandgap references
- Selectable hysteresis
 - 8 levels between 0 and ± 70 mV
- Selectable response time
- Asynchronous interrupt generation on selectable edges
 - Rising edge
 - Falling edge
 - Both edges
- Operational in EM0-EM3
- Dedicated capacitive sense mode with up to 8 inputs
 - Adjustable internal resistor

- Configurable inversion of comparator output
- Configurable output when inactive
- Comparator output direct on PRS
- Comparator output on GPIO through alternate functionality
 - Output inversion available

22.3 Functional Description

An overview of the ACMP is shown in Figure 22.1 (p. 379) .

Figure 22.1. ACMP Overview

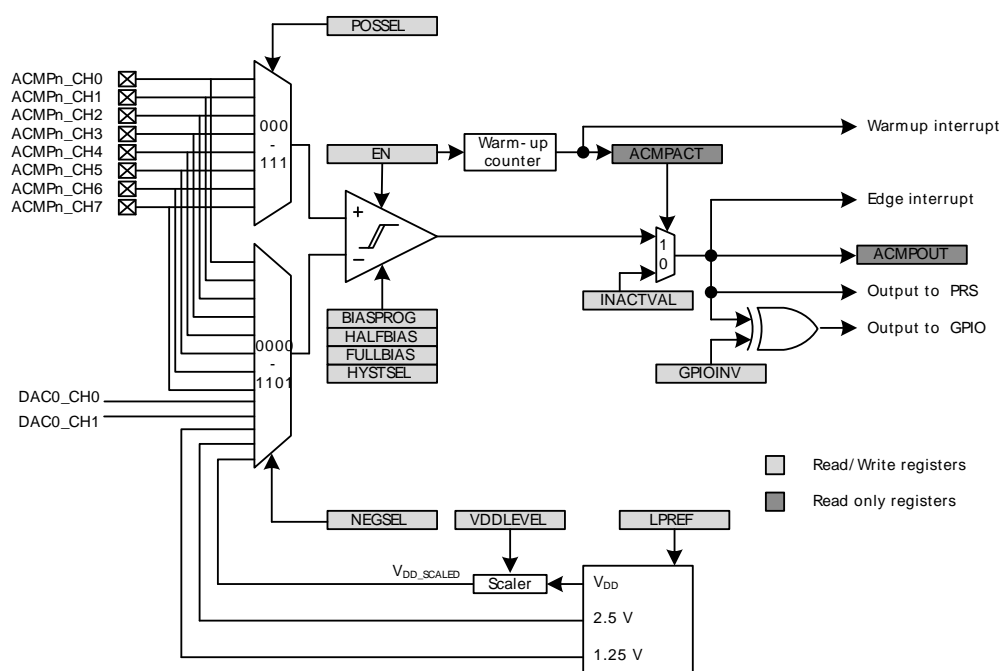

The comparator has two analog inputs, one positive and one negative. When the comparator is active, the output indicates which of the two input voltages is higher. When the voltage on the positive input is higher than the voltage on the negative input, the digital output is high and vice versa.

The output of the comparator can be read in the ACMPOUT bit in ACMPn_STATUS. It is possible to switch inputs while the comparator is enabled, but all other configuration should only be changed while the comparator is disabled.

22.3.1 Warm-up Time

The analog comparator is enabled by setting the EN bit in ACMPn_CTRL. When this bit is set, the comparator must stabilize before becoming active and the outputs can be used. This time period is called the warm-up time. The warm-up time is a configurable number of peripheral clock (HFPERCLK) cycles, set in WARMTIME, which should be set to at least 10 μ s but lengthens to up to 1ms if LPREF is enabled. The ACMP should always start in active mode and then enable the LPREF after warm-up time. When the comparator is enabled and warmed up, the ACMPACT bit in ACMPn_STATUS will indicate that the comparator is active. The output value when the comparator is inactive is set to the value in INACTVAL in ACMPn_CTRL (see Figure 22.1 (p. 379)).

An edge interrupt will be generated after the warm-up time if edge interrupt is enabled and the value set in INACTVAL is different from ACMPOUT after warm-up.

One should wait until the warm-up period is over before entering EM2 or EM3, otherwise no comparator interrupts will be detected. EM1 can still be entered during warm-up. After the warm-up period is completed, interrupts will be detected in EM2 and EM3.

22.3.2 Response Time

There is a delay from when the actual input voltage changes polarity, to when the output toggles. This period is called the response time and can be altered by increasing or decreasing the bias current to the comparator through the BIASPROG, FULLBIASPROG and HALFBIAS fields in the ACMPn_CTRL register, as illustrated in Table 22.1 (p. 380). Setting the HALFBIAS bit in ACMPn_CTRL effectively halves the current. Setting a lower bias current will result in lower power consumption, but a longer response time.

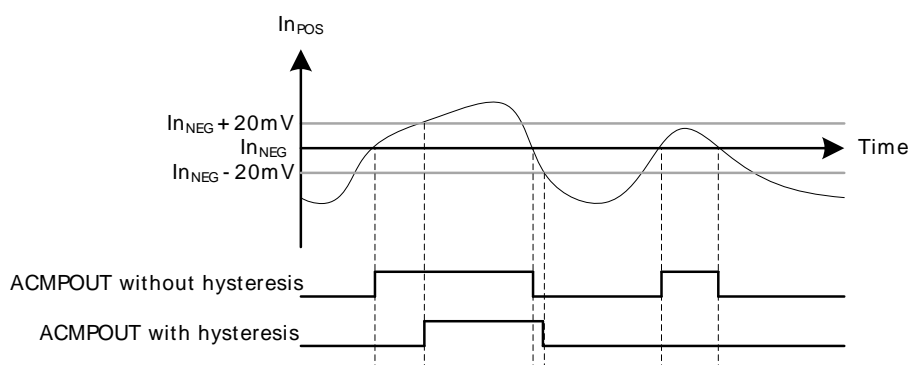
If the FULLBIAS bit is set, the highest hysteresis level should be used to avoid glitches on the output.

Table 22.1. Bias Configuration

| BIASPROG | Bias Current (μ A), HYSTSEL=0 | | | |
|----------|------------------------------------|---------------------------|---------------------------|---------------------------|
| | FULLBIAS=0, HALFBIAS=1 | FULLBIAS=0, HALFBIAS=0 | FULLBIAS=1, HALFBIAS=1 | FULLBIAS=1, HALFBIAS=0 |
| 0b0000 | 0.05 | 0.1 | 3.3 | 6.5 |
| 0b0001 | 0.1 | 0.2 | 6.5 | 13 |
| 0b0010 | 0.2 | 0.4 | 13 | 26 |
| 0b0011 | 0.3 | 0.6 | 20 | 39 |
| 0b0100 | 0.4 | 0.8 | 26 | 52 |
| 0b0101 | 0.5 | 1.0 | 33 | 65 |
| 0b0110 | 0.6 | 1.2 | 39 | 78 |
| 0b0111 | 0.7 | 1.4 | 46 | 91 |
| 0b1000 | 1.0 | 2.0 | 65 | 130 |
| 0b1001 | 1.1 | 2.2 | 72 | 143 |
| 0b1010 | 1.2 | 2.4 | 78 | 156 |
| 0b1011 | 1.3 | 2.6 | 85 | 169 |
| 0b1100 | 1.4 | 2.8 | 91 | 182 |
| 0b1101 | 1.5 | 3.0 | 98 | 195 |
| 0b1110 | 1.6 | 3.2 | 104 | 208 |
| 0b1111 | 1.7 | 3.4 | 111 | 221 |

22.3.3 Hysteresis

In the analog comparator, hysteresis can be configured to 8 different levels, including off which is level 0, through the HYSTSEL field in ACMPn_CTRL. When the hysteresis level is set above 0, the digital output will not toggle until the positive input voltage is at a voltage equal to the hysteresis level above or below the negative input voltage (see Figure 22.2 (p. 381)). This feature can be used to filter out uninteresting input fluctuations around zero and only show changes that are big enough to breach the hysteresis threshold. Note that the ACMP current consumption will be influenced by the selected hysteresis level and in general decrease with increasing HYSTSEL values.

Figure 22.2. 20 mV Hysteresis Selected

22.3.4 Input Selection

The POSSEL and NEGSEL fields in ACMPn_INPUTSEL controls which signals are connected to the two inputs of the comparator. 8 external pins are available for both the negative and positive input. For the negative input, 5 additional internal reference sources are available; 1.25 V bandgap, 2.5V bandgap, DAC channel 0, DAC channel 1, and V_{DD} . The V_{DD} reference can be scaled by a configurable factor, which is set in VDDLEVEL (in ACMPn_INPUTSEL) according to the following formula:

V_{DD} Scaled

$$V_{DD_SCALED} = V_{DD} \times VDDLEVEL / 63 \quad (22.1)$$


A low power reference mode can be enabled by setting the LPREF bit in ACMPn_INPUTSEL. In this mode, the power consumption in the reference buffer (V_{DD} and bandgap) is lowered at the cost of accuracy. Low power mode will only save power if V_{DD} with VDDLEVEL higher than 0 or a bandgap reference is selected.

Normally the analog comparator input mux is disabled when the EN (in ACMPn_CTRL) bit is set low. However if the MUXEN bit in ACMPn_CTRL is set, the mux is enabled regardless of the EN bit. This will minimize kickback noise on the mux inputs when the EN bit is toggled.

22.3.5 Capacitive Sense Mode

The analog comparator includes specialized hardware for capacitive sensing of passive push buttons. Such buttons are traces on PCB laid out in a way that creates a parasitic capacitor between the button and the ground node. Because a human finger will have a small intrinsic capacitance to ground, the capacitance of the button will increase when the button is touched. The capacitance is measured by including the capacitor in a free-running RC oscillator (see Figure 22.3 (p. 382)). The frequency produced will decrease when the button is touched compared to when it is not touched. By measuring the output frequency with a timer (e.g. through PRS), the change in capacitance can be calculated.

The analog comparator contains a complete feedback loop including an optional internal resistor. This resistor is enabled by setting the CSRESEN bit in ACMPn_INPUTSEL. The resistance can be set to one of four values by configuring the CSRESSEL bits in ACMPn_INPUTSEL. If the internal resistor is not enabled, the circuit will be open. The capacitive sense mode is enabled by setting the NEGSEL field in ACMPn_INPUTSEL to CAPSENSE. The input pin is selected through the POSSEL bits in ACMPn_INPUTSEL. The scaled V_{DD} in Figure 22.3 (p. 382) can be altered by configuring the VDDLEVEL in ACMPn_INPUTSEL. It is recommended to set the hysteresis (HYSTSEL in ACMPn_CTRL) higher than the lowest level when using the analog comparator in capacitive sense mode.

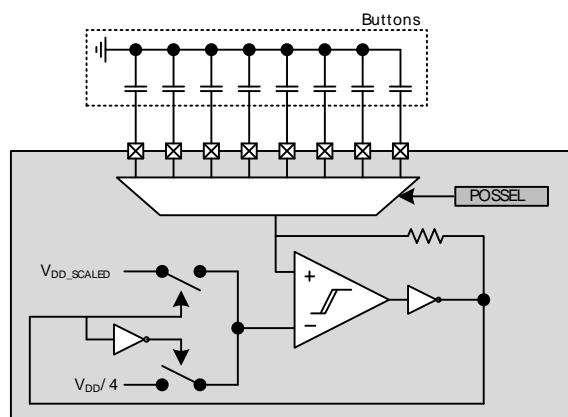Figure 22.3. Capacitive Sensing Set-up

22.3.6 Interrupts and PRS Output

The analog comparator includes an edge triggered interrupt flag (EDGE in ACMPn_IF). If either IRISE and/or IFALL in ACMPn_CTRL is set, the EDGE interrupt flag will be set on rising and/or falling edge of the comparator output, respectively. An interrupt request will be sent if the EDGE interrupt flag in ACMPn_IF is set and enabled through the EDGE bit in ACMPn_IEN. The edge interrupt can also be used to wake up the device from EM3-EM1.

The analog comparator also includes an interrupt flag, WARMUP in ACMPn_IF, which is set when a warm-up sequence has finished. An interrupt request will be sent if the WARMUP interrupt flag in ACMPn_IF is set and enabled through the WARMUP bit in ACMPn_IEN.

The comparator output is also available as a PRS signal.

22.3.7 Output to GPIO

The output from the comparator is available as alternate function to the GPIO pins. Set the ACMPn_PEN bit in ACMPn_ROUTE to enable output to pin, and the LOCATION bits to select output location. The GPIO-pin must also be set as output. The output to the GPIO can be inverted by setting the GPIOINV bit in ACMPn_CTRL.

22.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|----------------|------|-------------------------------|
| 0x000 | ACMPn_CTRL | RW | Control Register |
| 0x004 | ACMPn_INPUTSEL | RW | Input Selection Register |
| 0x008 | ACMPn_STATUS | R | Status Register |
| 0x00C | ACMPn_IEN | RW | Interrupt Enable Register |
| 0x010 | ACMPn_IF | R | Interrupt Flag Register |
| 0x014 | ACMPn_IFS | W1 | Interrupt Flag Set Register |
| 0x018 | ACMPn_IFC | W1 | Interrupt Flag Clear Register |
| 0x01C | ACMPn_ROUTE | RW | I/O Routing Register |

22.5 Register Description

22.5.1 ACMPn_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----------|----|----|----|----------|----|----|----|----|----|----|----|----|-------|-------|----|----|----|----|----|----|----------|---|---|---|---------|---------|----------|-------|----|----|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0 | 1 | | | | 0x7 | | | | | | | | | 0 | 0 | | | | | | | 0x0 | | | | 0x0 | | 0 | 0 | 0 | 0 |
| Access | RW | RW | | | | RW | | | | | | | | | RW | RW | | | | | | | RW | | | | RW | | RW | RW | RW | RW |
| Name | FULLBIAS | HALFBIAS | | | | BIASPROG | | | | | | | | | IFALL | IRISE | | | | | | | WARMTIME | | | | HYSTSEL | GPIOINV | INACTVAL | MUXEN | EN | |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|-------|----------|---|--------|---|-------|------|-------------|---|----------|---|---|---------|---|
| 31 | FULLBIAS | 0 | RW | Full Bias Current Set this bit to 1 for full bias current in accordance with Table 22.1 (p. 380) . | | | | | | | | | |
| 30 | HALFBIAS | 1 | RW | Half Bias Current Set this bit to 1 to halve the bias current in accordance with Table 22.1 (p. 380) . | | | | | | | | | |
| 29:28 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 27:24 | BIASPROG | 0x7 | RW | Bias Configuration These bits control the bias current level in accordance with Table 22.1 (p. 380) . | | | | | | | | | |
| 23:18 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 17 | IFALL | 0 | RW | Falling Edge Interrupt Sense Set this bit to 1 to set the EDGE interrupt flag on falling edges of comparator output. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>DISABLED</td><td>Interrupt flag is not set on falling edges.</td></tr><tr><td>1</td><td>ENABLED</td><td>Interrupt flag is set on falling edges.</td></tr></table> | Value | Mode | Description | 0 | DISABLED | Interrupt flag is not set on falling edges. | 1 | ENABLED | Interrupt flag is set on falling edges. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | DISABLED | Interrupt flag is not set on falling edges. | | | | | | | | | | | |
| 1 | ENABLED | Interrupt flag is set on falling edges. | | | | | | | | | | | |
| 16 | IRISE | 0 | RW | Rising Edge Interrupt Sense Set this bit to 1 to set the EDGE interrupt flag on rising edges of comparator output. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>DISABLED</td><td>Interrupt flag is not set on rising edges.</td></tr><tr><td>1</td><td>ENABLED</td><td>Interrupt flag is set on rising edges.</td></tr></table> | Value | Mode | Description | 0 | DISABLED | Interrupt flag is not set on rising edges. | 1 | ENABLED | Interrupt flag is set on rising edges. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | DISABLED | Interrupt flag is not set on rising edges. | | | | | | | | | | | |
| 1 | ENABLED | Interrupt flag is set on rising edges. | | | | | | | | | | | |
| 15:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 10:8 | WARMTIME | 0x0 | RW | Warm-up Time Set analog comparator warm-up time. | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|---|
| | Value | Mode | | Description |
| | 0 | 4CYCLES | | 4 HFPERCLK cycles. |
| | 1 | 8CYCLES | | 8 HFPERCLK cycles. |
| | 2 | 16CYCLES | | 16 HFPERCLK cycles. |
| | 3 | 32CYCLES | | 32 HFPERCLK cycles. |
| | 4 | 64CYCLES | | 64 HFPERCLK cycles. |
| | 5 | 128CYCLES | | 128 HFPERCLK cycles. |
| | 6 | 256CYCLES | | 256 HFPERCLK cycles. |
| | 7 | 512CYCLES | | 512 HFPERCLK cycles. |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6:4 | HYSTSEL | 0x0 | RW | Hysteresis Select Select hysteresis level. The hysteresis levels can vary, please see the electrical characteristics for the device for more information. |
| | Value | Mode | | Description |
| | 0 | HYST0 | | No hysteresis. |
| | 1 | HYST1 | | ~15 mV hysteresis. |
| | 2 | HYST2 | | ~22 mV hysteresis. |
| | 3 | HYST3 | | ~29 mV hysteresis. |
| | 4 | HYST4 | | ~36 mV hysteresis. |
| | 5 | HYST5 | | ~43 mV hysteresis. |
| | 6 | HYST6 | | ~50 mV hysteresis. |
| | 7 | HYST7 | | ~57 mV hysteresis. |
| 3 | GPIOINV | 0 | RW | Comparator GPIO Output Invert Set this bit to 1 to invert the comparator alternate function output to GPIO. |
| | Value | Mode | | Description |
| | 0 | NOTINV | | The comparator output to GPIO is not inverted. |
| | 1 | INV | | The comparator output to GPIO is inverted. |
| 2 | INACTVAL | 0 | RW | Inactive Value The value of this bit is used as the comparator output when the comparator is inactive. |
| | Value | Mode | | Description |
| | 0 | LOW | | The inactive value is 0. |
| | 1 | HIGH | | The inactive state is 1. |
| 1 | MUXEN | 0 | RW | Input Mux Enable Enable Input Mux. Setting the EN bit will also enable the input mux. |
| 0 | EN | 0 | RW | Analog Comparator Enable Enable/disable analog comparator. |

22.5.2 ACMPn_INPUTSEL - Input Selection Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----------|----|----|----|---------|----|----|----|----|----|----|----|----|-------|----|----|----------|----|----|----|---|---|---|---|---|---|--------|---|---|--------|--|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | 0x0 | | | | 0 | | | | | | | | | 1 | | | 0x00 | | | | | | | | | | 0x8 | | | 0x0 | |
| Access | | | RW | | | | RW | | | | | | | | | RW | | | RW | | | | | | | | | | RW | | | RW | |
| Name | | | CSRESSEL | | | | CSRESEN | | | | | | | | | LPREF | | | VDDLEVEL | | | | | | | | | | NEGSEL | | | POSSEL | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:30 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|---|--------|--|-------|-------------|-------------|--------------------------|------|---|---|------|---|---|------|---|---|------|---|---|-----|------------------------------|---|-----|------------------------------|---|-----|------------------------------|---|-----|------------------------------|---|------|---------------------------|---|-----|--------------------------|----|-----|-------------------------------|----|----------|------------------------|----|---------|-----------------|----|---------|-----------------|
| 29:28 | CSRESSEL | 0x0 | RW | Capacitive Sense Mode Internal Resistor Select These bits select the resistance value for the internal capacitive sense resistor. Resulting actual resistor values are given in the device datasheets. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>RES0</td><td>Internal capacitive sense resistor value 0.</td></tr><tr><td>1</td><td>RES1</td><td>Internal capacitive sense resistor value 1.</td></tr><tr><td>2</td><td>RES2</td><td>Internal capacitive sense resistor value 2.</td></tr><tr><td>3</td><td>RES3</td><td>Internal capacitive sense resistor value 3.</td></tr></table> | | | | | Value | Mode | Description | 0 | RES0 | Internal capacitive sense resistor value 0. | 1 | RES1 | Internal capacitive sense resistor value 1. | 2 | RES2 | Internal capacitive sense resistor value 2. | 3 | RES3 | Internal capacitive sense resistor value 3. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | RES0 | Internal capacitive sense resistor value 0. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | RES1 | Internal capacitive sense resistor value 1. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | RES2 | Internal capacitive sense resistor value 2. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | RES3 | Internal capacitive sense resistor value 3. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27:25 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | CSRESEN | 0 | RW | Capacitive Sense Mode Internal Resistor Enable Enable/disable the internal capacitive sense resistor. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23:17 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | LPREF | 1 | RW | Low Power Reference Mode Enable low power mode for VDD and bandgap references. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Low power mode disabled.</td></tr><tr><td>1</td><td>Low power mode enabled.</td></tr></table> | | | | | Value | Description | 0 | Low power mode disabled. | 1 | Low power mode enabled. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | Low power mode disabled. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Low power mode enabled. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15:14 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13:8 | VDDLEVEL | 0x00 | RW | VDD Reference Level Select scaling factor for VDD reference level. $V_{DD_SCALED} = V_{DD} \times VDDLEVEL/63$. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7:4 | NEGSEL | 0x8 | RW | Negative Input Select Select negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>CH0</td><td>Channel 0 as negative input.</td></tr><tr><td>1</td><td>CH1</td><td>Channel 1 as negative input.</td></tr><tr><td>2</td><td>CH2</td><td>Channel 2 as negative input.</td></tr><tr><td>3</td><td>CH3</td><td>Channel 3 as negative input.</td></tr><tr><td>4</td><td>CH4</td><td>Channel 4 as negative input.</td></tr><tr><td>5</td><td>CH5</td><td>Channel 5 as negative input.</td></tr><tr><td>6</td><td>CH6</td><td>Channel 6 as negative input.</td></tr><tr><td>7</td><td>CH7</td><td>Channel 7 as negative input.</td></tr><tr><td>8</td><td>1V25</td><td>1.25 V as negative input.</td></tr><tr><td>9</td><td>2V5</td><td>2.5 V as negative input.</td></tr><tr><td>10</td><td>VDD</td><td>Scaled VDD as negative input.</td></tr><tr><td>11</td><td>CAPSENSE</td><td>Capacitive sense mode.</td></tr><tr><td>12</td><td>DAC0CH0</td><td>DAC0 channel 0.</td></tr><tr><td>13</td><td>DAC0CH1</td><td>DAC0 channel 1.</td></tr></table> | | | | | Value | Mode | Description | 0 | CH0 | Channel 0 as negative input. | 1 | CH1 | Channel 1 as negative input. | 2 | CH2 | Channel 2 as negative input. | 3 | CH3 | Channel 3 as negative input. | 4 | CH4 | Channel 4 as negative input. | 5 | CH5 | Channel 5 as negative input. | 6 | CH6 | Channel 6 as negative input. | 7 | CH7 | Channel 7 as negative input. | 8 | 1V25 | 1.25 V as negative input. | 9 | 2V5 | 2.5 V as negative input. | 10 | VDD | Scaled VDD as negative input. | 11 | CAPSENSE | Capacitive sense mode. | 12 | DAC0CH0 | DAC0 channel 0. | 13 | DAC0CH1 | DAC0 channel 1. |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | CH0 | Channel 0 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | CH1 | Channel 1 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | CH2 | Channel 2 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | CH3 | Channel 3 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | CH4 | Channel 4 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | CH5 | Channel 5 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | CH6 | Channel 6 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | CH7 | Channel 7 as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | 1V25 | 1.25 V as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | 2V5 | 2.5 V as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | VDD | Scaled VDD as negative input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | CAPSENSE | Capacitive sense mode. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | DAC0CH0 | DAC0 channel 0. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | DAC0CH1 | DAC0 channel 1. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2:0 | POSSEL | 0x0 | RW | Positive Input Select Select positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>CH0</td><td>Channel 0 as positive input.</td></tr><tr><td>1</td><td>CH1</td><td>Channel 1 as positive input.</td></tr><tr><td>2</td><td>CH2</td><td>Channel 2 as positive input.</td></tr><tr><td>3</td><td>CH3</td><td>Channel 3 as positive input.</td></tr><tr><td>4</td><td>CH4</td><td>Channel 4 as positive input.</td></tr><tr><td>5</td><td>CH5</td><td>Channel 5 as positive input.</td></tr><tr><td>6</td><td>CH6</td><td>Channel 6 as positive input.</td></tr><tr><td>7</td><td>CH7</td><td>Channel 7 as positive input.</td></tr></table> | | | | | Value | Mode | Description | 0 | CH0 | Channel 0 as positive input. | 1 | CH1 | Channel 1 as positive input. | 2 | CH2 | Channel 2 as positive input. | 3 | CH3 | Channel 3 as positive input. | 4 | CH4 | Channel 4 as positive input. | 5 | CH5 | Channel 5 as positive input. | 6 | CH6 | Channel 6 as positive input. | 7 | CH7 | Channel 7 as positive input. | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | CH0 | Channel 0 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | CH1 | Channel 1 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | CH2 | Channel 2 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | CH3 | Channel 3 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | CH4 | Channel 4 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | CH5 | Channel 5 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | CH6 | Channel 6 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | CH7 | Channel 7 as positive input. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

22.5.3 ACMPn_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|---------|---|---------|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | | R | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | ACMPOUT | | ACMPACT | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | ACMPOUT | 0 | R | Analog Comparator Output Analog comparator output value. |
| 0 | ACMPACT | 0 | R | Analog Comparator Active Analog comparator active status. |

22.5.4 ACMPn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|--------|------|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | WARMUP | EDGE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | RW | Warm-up Interrupt Enable Enable/disable interrupt on finished warm-up. |
| 0 | EDGE | 0 | RW | Edge Trigger Interrupt Enable Enable/disable edge triggered interrupt. |

22.5.5 ACMPn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|--------|------|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | WARMUP | EDGE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | R | Warm-up Interrupt Flag Indicates that the analog comparator warm-up period is finished. |
| 0 | EDGE | 0 | R | Edge Triggered Interrupt Flag Indicates that there has been a rising or falling edge on the analog comparator output. |

22.5.6 ACMPn_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|--------|------|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | WARMUP | EDGE | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | W1 | Warm-up Interrupt Flag Set Write to 1 to set warm-up finished interrupt flag. |
| 0 | EDGE | 0 | W1 | Edge Triggered Interrupt Flag Set Write to 1 to set edge triggered interrupt flag. |

22.5.7 ACMPn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|--------|------|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | WARMUP | EDGE | |



| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | W1 | Warm-up Interrupt Flag Clear Write to 1 to clear warm-up finished interrupt flag. |
| 0 | EDGE | 0 | W1 | Edge Triggered Interrupt Flag Clear Write to 1 to clear edge triggered interrupt flag. |

22.5.8 ACMPn_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|---|---|---|---|---|---|---|---|---|---|--------|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | LOCATION | | | | | | | | | | | ACMPEN |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | |
|-------|----------|---|--------|---|-------|------|-------------|---|------|------------|---|------|------------|---|------|------------|
| 31:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | |
| 10:8 | LOCATION | 0x0 | RW | I/O Location Decides the location of the ACMP I/O pin. <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr><tr><td>2</td><td>LOC2</td><td>Location 2</td></tr></table> | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 | 2 | LOC2 | Location 2 |
| Value | Mode | Description | | | | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | | | | |
| 2 | LOC2 | Location 2 | | | | | | | | | | | | | | |
| 7:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | |
| 0 | ACMPPEN | 0 | RW | ACMP Output Pin Enable Enable/disable analog comparator output to pin. | | | | | | | | | | | | |

23 VCMP - Voltage Comparator

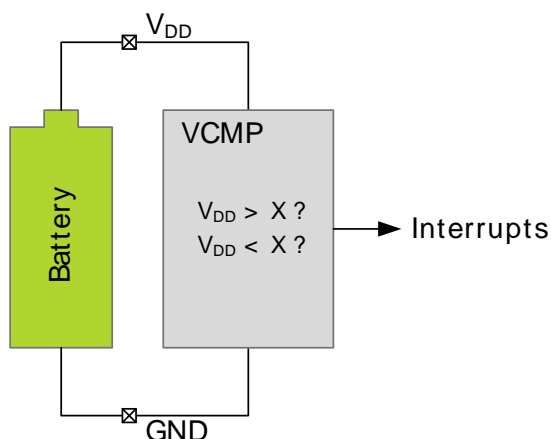

Quick Facts

What?

The Voltage Supply Comparator (VCMP) monitors the input voltage supply and generates software interrupts on events using as little as 100 nA.

Why?

The VCMP can be used for simple power supply monitoring, e.g. for a battery level indicator.

How?

The scaled power supply is compared to a programmable reference voltage, and an interrupt can be generated when the supply is higher or lower than the reference. The VCMP can also be duty-cycled by software to further reduce the energy consumption.

23.1 Introduction

The Voltage Supply Comparator is used to monitor the supply voltage from software. An interrupt can be generated when the supply falls below or rises above a programmable threshold.

Note

Note that VCMP comes in addition to the Power-on Reset and Brown-out Detector peripherals, that both generate reset signals when the voltage supply is insufficient for reliable operation. VCMP does not generate reset, only interrupt. Also note that the ADC is capable of sampling the input voltage supply.


23.2 Features

- Voltage supply monitoring
- Scalable V_{DD} in 64 steps selectable as positive comparator input
- Internal 1.25 V bandgap reference
- Low power mode for internal V_{DD} and bandgap references
- Selectable hysteresis
 - 0 or ± 20 mV
- Selectable response time
- Asynchronous interrupt generation on selectable edges
 - Rising edge
 - Falling edge
 - Rising and Falling edges
- Operational in EM0-EM3
- Comparator output direct on PRS
- Configurable output when inactive to avoid unwanted interrupts

23.3 Functional Description

An overview of the VCMP is shown in Figure 23.1 (p. 390) .

Figure 23.1. VCMP Overview

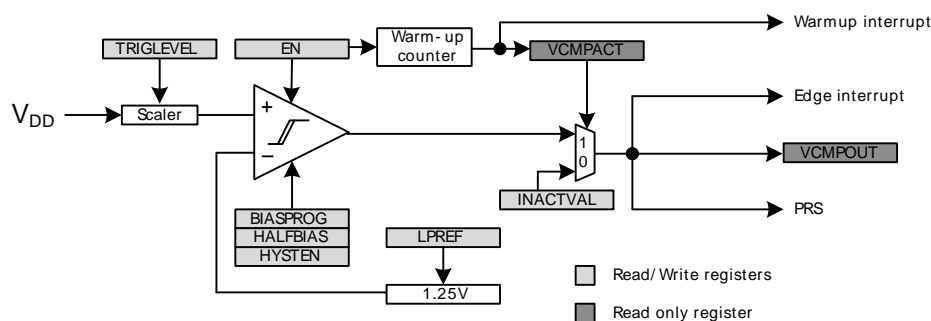

The comparator has two analog inputs, one positive and one negative. When the comparator is active, the output indicates which of the two input voltages is higher. When the voltage on the positive input is higher than the negative input voltage, the digital output is high and vice versa.

The output of the comparator can be read in the VCMPOUT bit in VCMP_STATUS. Configuration registers should only be changed while the comparator is disabled.

23.3.1 Warm-up Time

VCMP is enabled by setting the EN bit in VCMP_CTRL. When this bit is set, the comparator must stabilize before becoming active and the outputs can be used. This time period is called the warm-up time. The warm-up time is a configurable number of HFPERCLK cycles, set in WARMTIME, which should be set to at least 10 μ s. When the comparator is enabled and warmed up, the VCMPACT bit in VCMP_STATUS will be set to indicate that the comparator is active.

As long as the comparator is not enabled or not warmed up, VCMPACT will be cleared and the comparator output value is set to the value in INACTVAL in VCMP_CTRL.

One should wait until the warm-up period is over before entering EM2 or EM3, otherwise no comparator interrupts will be detected. EM1 can still be entered during warm-up. After the warm-up period is completed, interrupts will be detected in EM2 and EM3.

23.3.2 Response Time

There is a delay from when the actual input voltage changes polarity, to when the output toggles. This period is called the response time and can be altered by increasing or decreasing the bias current to the comparator through the BIAS and HALFBIAS fields in VCMP_CTRL as shown in Table 23.1 (p. 390) . Setting a lower bias current will result in lower power consumption, but a longer response time.

Table 23.1. Bias Configuration


| BIAS | Bias Current (μ A) | |
|--------|-------------------------|------------|
| | HALFBIAS=0 | HALFBIAS=1 |
| 0b0000 | 0.1 | 0.05 |
| 0b0001 | 0.2 | 0.1 |
| 0b0010 | 0.4 | 0.2 |
| 0b0011 | 0.6 | 0.3 |

| BIAS | Bias Current (μA) | |
|--------|-------------------|------------|
| | HALFBIAS=0 | HALFBIAS=1 |
| 0b0100 | 0.8 | 0.4 |
| 0b0101 | 1.0 | 0.5 |
| 0b0110 | 1.2 | 0.6 |
| 0b0111 | 1.4 | 0.7 |
| 0b1000 | 2.0 | 1.0 |
| 0b1001 | 2.2 | 1.1 |
| 0b1010 | 2.4 | 1.2 |
| 0b1011 | 2.6 | 1.3 |
| 0b1100 | 2.8 | 1.4 |
| 0b1101 | 3.0 | 1.5 |
| 0b1110 | 3.2 | 1.6 |
| 0b1111 | 3.4 | 1.7 |

23.3.3 Hysteresis

In the voltage supply comparator, hysteresis can be enabled by setting HYSTEN in VCMP_CTRL. When HYSTEN is set, the digital output will not toggle until the positive input voltage is at least 20mV above or below the negative input voltage. This feature can be used to filter out uninteresting input fluctuations around zero and only show changes that are big enough to breach the hysteresis threshold.

Figure 23.2. VCMP 20 mV Hysteresis Enabled

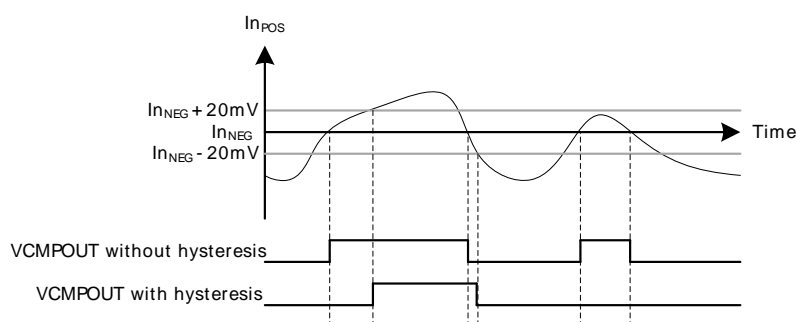

23.3.4 Input Selection

The positive comparator input is always connected to the scaled power supply input. The negative comparator input is connected to the internal 1.25 V bandgap reference. The V_{DD} trigger level can be configured by setting the TRIGLEVEL field in VCMP_CTRL according to the following formula:

VCMP V_{DD} Trigger Level

$$V_{DD} \text{ Trigger Level} = 1.667V + 0.034V \times \text{TRIGLEVEL} \quad (23.1)$$

A low power reference mode can be enabled by setting the LPREF bit in VCMP_INPUTSEL. In this mode, the power consumption in the reference buffer (V_{DD} and bandgap) is lowered at the cost of accuracy.

23.3.5 Interrupts and PRS Output

The VCMP includes an edge triggered interrupt flag (EDGE in VCMP_IF). If either IRISE and/or IFALL in VCMPn_CTRL is set, the EDGE interrupt flag will be set on rising and/or falling edge of the comparator output respectively. An interrupt request will be sent if the EDGE interrupt flag in VCMP_IF is set and enabled through the EDGE bit in VCMPn_IEN. The edge interrupt can also be used to wake up the device from EM3-EM1. VCMP also includes an interrupt flag, WARMUP in VCMP_IF, which is set when a warm-up sequence has finished. An interrupt request will be sent if the WARMUP interrupt flag in VCMP_IF is set and enabled through the WARMUP bit in VCMPn_IEN. The synchronized comparator output is also available as a PRS output signal.

23.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|---------------|------|-------------------------------|
| 0x000 | VCMP_CTRL | RW | Control Register |
| 0x004 | VCMP_INPUTSEL | RW | Input Selection Register |
| 0x008 | VCMP_STATUS | R | Status Register |
| 0x00C | VCMP_IEN | RW | Interrupt Enable Register |
| 0x010 | VCMP_IF | R | Interrupt Flag Register |
| 0x014 | VCMP_IFS | W1 | Interrupt Flag Set Register |
| 0x018 | VCMP_IFC | W1 | Interrupt Flag Clear Register |

23.5 Register Description

23.5.1 VCMP_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----------|----|----|----|----------|----|----|----|----|----|----|----|----|-------|-------|----|----|----|----|----|----------|-----|---|---|---|---|--------|---|----------|---|----|--|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | 1 | | | | 0x7 | | | | | | | | | 0 | 0 | | | | | | | 0x0 | | | | | 0 | | 0 | | 0 | |
| Access | | RW | | | | RW | | | | | | | | | RW | RW | | | | | | | RW | | | | | RW | | RW | | RW | |
| Name | | HALFBIAS | | | | BIASPROG | | | | | | | | | IFALL | IRISE | | | | | | WARMTIME | | | | | | HYSTEN | | INACTVAL | | EN | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------|---|--------|--|-------|------|-------------|---|---------|-------------------|---|---------|-------------------|---|----------|--------------------|---|----------|--------------------|---|----------|--------------------|---|-----------|---------------------|---|-----------|---------------------|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 | HALFBIAS | 1 | RW | Half Bias Current Set this bit to 1 to halve the bias current. Table 23.1 (p. 390) . | | | | | | | | | | | | | | | | | | | | | | | | |
| 29:28 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27:24 | BIASPROG | 0x7 | RW | VCMP Bias Programming Value These bits control the bias current level. Table 23.1 (p. 390) . | | | | | | | | | | | | | | | | | | | | | | | | |
| 23:18 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 | IFALL | 0 | RW | Falling Edge Interrupt Sense Set this bit to 1 to set the EDGE interrupt flag on falling edges of comparator output. | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | IRISE | 0 | RW | Rising Edge Interrupt Sense Set this bit to 1 to set the EDGE interrupt flag on rising edges of comparator output. | | | | | | | | | | | | | | | | | | | | | | | | |
| 15:11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10:8 | WARMTIME | 0x0 | RW | Warm-Up Time Set warm-up time | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>4CYCLES</td><td>4 HFPERCLK cycles</td></tr><tr><td>1</td><td>8CYCLES</td><td>8 HFPERCLK cycles</td></tr><tr><td>2</td><td>16CYCLES</td><td>16 HFPERCLK cycles</td></tr><tr><td>3</td><td>32CYCLES</td><td>32 HFPERCLK cycles</td></tr><tr><td>4</td><td>64CYCLES</td><td>64 HFPERCLK cycles</td></tr><tr><td>5</td><td>128CYCLES</td><td>128 HFPERCLK cycles</td></tr><tr><td>6</td><td>256CYCLES</td><td>256 HFPERCLK cycles</td></tr></table> | | | | | Value | Mode | Description | 0 | 4CYCLES | 4 HFPERCLK cycles | 1 | 8CYCLES | 8 HFPERCLK cycles | 2 | 16CYCLES | 16 HFPERCLK cycles | 3 | 32CYCLES | 32 HFPERCLK cycles | 4 | 64CYCLES | 64 HFPERCLK cycles | 5 | 128CYCLES | 128 HFPERCLK cycles | 6 | 256CYCLES | 256 HFPERCLK cycles |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 4CYCLES | 4 HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 8CYCLES | 8 HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16CYCLES | 16 HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 32CYCLES | 32 HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 64CYCLES | 64 HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 128CYCLES | 128 HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 256CYCLES | 256 HFPERCLK cycles | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|---|-------------------|--------|--|
| | Value | Mode | | Description |
| | 7 | 512CYCLES | | 512 HFPERCLK cycles |
| 7:5 | <i>Reserved</i> To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 4 | HYSTEN | 0 | RW | Hysteresis Enable Enable hysteresis. |
| | Value | Description | | |
| | 0 | No hysteresis | | |
| | 1 | +20 mV hysteresis | | |
| 3 | <i>Reserved</i> To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 2 | INACTVAL | 0 | RW | Inactive Value Configure the output value when the comparator is inactive. |
| 1 | <i>Reserved</i> To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 0 | EN | 0 | RW | Voltage Supply Comparator Enable Enable/disable voltage supply comparator. |

23.5.2 VCMP_INPUTSEL - Input Selection Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|-------|---|-----------|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | 0 | | 0x00 | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | RW | | RW | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | LPREF | | TRIGLEVEL | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|---|-------|--------|---|
| 31:9 | <i>Reserved</i> To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 8 | LPREF | 0 | RW | Low Power Reference Enable/disable low power mode for VDD and bandgap reference. When using this bit, always leave it as 0 during warm-up and then set it to 1 if desired when the warm-up is done. |
| 7:6 | <i>Reserved</i> To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 5:0 | TRIGLEVEL | 0x00 | RW | Trigger Level Select VDD trigger level. $V_{\text{trig}} = 1.667V + 0.034V \times \text{TRIGLEVEL}$. |

23.5.3 VCMP_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---------|---------|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | VCMPOUT | VCMPACT | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | VCMPOUT | 0 | R | Voltage Supply Comparator Output Voltage supply comparator output value |
| 0 | VCMPACT | 0 | R | Voltage Supply Comparator Active Voltage supply comparator active status. |

23.5.4 VCMP_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|--------|------|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | WARMUP | EDGE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | RW | Warm-up Interrupt Enable Enable/disable interrupt on finished warm-up. |
| 0 | EDGE | 0 | RW | Edge Trigger Interrupt Enable Enable/disable edge triggered interrupt. |

23.5.5 VCMP_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | R | Warm-up Interrupt Flag Indicates that warm-up has finished. |
| 0 | EDGE | 0 | R | Edge Triggered Interrupt Flag Indicates that there has been a rising and/or falling edge on the VCMP output. |

23.5.6 VCMP_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | W1 | Warm-up Interrupt Flag Set Write to 1 to set warm-up finished interrupt flag |
| 0 | EDGE | 0 | W1 | Edge Triggered Interrupt Flag Set Write to 1 to set edge triggered interrupt flag |

23.5.7 VCMP_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | WARMUP | 0 | W1 | Warm-up Interrupt Flag Clear Write to 1 to clear warm-up finished interrupt flag |
| 0 | EDGE | 0 | W1 | Edge Triggered Interrupt Flag Clear Write to 1 to clear edge triggered interrupt flag |

24 ADC - Analog to Digital Converter

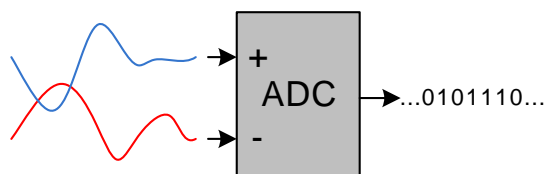

Quick Facts

What?

The ADC is used to convert analog signals into a digital representation and features 8 external input channels

Why?

In many applications there is a need to measure analog signals and record them in a digital representation, without exhausting your energy source.

How?

A low power Successive Approximation Register ADC samples up to 8 input channels in a programmable sequence. With the help of PRS and DMA, the ADC can operate without CPU intervention, minimizing the number of powered up resources. The ADC can further be duty-cycled to reduce the energy consumption.

24.1 Introduction

The ADC is a Successive Approximation Register (SAR) architecture, with a resolution of up to 12 bits at up to one million samples per second. The integrated input mux can select inputs from 8 external pins and 6 internal signals.

24.2 Features


- Programmable resolution (6/8/12-bit)
 - 13 prescaled clock (ADC_CLK) cycles per conversion
 - Maximum 1 MSPS @ 12-bit
 - Maximum 1.86 MSPS @ 6-bit
- Configurable acquisition time
- Integrated prescaler
 - Selectable clock division factor from 1 to 128
- 13 MHz to 32 kHz allowed for ADC_CLK
- 18 input channels
 - 8 external single ended channels
 - 6 internal single ended channels
 - Including temperature sensor
 - 4 external differential channels
- Integrated input filter
 - Low pass RC filter
 - Decoupling capacitor
- Left or right adjusted results
 - Results in 2's complement representation
 - Differential results sign extended to 32-bit results

- Programmable scan sequence
 - Up to 8 configurable samples in scan sequence
 - Mask to select which pins are included in the sequence
 - Triggered by software or PRS input
 - One shot or repetitive mode
 - Oversampling available
 - Overflow interrupt flag set when overwriting unread results
 - Conversion tailgating support for predictable periodic scans
- Programmable single conversion
 - Triggered by software or PRS input
 - Can be interleaved between two scan sequences
 - One shot or repetitive mode
 - Oversampling available
 - Overflow interrupt flag set when overwriting unread results
- Hardware oversampling support
 - 1st order accumulate and dump filter
 - From 2 to 4096 oversampling ratio (OSR)
 - Results in 16-bit representation
 - Enabled individually for scan sequence and single sample mode
 - Common OSR select
- Individually selectable voltage reference for scan and single mode
 - Internal 1.25V reference
 - Internal 2.5V reference
 - V_{DD}
 - Internal 5 V differential reference
 - Single ended external reference
 - Differential external reference
 - Unbuffered $2 \times V_{DD}$
- Support for offset and gain calibration
- Interrupt generation and/or DMA request
 - Finished single conversion
 - Finished scan conversion
 - Single conversion results overflow
 - Scan sequence results overflow
- Loopback configuration with DAC output measurement

24.3 Functional Description

An overview of the ADC is shown in Figure 24.1 (p. 399) .

Figure 24.1. ADC Overview

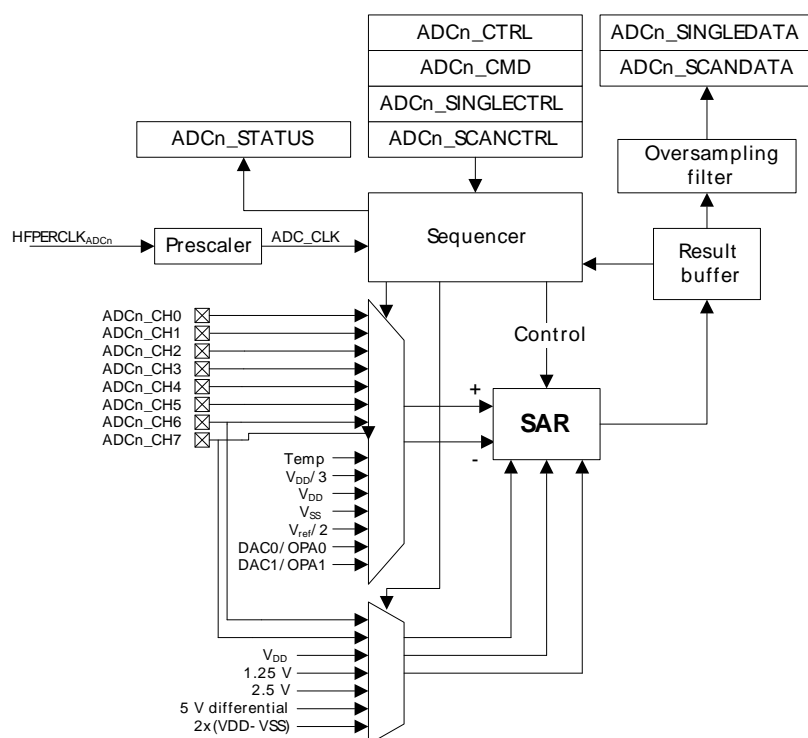

24.3.1 Clock Selection

The ADC has an internal prescaler (PRESC bits in `ADCn_CTRL`) which can divide the peripheral clock (HFPERCLK) by any factor between 1 and 128. Note that the resulting `ADC_CLK` should not be set to a higher frequency than 13 MHz and not lower than 32 kHz.

24.3.2 Conversions

A conversion consists of two phases. The input is sampled in the acquisition phase before it is converted to digital representation during the approximation phase. The acquisition time can be configured independently for scan and single conversions (see Section 24.3.7 (p. 403)) by setting `AT` in `ADCn_SINGLECTRL/ADCn_SCANCTRL`. The acquisition times can be set to any integer power of 2 from 1 to 256 `ADC_CLK` cycles.

Note


For high impedance sources the acquisition time should be adjusted to allow enough time for the internal sample capacitor to fully charge. The minimum acquisition time for the internal temperature sensor and $V_{DD}/3$ is given in the electrical characteristics for the device.

The analog to digital converter core uses one clock cycle per output bit in the approximation phase.

ADC Total Conversion Time (in `ADC_CLK` cycles) Per Output

$$T_{\text{conv}} = (T_A + N) \times \text{OSR} \quad (24.1)$$

T_A equals the number of acquisition cycles and N is the resolution. OSR is the oversampling ratio (see Section 24.3.7.7 (p. 405)). The minimum conversion time is 7 `ADC_CYCLES` with 6 bit resolution and 13 `ADC_CYCLES` with 12 bit resolution. The maximum conversion time is 1097728 `ADC_CYCLES` with the longest acquisition time, 12 bit resolution and highest oversampling rate.

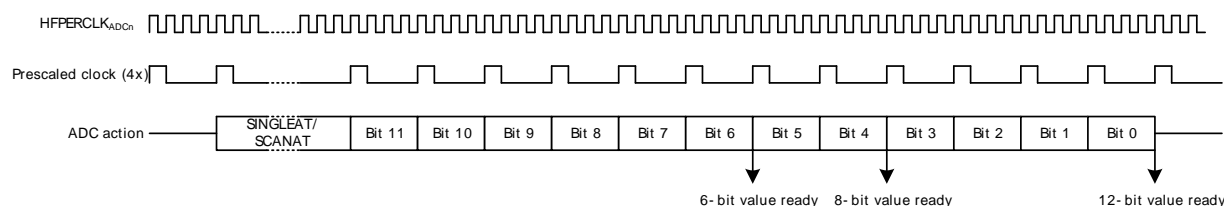Figure 24.2. ADC Conversion Timing

24.3.3 Warm-up Time

The ADC needs to be warmed up some time before a conversion can take place. This time period is called the warm-up time. When enabling the ADC or changing references between samples, the ADC is automatically warmed up for 1 μ s and an additional 5 μ s if the bandgap is selected as reference.


Normally, the ADC will be warmed up only when samples are requested and is shut off when there are no more samples waiting. However, if lower latency is needed, configuring the **WARMUPMODE** field in **ADCn_CTRL** allows the ADC and/or reference to stay warm between samples, eliminating the need for warm-up. Figure 24.3 (p. 401) shows the analog power consumption in scenarios using the different **WARMUPMODE** settings.

Only the bandgap reference selected for scan mode can be kept warm. If a different bandgap reference is selected for single mode, the warm-up time still applies.

- **NORMAL:** ADC and references are shut off when there are no samples waiting. a) in Figure 24.3 (p. 401) shows this mode used with an internal bandgap reference. Figure d) shows this mode when using VDD or an external reference.
- **FASTBG:** Bandgap warm-up is eliminated, but with reduced reference accuracy. d) in Figure 24.3 (p. 401) shows this mode used with an internal bandgap reference.
- **KEEPSCANREFWARM:** The reference selected for scan mode is kept warm. The ADC will still need to be warmed up before conversion. b) in Figure 24.3 (p. 401) shows this mode used with an internal bandgap reference.
- **KEEPADCWARM:** The ADC and the reference selected for scan mode is kept warm. c) in Figure 24.3 (p. 401) shows this mode used with an internal bandgap reference.

The minimum warm-up times are given in μ s. The timing is done automatically by the ADC, given that a proper time base is given in the **TIMEBASE** bits in **ADCn_CTRL**. The **TIMEBASE** must be set to the number of **HPPERCLK** which corresponds to at least 1 μ s. The **TIMEBASE** only affects the timing of the warm-up sequence and not the **ADC_CLK**.

When entering Energy Modes 2 or 3, the ADC must be stopped and **WARMUPMODE** in **ADCn_CTRL** written to 0.

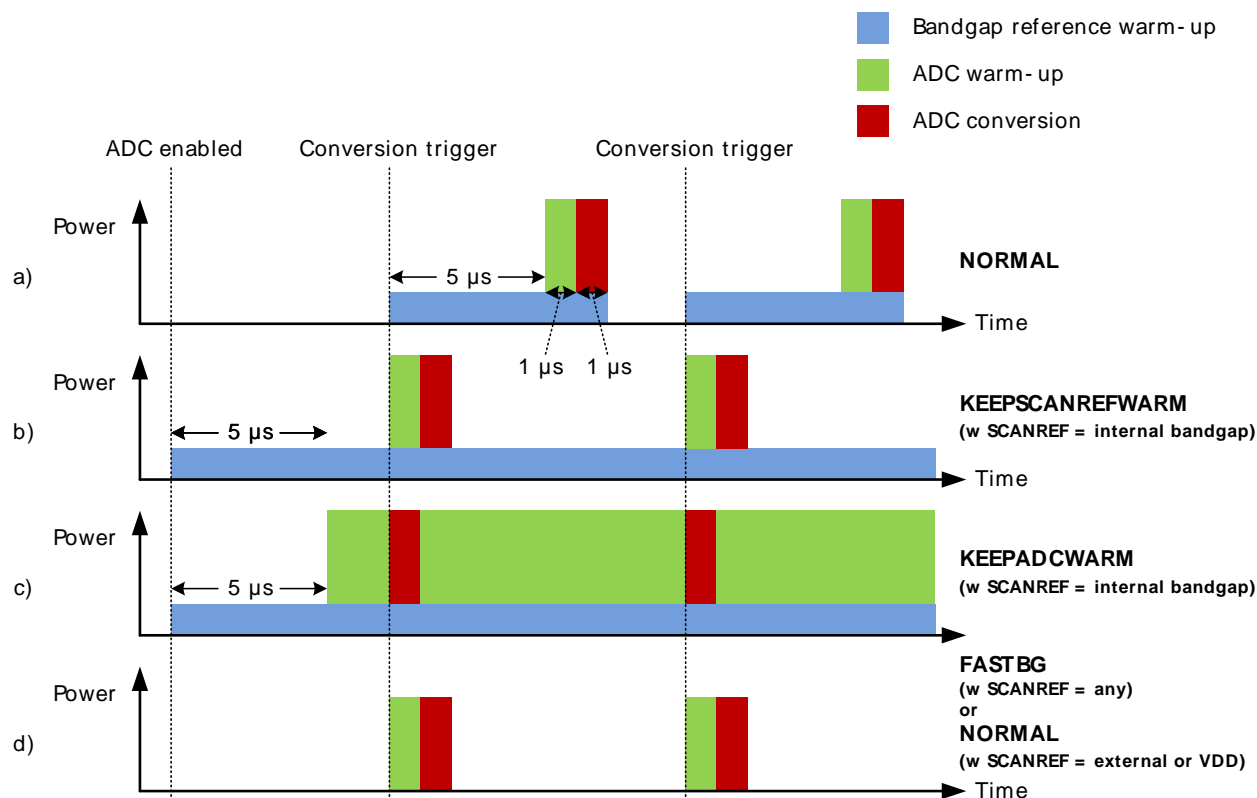Figure 24.3. ADC Analog Power Consumption With Different WARMUPMODE Settings

24.3.4 Input Selection

The ADC is connected to 8 external input pins, which can be selected as 8 different single ended inputs or 4 differential inputs. In addition, 6 single ended internal inputs can be selected. The available selections are given in the register description for ADCn_SINGLECTRL and ADCn_SCANCTRL.

For offset calibration purposes it is possible to internally short the differential ADC inputs and thereby measure a 0 V differential. Differential 0 V is selected by writing the DIFF bit to 1 and INPUTSEL to 4 in ADCn_SINGLECTRL. Calibration is described in detail in Section 24.3.10 (p. 406).


Note

When VDD/3 is sampled, the acquisition time should be above a lower limit. The reader is referred to the datasheet for minimum VDD/3 acquisition time.

24.3.4.1 Input Filtering

The selected input signal can be filtered, either through an internal low pass RC filter or an internal decoupling capacitor. The different filter configurations can be enabled through the LPFMODE bits in ADCn_CTRL. For maximum SNR, LPFMODE is recommended set to DECAP, with a cutoff frequency of 31.5 MHz.

The RC input filter configuration is given in Figure 24.4 (p. 402). The resistance and capacitance values are given in the electrical characteristics for the device, named R_{ADCFLT} and C_{ADCFLT} respectively.

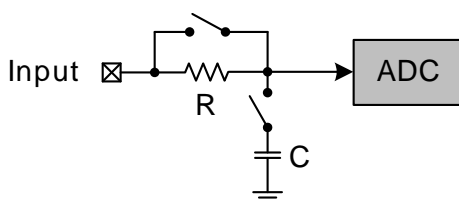Figure 24.4. ADC RC Input Filter Configuration

24.3.4.2 Temperature Measurement

The ADC includes an internal temperature sensor. This sensor is characterized during production and the temperature readout from the ADC at production temperature, `ADC0_TEMP_0_READ_1V25`, is given in the Device Information (DI) page. The production temperature, `CAL_TEMP_0`, is also given in this page. The temperature gradient, `TGRAD_ADCTH` (mV/degree Celsius), for the sensor is found in the datasheet for the devices. By selecting 1.25 V internal reference and measuring the internal temperature sensor with 12 bit resolution, the temperature can be calculated according to the following formula:

ADC Temperature Measurement

$$T_{\text{CELSIUS}} = \text{CAL_TEMP_0} - (\text{ADC0_TEMP_0_READ_1V25} - \text{ADC_result}) \times V_{\text{ref}} / (4096 \times \text{TGRAD_ADCTH}) \quad (24.2)$$

Note

The minimum acquisition time for the temperature reference is found in the electrical characteristics for the device.

24.3.5 Reference Selection

The reference voltage can be selected from these sources:

- 1.25 V internal bandgap.
- 2.5 V internal bandgap.
- V_{DD} .
- 5 V internal differential bandgap.
- External single ended input from Ch. 6.
- Differential input, 2x(Ch. 6 - Ch. 7).
- Unbuffered $2 \times V_{\text{DD}}$.
- The 2.5 V reference needs a supply voltage higher than 2.5 V.
- The differential 5 V reference needs a supply voltage higher than 2.75 V.

Since the $2 \times V_{\text{DD}}$ differential reference is unbuffered, it is directly connected to the ADC supply voltage and more susceptible to supply noise. The V_{DD} reference is buffered both in single ended and differential mode.

If a differential reference with a larger range than the supply voltage is combined with single ended measurements, for instance the 5 V internal reference, the full ADC range will not be available because the maximum input voltage is limited by the maximum electrical ratings.

Note


Single ended measurements with the external differential reference are not supported.

24.3.6 Programming of Bias Current

The bias current of the bandgap reference and the ADC comparator can be scaled by the `BIASPROG`, `HALFBIAS` and `COMPBIAS` bit fields of the `ADCn_BIASPROG` register. The `BIASPROG` and `HALFBIAS`

bitfields scale the current of ADC bandgap reference, and the COMPBIAS bits provide an additional bias programming for the ADC comparator as illustrated in Figure 24.5 (p. 403). The electrical characteristics given in the datasheet require the bias configuration to be set to the default values, where no other bias values are given.

Figure 24.5. ADC Bias Programming

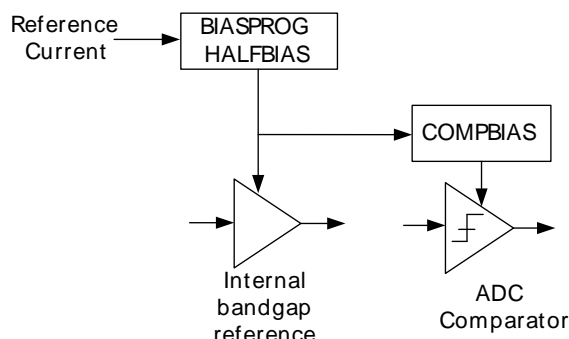

The minimum value of the BIASPROG and COMPBIAS bitfields of the ADCn_BIASPROG register (i.e. BIASPROG=0b0000, COMPBIAS=0b0000) represent the minimum bias currents. Similarly BIASPROG=0b1111 and COMPBIAS=0b1111 represent the maximum bias currents. Additionally, the bias current defined by the BIASPROG setting can be halved by setting the HALFBIAS bit of the ADCn_BIASPROG register.

The bias current settings should only be changed while the ADC is disabled.

24.3.7 ADC Modes

The ADC contains two separate programmable modes, one single sample mode and one scan mode. Both modes have separate configuration and result registers and can be set up to run only once per trigger or repetitively. The scan mode has priority over the single sample mode. However, if scan sequence is running, a triggered single sample will be interleaved between two scan samples.

24.3.7.1 Single Sample Mode

The single sample mode can be used to convert a single sample either once per trigger or repetitively. The configuration of the single sample mode is done in the ADCn_SINGLECTRL register and the results are found in the ADCn_SINGLEDATA register. The SINGLEDV bit in ADCn_STATUS is set high when there is valid data in the result register and is cleared when the data is read. The single mode results can also be read through ADCn_SINGLEDATAP without SINGLEDV being cleared. DIFF in ADCn_SINGLECTRL selects whether differential or single ended inputs are used and INPUTSEL selects input pin(s).

24.3.7.2 Scan mode


The scan mode is used to perform sweeps of the inputs. The configuration of the scan sequence is done in the ADCn_SCANCTRL register and the results are found in the ADCn_SCANDATA register. The SCANDV bit in ADCn_STATUS is set high when there is valid data in the result register and is cleared when the data is read. The scan mode results can also be read through ADCn_SCANDATAP without SCANDV being cleared. The inputs included in the sequence are defined by a the mask in INPUTMASK in ADCn_SCANCTRL. When the scan sequence is triggered, the sequence samples all inputs that are included in the mask, starting at the lowest pin number. DIFF in ADCn_SCANCTRL selects whether single ended or differential inputs are used.

24.3.7.3 Conversion Tailgating

The scan sequence has priority over the single sample mode. However, a scan trigger will not interrupt in the middle of a single conversion. If a scan sequence is triggered by a timer on a periodic basis,

single sample just before a scan trigger can delay the start of the scan sequence, thus causing jitter in sample rate. To solve this, conversion tailgating can be chosen by setting TAILGATE in ADCn_CTRL. When this bit is set, any triggered single samples will wait for the next scan sequence to finish before activating (see Figure 24.6 (p. 404)). The single sample will then follow immediately after the scan sequence. In this way, the scan sequence will always start immediately when triggered, if the period between the scan triggers is big enough to allow any single samples that might be triggered to finish in between the scan sequences.

Figure 24.6. ADC Conversion Tailgating

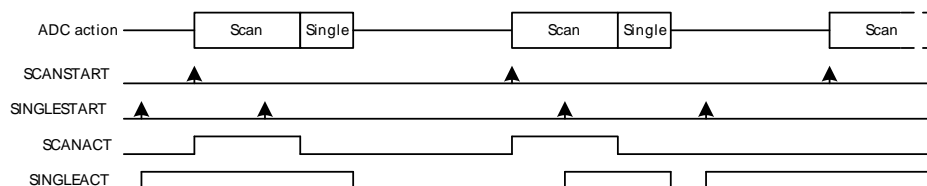

24.3.7.4 Conversion Trigger

The conversion modes can be activated by writing a 1 to the SINGLESTART or SCANSTART bit in the ADCn_CMD register. The conversions can be stopped by writing a 1 to the SINGLESTOP or SCANSTOP bit in the ADCn_CMD register. A START command will have priority over a stop command. When the ADC is stopped in the middle of a conversion, the result buffer is cleared. The SINGLEACT and SCANACT bits in ADCn_STATUS are set high when the modes are actively converting or have pending conversions.

It is also possible to trigger conversions from PRS signals. The system requires one HFPERCLK cycle pulses to trigger conversions. Setting PRSEN in ADCn_SINGLECTRL/ADCn_SCANCTRL enables triggering from PRS input. Which PRS channel to listen to is defined by PRSSEL in ADCn_SINGLECTRL/ADCn_SCANCTRL. When PRS trigger is selected, it is still possible to trigger the conversion from software. The reader is referred to the PRS datasheet for more information on how to set up the PRS channels.

Note

The conversion settings should not be changed while the ADC is running as this can lead to unpredictable behavior.

The prescaled clock phase is always reset by a triggered conversion as long as a conversion is not ongoing. This gives predictable latency from the time of the trigger to the time the conversion starts, regardless of when in the prescaled clock cycle the trigger occur.

24.3.7.5 Results

The results are presented in 2's complement form and the format for differential and single ended mode is given in Table 24.1 (p. 404) and Table 24.2 (p. 405). If differential mode is selected, the results are sign extended up to 32-bit (shown in Table 24.4 (p. 406)).

Table 24.1. ADC Single Ended Conversion

| Input/Reference | Results | |
|-----------------|--------------|-----------|
| | Binary | Hex value |
| 1 | 111111111111 | FFF |
| 0.5 | 011111111111 | 7FF |
| 1/4096 | 000000000001 | 001 |
| 0 | 000000000000 | 000 |

Table 24.2. ADC Differential Conversion

| Input/Reference | Results | |
|-----------------|--------------|-----------|
| | Binary | Hex value |
| 0.5 | 011111111111 | 7FF |
| 0.25 | 001111111111 | 3FF |
| 1/2048 | 000000000001 | 001 |
| 0 | 000000000000 | 000 |
| -1/2048 | 111111111111 | FFF |
| -0.25 | 101111111111 | BFF |
| -0.5 | 100000000000 | 800 |

24.3.7.6 Resolution

The ADC gives out 12-bit results, by default. However, if full 12-bit resolution is not needed, it is possible to speed up the conversion by selecting a lower resolution ($N = 6$ or 8 bits). For more information on the accuracy of the ADC, the reader is referred to the electrical characteristics section for the device.

24.3.7.7 Oversampling

To achieve higher accuracy, hardware oversampling can be enabled individually for each mode (Set RES in ADCn_SINGLECTRL/ADCn_SCANCTRL to 0x3). The oversampling rate (OVSRSEL in ADCn_CTRL) can be set to any integer power of 2 from 2 to 4096 and the configuration is shared between the scan and single sample mode (OVSRSEL field in ADCn_CTRL).

With oversampling, each selected input is sampled a number (given by the OVSR) of times, and the results are filtered by a first order accumulate and dump filter to form the end result. The data presented in the ADCn_SINGLEDATA and ADCn_SCANDATA registers are the direct contents of the accumulation register (sum of samples). However, if the oversampling ratio is set higher than 16x, the accumulated results are shifted to fit the MSB in bit 15 as shown in Table 24.3 (p. 405) .

Table 24.3. Oversampling Result Shifting and Resolution

| Oversampling setting | # right shifts | Result Resolution # bits |
|----------------------|----------------|--------------------------|
| 2x | 0 | 13 |
| 4x | 0 | 14 |
| 8x | 0 | 15 |
| 16x | 0 | 16 |
| 32x | 1 | 16 |
| 64x | 2 | 16 |
| 128x | 3 | 16 |
| 256x | 4 | 16 |
| 512x | 5 | 16 |
| 1024x | 6 | 16 |
| 2048x | 7 | 16 |
| 4096x | 8 | 16 |

24.3.7.8 Adjustment

By default, all results are right adjusted, with the LSB of the result in bit position 0 (zero). In differential mode the signed bit is extended up to bit 31, but in single ended mode the bits above the result are read as 0. By setting ADJ in ADCn_SINGLECTRL/ADCn_SCANCTRL, the results are left adjusted as shown in Table 24.4 (p. 406). When left adjusted, the MSB is always placed on bit 15 and sign extended to bit 31. All bits below the conversion result are read as 0 (zero).

Table 24.4. ADC Results Representation

| Adjustment | Resolution | Bit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|------------|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|
| | | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Right | 12 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | 8 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 4 | 3 | 2 | 1 | 0 | |
| | OVS | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| Left | 12 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | - | - | - | - |
| | 8 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | - | - | - | - | - | - | - | - | |
| | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 4 | 3 | 2 | 1 | 0 | - | - | - | - | - | - | - | - | - | - | |
| | OVS | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |

24.3.8 Interrupts, PRS Output

The single and scan modes have separate interrupt flags indicating finished conversions. Setting one of these flags will result in an ADC interrupt if the corresponding interrupt enable bit is set in ADCn_IEN.

In addition to the finished conversion flags, there is a scan and single sample result overflow flag which signalizes that a result from a scan sequence or single sample has been overwritten before being read.

A finished conversion will result in a one HFPERCLK cycle pulse which is output to the Peripheral Reflex System (PRS).

24.3.9 DMA Request

The ADC has two DMA request lines, SINGLE and SCAN, which are set when a single or scan conversion has completed. The request are cleared when the corresponding single or scan result register is read.

24.3.10 Calibration

The ADC supports offset and gain calibration to correct errors due to process and temperature variations. This must be done individually for each reference used. The ADC calibration (ADCn_CAL) register contains four register fields for calibrating offset and gain for both single and scan mode. The gain and offset calibration are done in single mode, but the resulting calibration values can be used for both single and scan mode.

Gain and offset for the 1V25, 2V5 and VDD references are calibrated during production and the calibration values for these can be found in the Device Information page. During reset, the gain and offset calibration registers are loaded with the production calibration values for the 1V25 reference.

The SCANGAIN and SINGLEGAIN calibration fields are not used when the unbuffered differential 2xVDD reference is selected.

The effects of changing the calibration register values are given in Table 24.5 (p. 407) . Step by step calibration procedures for offset and gain are given in Section 24.3.10.1 (p. 407) and Section 24.3.10.2 (p. 407) .

Table 24.5. Calibration Register Effect

| Calibration Register | ADC Result | Calibration Binary Value | Calibration Hex Value |
|----------------------|----------------|--------------------------|-----------------------|
| Offset | Lowest Output | 0111111 | 3F |
| | Highest Output | 1000000 | 40 |
| Gain | Lowest Output | 0000000 | 00 |
| | Highest Output | 1111111 | 7F |

The offset calibration register expects a signed 2's complement value with negative effect. A high value gives a low ADC reading.

The gain calibration register expects an unsigned value with positive effect. A high value gives a high ADC reading.

24.3.10.1 Offset Calibration

Offset calibration must be performed prior to gain calibration. Follow these steps for the offset calibration in single mode:

1. Select wanted reference by setting the REF bitfield of the ADCn_SINGLECTRL register.
2. Set the AT bitfield of the ADCn_SINGLECTRL register to 16CYCLES.
3. Set the INPUTSEL bitfield of the ADCn_SINGLECTRL register to DIFF0, and set the DIFF bitfield to 1 for enabling differential input. Since the input voltage is 0, the expected ADC output is the half of the ADC code range as it is in differential mode.
4. A binary search is used to find the offset calibration value. Set the SINGLESTART bit in the ADCn_CMD register and read the ADCn_SINGLEDATA register. The result of the binary search is written to the SINGLEOFFSET field of the ADCn_CAL register.

24.3.10.2 Gain Calibration

Offset calibration must be performed prior to gain calibration. The Gain Calibration is done in the following manner:

1. Select an external ADC channel (a differential channel can also be used).
2. Apply an external voltage on the selected ADC input channel. This voltage should correspond to the top of the ADC range.
3. A binary search is used to find the gain calibration value. Set the SINGLESTART bit in the ADCn_CTRL register and read the ADCn_SINGLEDATA register. The target value is ideally the top of the ADC range, but it is recommended to use a value a couple of LSBs below in order to avoid overshooting. The result of the binary search is written to the SINGLEGAIN field of the ADCn_CAL register.

24.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|------------------|------|---|
| 0x000 | ADCn_CTRL | RW | Control Register |
| 0x004 | ADCn_CMD | W1 | Command Register |
| 0x008 | ADCn_STATUS | R | Status Register |
| 0x00C | ADCn_SINGLECTRL | RW | Single Sample Control Register |
| 0x010 | ADCn_SCANCTRL | RW | Scan Control Register |
| 0x014 | ADCn_IEN | RW | Interrupt Enable Register |
| 0x018 | ADCn_IF | R | Interrupt Flag Register |
| 0x01C | ADCn_IFS | W1 | Interrupt Flag Set Register |
| 0x020 | ADCn_IFC | W1 | Interrupt Flag Clear Register |
| 0x024 | ADCn_SINGLEDATA | R | Single Conversion Result Data |
| 0x028 | ADCn_SCANDATA | R | Scan Conversion Result Data |
| 0x02C | ADCn_SINGLEDATAP | R | Single Conversion Result Data Peek Register |
| 0x030 | ADCn_SCANDATAP | R | Scan Sequence Result Data Peek Register |
| 0x034 | ADCn_CAL | RW | Calibration Register |
| 0x03C | ADCn_BIASPROG | RW | Bias Programming Register |

24.5 Register Description

24.5.1 ADCn_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|--------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|-------|----|---|---|---|---|---|---|---------|---|----|---|----------|--|----|--|------------|--|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | 0x0 | | | | | | | | 0x1F | | | | | | | | 0x00 | | | | | | | | 0x0 | | 0 | | 0x0 | | | | | |
| Access | | | | | RW | | | | | | | | RW | | | | | | | | RW | | | | | | | | RW | | RW | | | | RW | | | |
| Name | | | | | OVSSEL | | | | | | | | TIMEBASE | | | | | | | | PRESC | | | | | | | | LPFMODE | | | | TAILGATE | | | | WARMUPMODE | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:28 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

27:24 OVSSEL 0x0 RW **Oversample Rate Select**

Select oversampling rate. Oversampling must be enabled for each mode for this setting to take effect.

| Value | Mode | Description |
|-------|------|--|
| 0 | X2 | 2 samples for each conversion result |
| 1 | X4 | 4 samples for each conversion result |
| 2 | X8 | 8 samples for each conversion result |
| 3 | X16 | 16 samples for each conversion result |
| 4 | X32 | 32 samples for each conversion result |
| 5 | X64 | 64 samples for each conversion result |
| 6 | X128 | 128 samples for each conversion result |
| 7 | X256 | 256 samples for each conversion result |
| 8 | X512 | 512 samples for each conversion result |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | |
|----------|--|--|--------|--|-------|-------------|-------------|--|--------|--|---|--------|--|---|-----------------|--|---|-------------|---|
| | Value | Mode | | Description | | | | | | | | | | | | | | | |
| | 9 | X1024 | | 1024 samples for each conversion result | | | | | | | | | | | | | | | |
| | 10 | X2048 | | 2048 samples for each conversion result | | | | | | | | | | | | | | | |
| | 11 | X4096 | | 4096 samples for each conversion result | | | | | | | | | | | | | | | |
| 23:21 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | |
| 20:16 | TIMEBASE | 0x1F | RW | Time Base Set time base used for ADC warm up sequence according to the HFPERCLK frequency. The time base is defined as a number of HFPERCLK cycles which should be set equal to or higher than 1us. <table><tr><td>Value</td><td>Description</td></tr><tr><td>TIMEBASE</td><td>ADC warm-up is set to TIMEBASE+1 HFPERCLK clock cycles and bandgap warm-up is set to 5x(TIMEBASE+1) HFPERCLK cycles.</td></tr></table> | Value | Description | TIMEBASE | ADC warm-up is set to TIMEBASE+1 HFPERCLK clock cycles and bandgap warm-up is set to 5x(TIMEBASE+1) HFPERCLK cycles. | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| TIMEBASE | ADC warm-up is set to TIMEBASE+1 HFPERCLK clock cycles and bandgap warm-up is set to 5x(TIMEBASE+1) HFPERCLK cycles. | | | | | | | | | | | | | | | | | | |
| 15 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | |
| 14:8 | PRESC | 0x00 | RW | Prescaler Setting Select clock division factor. <table><tr><td>Value</td><td>Description</td></tr><tr><td>PRESC</td><td>Clock division factor of PRESC+1.</td></tr></table> | Value | Description | PRESC | Clock division factor of PRESC+1. | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| PRESC | Clock division factor of PRESC+1. | | | | | | | | | | | | | | | | | | |
| 7:6 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | |
| 5:4 | LPFMODE | 0x0 | RW | Low Pass Filter Mode These bits control the filtering of the ADC input. Details on the filter characteristics can be found in the device datasheets. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>BYPASS</td><td>No filter or decoupling capacitor</td></tr><tr><td>1</td><td>DECAP</td><td>On chip decoupling capacitor selected</td></tr><tr><td>2</td><td>RCFILT</td><td>On chip RC filter selected</td></tr></table> | Value | Mode | Description | 0 | BYPASS | No filter or decoupling capacitor | 1 | DECAP | On chip decoupling capacitor selected | 2 | RCFILT | On chip RC filter selected | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | |
| 0 | BYPASS | No filter or decoupling capacitor | | | | | | | | | | | | | | | | | |
| 1 | DECAP | On chip decoupling capacitor selected | | | | | | | | | | | | | | | | | |
| 2 | RCFILT | On chip RC filter selected | | | | | | | | | | | | | | | | | |
| 3 | TAILGATE | 0 | RW | Conversion Tailgating Enable/disable conversion tailgating. <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Scan sequence has priority, but can be delayed by ongoing single samples.</td></tr><tr><td>1</td><td>Scan sequence has priority and single samples will only start immediately after scan sequence.</td></tr></table> | Value | Description | 0 | Scan sequence has priority, but can be delayed by ongoing single samples. | 1 | Scan sequence has priority and single samples will only start immediately after scan sequence. | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | |
| 0 | Scan sequence has priority, but can be delayed by ongoing single samples. | | | | | | | | | | | | | | | | | | |
| 1 | Scan sequence has priority and single samples will only start immediately after scan sequence. | | | | | | | | | | | | | | | | | | |
| 2 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | |
| 1:0 | WARMUPMODE | 0x0 | RW | Warm-up Mode Select Warm-up Mode for ADC <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>NORMAL</td><td>ADC is shut down after each conversion</td></tr><tr><td>1</td><td>FASTBG</td><td>Bandgap references do not need warm up, but have reduced accuracy.</td></tr><tr><td>2</td><td>KEEPSCANREFWARM</td><td>Reference selected for scan mode is kept warm.</td></tr><tr><td>3</td><td>KEEPADCWARM</td><td>ADC is kept warmed up and scan reference is kept warm</td></tr></table> | Value | Mode | Description | 0 | NORMAL | ADC is shut down after each conversion | 1 | FASTBG | Bandgap references do not need warm up, but have reduced accuracy. | 2 | KEEPSCANREFWARM | Reference selected for scan mode is kept warm. | 3 | KEEPADCWARM | ADC is kept warmed up and scan reference is kept warm |
| Value | Mode | Description | | | | | | | | | | | | | | | | | |
| 0 | NORMAL | ADC is shut down after each conversion | | | | | | | | | | | | | | | | | |
| 1 | FASTBG | Bandgap references do not need warm up, but have reduced accuracy. | | | | | | | | | | | | | | | | | |
| 2 | KEEPSCANREFWARM | Reference selected for scan mode is kept warm. | | | | | | | | | | | | | | | | | |
| 3 | KEEPADCWARM | ADC is kept warmed up and scan reference is kept warm | | | | | | | | | | | | | | | | | |

24.5.2 ADCn_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|--|
| 31:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3 | SCANSTOP | 0 | W1 | Scan Sequence Stop Write a 1 to stop scan sequence. |
| 2 | SCANSTART | 0 | W1 | Scan Sequence Start Write a 1 to start scan sequence. |
| 1 | SINGLESTOP | 0 | W1 | Single Conversion Stop Write a 1 to stop single conversion. |
| 0 | SINGLESTART | 0 | W1 | Single Conversion Start Write to 1 to start single conversion. |

24.5.3 ADCn_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|-------------|----|----|----|----|----|----|----|----|----|--------|----------|----|----|----|----|------|---|---|---|---|-------------|---------------|---|---|---|---|---|--|---|---|---------|-----------|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | 0x0 | | | | | | | | | | 0 | 0 | | | | | 0 | 0 | | | | | | | | | 0 | 0 | | | | | |
| Access | | | | | | R | | | | | | | | | | R | R | | | | | R | | | | | R | 0 | | | | | | | R | R | | |
| Name | | | | | | SCANDATASRC | | | | | | | | | | SCANDV | SINGLEDV | | | | | WARM | | | | | SCANREFWARM | SINGLEREFWARM | | | | | | | | | SCANACT | SINGLEACT |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------|---|--------|--|-------|------|-------------|---|-----|---|---|-----|---|---|-----|---|---|-----|---|---|-----|--|---|-----|--|---|-----|--|---|-----|--|
| 31:27 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26:24 | SCANDATASRC | 0x0 | R | Scan Data Source This value indicates from which input channel the results in the ADCn_SCANDATA register originates. <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>CH0</td><td>Single ended mode: SCANDATA result originates from ADCn_CH0. Differential mode: SCANDATA result originates from ADCn_CH0-ADCn_CH1</td></tr><tr><td>1</td><td>CH1</td><td>Single ended mode: SCANDATA result originates from ADCn_CH1. Differential mode: SCANDATA result originates from ADCn_CH2-ADCn_CH3</td></tr><tr><td>2</td><td>CH2</td><td>Single ended mode: SCANDATA result originates from ADCn_CH2. Differential mode: SCANDATA result originates from ADCn_CH4-ADCn_CH5</td></tr><tr><td>3</td><td>CH3</td><td>Single ended mode: SCANDATA result originates from ADCn_CH3. Differential mode: SCANDATA result originates from ADCn_CH6-ADCn_CH7</td></tr><tr><td>4</td><td>CH4</td><td>SCANDATA result originates from ADCn_CH4</td></tr><tr><td>5</td><td>CH5</td><td>SCANDATA result originates from ADCn_CH5</td></tr><tr><td>6</td><td>CH6</td><td>SCANDATA result originates from ADCn_CH6</td></tr><tr><td>7</td><td>CH7</td><td>SCANDATA result originates from ADCn_CH7</td></tr></table> | Value | Mode | Description | 0 | CH0 | Single ended mode: SCANDATA result originates from ADCn_CH0. Differential mode: SCANDATA result originates from ADCn_CH0-ADCn_CH1 | 1 | CH1 | Single ended mode: SCANDATA result originates from ADCn_CH1. Differential mode: SCANDATA result originates from ADCn_CH2-ADCn_CH3 | 2 | CH2 | Single ended mode: SCANDATA result originates from ADCn_CH2. Differential mode: SCANDATA result originates from ADCn_CH4-ADCn_CH5 | 3 | CH3 | Single ended mode: SCANDATA result originates from ADCn_CH3. Differential mode: SCANDATA result originates from ADCn_CH6-ADCn_CH7 | 4 | CH4 | SCANDATA result originates from ADCn_CH4 | 5 | CH5 | SCANDATA result originates from ADCn_CH5 | 6 | CH6 | SCANDATA result originates from ADCn_CH6 | 7 | CH7 | SCANDATA result originates from ADCn_CH7 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | CH0 | Single ended mode: SCANDATA result originates from ADCn_CH0. Differential mode: SCANDATA result originates from ADCn_CH0-ADCn_CH1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | CH1 | Single ended mode: SCANDATA result originates from ADCn_CH1. Differential mode: SCANDATA result originates from ADCn_CH2-ADCn_CH3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | CH2 | Single ended mode: SCANDATA result originates from ADCn_CH2. Differential mode: SCANDATA result originates from ADCn_CH4-ADCn_CH5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | CH3 | Single ended mode: SCANDATA result originates from ADCn_CH3. Differential mode: SCANDATA result originates from ADCn_CH6-ADCn_CH7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | CH4 | SCANDATA result originates from ADCn_CH4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | CH5 | SCANDATA result originates from ADCn_CH5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | CH6 | SCANDATA result originates from ADCn_CH6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | CH7 | SCANDATA result originates from ADCn_CH7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23:18 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 | SCANDV | 0 | R | Scan Data Valid Scan conversion data is valid. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | SINGLEDV | 0 | R | Single Sample Data Valid Single conversion data is valid. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15:13 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | WARM | 0 | R | ADC Warmed Up ADC is warmed up. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | SCANREFWARM | 0 | R | Scan Reference Warmed Up | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|---------------|---|--------|-----------------------------------|
| Reference selected for scan mode is warmed up. | | | | |
| 8 | SINGLEREFWARM | 0 | R | Single Reference Warmed Up |
| Reference selected for single mode is warmed up. | | | | |
| 7:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | SCANACT | 0 | R | Scan Conversion Active |
| Scan sequence is active or has pending conversions. | | | | |
| 0 | SINGLEACT | 0 | R | Single Conversion Active |
| Single conversion is active or has pending conversions. | | | | |

24.5.4 ADCn_SINGLECTRL - Single Sample Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|-------|----|----|----|----|-------|----|-----|----|----|----|----|-----|----|----|----|----|----|----|----------|----|---|---|---|---|-----|----|---|-----|------|-----|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | 0x0 | | | | | 0 | | 0x0 | | | | | 0x0 | | | | | | | 0x0 | | | | | | 0x0 | | | 0 | 0 | 0 | |
| Access | | | RW | | | | | RW | | RW | | | | | RW | | | | | | | | RW | | | | | | RW | | RW | 0 | 0 | 0 |
| Name | | | PRSEL | | | | | PRSEN | | AT | | | | | REF | | | | | | | INPUTSEL | | | | | | RES | | | ADJ | DIFF | REP | |

| Bit | Name | Reset | Access | Description |
|-----|----------|---|--------|-------------|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| | | | | |
|-------|-------|-----|----|---|
| 30:28 | PRSEL | 0x0 | RW | Single Sample PRS Trigger Select |
|-------|-------|-----|----|---|

Select PRS trigger for single sample.

| Value | Mode | Description |
|-------|--------|---------------------------------|
| 0 | PRSCH0 | PRS ch 0 triggers single sample |
| 1 | PRSCH1 | PRS ch 1 triggers single sample |
| 2 | PRSCH2 | PRS ch 2 triggers single sample |
| 3 | PRSCH3 | PRS ch 3 triggers single sample |
| 4 | PRSCH4 | PRS ch 4 triggers single sample |
| 5 | PRSCH5 | PRS ch 5 triggers single sample |
| 6 | PRSCH6 | PRS ch 6 triggers single sample |
| 7 | PRSCH7 | PRS ch 7 triggers single sample |

| | | | | |
|-------|----------|---|--|--|
| 27:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
|-------|----------|---|--|--|

| | | | | |
|----|-------|---|----|---|
| 24 | PRSEN | 0 | RW | Single Sample PRS Trigger Enable |
|----|-------|---|----|---|

Enabled/disable PRS trigger of single sample.

| Value | Description |
|-------|---|
| 0 | Single sample is not triggered by PRS input |
| 1 | Single sample is triggered by PRS input selected by PRSEL |

| | | | | |
|-------|----|-----|----|---------------------------------------|
| 23:20 | AT | 0x0 | RW | Single Sample Acquisition Time |
|-------|----|-----|----|---------------------------------------|

Select the acquisition time for single sample.

| Value | Mode | Description |
|-------|----------|--|
| 0 | 1CYCLE | 1 ADC_CLK cycle acquisition time for single sample |
| 1 | 2CYCLES | 2 ADC_CLK cycles acquisition time for single sample |
| 2 | 4CYCLES | 4 ADC_CLK cycles acquisition time for single sample |
| 3 | 8CYCLES | 8 ADC_CLK cycles acquisition time for single sample |
| 4 | 16CYCLES | 16 ADC_CLK cycles acquisition time for single sample |
| 5 | 32CYCLES | 32 ADC_CLK cycles acquisition time for single sample |
| 6 | 64CYCLES | 64 ADC_CLK cycles acquisition time for single sample |

| Bit | Name | Reset | Access | Description |
|-----|-------|-----------|--------|---|
| | Value | Mode | | Description |
| | 7 | 128CYCLES | | 128 ADC_CLK cycles acquisition time for single sample |
| | 8 | 256CYCLES | | 256 ADC_CLK cycles acquisition time for single sample |

19 *Reserved* To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)

18:16 REF 0x0 RW **Single Sample Reference Selection**

Select reference to ADC single sample mode.

| Value | Mode | Description |
|-------|-----------|--|
| 0 | 1V25 | Internal 1.25 V reference |
| 1 | 2V5 | Internal 2.5 V reference |
| 2 | VDD | Buffered VDD |
| 3 | 5VDIFF | Internal differential 5 V reference |
| 4 | EXTSINGLE | Single ended external reference from pin 6 |
| 5 | 2XEXTDIFF | Differential external reference, 2x(pin 6 - pin 7) |
| 6 | 2XVDD | Unbuffered 2xVDD |

15:12 *Reserved* To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)

11:8 INPUTSEL 0x0 RW **Single Sample Input Selection**

Select input to ADC single sample mode in either single ended mode or differential mode.

| DIFF = 0 | | |
|----------|-------|---|
| Mode | Value | Description |
| CH0 | 0 | ADCn_CH0 |
| CH1 | 1 | ADCn_CH1 |
| CH2 | 2 | ADCn_CH2 |
| CH3 | 3 | ADCn_CH3 |
| CH4 | 4 | ADCn_CH4 |
| CH5 | 5 | ADCn_CH5 |
| CH6 | 6 | ADCn_CH6 |
| CH7 | 7 | ADCn_CH7 |
| TEMP | 8 | Temperature reference |
| VDDDIV3 | 9 | VDD/3 |
| VDD | 10 | VDD |
| VSS | 11 | VSS |
| VREFDIV2 | 12 | VREF/2 |
| DAC0OUT0 | 13 | DAC0 output 0 |
| DAC0OUT1 | 14 | DAC0 output 1 |
| DIFF = 1 | | |
| Mode | Value | Description |
| CH0CH1 | 0 | Positive input: ADCn_CH0 Negative input: ADCn_CH1 |
| CH2CH3 | 1 | Positive input: ADCn_CH2 Negative input: ADCn_CH3 |
| CH4CH5 | 2 | Positive input: ADCn_CH4 Negative input: ADCn_CH5 |
| CH6CH7 | 3 | Positive input: ADCn_CH6 Negative input: ADCn_CH7 |
| DIFF0 | 4 | Differential 0 (Short between positive and negative inputs) |

7:6 *Reserved* To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)

5:4 RES 0x0 RW **Single Sample Resolution Select**

Select single sample conversion resolution.

| Value | Mode | Description |
|-------|-------|---|
| 0 | 12BIT | 12-bit resolution |
| 1 | 8BIT | 8-bit resolution |
| 2 | 6BIT | 6-bit resolution |
| 3 | OVS | Oversampling enabled. Oversampling rate is set in OVSRSEL |

3 *Reserved* To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)

| Bit | Name | Reset | Access | Description |
|--|-------|---|----------------------------|--|
| 2 | ADJ | 0 | RW | Single Sample Result Adjustment |
| Select single sample result adjustment. | | | | |
| | Value | Mode | Description | |
| | 0 | RIGHT | Results are right adjusted | |
| | 1 | LEFT | Results are left adjusted | |
| 1 | DIFF | 0 | RW | Single Sample Differential Mode |
| Select single ended or differential input. | | | | |
| | Value | Description | | |
| | 0 | Single ended input | | |
| | 1 | Differential input | | |
| 0 | REP | 0 | RW | Single Sample Repetitive Mode |
| Enable/disable repetitive single samples. | | | | |
| | Value | Description | | |
| | 0 | Single conversion mode is deactivated after one conversion | | |
| | 1 | Single conversion mode is converting continuously until SINGLESTOP is written | | |

24.5.5 ADCn_SCANCTRL - Scan Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|-------|-----|----|----|----|----|-------|----|-----|----|----|----|-----|----|----|-----------|----|----|------|----|----|---|---|---|-----|-----|----|---|-----|----|------|-----|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | 0x0 | | | | | 0 | | 0x0 | | | | 0x0 | | | | | | 0x00 | | | | | | | 0x0 | | | 0 | 0 | 0 | |
| Access | | | RW | | | | | RW | | RW | | | | RW | | | | | | RW | | | | | | | | RW | | | RW | RW | RW |
| Name | | PRSEL | | | | | | PRSEN | AT | | | | | REF | | | INPUTMASK | | | | | | | | | RES | | | | ADJ | | DIFF | REP |

| Bit | Name | Reset | Access | Description |
|---|----------|---|---------------------------------|---|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 30:28 | PRSEL | 0x0 | RW | Scan Sequence PRS Trigger Select |
| Select PRS trigger for scan sequence. | | | | |
| | Value | Mode | Description | |
| | 0 | PRSCH0 | PRS ch 0 triggers scan sequence | |
| | 1 | PRSCH1 | PRS ch 1 triggers scan sequence | |
| | 2 | PRSCH2 | PRS ch 2 triggers scan sequence | |
| | 3 | PRSCH3 | PRS ch 3 triggers scan sequence | |
| | 4 | PRSCH4 | PRS ch 4 triggers scan sequence | |
| | 5 | PRSCH5 | PRS ch 5 triggers scan sequence | |
| | 6 | PRSCH6 | PRS ch 6 triggers scan sequence | |
| | 7 | PRSCH7 | PRS ch 7 triggers scan sequence | |
| 27:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 24 | PRSEN | 0 | RW | Scan Sequence PRS Trigger Enable |
| Enabled/disable PRS trigger of scan sequence. | | | | |
| | Value | Description | | |
| | 0 | Scan sequence is not triggered by PRS input | | |
| | 1 | Scan sequence is triggered by PRS input selected by PRSEL | | |
| 23:20 | AT | 0x0 | RW | Scan Sample Acquisition Time |
| Select the acquisition time for scan samples. | | | | |

| Bit | Name | Reset | Access | Description |
|-------|--|-------------------|--|---|
| | Value | Mode | Description | |
| | 0 | 1CYCLE | 1 ADC_CLK cycle acquisition time for scan samples | |
| | 1 | 2CYCLES | 2 ADC_CLK cycles acquisition time for scan samples | |
| | 2 | 4CYCLES | 4 ADC_CLK cycles acquisition time for scan samples | |
| | 3 | 8CYCLES | 8 ADC_CLK cycles acquisition time for scan samples | |
| | 4 | 16CYCLES | 16 ADC_CLK cycles acquisition time for scan samples | |
| | 5 | 32CYCLES | 32 ADC_CLK cycles acquisition time for scan samples | |
| | 6 | 64CYCLES | 64 ADC_CLK cycles acquisition time for scan samples | |
| | 7 | 128CYCLES | 128 ADC_CLK cycles acquisition time for scan samples | |
| | 8 | 256CYCLES | 256 ADC_CLK cycles acquisition time for scan samples | |
| 19 | Reserved <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 18:16 | REF | 0x0 | RW | Scan Sequence Reference Selection Select reference to ADC scan sequence. |
| | Value | Mode | Description | |
| | 0 | 1V25 | Internal 1.25 V reference | |
| | 1 | 2V5 | Internal 2.5 V reference | |
| | 2 | VDD | VDD | |
| | 3 | 5VDIFF | Internal differential 5 V reference | |
| | 4 | EXTSINGLE | Single ended external reference from pin 6 | |
| | 5 | 2XEXTDIFF | Differential external reference, 2x(pin 6 - pin 7) | |
| | 6 | 2XVDD | Unbuffered 2xVDD | |
| 15:8 | INPUTMASK | 0x00 | RW | Scan Sequence Input Mask Set one or more bits in this mask to select which inputs are included the scan sequence in either single ended or differential mode. |
| | DIFF = 0 | | | |
| | Mode | Value | Description | |
| | CH0 | 00000001 | ADCn_CH0 included in mask | |
| | CH1 | 00000010 | ADCn_CH1 included in mask | |
| | CH2 | 00000100 | ADCn_CH2 included in mask | |
| | CH3 | 00001000 | ADCn_CH3 included in mask | |
| | CH4 | 00010000 | ADCn_CH4 included in mask | |
| | CH5 | 00100000 | ADCn_CH5 included in mask | |
| | CH6 | 01000000 | ADCn_CH6 included in mask | |
| | CH7 | 10000000 | ADCn_CH7 included in mask | |
| | DIFF = 1 | | | |
| | Mode | Value | Description | |
| | CH0CH1 | 00000001 | (Positive input: ADCn_CH0 Negative input: ADCn_CH1) included in mask | |
| | CH2CH3 | 00000010 | (Positive input: ADCn_CH2 Negative input: ADCn_CH3) included in mask | |
| | CH4CH5 | 00000100 | (Positive input: ADCn_CH4 Negative input: ADCn_CH5) included in mask | |
| | CH6CH7 | 00001000 | (Positive input: ADCn_CH6 Negative input: ADCn_CH7) included in mask | |
| | | 0001xxxx-1111xxxx | Reserved | |
| 7:6 | Reserved <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 5:4 | RES | 0x0 | RW | Scan Sequence Resolution Select Select scan sequence conversion resolution. |
| | Value | Mode | Description | |
| | 0 | 12BIT | 12-bit resolution | |
| | 1 | 8BIT | 8-bit resolution | |
| | 2 | 6BIT | 6-bit resolution | |
| | 3 | OVS | Oversampling enabled. Oversampling rate is set in OVSRSSEL | |
| 3 | Reserved <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|---|---|----------------------------|--------|--|-------|-------------|-------------|--|-------|---|---|------|---------------------------|
| 2 | ADJ | 0 | RW | Scan Sequence Result Adjustment Select scan sequence result adjustment. | | | | | | | | | |
| <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>RIGHT</td><td>Results are right adjusted</td></tr><tr><td>1</td><td>LEFT</td><td>Results are left adjusted</td></tr></table> | | | | | Value | Mode | Description | 0 | RIGHT | Results are right adjusted | 1 | LEFT | Results are left adjusted |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | RIGHT | Results are right adjusted | | | | | | | | | | | |
| 1 | LEFT | Results are left adjusted | | | | | | | | | | | |
| 1 | DIFF | 0 | RW | Scan Sequence Differential Mode Select single ended or differential input. | | | | | | | | | |
| <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Single ended input</td></tr><tr><td>1</td><td>Differential input</td></tr></table> | | | | | Value | Description | 0 | Single ended input | 1 | Differential input | | | |
| Value | Description | | | | | | | | | | | | |
| 0 | Single ended input | | | | | | | | | | | | |
| 1 | Differential input | | | | | | | | | | | | |
| 0 | REP | 0 | RW | Scan Sequence Repetitive Mode Enable/disable repetitive scan sequence. | | | | | | | | | |
| <table><tr><td>Value</td><td>Description</td></tr><tr><td>0</td><td>Scan conversion mode is deactivated after one sequence</td></tr><tr><td>1</td><td>Scan conversion mode is converting continuously until SCANSTOP is written</td></tr></table> | | | | | Value | Description | 0 | Scan conversion mode is deactivated after one sequence | 1 | Scan conversion mode is converting continuously until SCANSTOP is written | | | |
| Value | Description | | | | | | | | | | | | |
| 0 | Scan conversion mode is deactivated after one sequence | | | | | | | | | | | | |
| 1 | Scan conversion mode is converting continuously until SCANSTOP is written | | | | | | | | | | | | |

24.5.6 ADCn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | |
|---------------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 |
| Reset | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 9 | SCANOF | 0 | RW | Scan Result Overflow Interrupt Enable Enable/disable scan result overflow interrupt. |
| 8 | SINGLEOF | 0 | RW | Single Result Overflow Interrupt Enable Enable/disable single result overflow interrupt. |
| 7:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | SCAN | 0 | RW | Scan Conversion Complete Interrupt Enable Enable/disable scan conversion complete interrupt. |
| 0 | SINGLE | 0 | RW | Single Conversion Complete Interrupt Enable Enable/disable single conversion complete interrupt. |

24.5.7 ADCn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|---|----------|---|---|---|---|---|---|---|--|--|--|--|------|---|--------|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 0 | | | | | | | | | | | R | 0 | R | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | R | | R | | | | | | | | | | | | R | | R | |
| Name | | | | | | | | | | | | | | | | | | | | | | | SCANOF | | SINGLEOF | | | | | | | | | | | | SCAN | | SINGLE | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 9 | SCANOF | 0 | R | Scan Result Overflow Interrupt Flag Indicates scan result overflow when this bit is set. |
| 8 | SINGLEOF | 0 | R | Single Result Overflow Interrupt Flag Indicates single result overflow when this bit is set. |
| 7:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | SCAN | 0 | R | Scan Conversion Complete Interrupt Flag Indicates scan conversion complete when this bit is set. |
| 0 | SINGLE | 0 | R | Single Conversion Complete Interrupt Flag Indicates single conversion complete when this bit is set. |

24.5.8 ADCn_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----------|---|---|---|---|---|---|---|---|--|--|------|--------|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | | | | | | | | | | | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | SCANOF | SINGLEOF | | | | | | | | | | | SCAN | SINGLE |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 9 | SCANOF | 0 | W1 | Scan Result Overflow Interrupt Flag Set Write to 1 to set scan result overflow interrupt flag |
| 8 | SINGLEOF | 0 | W1 | Single Result Overflow Interrupt Flag Set Write to 1 to set single result overflow interrupt flag. |
| 7:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | SCAN | 0 | W1 | Scan Conversion Complete Interrupt Flag Set Write to 1 to set scan conversion complete interrupt flag. |
| 0 | SINGLE | 0 | W1 | Single Conversion Complete Interrupt Flag Set Write to 1 to set single conversion complete interrupt flag. |

24.5.9 ADCn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----------|---|---|---|---|---|---|------|--------|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | | | | | | | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | SCANOF | SINGLEOF | | | | | | | SCAN | SINGLE |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 9 | SCANOF | 0 | W1 | Scan Result Overflow Interrupt Flag Clear Write to 1 to clear scan result overflow interrupt flag. |
| 8 | SINGLEOF | 0 | W1 | Single Result Overflow Interrupt Flag Clear Write to 1 to clear single result overflow interrupt flag. |
| 7:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | SCAN | 0 | W1 | Scan Conversion Complete Interrupt Flag Clear Write to 1 to clear scan conversion complete interrupt flag. |
| 0 | SINGLE | 0 | W1 | Single Conversion Complete Interrupt Flag Clear Write to 1 to clear single conversion complete interrupt flag. |

24.5.10 ADCn_SINGLEDATA - Single Conversion Result Data

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | DATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|------|------------|--------|---|
| 31:0 | DATA | 0x00000000 | R | Single Conversion Result Data The register holds the results from the last single conversion. Reading this field clears the SINGLEDV bit in the ADCn_STATUS register. |

24.5.11 ADCn_SCANDATA - Scan Conversion Result Data

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | DATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|------|------------|--------|---|
| 31:0 | DATA | 0x00000000 | R | Scan Conversion Result Data The register holds the results from the last scan conversion. Reading this field clears the SCANDV bit in the ADCn_STATUS register. |

24.5.12 ADCn_SINGLEDATAP - Single Conversion Result Data Peek Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | DATAP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------|------------|--------|---|
| 31:0 | DATAP | 0x00000000 | R | Single Conversion Result Data Peek The register holds the results from the last single conversion. Reading this field will not clear SINGLEDV in ADCn_STATUS or SINGLE DMA request. |

24.5.13 ADCn_SCANDATAP - Scan Sequence Result Data Peek Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | DATAP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------|------------|--------|---|
| 31:0 | DATAP | 0x00000000 | R | Scan Conversion Result Data Peek The register holds the results from the last scan conversion. Reading this field will not clear SCANDV in ADCn_STATUS or single DMA request. |

24.5.14 ADCn_CAL - Calibration Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----------|----|----|----|----|----|----|----|------------|----|----|----|----|----|----|----|------------|----|----|----|----|---|---|---|--------------|---|---|---|---|---|---|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | 0x3F | | | | | | | | 0x00 | | | | | | | | 0x3F | | | | | | | | 0x00 | | | | | | |
| Access | | RW | | | | | | | | RW | | | | | | | | RW | | | | | | | | RW | | | | | | |
| Name | | SCANGAIN | | | | | | | | SCANOFFSET | | | | | | | | SINGLEGAIN | | | | | | | | SINGLEOFFSET | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|--------------|---|--------|--|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 30:24 | SCANGAIN | 0x3F | RW | Scan Mode Gain Calibration Value This register contains the gain calibration value used with scan conversions. This field is set to the production gain calibration value for the 1V25 internal reference during reset, hence the reset value might differ from device to device. The field is unsigned. Higher values lead to higher ADC results. |
| 23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 22:16 | SCANOFFSET | 0x00 | RW | Scan Mode Offset Calibration Value This register contains the offset calibration value used with scan conversions. This field is set to the production offset calibration value for the 1V25 internal reference during reset, hence the reset value might differ from device to device. The field is encoded as a signed 2's complement number. Higher values lead to lower ADC results. |
| 15 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 14:8 | SINGLEGAIN | 0x3F | RW | Single Mode Gain Calibration Value This register contains the gain calibration value used with single conversions. This field is set to the production gain calibration value for the 1V25 internal reference during reset, hence the reset value might differ from device to device. The field is unsigned. Higher values lead to higher ADC results. |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6:0 | SINGLEOFFSET | 0x00 | RW | Single Mode Offset Calibration Value |



| Bit | Name | Reset | Access | Description |
|---|------|-------|--------|-------------|
| This register contains the offset calibration value used with single conversions. This field is set to the production offset calibration value for the 1V25 internal reference during reset, hence the reset value might differ from device to device. The field is encoded as a signed 2's complement number. Higher values lead to lower ADC results. | | | | |

24.5.15 ADCn_BIASPROG - Bias Programming Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|---|---|---|----------|---|---|---|----------|---|---|--|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0x7 | | | | | 1 | | | | 0x7 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | RW | | | | | RW | | | | RW | | | |
| Name | | | | | | | | | | | | | | | | | | | | | COMPBIAS | | | | | HALFBIAS | | | | BIASPROG | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 11:8 | COMPBIAS | 0x7 | RW | Comparator Bias Value These bits are used to adjust the bias current to the ADC Comparator. |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | HALFBIAS | 1 | RW | Half Bias Current Set this bit to halve the bias current. |
| 5:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:0 | BIASPROG | 0x7 | RW | Bias Programming Value These bits are used to adjust the bias current. |

25 DAC - Digital to Analog Converter

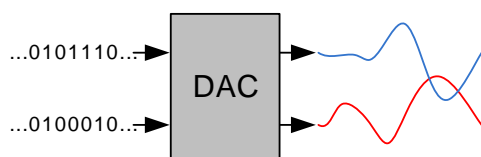

Quick Facts

What?

The DAC is designed for low energy consumption, but can also provide very good performance. It can convert digital values to analog signals at up to 500 kilo samples/second and with 12-bit accuracy.

Why?

The DAC is able to generate accurate analog signals using only a limited amount of energy.

How?

The DAC can generate high-resolution analog signals while the MCU is operating at low frequencies and with low total power consumption. Using DMA and a timer, the DAC can be used to generate waveforms without any CPU intervention.

25.1 Introduction

The Digital to Analog Converter (DAC) can convert a digital value to an analog output voltage. The DAC is fully differential rail-to-rail, with 12-bit resolution. It has two single ended output buffers which can be combined into one differential output. The DAC may be used for a number of different applications such as sensor interfaces or sound output.

25.2 Features


- 500 ksamples/s operation
- Two single ended output channels
 - Can be combined into one differential output
- Integrated prescaler with division factor selectable between 1-128
- Selectable voltage reference
 - Internal 2.5V
 - Internal 1.25V
 - V_{DD}
- Conversion triggers
 - Data write
 - PRS input
- Automatic refresh timer
 - Selection from 16-64 prescaled HFPERCLK cycles
 - Individual refresh enable for each channel
- Interrupt generation on finished conversion
 - Separate interrupt flag for each channel
- PRS output pulse on finished conversion
 - Separate line for each channel
- DMA request on finished conversion
 - Separate request for each channel
- Support for offset and gain calibration

- Output to ADC
- Sine generation mode
- Optional high strength line driver

25.3 Functional Description

An overview of the DAC module is shown in Figure 25.1 (p. 422) .

Figure 25.1. DAC Overview

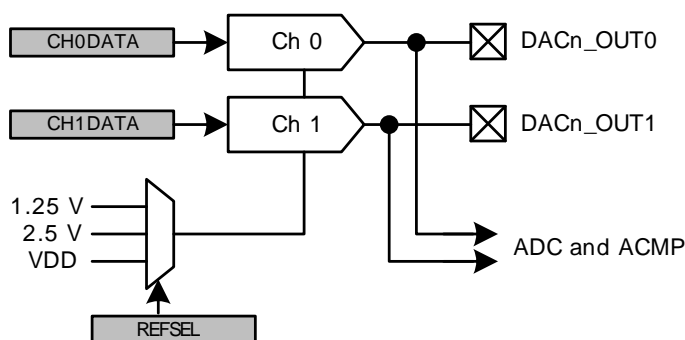

25.3.1 Conversions

The DAC consists of two channels (Channel 0 and 1) with separate 12-bit data registers (DACn_CH0DATA and DACn_CH1DATA). These can be used to produce two independent single ended outputs or the channel 0 register can be used to drive both outputs in differential mode. The DAC supports three conversion modes, continuous, sample/hold, sample/off.

25.3.1.1 Continuous Mode

In continuous mode the DAC channels will drive their outputs continuously with the data in the DACn_CHxDATA registers. This mode will maintain the output voltage and refresh is therefore not needed.

25.3.1.2 Sample/Hold Mode

In sample/hold mode, the DAC core converts data on a triggered conversion and then holds the output in a sample/hold element. When not converting, the DAC core is turned off between samples, which reduces the power consumption. Because of output voltage drift the sample/hold element will only hold the output for a certain period without a refresh conversion. The reader is referred to the electrical characteristics for the details on the voltage drift. The sampling period in this mode is set to the length of one prescaled clock cycle.

25.3.1.3 Sample/Off Mode

In sample/off mode the DAC and the sample/hold element is turned completely off between samples, tri-stating the DAC output. This requires the DAC output voltage to be held externally. The references are also turned off between samples, which means that a new warm-up period is needed before each conversion. The sampling period in this mode is set to the length of one prescaled clock cycle.

25.3.1.4 Conversion Start

The DAC channel must be enabled before it can be used. When the channel is enabled, a conversion can be started by writing to the DACn_CHxDATA register. These data registers are also mapped into

a combined data register, DACn_COMBDATA, where the data values for both channels can be written simultaneously. Writing to this register will start all enabled channels.

If the PRSEN bit in DACn_CHxCTRL is set, a DAC conversion on channel x will not be started by data write, but when a positive one HFPERCLK cycle pulse is received on the PRS input selected by PRSSEL in DACn_CHxCTRL.

The CH0DV and CH1DV bits in DACn_STATUS indicate that the corresponding channel contains data that has not yet been converted.

When entering Energy Mode 4, both DAC channels must be stopped.

25.3.1.5 Clock Prescaling

The DAC has an internal clock prescaler, which can divide the HFPERCLK by any factor between 1 and 128, by setting the PRESC bits in DACnCTRL. The resulting DAC_CLK is used by the converter core and the frequency is given by Equation 25.1 (p. 423) :

DAC Clock Prescaling

$$f_{\text{DAC_CLK}} = f_{\text{HFPERCLK}} / 2^{\text{PRESC}} \quad (25.1)$$

where f_{HFPERCLK} is the HFPERCLK frequency. One conversion takes 2 DAC_CLK cycles and the DAC_CLK should not be set higher than 1 MHz.

Normally the PRESCALER runs continuously when either of the channels are enabled. When running with a prescaler setting higher than 0, there will be an unpredictable delay from the time the conversion was triggered to the time the actual conversion takes place. This is because the conversions is controlled by the prescaled clock and the conversion can arrive at any time during a prescaled clock (DAC_CLK) period. However, if the CH0PRESCRST bit in DACn_CTRL is set, the prescaler will be reset every time a conversion is triggered on channel 0. This leads to a predictable latency between channel 0 trigger and conversion.

25.3.2 Reference Selection


Three internal voltage references are available and are selected by setting the REFSEL bits in DACn_CTRL:

- Internal 2.5V
- Internal 1.25V
- V_{DD}

The reference selection can only be changed while both channels are disabled. The references for the DAC need to be enabled for some time before they can be used. This is called the warm-up period, and starts when one of the channels is enabled. For a bandgap reference, this period is 5 DAC_CLK cycles while the V_{DD} reference needs 1 DAC_CLK cycle. The DAC will time this period automatically (given that the prescaler is set correctly) and delay any conversion triggers received during the warm-up until the references have stabilized.

25.3.3 Programming of Bias Current

The bias current of the bandgap reference and the DAC output buffer can be scaled by the BIASPROG and HALFBIAS bit fields of the DACn_BIASPROG register as illustrated in Figure 25.2 (p. 424) .

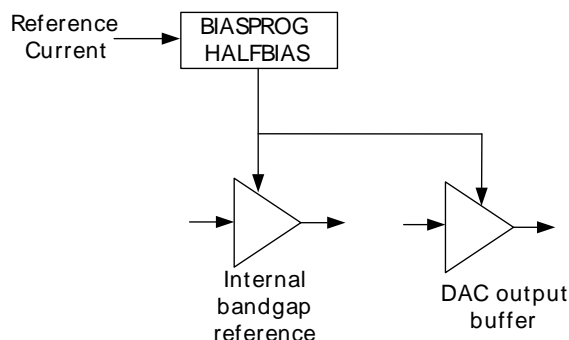Figure 25.2. DAC Bias Programming

The minimum value of the BIASPROG bit-field of the DACn_BIASPROG register (i.e. BIASPROG=0b0000) represents the minimum bias current. Similarly BIASPROG=0b1111 represents the maximum bias current. The bias current defined by the BIASPROG setting can be halved by setting the HALFBIAS bit of the DACn_BIASPROG register.

The bias current settings should only be changed while both DAC channels are disabled. The electrical characteristics given in the datasheet require the bias configuration to be set to the default values, where no other bias values are given.

25.3.4 Mode

The two DAC channels can act as two separate single ended channels or be combined into one differential channel. This is selected through the DIFF bit in DACn_CTRL.

25.3.4.1 Single Ended Output

When operating in single ended mode, the channel 0 output is on DACn_OUT0 and the channel 1 output is on DACn_OUT1. The output voltage can be calculated using Equation 25.2 (p. 424)

DAC Single Ended Output Voltage

$$V_{OUT} = V_{DACn_OUTx} - V_{SS} = V_{ref} \times CHxDATA/4095 \quad (25.2)$$

where CHxDATA is a 12-bit unsigned integer.

25.3.4.2 Differential Output

When operating in differential mode, both DAC outputs are used as output for the bipolar voltage. The differential conversion uses DACn_CH0DATA as source. The positive output is on DACn_OUT1 and the negative output is on DACn_OUT0. Since the output can be negative, it is expected that the data is written in 2's complement form with the MSB of the 12-bit value being the signed bit. The output voltage can be calculated using Equation 25.3 (p. 424) :

DAC Differential Output Voltage

$$V_{OUT} = V_{DACn_OUT1} - V_{DACn_OUT0} = V_{ref} \times CH0DATA/2047 \quad (25.3)$$

where CH0DATA is a 12-bit signed integer. The common mode voltage is $V_{DD}/2$.

25.3.5 Sine Generation Mode

The DAC contains an automatic sine-generation mode, which is enabled by setting the SINEMODE bit in DACn_CTRL. In this mode, the DAC data is overridden with a conversion data taken from a sine lookup


table. The sine signal is controlled by the PRS line selected by CH0PRSEL in DACn_CH0CTRL. When the PRS line is low, a voltage of $V_{ref}/2$ will be produced. When the line is high, a sine wave will be produced. Each period, starting at 0 degrees, is made up of 16 samples and the frequency is given by Equation 25.4 (p. 425) :

DAC Sine Generation

$$f_{\text{sine}} = f_{\text{HFPERCLK}} / 32 \times (\text{PRESC} + 1) \quad (25.4)$$

The SINE wave will be output on channel 0. If DIFF is set in DACn_CTRL, the sine wave will be output on both channels (if enabled), but inverted (see Figure 25.1 (p. 422)). Note that when OUTENPRS in DACn_CTRL is set, the sine output will be reset to 0 degrees when the PRS line selected by CH1PRSEL is low.

Figure 25.3. DAC Sine Mode

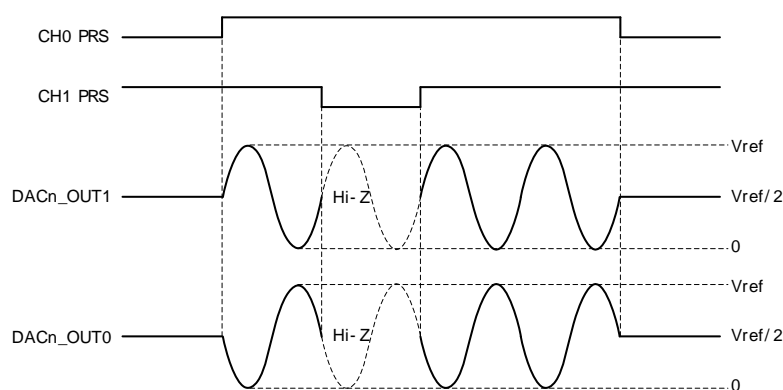

25.3.6 Interrupts and PRS Output

Both DAC channels have separate interrupt flags (in DACn_IF) indicating that a conversion has finished on the channel and that new data can be written to the data registers. Setting one of these flags will result in a DAC interrupt if the corresponding interrupt enable bit is set in DACn_IEN. All generated interrupts from the DAC will activate the same interrupt vector when enabled.

The DAC has two PRS outputs which will carry a one cycle (HFPERCLK) high pulse when the corresponding channel has finished a conversion.

25.3.7 DMA Request

The DAC sends out a DMA request when a conversion on a channel is complete. This request is cleared when the corresponding channel's data register is written.

25.3.8 Analog Output

Each DAC channel has its own output pin (DACn_OUT0 and DACn_OUT1) in addition to an internal loopback to the ADC and ACMP. These outputs can be enabled and disabled individually in the EN field in DACn_CHxCTRL registers in combination with OUTPUTSEL in DACn_CTRL. The DAC outputs can also be directed to the ADC and ACMP, which is also configurable in the OUTPUTSEL field in DACn_CTRL.

The DAC outputs are tri-stated when the channels are not enabled. By setting the OUTENPRS bit in DACn_CTRL, the outputs are also tri-stated when the PRS line selected by CH1PRSEL in DACn_CH1CTRL is low. When the PRS signal is high, the outputs are enabled as normal.

The DAC channels can also drive an alternative output network, which is described in the Opamp chapter in Section 26.3.1.2 (p. 444) . To enable this network, OUTMODE must be configured to ADC in DACn_CTRL. The actual output network can be configured by configuring DACn_OPAMUX registers.

25.3.9 Calibration

The DAC contains a calibration register, DACn_CAL, where calibration values for both offset and gain correction can be written. Offset calibration is done separately for each channel through the CHxOFFSET bit-fields. Gain is calibrated in one common register field, GAIN. The gain calibration is linked to the reference and when the reference is changed, the gain must be re-calibrated. Gain and offset for the 1V25, 2V5 and VDD references are calibrated during production and the calibration values for these can be found in the Device Information page. During reset, the gain and offset calibration registers are loaded with the production calibration values for the 1V25 reference.

25.3.10 Opamps

The DAC includes a set of three highly configurable opamps that can be accessed in the DAC module. Two of the opamps are located in the DAC, while the third opamp is a standalone opamp. For detailed description see the OPAMP chapter. The register description can be found Section 25.5 (p. 427)

25.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|----------------|------|--|
| 0x000 | DACn_CTRL | RW | Control Register |
| 0x004 | DACn_STATUS | R | Status Register |
| 0x008 | DACn_CH0CTRL | RW | Channel 0 Control Register |
| 0x00C | DACn_CH1CTRL | RW | Channel 1 Control Register |
| 0x010 | DACn_IEN | RW | Interrupt Enable Register |
| 0x014 | DACn_IF | R | Interrupt Flag Register |
| 0x018 | DACn_IFS | W1 | Interrupt Flag Set Register |
| 0x01C | DACn_IFC | W1 | Interrupt Flag Clear Register |
| 0x020 | DACn_CH0DATA | RW | Channel 0 Data Register |
| 0x024 | DACn_CH1DATA | RW | Channel 1 Data Register |
| 0x028 | DACn_COMBDATA | W | Combined Data Register |
| 0x02C | DACn_CAL | RW | Calibration Register |
| 0x030 | DACn_BIASPROG | RW | Bias Programming Register |
| 0x054 | DACn_OPACtrl | RW | Operational Amplifier Control Register |
| 0x058 | DACn_OPAOFFSET | RW | Operational Amplifier Offset Register |
| 0x05C | DACn_OPA0MUX | RW | Operational Amplifier Mux Configuration Register |
| 0x060 | DACn_OPA1MUX | RW | Operational Amplifier Mux Configuration Register |
| 0x064 | DACn_OPA2MUX | RW | Operational Amplifier Mux Configuration Register |

25.5 Register Description

25.5.1 DACn_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|---------|----|----|-------|----|----|----|----|----|----|----|---|-----|---|---|---|-----|---|-----|---|----|---|----|--------|----|-------------|----|----------|----|---------|----|----------|---|----------|---|------|--|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | |
| Reset | | | | | | | | | | | | 0x0 | | | | | | | | | | | | 0x0 | | 0 | 0 | 0x1 | | 0x0 | | 0 | 0 | 0 | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | RW | | | | | | | | | | | | RW | | | | | | | | RW | | RW | | RW | | RW | | RW | | RW | | 0 | 0 | 0 | | |
| Name | | | | | | | | | | | | REFRSEL | | | PRESC | | | | | | | | | | | | | | | | | | | | REFSEL | | CHOPRESCRST | | OUTENPRS | | OUTMODE | | CONVMODE | | SINEMODE | | DIFF | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:22 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

21:20 REFRSEL 0x0 RW **Refresh Interval Select**

Select refresh counter timeout value. A channel x will be refreshed with the interval set in this register if the REFREN bit in DACn_CHxCTRL is set.

| Value | Mode | Description |
|-------|----------|---|
| 0 | 8CYCLES | All channels with enabled refresh are refreshed every 8 prescaled cycles |
| 1 | 16CYCLES | All channels with enabled refresh are refreshed every 16 prescaled cycles |
| 2 | 32CYCLES | All channels with enabled refresh are refreshed every 32 prescaled cycles |

| Bit | Name | Reset | Access | Description |
|-------|---|--|--------|---|
| | Value | Mode | | Description |
| | 3 | 64CYCLES | | All channels with enabled refresh are refreshed every 64 prescaled cycles |
| 19 | <i>Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 18:16 | PRES | 0x0 | RW | Prescaler Setting |
| | Select clock division factor. | | | |
| | Value | Mode | | Description |
| | PRES | | | Clock division factor of 2 ^{PRES} . |
| 15:10 | <i>Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 9:8 | REFSEL | 0x0 | RW | Reference Selection |
| | Select reference. | | | |
| | Value | Mode | | Description |
| | 0 | 1V25 | | Internal 1.25 V bandgap reference |
| | 1 | 2V5 | | Internal 2.5 V bandgap reference |
| | 2 | VDD | | VDD reference |
| 7 | CH0PRESCRST | 0 | RW | Channel 0 Start Reset Prescaler |
| | Select if prescaler is reset on channel 0 start. | | | |
| | Value | Description | | |
| | 0 | Prescaler not reset on channel 0 start | | |
| | 1 | Prescaler reset on channel 0 start | | |
| 6 | OUTENPRS | 0 | RW | PRS Controlled Output Enable |
| | Enable PRS Control of DAC output enable. | | | |
| | Value | Description | | |
| | 0 | DAC output enable always on | | |
| | 1 | DAC output enable controlled by PRS signal selected for CH1. | | |
| 5:4 | OUTMODE | 0x1 | RW | Output Mode |
| | Select output mode. | | | |
| | Value | Mode | | Description |
| | 0 | DISABLE | | DAC output to pin and ADC disabled |
| | 1 | PIN | | DAC output to pin enabled. DAC output to ADC and ACMP disabled |
| | 2 | ADC | | DAC output to pin disabled. DAC output to ADC and ACMP enabled |
| | 3 | PINADC | | DAC output to pin, ADC, and ACMP enabled |
| 3:2 | CONVMODE | 0x0 | RW | Conversion Mode |
| | Configure conversion mode. | | | |
| | Value | Mode | | Description |
| | 0 | CONTINUOUS | | DAC is set in continuous mode |
| | 1 | SAMPLEHOLD | | DAC is set in sample/hold mode |
| | 2 | SAMPLEOFF | | DAC is set in sample/shut off mode |
| 1 | SINEMODE | 0 | RW | Sine Mode |
| | Enable/disable sine mode. | | | |
| | Value | Description | | |
| | 0 | Sine mode disabled. Sine reset to 0 degrees | | |
| | 1 | Sine mode enabled | | |
| 0 | DIFF | 0 | RW | Differential Mode |
| | Select single ended or differential mode. | | | |
| | Value | Description | | |
| | 0 | Single ended output | | |
| | 1 | Differential output | | |

25.5.2 DACn_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-------|-------|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | CH1DV | CH0DV |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | CH1DV | 0 | R | Channel 1 Data Valid This bit is set high when CH1DATA is written and is set low when CH1DATA is used in conversion. |
| 0 | CH0DV | 0 | R | Channel 0 Data Valid This bit is set high when CH0DATA is written and is set low when CH0DATA is used in conversion. |

25.5.3 DACn_CH0CTRL - Channel 0 Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|-------|---|---|-------|--------|----|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | 0 | 0 | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | RW | RW | RW | 0 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PRSEL | | | PRSEN | REFREN | EN | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|--------|---|-------|-------------|-------------|---|--------|---|---|--------|---|---|--------|---|---|--------|---|---|--------|---|---|--------|---|---|--------|---|---|--------|---|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6:4 | PRSEL | 0x0 | RW | Channel 0 PRS Trigger Select Select Channel 0 PRS input channel. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PRSCH0</td><td>PRS ch 0 triggers channel 0 conversion.</td></tr><tr><td>1</td><td>PRSCH1</td><td>PRS ch 1 triggers channel 0 conversion.</td></tr><tr><td>2</td><td>PRSCH2</td><td>PRS ch 2 triggers channel 0 conversion.</td></tr><tr><td>3</td><td>PRSCH3</td><td>PRS ch 3 triggers channel 0 conversion.</td></tr><tr><td>4</td><td>PRSCH4</td><td>PRS ch 4 triggers channel 0 conversion.</td></tr><tr><td>5</td><td>PRSCH5</td><td>PRS ch 5 triggers channel 0 conversion.</td></tr><tr><td>6</td><td>PRSCH6</td><td>PRS ch 6 triggers channel 0 conversion.</td></tr><tr><td>7</td><td>PRSCH7</td><td>PRS ch 7 triggers channel 0 conversion.</td></tr></table> | | | | | Value | Mode | Description | 0 | PRSCH0 | PRS ch 0 triggers channel 0 conversion. | 1 | PRSCH1 | PRS ch 1 triggers channel 0 conversion. | 2 | PRSCH2 | PRS ch 2 triggers channel 0 conversion. | 3 | PRSCH3 | PRS ch 3 triggers channel 0 conversion. | 4 | PRSCH4 | PRS ch 4 triggers channel 0 conversion. | 5 | PRSCH5 | PRS ch 5 triggers channel 0 conversion. | 6 | PRSCH6 | PRS ch 6 triggers channel 0 conversion. | 7 | PRSCH7 | PRS ch 7 triggers channel 0 conversion. |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PRSCH0 | PRS ch 0 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PRSCH1 | PRS ch 1 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PRSCH2 | PRS ch 2 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PRSCH3 | PRS ch 3 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PRSCH4 | PRS ch 4 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PRSCH5 | PRS ch 5 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | PRSCH6 | PRS ch 6 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | PRSCH7 | PRS ch 7 triggers channel 0 conversion. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PRSEN | 0 | RW | Channel 0 PRS Trigger Enable Select Channel 0 conversion trigger. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><th>Value</th><th>Description</th></tr><tr><td>0</td><td>Channel 0 is triggered by CH0DATA or COMBDATA write</td></tr><tr><td>1</td><td>Channel 0 is triggered by PRS input</td></tr></table> | | | | | Value | Description | 0 | Channel 0 is triggered by CH0DATA or COMBDATA write | 1 | Channel 0 is triggered by PRS input | | | | | | | | | | | | | | | | | | | | | |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | Channel 0 is triggered by CH0DATA or COMBDATA write | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Channel 0 is triggered by PRS input | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|--------|--|--------|---|
| 1 | REFREN | 0 | RW | Channel 0 Automatic Refresh Enable Set to enable automatic refresh of channel 0. Refresh period is set by REFRSEL in DACn_CTRL. |
| Value | | Description | | |
| 0 | | Channel 0 is not refreshed automatically | | |
| 1 | | Channel 0 is refreshed automatically | | |
| 0 | EN | 0 | RW | Channel 0 Enable Enable/disable channel 0. |

25.5.4 DACn_CH1CTRL - Channel 1 Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|--------|---|---|---|-------|---|--------|---|----|--|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | 0 | | 0 | | 0 | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | RW | | RW | | RW | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | PRSSEL | | | | PRSEN | | REFREN | | EN | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6:4 | PRSSEL | 0x0 | RW | Channel 1 PRS Trigger Select Select Channel 1 PRS input channel. |
| Value | | Mode | | Description |
| 0 | | PRSCH0 | | PRS ch 0 triggers channel 1 conversion. |
| 1 | | PRSCH1 | | PRS ch 1 triggers channel 1 conversion. |
| 2 | | PRSCH2 | | PRS ch 2 triggers channel 1 conversion. |
| 3 | | PRSCH3 | | PRS ch 3 triggers channel 1 conversion. |
| 4 | | PRSCH4 | | PRS ch 4 triggers channel 1 conversion. |
| 5 | | PRSCH5 | | PRS ch 5 triggers channel 1 conversion. |
| 6 | | PRSCH6 | | PRS ch 6 triggers channel 1 conversion. |
| 7 | | PRSCH7 | | PRS ch 7 triggers channel 1 conversion. |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | PRSEN | 0 | RW | Channel 1 PRS Trigger Enable Select Channel 1 conversion trigger. |
| Value | | Description | | |
| 0 | | Channel 1 is triggered by CH1DATA or COMBDATA write | | |
| 1 | | Channel 1 is triggered by PRS input | | |
| 1 | REFREN | 0 | RW | Channel 1 Automatic Refresh Enable Set to enable automatic refresh of channel 1. Refresh period is set by REFRSEL in DACn_CTRL. |
| Value | | Description | | |
| 0 | | Channel 1 is not refreshed automatically | | |
| 1 | | Channel 1 is refreshed automatically | | |
| 0 | EN | 0 | RW | Channel 1 Enable Enable/disable channel 1. |

25.5.5 DACn_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|-------|---|-------|---|---|---|-----|--|-----|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | | 0 | | | | 0 | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | RW | | RW | | 0 | | RW | | 0 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | CH1UF | | CH0UF | | | | CH1 | | CH0 |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | CH1UF | 0 | RW | Channel 1 Conversion Data Underflow Interrupt Enable Enable/disable channel 1 data underflow interrupt. |
| 4 | CH0UF | 0 | RW | Channel 0 Conversion Data Underflow Interrupt Enable Enable/disable channel 0 data underflow interrupt. |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | CH1 | 0 | RW | Channel 1 Conversion Complete Interrupt Enable Enable/disable channel 1 conversion complete interrupt. |
| 0 | CH0 | 0 | RW | Channel 0 Conversion Complete Interrupt Enable Enable/disable channel 0 conversion complete interrupt. |

25.5.6 DACn_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------|-------|---|---|-----|-----|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 5 | 0 | 4 | | | 0 | 1 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | R | 0 | R | 0 | | | R | 0 | R | 0 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH1UF | CH0UF | | | CH1 | CH0 | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | CH1UF | 0 | R | Channel 1 Data Underflow Interrupt Flag Indicates channel 1 data underflow. |
| 4 | CH0UF | 0 | R | Channel 0 Data Underflow Interrupt Flag Indicates channel 0 data underflow. |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | CH1 | 0 | R | Channel 1 Conversion Complete Interrupt Flag Indicates channel 1 conversion complete and that new data can be written to the data register. |
| 0 | CH0 | 0 | R | Channel 0 Conversion Complete Interrupt Flag Indicates channel 0 conversion complete and that new data can be written to the data register. |

25.5.7 DACn_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------|-------|----|---|-----|-----|----|----|---|--|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | | 0 | 0 | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | W1 | 0 | | | W1 | W1 | 0 | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH1UF | CH0UF | | | CH1 | CH0 | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | CH1UF | 0 | W1 | Channel 1 Data Underflow Interrupt Flag Set Write to 1 to set channel 1 Data Underflow interrupt flag. |
| 4 | CH0UF | 0 | W1 | Channel 0 Data Underflow Interrupt Flag Set Write to 1 to set channel 0 Data Underflow interrupt flag. |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | CH1 | 0 | W1 | Channel 1 Conversion Complete Interrupt Flag Set Write to 1 to set channel 1 conversion complete interrupt flag. |
| 0 | CH0 | 0 | W1 | Channel 0 Conversion Complete Interrupt Flag Set Write to 1 to set channel 0 conversion complete interrupt flag. |

25.5.8 DACn_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------|-------|---|---|-----|-----|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | | | 0 | 0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 | | | W1 | W1 | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | CH1UF | CH0UF | | | CH1 | CH0 | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5 | CH1UF | 0 | W1 | Channel 1 Data Underflow Interrupt Flag Clear Write to 1 to clear channel 1 data underflow interrupt flag. |
| 4 | CH0UF | 0 | W1 | Channel 0 Data Underflow Interrupt Flag Clear Write to 1 to clear channel 0 data underflow interrupt flag. |
| 3:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | CH1 | 0 | W1 | Channel 1 Conversion Complete Interrupt Flag Clear Write to 1 to clear channel 1 conversion complete interrupt flag. |
| 0 | CH0 | 0 | W1 | Channel 0 Conversion Complete Interrupt Flag Clear Write to 1 to clear channel 0 conversion complete interrupt flag. |

25.5.9 DACn_CH0DATA - Channel 0 Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0x000 | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | DATA | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 11:0 | DATA | 0x000 | RW | Channel 0 Data This register contains the value which will be converted by channel 0. |

25.5.10 DACn_CH1DATA - Channel 1 Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|----|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | | | | | | | | | | | | | | | | | 0x000 | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | DATA | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 11:0 | DATA | 0x000 | RW | Channel 1 Data This register contains the value which will be converted by channel 1. |

25.5.11 DACn_COMBDATA - Combined Data Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|---|---|---|---|---|---|---|---|---|---|--|--|--|--|--|--|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | |
| Reset | | | | | 0x000 | | | | | | | | | | | | | | | | 0x000 | | | | | | | | | | | | | | | | | |
| Access | | | | | W | | | | | | | | | | | | | | | | W | | | | | | | | | | | | | | | | | |
| Name | | | | | CH1DATA | | | | | | | | | | | | | | | | CH0DATA | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:28 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 27:16 | CH1DATA | 0x000 | W | Channel 1 Data Data written to this register will be written to DATA in DACn_CH1DATA. |
| 15:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 11:0 | CH0DATA | 0x000 | W | Channel 0 Data Data written to this register will be written to DATA in DACn_CH0DATA. |

25.5.12 DACn_CAL - Calibration Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|------|----|----|----|----|----|----|----|----|-----------|----|----|----|---|---|---|---|---|-----------|---|---|---|---|--|--|
| 0x02C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| Reset | | | | | | | | | | 0x40 | | | | | | | | | 0x00 | | | | | | | | | 0x00 | | | | | | |
| Access | | | | | | | | | | RW | | | | | | | | | RW | | | | | | | | | RW | | | | | | |
| Name | | | | | | | | | | GAIN | | | | | | | | | CH1OFFSET | | | | | | | | | CH0OFFSET | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|-----------|---|--------|--|
| 31:23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 22:16 | GAIN | 0x40 | RW | Gain Calibration Value This register contains the gain calibration value. This field is set to the production gain calibration value for the 1V25 internal reference during reset, hence the reset value might differ from device to device. The field is unsigned. Higher values lead to lower DAC results. |
| 15:14 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 13:8 | CH1OFFSET | 0x00 | RW | Channel 1 Offset Calibration Value This register contains the offset calibration value used with channel 1 conversions. This field is set to the production channel 1 offset calibration value for the 1V25 internal reference during reset, hence the reset value might differ from device to device. The field is sign-magnitude encoded. Higher values lead to lower DAC results. |
| 7:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5:0 | CH0OFFSET | 0x00 | RW | Channel 0 Offset Calibration Value This register contains the offset calibration value used with channel 0 conversions. This field is set to the production channel 0 offset calibration value for the 1V25 internal reference during reset, hence the reset value might differ from device to device. The field is sign-magnitude encoded. Higher values lead to lower DAC results. |

25.5.13 DACn_BIASPROG - Bias Programming Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------------|----|----|--------------|---|---|---|---|----------|---|---|----------|---|---|--|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | 1 | | | 0x7 | | | | | 1 | | | 0x7 | | | |
| Access | | | | | | | | | | | | | | | | | | | RW | | | RW | | | | | RW | | | RW | | | |
| Name | | | | | | | | | | | | | | | | | | | OPA2HALFBIAS | | | OPA2BIASPROG | | | | | HALFBIAS | | | BIASPROG | | | |

| Bit | Name | Reset | Access | Description |
|-------|--------------|---|--------|--------------------------|
| 31:15 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 14 | OPA2HALFBIAS | 1 | RW | Half Bias Current |

| Bit | Name | Reset | Access | Description |
|-------|--------------|---|--------|--|
| | | | | Set this bit to halve the bias current. |
| 13:12 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 11:8 | OPA2BIASPROG | 0x7 | RW | Bias Programming Value for OPA2 |
| | | | | These bits control the bias current level. |
| 7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | HALFBIAS | 1 | RW | Half Bias Current |
| | | | | Set this bit to halve the bias current. |
| 5:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:0 | BIASPROG | 0x7 | RW | Bias Programming Value |
| | | | | These bits control the bias current level. |

25.5.14 DACn_OPACTRL - Operational Amplifier Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|-----------|-----------|-----------|----|----|----|----|------------|----|----|----|----|------------|-----|----|---|---|------------|---|----|----|----|------------|------------|------------|---|----|----|----|--------|--------|--------|
| 0x054 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | |
| Reset | | | | | | | | 0 | 0 | 0 | | | | | 0x0 | | | | | 0x0 | 0x0 | | | | | 0 | 0 | 0 | | | | | 0 | 0 | 0 | | | | |
| Access | | | | | | | | RW | RW | RW | | | | | RW | | | | | RW | RW | RW | | | | | RW | RW | RW | | | | | RW | RW | RW | | | |
| Name | | | | | | | | OPA2SHORT | OPA1SHORT | OPA0SHORT | | | | | OPA2LPFDIS | | | | | OPA1LPFDIS | | | | | OPA0LPFDIS | | | | | OPA2HCMDIS | OPA1HCMDIS | OPA0HCMDIS | | | | | OPA2EN | OPA1EN | OPA0EN |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|-------------|------------|---|--------|--|-------------|-------|-------------|---------|----|---|---------|----|---|
| 31:25 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 24 | OPA2SHORT | 0 | RW | Short the non-inverting and inverting input. Set to short the non-inverting and inverting input. | | | | | | | | | |
| 23 | OPA1SHORT | 0 | RW | Short the non-inverting and inverting input. Set to short the non-inverting and inverting input. | | | | | | | | | |
| 22 | OPA0SHORT | 0 | RW | Short the non-inverting and inverting input. Set to short the non-inverting and inverting input. | | | | | | | | | |
| 21:18 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 17:16 | OPA2LPFDIS | 0x0 | RW | Disables Low Pass Filter. Disables the low pass filter between pad and the positive and negative input mux. <table><tr><td>LPF DISABLE</td><td>VALUE</td><td>Description</td></tr><tr><td>PLPFDIS</td><td>x1</td><td>Disables the low pass filter between positive pad and positive input.</td></tr><tr><td>NLPFDIS</td><td>1x</td><td>Disables the low pass filter between negative pad and negative input.</td></tr></table> | LPF DISABLE | VALUE | Description | PLPFDIS | x1 | Disables the low pass filter between positive pad and positive input. | NLPFDIS | 1x | Disables the low pass filter between negative pad and negative input. |
| LPF DISABLE | VALUE | Description | | | | | | | | | | | |
| PLPFDIS | x1 | Disables the low pass filter between positive pad and positive input. | | | | | | | | | | | |
| NLPFDIS | 1x | Disables the low pass filter between negative pad and negative input. | | | | | | | | | | | |
| 15:14 | OPA1LPFDIS | 0x0 | RW | Disables Low Pass Filter. Disables the low pass filter between pad and the positive and negative input mux. <table><tr><td>LPF DISABLE</td><td>VALUE</td><td>Description</td></tr><tr><td>PLPFDIS</td><td>x1</td><td>Disables the low pass filter between positive pad and positive input.</td></tr><tr><td>NLPFDIS</td><td>1x</td><td>Disables the low pass filter between negative pad and negative input.</td></tr></table> | LPF DISABLE | VALUE | Description | PLPFDIS | x1 | Disables the low pass filter between positive pad and positive input. | NLPFDIS | 1x | Disables the low pass filter between negative pad and negative input. |
| LPF DISABLE | VALUE | Description | | | | | | | | | | | |
| PLPFDIS | x1 | Disables the low pass filter between positive pad and positive input. | | | | | | | | | | | |
| NLPFDIS | 1x | Disables the low pass filter between negative pad and negative input. | | | | | | | | | | | |
| 13:12 | OPA0LPFDIS | 0x0 | RW | Disables Low Pass Filter. Disables the low pass filter between pad and the positive and negative input mux. | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------------|---|--------|--|
| | LPF DISABLE | VALUE | | Description |
| | PLPFDIS | x1 | | Disables the low pass filter between positive pad and positive input. |
| | NLPFDIS | 1x | | Disables the low pass filter between negative pad and negative input. |
| 11:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8 | OPA2HCMDIS | 0 | RW | High Common Mode Disable. Set to disable high common mode. Disables rail-to-rail on input, while output still remains rail-to-rail. The input voltage to the opamp while HCM is disabled is restricted between VSS and VDD-1.2V. |
| 7 | OPA1HCMDIS | 0 | RW | High Common Mode Disable. Set to disable high common mode. Disables rail-to-rail on input, while output still remains rail-to-rail. The input voltage to the opamp while HCM is disabled is restricted between VSS and VDD-1.2V. |
| 6 | OPA0HCMDIS | 0 | RW | High Common Mode Disable. Set to disable high common mode. Disables rail-to-rail on input, while output still remains rail-to-rail. The input voltage to the opamp while HCM is disabled is restricted between VSS and VDD-1.2V. |
| 5:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | OPA2EN | 0 | RW | OPA2 Enable Set to enable OPA2, clear to disable. |
| 1 | OPA1EN | 0 | RW | OPA1 Enable Set to enable OPA1, clear to disable. CH1EN in DAC_CH1CTRL must also be set. |
| 0 | OPA0EN | 0 | RW | OPA0 Enable Set to enable OPA0, clear to disable. CH0EN in DAC_CH0CTRL must also be set. |

25.5.15 DACn_OPAOFFSET - Operational Amplifier Offset Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|------------|---|---|---|---|---|---|---|
| 0x058 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x20 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | DPA2OFFSET | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|------------|---|--------|---|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5:0 | OPA2OFFSET | 0x20 | RW | OPA2 Offset Configuration Value This register contains the offset calibration value for OPA2. This field is set to the production OPA2 offset calibration value, hence the reset value might differ from device to device. The field is sign-magnitude encoded. Higher values lead to lower OPA results. The resolution of the LSB is 1.6mV/LSB |

25.5.16 DACn_OPA0MUX - Operational Amplifier Mux Configuration Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|--------|-----|----|----|---------|----|----|---------|----|----|----|----|--------|----|------|----|----|------|------|----|----------|---|-----|---|--------|---|-----|--------|---|-----|----|--|
| 0x05C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | 0x0 | | | 0 | | | 0x1 | | | | | | | 0x00 | | | | 0 | 0 | | | 0x0 | | | | 0x0 | | | 0x0 | | |
| Access | | | RW | | | RW | | | RW | | | | | | | RW | | | | RW | RW | | | RW | | | | RW | | | | RW | |
| Name | | RESSEL | | | | NEXTOUT | | | OUTMODE | | | | | OUTPEN | | | | | NPEN | PPEN | | RESINMUX | | | | NEGSEL | | | POSSEL | | | | |

| Bit | Name | Reset | Access | Description |
|-------|------------|---|--|--|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 30:28 | RESSEL | 0x0 | RW | OPA0 Resistor Ladder Select Configures the resistor ladder tap for OPA0. |
| | Value | Mode | Resistor Value | Inverting Mode Gain (-R2/R1) |
| | 0 | RES0 | R2 = 1/3 x R1 | -1/3 |
| | 1 | RES1 | R2 = R1 | -1 |
| | 2 | RES2 | R2 = 1 2/3 x R1 | -1 2/3 |
| | 3 | RES3 | R2 = 2 x R1 | -2 1/5 |
| | 4 | RES4 | R2 = 3 x R1 | -3 |
| | 5 | RES5 | R2 = 4 1/3 x R1 | -4 1/3 |
| | 6 | RES6 | R2 = 7 x R1 | -7 |
| | 7 | RES7 | R2 = 15 x R1 | -15 |
| 27 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 26 | NEXTOUT | 0 | RW | OPA0 Next Enable Makes output of OPA0 available to OPA1. |
| 25:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:22 | OUTMODE | 0x1 | RW | Output Select Select output channel. |
| | Value | Mode | Description | |
| | 0 | DISABLE | OPA0 output is disabled | |
| | 1 | MAIN | Main OPA0 output to pin enabled | |
| | 2 | ALT | OPA0 alternative output enabled. | |
| | 3 | ALL | Main OPA0 output drives both main and alternative outputs. | |
| 21:19 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 18:14 | OUTPEN | 0x00 | RW | OPA0 Output Enable Value Set to enable output, clear to disable output |
| | OUT ENABLE | VALUE | Description | |
| | OUT0 | xxxx1 | Alternate Output 0 | |
| | OUT1 | xxx1x | Alternate Output 1 | |
| | OUT2 | xx1xx | Alternate Output 2 | |
| | OUT3 | x1xxx | Alternate Output 3 | |
| | OUT4 | 1xxxx | Alternate Output 4 | |
| 13 | NPEN | 0 | RW | OPA0 Negative Pad Input Enable Connects pad to the negative input mux |
| 12 | PPEN | 0 | RW | OPA0 Positive Pad Input Enable Connects pad to the positive input mux |

| Bit | Name | Reset | Access | Description |
|--|----------|---|-------------------------------|---------------------------------------|
| 11 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 10:8 | RESINMUX | 0x0 | RW | OPA0 Resistor Ladder Input Mux |
| These bits selects the source for the input mux to the resistor ladder | | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Set for Unity Gain | |
| | 1 | OPA0INP | Set for OPA0 input | |
| | 2 | NEGPAD | NEG pad connected | |
| | 3 | POSPAD | POS pad connected | |
| | 4 | VSS | VSS connected | |
| 7:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5:4 | NEGSEL | 0x0 | RW | OPA0 inverting Input Mux |
| These bits selects the source for the inverting input on OPA0 | | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Input disabled | |
| | 1 | UG | Unity Gain feedback path | |
| | 2 | OPATAP | OPA0 Resistor ladder as input | |
| | 3 | NEGPAD | Input from NEG PAD | |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2:0 | POSSEL | 0x0 | RW | OPA0 non-inverting Input Mux |
| These bits selects the source for the non-inverting input on OPA0 | | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Input disabled | |
| | 1 | DAC | DAC as input | |
| | 2 | POSPAD | POS PAD as input | |
| | 3 | OPA0INP | OPA0 as input | |
| | 4 | OPATAP | OPA0 Resistor ladder as input | |

25.5.17 DACn_OPA1MUX - Operational Amplifier Mux Configuration Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|--------|----|----|---------|----|----|---------|----|----|----|----|----|----|--------|----|----|----|------|------|----|---|----------|---|---|---|--------|---|---|--------|----|
| 0x060 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | 0x0 | | | 0 | | | 0x0 | | | | | | | 0x00 | | | | 0 | 0 | | | 0x0 | | | | 0x0 | | | 0x0 | |
| Access | | | RW | | | RW | | | RW | | | | | | | RW | | | | RW | RW | | | | | | | RW | | | | RW |
| Name | | | RESSEL | | | NEXTOUT | | | OUTMODE | | | | | | | OUTPEN | | | | NPEN | PPEN | | | RESINMUX | | | | NEGSEL | | | POSSEL | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------------------------------|------------------------------------|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 30:28 | RESSEL | 0x0 | RW | OPA1 Resistor Ladder Select |
| Configures the resistor ladder tap for OPA1. | | | | |
| | Value | Mode | Resistor Value | Inverting Mode Gain (-R2/R1) |
| | 0 | RES0 | $R2 = 1/3 \times R1$ | -1/3 |
| | 1 | RES1 | $R2 = R1$ | -1 |
| | 2 | RES2 | $R2 = 1 \frac{2}{3} \times R1$ | -1 $\frac{2}{3}$ |
| | 3 | RES3 | $R2 = 2 \times R1$ | -2 $\frac{1}{5}$ |

| Bit | Name | Reset | Access | Description |
|-------|--|---------|--|--------------------------------|
| | Value | Mode | Resistor Value | Inverting Mode Gain (-R2/R1) |
| | 4 | RES4 | R2 = 3 x R1 | -3 |
| | 5 | RES5 | R2 = 4 1/3 x R1 | -4 1/3 |
| | 6 | RES6 | R2 = 7 x R1 | -7 |
| | 7 | RES7 | R2 = 15 x R1 | -15 |
| 27 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 26 | NEXTOUT | 0 | RW | OPA1 Next Enable |
| | Makes output of OPA1 available to OPA2. | | | |
| 25:24 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 23:22 | OUTMODE | 0x0 | RW | Output Select |
| | Select output channel. | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | OPA0 output is disabled | |
| | 1 | MAIN | Main OPA1 output to pin enabled | |
| | 2 | ALT | OPA1 alternative output enabled. | |
| | 3 | ALL | Main OPA1 output drives both main and alternative outputs. | |
| 21:19 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 18:14 | OUTPEN | 0x00 | RW | OPA1 Output Enable Value |
| | Set to enable output, clear to disable output | | | |
| | OUT ENABLE | VALUE | Description | |
| | OUT0 | xxxx1 | Alternate Output 0 | |
| | OUT1 | xxx1x | Alternate Output 1 | |
| | OUT2 | xx1xx | Alternate Output 2 | |
| | OUT3 | x1xxx | Alternate Output 3 | |
| | OUT4 | 1xxxx | Alternate Output 4 | |
| 13 | NPEN | 0 | RW | OPA1 Negative Pad Input Enable |
| | Connects pad to the negative input mux | | | |
| 12 | PPEN | 0 | RW | OPA1 Positive Pad Input Enable |
| | Connects pad to the positive input mux | | | |
| 11 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 10:8 | RESINMUX | 0x0 | RW | OPA1 Resistor Ladder Input Mux |
| | These bits selects the source for the input mux to the resistor ladder | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Set for Unity Gain | |
| | 1 | OPA0INP | Set for OPA0 input | |
| | 2 | NEGPAD | NEG PAD connected | |
| | 3 | POSPAD | POS PAD connected | |
| | 4 | VSS | VSS connected | |
| 7:6 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 5:4 | NEGSEL | 0x0 | RW | OPA1 inverting Input Mux |
| | These bits selects the source for the inverting input on OPA1 | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Input disabled | |
| | 1 | UG | Unity Gain feedback path | |
| | 2 | OPATAP | OPA1 Resistor ladder as input | |
| | 3 | NEGPAD | Input from NEG PAD | |
| 3 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |

| Bit | Name | Reset | Access | Description |
|---|--------|---------|--------------------------------|-------------------------------------|
| 2:0 | POSSEL | 0x0 | RW | OPA1 non-inverting Input Mux |
| These bits selects the source for the non-inverting input on OPA1 | | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Input disabled | |
| | 1 | DAC | DAC as input | |
| | 2 | POSPAD | POS PAD as input | |
| | 3 | OPA0INP | OPA0 as input | |
| | 4 | OPATAP | OPA 1 Resistor ladder as input | |



25.5.18 DACn_OPA2MUX - Operational Amplifier Mux Configuration Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|--------|-----|----|----|---------|----|----|----|----|----|---------|----|----|----|----|-----|----|--------|----|------|----|------|-----|----|-----|----------|-----|---|----|--------|---|--|----|--------|--|
| 0x064 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | |
| Reset | | | 0x0 | | | 0 | | | | | 0 | | | | | | 0x0 | | 0 | 0 | | | | 0x0 | | | | 0x0 | | | 0x0 | | | | | |
| Access | | | RW | | | RW | | | | | RW | | | | | | RW | | RW | RW | 0 | | | | RW | 0x0 | | | | RW | 0x0 | | | RW | 0x0 | |
| Name | | RESSEL | | | | NEXTOUT | | | | | | OUTMODE | | | | | | | OUTPEN | | NPEN | | PPEN | | | | RESINMUX | | | | NEGSEL | | | | POSSEL | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------------------------------|---------------------------------------|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 30:28 | RESSEL | 0x0 | RW | OPA2 Resistor Ladder Select |
| Configures the resistor ladder tap for OPA2. | | | | |
| | Value | Mode | Resistor Value | Inverting Mode Gain (-R2/R1) |
| | 0 | RES0 | $R2 = 1/3 \times R1$ | -1/3 |
| | 1 | RES1 | $R2 = R1$ | -1 |
| | 2 | RES2 | $R2 = 1 \frac{2}{3} \times R1$ | -1 $\frac{2}{3}$ |
| | 3 | RES3 | $R2 = 2 \times R1$ | -2 $\frac{1}{5}$ |
| | 4 | RES4 | $R2 = 3 \times R1$ | -3 |
| | 5 | RES5 | $R2 = 4 \frac{1}{3} \times R1$ | -4 $\frac{1}{3}$ |
| | 6 | RES6 | $R2 = 7 \times R1$ | -7 |
| | 7 | RES7 | $R2 = 15 \times R1$ | -15 |
| 27 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 26 | NEXTOUT | 0 | RW | OPA2 Next Enable |
| OPA2 does not have an next output. | | | | |
| 25:23 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 22 | OUTMODE | 0 | RW | Output Select |
| Enables OPA2 main output. | | | | |
| 21:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:14 | OUTPEN | 0x0 | RW | OPA2 Output Location |
| Select location for main output | | | | |
| | Value | Mode | Description | |
| | 1 | OUT0 | Main Output 0 | |
| | 2 | OUT1 | Main Output 1 | |
| 13 | NPEN | 0 | RW | OPA2 Negative Pad Input Enable |

| Bit | Name | Reset | Access | Description |
|------|--|---------|-------------------------------|---------------------------------------|
| | Connects pad to the negative input mux | | | |
| 12 | PPEN | 0 | RW | OPA2 Positive Pad Input Enable |
| | Connects pad to the positive input mux | | | |
| 11 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 10:8 | RESINMUX | 0x0 | RW | OPA2 Resistor Ladder Input Mux |
| | These bits selects the source for the input mux to the resistor ladder | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Set for Unity Gain | |
| | 1 | OPA1INP | Set for OPA1 input | |
| | 2 | NEGPAD | NEG PAD connected | |
| | 3 | POSPAD | POS PAD connected | |
| | 4 | VSS | VSS connected | |
| 7:6 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 5:4 | NEGSEL | 0x0 | RW | OPA2 inverting Input Mux |
| | These bits selects the source for the inverting input on OPA2 | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Input disabled | |
| | 1 | UG | Unity Gain feedback path | |
| | 2 | OPATAP | OPA2 Resistor ladder as input | |
| | 3 | NEGPAD | Input from NEG PAD | |
| 3 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 2:0 | POSSEL | 0x0 | RW | OPA2 non-inverting Input Mux |
| | These bits selects the source for the non-inverting input on OPA2 | | | |
| | Value | Mode | Description | |
| | 0 | DISABLE | Input disabled | |
| | 2 | POSPAD | POS PAD as input | |
| | 3 | OPA1INP | OPA1 as input | |
| | 4 | OPATAP | OPA0 Resistor ladder as input | |

26 OPAMP - Operational Amplifier



Quick Facts

What?

The opamps are low power amplifiers with a high degree of flexibility targeting a wide variety of standard opamp application areas. With flexible gain and interconnection built-in programming they can be configured to support multiple common opamp functions, with all pins available externally for filter configurations. Each opamp has a rail to rail input and a rail to rail output.

Why?

The opamps are included to save energy on a pcb compared to standalone opamps, but also reduce system cost by replacing external opamps.

How?

Two of the opamps are made available as part of the DAC, while the third opamp is standalone. An ADC unity gain buffer mode configuration makes it possible to isolate kickback noise, in addition to popular differential to single ended and differential to differential driver modes. The opamps can also be configured as a one, two- or three-step cascaded PGA, and for all of the built-in modes no external components are necessary.

26.1 Introduction

The opamps are highly configurable general purpose opamps, suitable for simple filters and buffer applications. The three opamps can be configured to support various operational amplifier functions through a network of muxes, with possibilities of selecting ranges of on-chip non-inverting and inverting gain configurations, and selecting between outputs to various destinations. The opamps can also be configured with external feedback in addition to supporting cascade connections between two or three opamps. The opamps are rail-to-rail in and out. A user selectable mode has been added to optimize linearity, in which case the input voltage to the opamp is restricted between VSS and VDD-1.2V.

26.2 Features


- 3 individually configurable opamps
- Opamps support rail-to-rail inputs and outputs
- Supports the following functions
 - General Opamp Mode
 - Voltage Follower Unity Gain
 - Inverting Input PGA
 - Non-inverting PGA
 - Cascaded Inverting PGA

- Cascaded Non-inverting PGA
- Two Opamp Differential Amplifier
- Three Opamp Differential Amplifier
- Dual Buffer ADC Driver
- Programmable gain


26.3 Functional Description

The three opamps can be configured to perform various opamp functions through a network of muxes. An overview of the opamps are shown in Figure 26.1 (p. 443). Two of the three opamps are part of the DAC, while the third opamp is standalone. The output of OPA0 can be routed to ADC CH0, OPA1 and various pin outputs. The output of OPA1 can be routed to ADC CH1, OPA2, and various pin outputs. The output of OPA2 can be routed to ADC CH0, CH5, and various pin output destinations. All three opamps can also take input from pins. Since OPA0 and OPA1 are part of the DAC, special considerations need to be taken when both the DAC Ch0/Ch1 and OPA0/OPA1 are being used. For detailed explanation the reader is referred to Section 26.3.3 (p. 452).

Figure 26.1. OPAMP System Overview

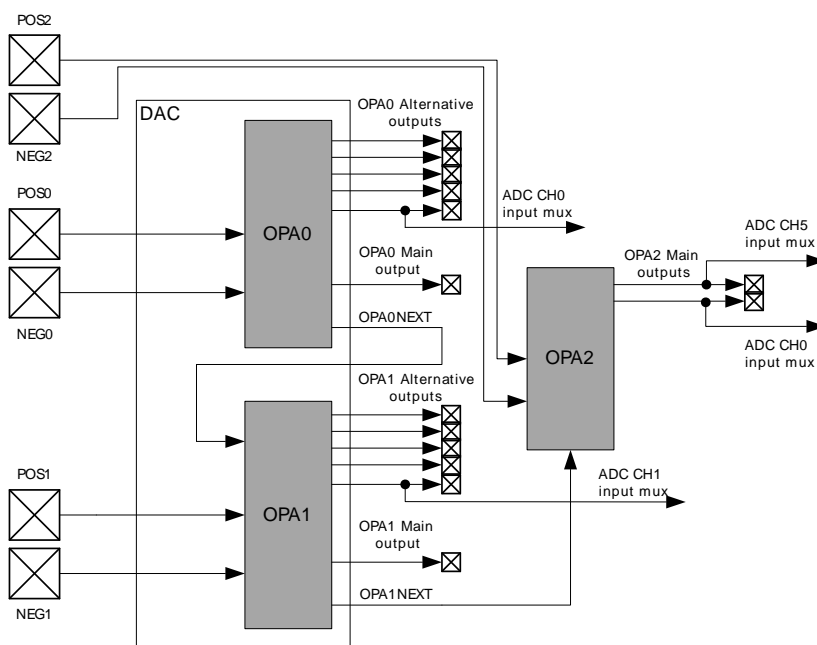

A more detailed view of the three opamps, including the mux network is shown in Figure 26.2 (p. 444). There is a set of input muxes for each opamp, making it possible to select various input sources. The POSSEL mux connected to the positive input makes it possible to select pin, another opamp output, or tap from the resistor network. Similarly, the NEGSEL mux on the negative input makes it possible to select pin or a feedback path as its source. The feedback path can be a unity gain configuration, or selected from the resistor network for programmable gain. The output of the opamp have different sets of outputs, a main output, an alternative output network and a next output. These outputs make it possible to route the output to pin, another opamp input, ADC, or into the feedback path. For details regarding configuring the outputs, the reader is referred to Section 26.3.1.2 (p. 444). In addition, there is also a mux to configure the resistor ladder to be connected to vss, pin, or another opamp output.

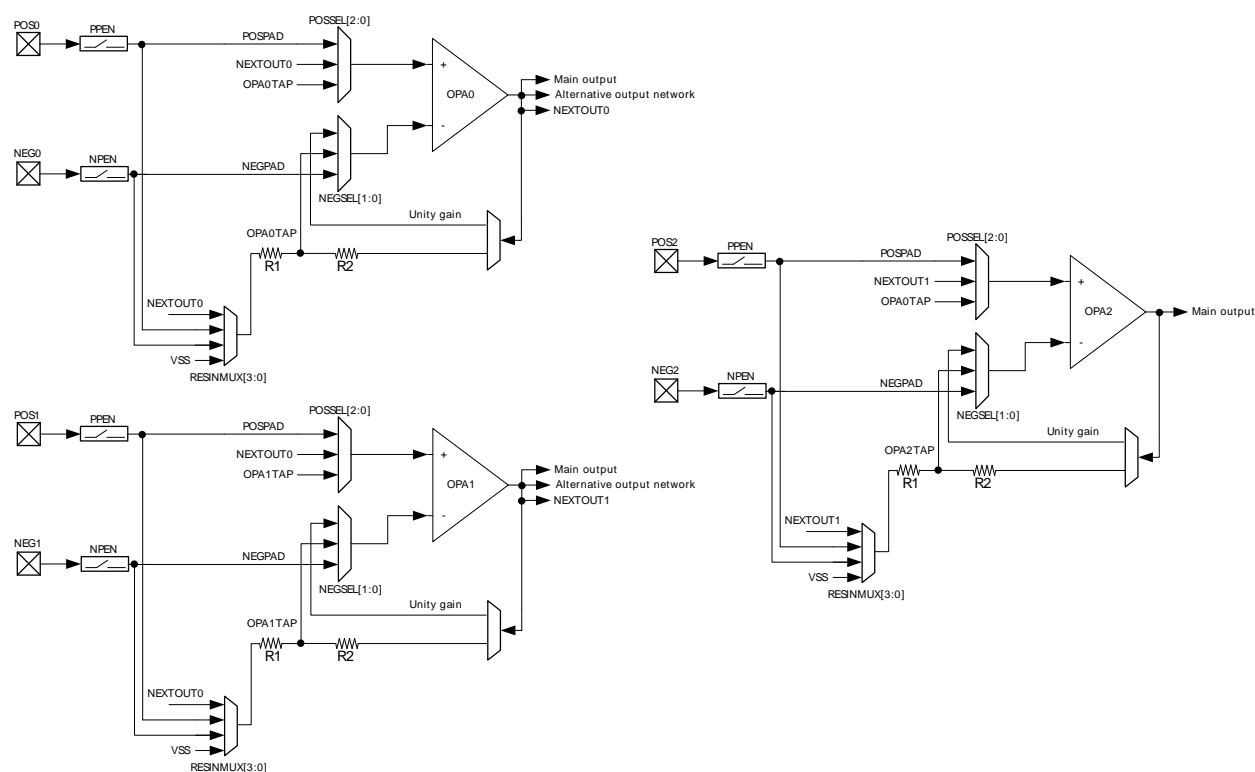Figure 26.2. OPAMP Overview

26.3.1 Opamp Configuration


Since two of the three opamps (OPA0, OPA1) are part of the DAC, the opamp configuration registers are located in the DAC. The mux registers for OPA0/OPA1 together with OPA2 registers are separate registers, also located under the DAC module. OPA0 and OPA1 can be enabled by setting OPAXEN in DACn_OPACTRL and CHxEN in CHxCTRL. OPA2 can be enabled by only setting OPA2EN in DACn_OPACTRL.

26.3.1.1 Input Configuration

The inputs to the opamps are controlled through a set of input muxes. The mux connected to the positive input is configured by the POSSEL bit-field in the DACn_OPAXMUX register. Similarly, the mux connected to the negative input is configured by setting the NEGSEL bit-field in DACn_OPAXMUX. To connect the pins to the input muxes, the pin switches must also be enabled. Setting the PPEN bit-field enables POSPADx, while setting the NPEN bit-field enables NEGPADx, both located in DACn_OPAXMUX. The input into the resistor ladder can be configured by setting the RESINMUX bit-field in DACn_OPAXMUX.

26.3.1.2 Output Configuration

The opamp have two outputs, one main output and one alternative output with lower drive strength. These two outputs can be used to drive the different outputs as shown in Figure 26.3 (p. 445). The main opamp output can be used to drive the main output by setting OUTMODE to MAIN in DACn_OPAXMUX. The alternative opamp output can drive the alternative output network by setting OUTMODE to ALT in DACn_OPAXMUX. In addition, it is also possible to use the main opamp output to drive both the main output and the alternative output network by setting OUTMODE to ALL in DACn_OPAXMUX.

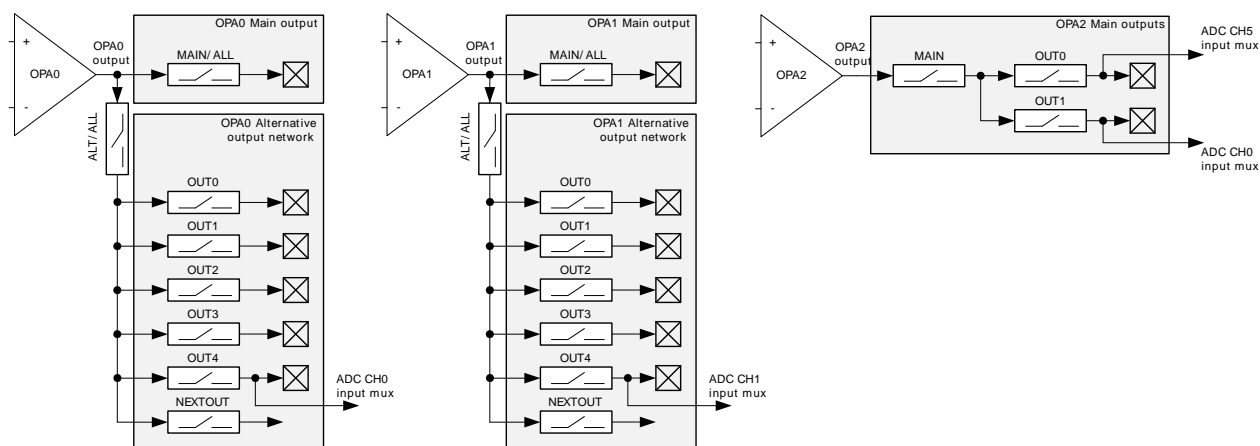Figure 26.3. Opamp Output Stage Overview

The alternative output network consists of connections to pins, ADC, and a connection to the next opamp (OPA0 to OPA1, and OPA1 to OPA2). The connections to pins can be individually enabled by configuring OUTPEN in DACn_OPAXMUX register. To enable cascaded opamp configurations, each opamp has a NEXTOUT connection. This output makes it possible to connect OPA0 to OPA1, and OPA1 to OPA2. This output connection is enabled by setting NEXTOUT in DACn_OPAXMUX.

The opamps can also be routed to the ADC. OPA0 can be connected to ADC CH0, OPA1 to ADC CH1 and OPA2 can be connected to both ADC CH1 and CH5. The ADC connections are created by routing the OPA output by setting corresponding bits in OUTPEN in DACn_OPAXMUX. For OPA0 alternative output 4 is connected to ADC input mux CH0 when enabled. OPA1's alternative output 4 is connected to ADC input mux CH1 when enabled. For OPA2, the two main outputs can be connected to ADC input mux CH0 and ADC input mux CH5 respectively when enabled. See Section 24.3.4 (p. 401), in the ADC chapter for information on how to configure the ADC input mux.

26.3.1.3 Gain Programming

The feedback path of each mux includes a resistor ladder, which can be used to select a set of gain values. The gain can be selected by the RESSEL bit-field located in DACn_OPAXMUX register. The gain values are taken from tappings of the resistor ladder based on ratio of R2/R1. It is also possible to bypass the resistor ladder in Unity Gain (UG) mode.

26.3.1.4 Offset Calibration

The offset calibration registers are located in different registers for the opamps. OPA0 and OPA1's offset can be set through the CH0OFFSET and CH1OFFSET bit-fields respectively in DACn_CAL. The offset for OPA2 can be set through OPA2OFFSET in DACn_OPAOFFSET.

26.3.1.5 Shorting Non-inverting and Inverting Input

Functionality for offset calibration of the opamps has been added, this functionality is enabled by setting the OPAXSHORT bit-field in DACn_OPAXCTRL. Setting this bit-field enables a switch that shorts between the inverting and non-inverting input of the OPA, effectively driving the offset voltage of the opamp to the output. Using the ADC to measure this offset, the calibration register can be adjusted to minimize the output offset.

26.3.1.6 Low Pass Filter

The low pass filter is located between the pad and the positive input. The low-pass filter is designed to couple the input signal to local VSS for high frequencies and has a 3 dB frequency of approximately 130

MHz when driven from a 50 ohm source. The filter adds a parasitic capacitance of approximately 1.2 pF towards local VSS when enabled. The filter is enabled out of reset and can be disabled by setting OPAXLPFDIS in DACn_OPAXCTRL.

26.3.1.7 Disabling of rail-to-rail Operation

Each opamp can have the input rail-to-rail stage disabled by setting the OPAXHCMDIS bit-field in DACn_OPACTRL. Disabling the rail-to-rail input stage improves linearity of the opamp, thus improving the Total Harmonic Distortion, THD, at the cost of reduced input signal swing.

26.3.2 Opamp Modes

The opamp can be configured to perform different Operational Amplifier functions by configuring the internal signal routing between the opamps. The modes available are described in the following sections.

26.3.2.1 General Opamp Mode

In this mode the resistor ladder is isolated from the feedback path and input signal routing is defined by OPAXPOSSEL and OPAXNEGSEL in DACn_OPAXMUX. The output signal routing is defined by OUTPEN in DACn_OPAXMUX

Table 26.1. General Opamp Mode Configuration

| OPA bit-fields | OPA Configuration |
|----------------|-------------------------------|
| OPAx POSSEL | POSPADx |
| OPAx NEGSEL | OPATAP, UG, NEGPADx |
| OPAx RESINMUX | NEXTOUT, POSPADx, NEGPADx VSS |

26.3.2.2 Voltage Follower Unity Gain

In this mode the unity gain feedback path is selected for the negative input by setting the OPAXNEGSEL bit-field to UG in the DACn_OPAXMUX register as shown in Figure 26.4 (p. 446) . The positive input is selected by the OPAXPOSSEL bit-field, and the output is configured by the OUTPEN bit-field, both in the DACn_OPAXMUX register.

Figure 26.4. Voltage Follower Unity Gain Overview

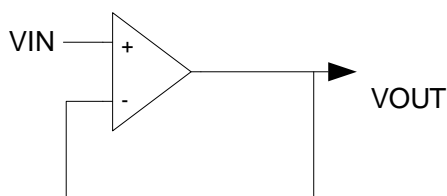


Table 26.2. Voltage Follower Unity Gain Configuration

| OPA bit-fields | OPA Configuration |
|----------------|--------------------------|
| OPAx POSSEL | OPATAP, NEXTOUT, POSPADx |
| OPAx NEGSEL | UG |
| OPAx RESINMUX | DISABLE |

26.3.2.3 Inverting input PGA

Figure 26.5 (p. 447) shows the inverting input PGA configuration. In this mode the negative input is connected to the resistor ladder by setting the OPAXNEGSEL bit-field to OPATAP in the DACn_OPAXMUX register. This setting provides a programmable gain on the negative input, which can be set by choosing the wanted gain value in the RESSEL bit-field in DACn_OPAXMUX. Signal ground for the positive input can be generated off-chip through the pad by setting OPAXPOSSEL bit-field to PAD in DACn_OPAXMUX. In addition the output is configured by the OUTPEN bit-field, located in DACn_OPAXMUX.

Figure 26.5. Inverting input PGA Overview

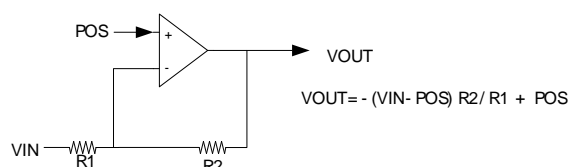


Table 26.3. Inverting input PGA Configuration

| OPA bit-fields | OPA Configuration |
|----------------|---------------------------|
| OPAx POSSEL | POSPADx |
| OPAx NEGSEL | OPATAP |
| OPAx RESINMUX | NEXTOUT, NEGPADx, POSPADx |

26.3.2.4 Non-inverting PGA

Figure 26.6 (p. 447) shows the non-inverting input configuration. In this mode the negative input is connected to the resistor ladder by setting the OPAXNEGSEL bit-field to OPATAP in DACn_OPAXMUX. This setting provides a programmable gain on the negative input, which can be set by choosing the wanted gain value in the RESSEL bit-field in DACn_OPAXMUX. In addition the OPAXRESINMUX bit-field must be set to VSS or NEGPAD in DACn_OPAXMUX. The positive input is selected by the OPAXPOSSEL bit-field, and the output is configured by the OUTPEN bit-field, both located in DACn_OPAXMUX.

Figure 26.6. Non-inverting PGA Overview

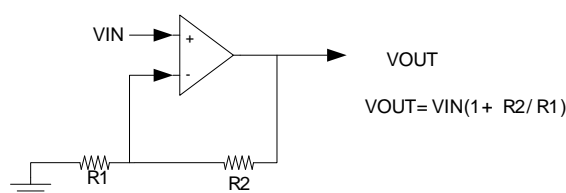


Table 26.4. Non-inverting PGA Configuration

| OPA bit-fields | OPA Configuration |
|----------------|-------------------|
| OPAx POSSEL | NEXTOUT, POSPADx |
| OPAx NEGSEL | OPATAP |
| OPAx RESINMUX | VSS, NEGPAD |

26.3.2.5 Cascaded Inverting PGA

This mode enables the opamp signals to be internally configured to cascade two or three opamps in inverting mode as shown in Figure 26.7 (p. 448). In both cases the positive input will be configured to signal ground by setting OPAXPOSSEL bit-field to PAD in DACn_OPAX_MUX. When cascaded, the negative input is connected to the resistor ladder by setting the OPAXNEGSEL bit-field to OPATAP in DACn_OPAXMUX. The input to the resistor ladder can be configured in the OPAXRESINMUX bit-field in DAC_nOPAXMUX. The output from OPA0 can be connected to OPA1 to create the second stage by setting the NEXTOUT bit-field in DACn_OPAXMUX. To complete the stage, OPA1RESINMUX field must be set to OPA0INP. Similarly, the last stage can be created by setting the NEXTOUT bit-field in DACn_OPA1MUX and OPA2RESINMUX bit-field to OPA1INP in DACn_OPA2MUX.

Figure 26.7. Cascaded Inverting PGA Overview

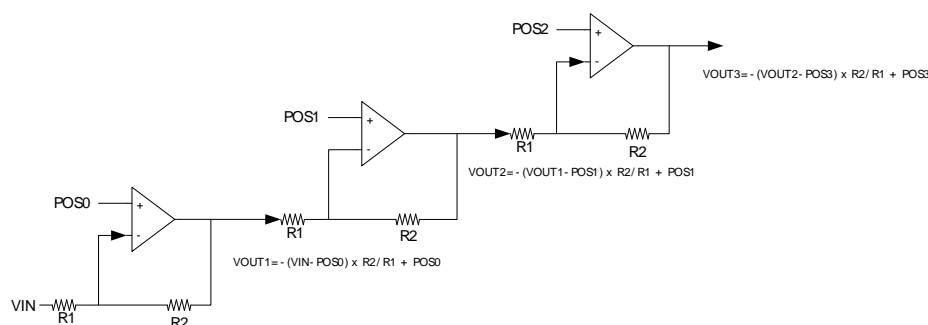


Table 26.5. Cascaded Inverting PGA Configuration

| OPA | OPA bit-fields | OPA Configuration |
|------|----------------|-------------------|
| OPA0 | POSSEL | POSPAD0 |
| OPA0 | NEGSEL | OPA0TAP |
| OPA0 | RESINMUX | NEGPAD0 |
| OPA0 | NEXTOUT | 1 |
| OPA1 | POSSEL | POSPAD1 |
| OPA1 | NEGSEL | OPATAP |
| OPA1 | RESINMUX | OPA0INP |
| OPA1 | NEXTOUT | 1 |
| OPA2 | POSSEL | POSPAD2 |
| OPA2 | NEGSEL | OPATAP |
| OPA2 | RESINMUX | OPA1INP |

26.3.2.6 Cascaded Non-inverting PGA

This mode enables the opamp signals to be internally configured to cascade two or three opamps in non-inverting mode as shown in Figure 26.8 (p. 449). In both cases the negative input for all opamps will be connected to the resistor ladder by setting the OPAXNEGSEL bit-field to OPATAP. In addition the resistor ladder input must be set to VSS or NEGPADx in the OPAXRESINMUX in DACn_OPAXMUX. When cascaded, the positive input on OPA0 is configured by the OPA0POSSEL bit-field. The output from OPA0 can be connected to OPA1 to create the second stage by setting NEXTOUT in DACn_OPA0MUX. To complete the stage, the OPA1POSSEL bit-field must be set to OPA0INP in DACn_OPA1MUX. Similarly,

the last stage can be created by setting NEXTOUT in DACn_OPA1MUX and OPA2POSSEL bit-field to OPA1INP in DACn_OPA2MUX.

Figure 26.8. Cascaded Non-inverting PGA Overview

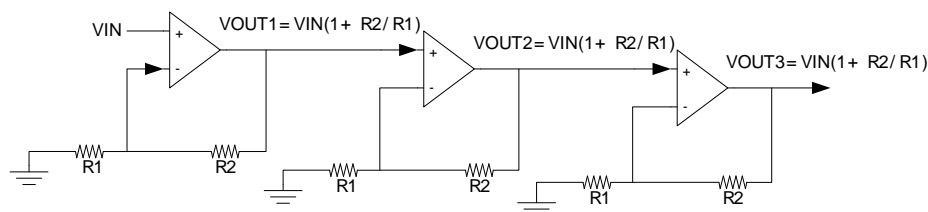


Table 26.6. Cascaded Non-inverting PGA Configuration

| OPA | OPA bit-fields | OPA Configuration |
|------|----------------|-------------------|
| OPA0 | POSSEL | POSPAD0 |
| OPA0 | NEGSEL | OPATAP |
| OPA0 | RESINMUX | VSS, NEGPAD0 |
| OPA0 | NEXTOUT | 1 |
| OPA1 | POSSEL | OPA0INP |
| OPA1 | NEGSEL | OPATAP |
| OPA1 | RESINMUX | VSS, NEGPAD1 |
| OPA1 | NEXTOUT | 1 |
| OPA2 | POSSEL | OPA1INP |
| OPA2 | NEGSEL | OPATAP |
| OPA2 | RESINMUX | VSS, NEGPAD2 |


26.3.2.7 Two Opamp Differential Amplifier

This mode enables OPA0 and OPA1 or OPA1 and OPA2 to be internally configured to form a two opamp differential amplifier as shown in Figure 26.9 (p. 450). When using OPA0 and OPA1, the positive input of OPA0 can be connected to any input by configuring the OPA0POSSEL bit-field in DACn_OPA0MUX. The OPA0 feedback path must be configured to unity gain by setting the OPA0NEGSEL bit-field to UG in DACn_OPA0MUX. In addition, the OPA0RESINMUX bit-field must be set to DISABLED. The OPA0OUT must be connected to OPA1 by setting NEXTOUT in DACn_OPA0MUX, and OPA1RESINMUX to OPA0INP. The positive input on OPA1 can be set by configuring OPA1POSSEL. The OPA1 output can be configured by configuring the OUTPEN and OUTMODE bit-field.

When using OPA1 and OPA2, the positive input of OPA1 can be connected to any input by configuring the OPA1POSSEL bit-field in DACn_OPA1MUX. The OPA1 feedback path must be configured to unity gain by setting the OPA1NEGSEL bit-field to UG in DACn_OPA1MUX. In addition, the OPA1RESINMUX bit-field must be set to DISABLED. The OPA1OUT must be connected to OPA2 by setting NEXTOUT in DACn_OPA1MUX, and OPA2RESINMUX to OPA1INP. The positive input on OPA2 can be set by configuring OPA2POSSEL. The OPA2 output can be configured by configuring the OUTPEN and OUTMODE bit-field.

Note

When making a differential connection with the ADC, only OPA1 and OPA2 can be used

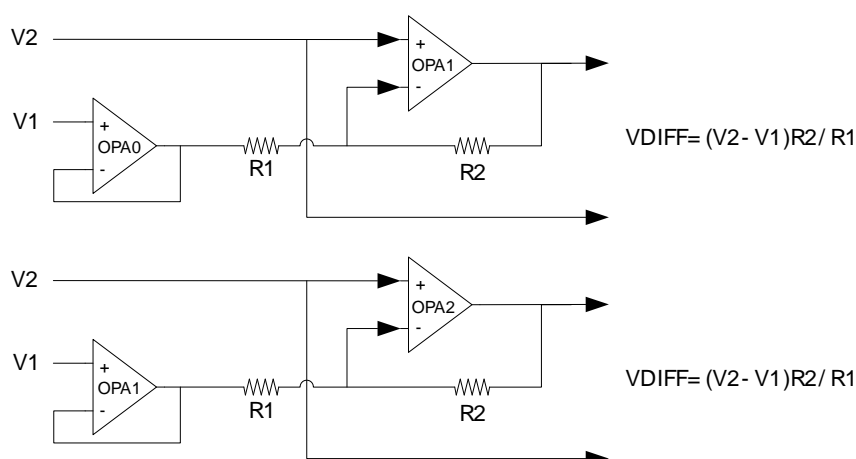Figure 26.9. Two Op-amp Differential Amplifier Overview**Table 26.7. OPA0/OPA1 Differential Amplifier Configuration**

| OPA | OPA bit-fields | OPA Configuration |
|------|----------------|-------------------|
| OPA0 | POSSEL | POSPAD1 |
| OPA0 | NEGSEL | UG |
| OPA0 | RESINMUX | DISABLE |
| OPA0 | NEXTOUT | 1 |
| OPA1 | POSSEL | POSPAD1 |
| OPA1 | NEGSEL | OPATAP |
| OPA1 | RESINMUX | OPA1INP |

Table 26.8. OPA1/OPA2 Differential Amplifier Configuration


| OPA | OPA bit-fields | OPA Configuration |
|------|----------------|-------------------|
| OPA1 | POSSEL | POSPAD1 |
| OPA1 | NEGSEL | UG |
| OPA1 | RESINMUX | DISABLE |
| OPA1 | NEXTOUT | 1 |
| OPA2 | POSSEL | POSPAD1 |
| OPA2 | NEGSEL | OPATAP |
| OPA2 | RESINMUX | OPA1INP |

26.3.2.8 Three Opamp Differential Amplifier

This mode enables the three opamps to be internally configured to form a three opamp differential amplifier as shown in Figure 26.10 (p. 451). Both OPA0 and OPA1 can be configured in the same unity gain mode. For both OPA0/OPA1 the positive input can be connected to any input by configuring the OPA0POSSEL/OPA1POSSEL bit-field. The OPA0/OPA1 feedback path must be configured to unity gain by setting the OPA0NEGSEL/OPA1NEGSEL bit-field to UG. In addition the OPA0RESINMUX/OPA1RESINMUX bit-fields must be set to DISABLED. The OPA1 output must be connected to

OPA2 by setting the NEXTOUT bit-field in DACn_OPA1MUX and OPA2RESINMUX to OPA1INP in DACn_OPA2MUX. In addition the OPA2POSSEL must be set to OPATAP. The OPA2 output can be configured by configuring the OUTPEN and OUTMODE bit-field.

Figure 26.10. Three Op-amp Differential Amplifier Overview

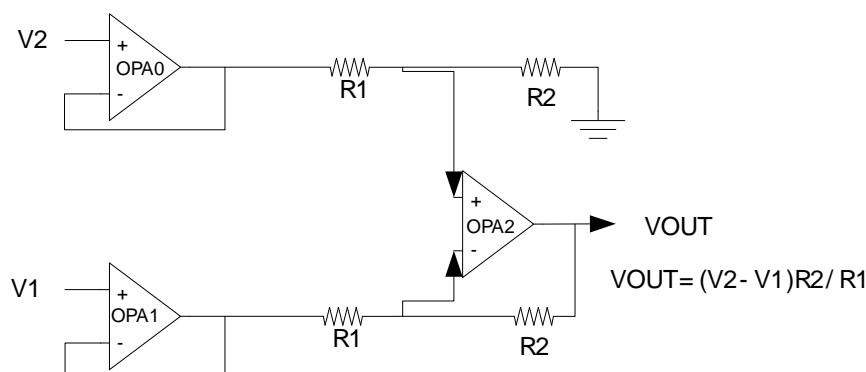

The gain values for the Three Opamp Differential Amplifier is determined by the combination of the gain settings of OPA0 and OPA2. The 3 different gain values available, 1/3, 1 and 3, can be programmed as shown in the table below.

Table 26.9. Three Opamp Differential Amplifier Gain Programming

| Gain | OPA0 RESSEL | OPA2 RESSEL |
|------|-------------|-------------|
| 1/3 | 4 | 0 |
| 1 | 1 | 1 |
| 3 | 0 | 4 |

Table 26.10. Three Opamp Differential Amplifier Configuration

| OPA | OPA bit-fields | OPA Configuration |
|------|----------------|-------------------|
| OPA0 | POSSEL | POSPAD |
| OPA0 | NEGSEL | UG |
| OPA0 | RESINMUX | DISABLE |
| OPA1 | POSSEL | POSPAD |
| OPA1 | NEGSEL | UG |
| OPA1 | RESINMUX | DISABLE |
| OPA1 | NEXTOUT | 1 |
| OPA2 | POSSEL | OPATAP |
| OPA2 | NEGSEL | OPATAP |
| OPA2 | RESINMUX | OPA1INP |

26.3.2.9 Dual Buffer ADC Driver

It is possible to use OPA0 and OPA1 to form a Dual Buffer ADC driver as shown in Figure 26.11 (p. 452). Both opamps used can be configured in the same way. The positive input is configured by setting the OPAXPOSSEL to PAD and the negative input can be connected to the resistor ladder by

setting OPATAP in DACn_OPAMUX. The output from the opamps can be configured to connect to the ADC by setting OUTMODE to ALT or ALL in DACn_OPAMUX.

Figure 26.11. Dual Buffer ADC Driver Overview

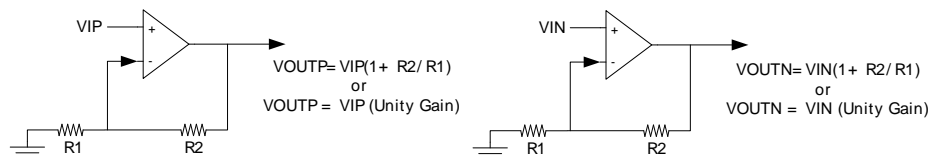


Table 26.11. Dual Buffer ADC Driver Configuration

| OPA | OPA bit-fields | OPA Configuration |
|------|----------------|-------------------|
| OPA0 | POSSEL | POSPAD0 |
| OPA0 | NEGSEL | OPATAP |
| OPA0 | RESINMUX | VSS |
| OPA1 | POSSEL | POSPAD1 |
| OPA1 | NEGSEL | OPATAP |
| OPA1 | RESINMUX | VSS |

26.3.3 Opamp DAC Combination

Since two of the opamps are part of the DAC it is not possible to use both DAC channels and all three opamps at the same time. If both DAC channels are used, only OPA2 is available out of the 3 opamps. However, it is possible to use one of the DAC channels in combination with OPA0/OPA1. OPA1 is available when DAC channel 0 is in use and OPA0 is available when DAC channel 1 is used. When using the opamp DAC combination, the DAC CONVMODE can only be configured to either CONTINUOUS or SAMPLEHOLD mode. The CONVMODE bitfield can be configured in DACn_CTRL register. In the opamp/DAC combination, the DAC channel enabled is configured through the DAC registers while the opamp is controlled through the opamp registers.



26.4 Register Description

The register description of the opamp can be found in Section 25.4 (p. 427) in the DAC chapter.

26.5 Register Map

The register map of the opamp can be found in Section 25.4 (p. 427) in the DAC chapter.

27 AES - Advanced Encryption Standard Accelerator

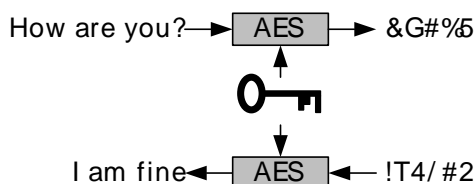

Quick Facts

What?

A fast and energy efficient hardware accelerator for AES-128 and AES-256 encryption and decryption.

Why?

Efficient encryption/decryption with little or no CPU intervention helps to meet the speed and energy demands of the application.

How?

High AES throughput allows the EFM32TG to spend more time in lower energy modes. In addition, specialized data access functions allow autonomous DMA/AES operation in both EM0 and EM1.

27.1 Introduction

The Advanced Encryption Standard (FIPS-197) is a symmetric block cipher operating on 128-bit blocks of data and 128-, 192- or 256-bit keys.


The AES accelerator performs AES encryption and decryption with 128-bit or 256-bit keys. Encrypting or decrypting one 128-bit data block takes 54 HFCORECLK cycles with 128-bit keys and 75 HFCORECLK cycles with 256-bit keys. The AES module is an AHB slave which enables efficient access to the data and key registers. All write accesses to the AES module must be 32-bit operations, i.e. 8- or 16-bit operations are not supported.

27.2 Features

- AES hardware encryption/decryption
 - 128-bit key (54 HFCORECLK cycles)
 - 256-bit key (75 HFCORECLK cycles)
- Efficient CPU/DMA support
- Interrupt on finished encryption/decryption
- DMA request on finished encryption/decryption
- Key buffer in AES128 mode
- Optional XOR on Data write
- Configurable byte ordering

27.3 Functional Description

Some data and a key must be loaded into the KEY and DATA registers before an encryption or decryption can take place. The input data before encryption is called the PlainText and output from the encryption is called CipherText. For encryption, the key is called PlainKey. After one encryption, the resulting key in the KEY registers is the CipherKey. This key must be loaded into the KEY registers before every decryption. After one decryption, the resulting key will be the PlainKey. The resulting PlainKey/CipherKey is only dependent on the value in the KEY registers before encryption/decryption. The resulting keys and data are shown in Figure 27.1 (p. 454).

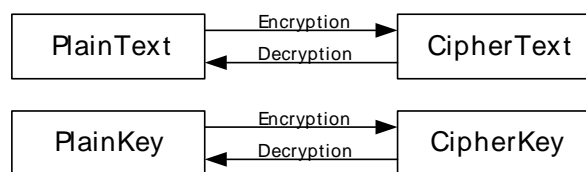Figure 27.1. AES Key and Data Definitions

27.3.1 Encryption/Decryption

The AES module can be set to encrypt or decrypt by clearing/setting the DECRYPT bit in AES_CTRL. The AES256 bit in AES_CTRL configures the size of the key used for encryption/decryption. The AES_CTRL register should not be altered while AES is running, as this may lead to unpredictable behaviour.


An AES encryption/decryption can be started in the following ways:

- Writing a 1 to the START bit in AES_CMD
- Writing 4 times 32 bits to AES_DATA when the DATASTART control bit is set
- Writing 4 times 32 bits to AES_XORDATA when the XORSTART control bit is set

An AES encryption/decryption can be stopped by writing a 1 to the STOP bit in AES_CMD. The RUNNING bit in AES_STATUS indicates that an AES encryption/decryption is ongoing.

27.3.2 Data and Key Access


The AES module contains a 128-bit DATA (State) register and two 128-bit KEY registers defined as DATA3-DATA0, KEY3-KEY0 (KEYL) and KEY7-KEY4 (KEYH). In AES128 mode, the 128-bit key is read from KEYL, while both KEYH and KEYL are used in AES256 mode. The AES module has configurable byte ordering which is configured in BYTEORDER in AES_CTRL. Figure 27.2 (p. 454) illustrates how data written to the AES registers is mapped to the key and state defined in the Advanced Encryption Standard (FIPS-197). The figure presents the key byte order for 256-bit keys. In 128-bit mode with BYTEORDER cleared, a_{16} represents the first byte of the 128-bit key. When BYTEORDER is set, a_0 represents the first byte in the key. AES encryption/decryption takes two extra cycles when BYTEORDER is set. BYTEORDER has to be set prior to loading the data and key registers.

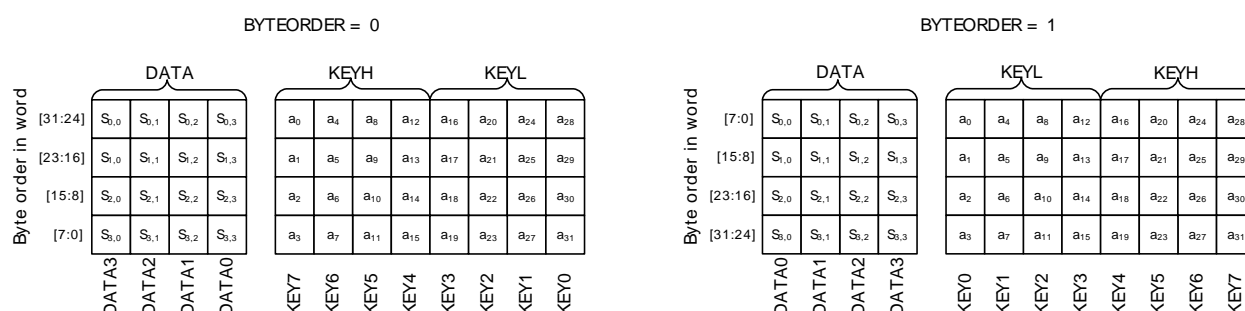Figure 27.2. AES Data and Key Orientation as Defined in the Advanced Encryption Standard

The registers DATA3-DATA0, are not memory mapped directly, but can be written/read by accessing AES_DATA or AES_XORDATA. The same applies for the key registers, KEY3-KEY0 which are

accessed through AES_KEYLn ($n=A, B, C$ or D), while KEY7-KEY4 are accessed through KEYHn ($n=A, B, C$ or D). Writing DATA3-DATA0 is then done through 4 consecutive writes to AES_DATA (or AES_XORDATA), starting with the word which is to be written to DATA0. For each write, the words will be word wise barrel shifted towards the least significant word. Accessing the KEY registers are done in the same fashion through KEYLn and KEYHn. See Figure 27.3 (p. 455). Note that KEYHA, KEYHB, KEYHC and KEYHD are really the same register, just mapped to four different addresses. You can then choose freely which of these addresses you want to use to update the KEY7-KEY4 registers. The same principle applies to the KEYLn registers. Mapping the same registers to multiple addresses like this, allows the DMA controller to write a full 256-bit key in one sweep, when incrementing the address between each word write.

Figure 27.3. AES Data and Key Register Operation

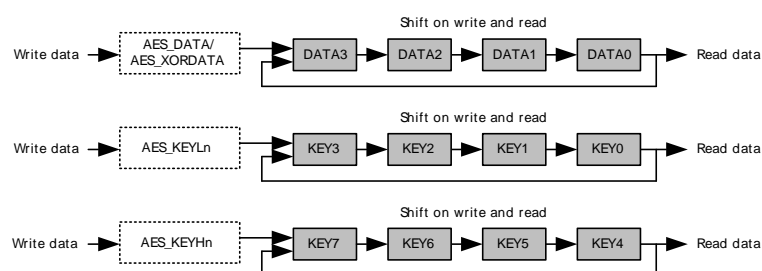

27.3.2.1 Key Buffer

When encrypting multiple blocks of data in a row, the PlainKey must be written to the key register between each encryption, since the contents of the key registers will be turned into the CipherKey during the encryption. The opposite applies when decrypting, where you have to re-supply the CipherKey between each block. However, in AES128 mode, KEY4-KEY7 can be used as a buffer register, to hold an extra copy of the KEY3-KEY0 registers. When KEYBUFEN is set in AES_CTRL, the contents of KEY7-KEY4 are copied to KEY3-KEY0, when an encryption/decryption is started. This eliminates the need for re-loading the KEY for every encrypted/decrypted block when running in AES128 mode.

27.3.2.2 Data Write XOR

The AES module contains an array of XOR gates connected to the DATA registers, which can be used during a data write to XOR the existing contents of the registers with the new data written. To use the XOR function, the data must be written to AES_XORDATA location.

Reading data from AES_XORDATA is equivalent to reading data from AES_DATA.

27.3.2.3 Start on Data Write

The AES module can be configured to start an encryption/decryption when the new data has been written to AES_DATA and/or AES_XORDATA. A 2-bit counter is incremented each time the AES_DATA or AES_XORDATA registers are written. This counter indicates which data word is written. If DATASTART/XORSTART in AES_CTRL is set, an encryption will start each time the counter overflows (DATA3 is written). Writing to the AES_CTRL register will reset the counter to 0.

27.3.3 Interrupt Request

The DONE interrupt flag is set when an encryption/ decryption has finished.

27.3.4 DMA Request

The AES module has 4 DMA requests which are all set on a finished encryption/decryption and cleared on the following conditions:

- DATAWR: Cleared on a AES_DATA write or AES_CTRL write
- XORDATAWR: Cleared on a AES_XORDATA write or AES_CTRL write
- DATARD: Cleared on a AES_DATA read or AES_CTRL write
- KEYWR: Cleared on a AES_KEYHn write or AES_CTRL write

27.3.5 Block Chaining Example

Example 27.1 (p. 456) below illustrates how the AES module could be configured to perform Cipher Block Chaining with 128-bit keys.

Example 27.1. AES Cipher Block Chaining

1. Configure module to encryption, key buffer enabled and XORSTART in AES_CTRL.
2. Write 128-bit initialization vector to AES_DATA, starting with least significant word.
3. Write PlainKey to AES_KEYHn, starting with least significant word.
4. Write PlainText to AES_XORDATA, starting with least significant word. Encryption will be started when the DATA3 is written. KEYH (PlainKey) will be copied to KEYL before encryption starts.
5. When encryption finished, read CipherText from AES_DATA, starting with least significant word.
6. Loop to step 4, if new PlainText is available.

27.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|-------------|------|-------------------------------|
| 0x000 | AES_CTRL | RW | Control Register |
| 0x004 | AES_CMD | W1 | Command Register |
| 0x008 | AES_STATUS | R | Status Register |
| 0x00C | AES_IEN | RW | Interrupt Enable Register |
| 0x010 | AES_IF | R | Interrupt Flag Register |
| 0x014 | AES_IFS | W1 | Interrupt Flag Set Register |
| 0x018 | AES_IFC | W1 | Interrupt Flag Clear Register |
| 0x01C | AES_DATA | RW | DATA Register |
| 0x020 | AES_XORDATA | RW | XORDATA Register |
| 0x030 | AES_KEYLA | RW | KEY Low Register |
| 0x034 | AES_KEYLB | RW | KEY Low Register |
| 0x038 | AES_KEYLC | RW | KEY Low Register |
| 0x03C | AES_KEYLD | RW | KEY Low Register |
| 0x040 | AES_KEYHA | RW | KEY High Register |
| 0x044 | AES_KEYHB | RW | KEY High Register |
| 0x048 | AES_KEYHC | RW | KEY High Register |
| 0x04C | AES_KEYHD | RW | KEY High Register |

27.5 Register Description

27.5.1 AES_CTRL - Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-----------|----------|-----------|---|----------|--------|---------|---|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 | 0 | | 0 | 0 | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW | RW | | RW | RW | RW | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | BYTEORDER | XORSTART | DATASTART | | KEYBUFEN | AES256 | DECRYPT | |

| Bit | Name | Reset | Access | Description |
|------|-----------|---|--------|--|
| 31:7 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 6 | BYTEORDER | 0 | RW | Configure byte order in data and key registers When set, the byte orders in the data and key registers are swapped before and after encryption/decryption. |
| 5 | XORSTART | 0 | RW | AES_XORDATA Write Start Set this bit to start encryption/decryption when DATA3 is written through AES_XORDATA. |
| 4 | DATASTART | 0 | RW | AES_DATA Write Start Set this bit to start encryption/decryption when DATA3 is written through AES_DATA. |
| 3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 2 | KEYBUFEN | 0 | RW | Key Buffer Enable |

| Bit | Name | Reset | Access | Description |
|--|----------------------------------|----------------|--------|-----------------------------------|
| Enable/disable key buffer in AES-128 mode. | | | | |
| 1 | AES256 | 0 | RW | AES-256 Mode |
| | Select AES-128 or AES-256 mode. | | | |
| | Value | Description | | |
| | 0 | AES-128 mode | | |
| | 1 | AES-256 mode | | |
| 0 | DECRYPT | 0 | RW | Decryption/Encryption Mode |
| | Select encryption or decryption. | | | |
| | Value | Description | | |
| | 0 | AES Encryption | | |
| | 1 | AES Decryption | | |

27.5.2 AES_CMD - Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|------|-------|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | STOP | START |

| Bit | Name | Reset | Access | Description |
|------|-------------------------------------|---|--------|------------------------------------|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | STOP | 0 | W1 | Encryption/Decryption Stop |
| | Set to stop encryption/decryption. | | | |
| 0 | START | 0 | W1 | Encryption/Decryption Start |
| | Set to start encryption/decryption. | | | |

27.5.3 AES_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---------|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RUNNING | |

| Bit | Name | Reset | Access | Description |
|------|---|---|--------|--------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | RUNNING | 0 | R | AES Running |
| | This bit indicates that the AES module is running an encryption/decryption. | | | |

27.5.4 AES_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | DONE | 0 | RW | Encryption/Decryption Done Interrupt Enable Enable/disable interrupt on encryption/decryption done. |

27.5.5 AES_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|------|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | DONE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | DONE | 0 | R | Encryption/Decryption Done Interrupt Flag Set when an encryption/decryption has finished. |

27.5.6 AES_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|------|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | DONE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | DONE | 0 | W1 | Encryption/Decryption Done Interrupt Flag Set Write to 1 to set encryption/decryption done interrupt flag |

27.5.7 AES_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|------|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | DONE |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | DONE | 0 | W1 | Encryption/Decryption Done Interrupt Flag Clear Write to 1 to clear encryption/decryption done interrupt flag |

27.5.8 AES_DATA - DATA Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | DATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|------|------------|--------|--|
| 31:0 | DATA | 0x00000000 | RW | Data Access Access data through this register. |

27.5.9 AES_XORDATA - XORDATA Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | XORDATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|---------|------------|--------|------------------------|
| 31:0 | XORDATA | 0x00000000 | RW | XOR Data Access |
| Access data with XOR function through this register. | | | | |

27.5.10 AES_KEYLA - KEY Low Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x030 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYLA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|-------|------------|--------|-------------------------|
| 31:0 | KEYLA | 0x00000000 | RW | Key Low Access A |
| Access the low key words through this register. | | | | |

27.5.11 AES_KEYLB - KEY Low Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x034 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYLB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|-------|------------|--------|-------------------------|
| 31:0 | KEYLB | 0x00000000 | RW | Key Low Access B |
| Access the low key words through this register. | | | | |

27.5.12 AES_KEYLC - KEY Low Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x038 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYLC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|-------|------------|--------|------------------|
| 31:0 | KEYLC | 0x00000000 | RW | Key Low Access C |
| Access the low key words through this register. | | | | |

27.5.13 AES_KEYLD - KEY Low Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------------|----|------------|----|--------|----|------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x03C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYLD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bit | Name | | Reset | | Access | | Description | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31:0 | KEYLD | | 0x00000000 | | RW | | Key Low Access D | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access the low key words through this register. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

27.5.14 AES_KEYHA - KEY High Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYHA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|-------|------------|--------|--------------------------|
| 31:0 | KEYHA | 0x00000000 | RW | Key High Access A |
| Access the high key words through this register. | | | | |

27.5.15 AES_KEYHB - KEY High Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x044 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYHB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|-------|------------|--------|--------------------------|
| 31:0 | KEYHB | 0x00000000 | RW | Key High Access B |
| Access the high key words through this register. | | | | |

27.5.16 AES_KEYHC - KEY High Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x048 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYHC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Bit | Name | Reset | Access | Description |
|--|-------|------------|--------|--------------------------|
| 31:0 | KEYHC | 0x00000000 | RW | Key High Access C |
| Access the high key words through this register. | | | | |

27.5.17 AES_KEYHD - KEY High Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x04C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x00000000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | RW | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | KEYHD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|-------|------------|--------|--|
| 31:0 | KEYHD | 0x00000000 | RW | Key High Access D |
| | | | | Access the high key words through this register. |

28 GPIO - General Purpose Input/Output

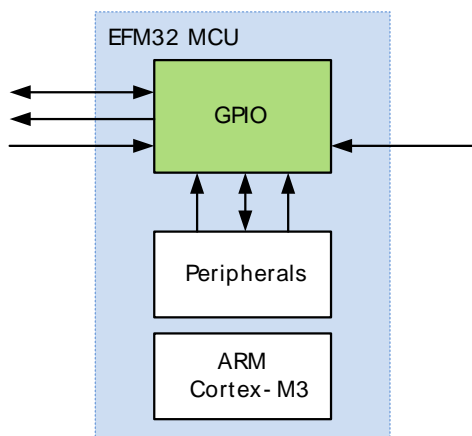

Quick Facts

What?

The GPIO (General Purpose Input/Output) is used for pin configuration and direct pin manipulation and sensing as well as routing for peripheral pin connections.

Why?

Easy to use and highly configurable input/output pins are important to fit many communication protocols as well as minimizing software control overhead. Flexible routing of peripheral functions helps to ease PCB layout.

How?

Each pin on the device can be individually configured as either an input or an output with several different drive modes. Also, individual bit manipulation registers minimizes control overhead. Peripheral connections to pins can be routed to several different locations, thus solving congestion issues that may arise with multiple functions on the same pin. Fully asynchronous interrupts can also be generated from any pin.

28.1 Introduction

In the EFM32TG devices the General Purpose Input/Output (GPIO) pins are organized into ports with up to 16 pins each. These pins can individually be configured as either an output or input. More advanced configurations like open-drain, filtering and drive strength can also be configured individually for the pins. The GPIO pins can also be overridden by peripheral pin connections, like Timer PWM outputs or USART communication, which can be routed to several locations on the device. The GPIO supports up to 16 asynchronous external pin interrupts, which enables interrupts from any pin on the device. Also, the input value of a pin can be routed through the Peripheral Reflex System to other peripherals.

28.2 Features

- Individual configuration for each pin
 - Tristate (reset state)
 - Push-pull
 - Open-drain
 - Pull-up resistor
 - Pull-down resistor
- Four drive strength modes
 - HIGH
 - STANDARD
 - LOW
 - LOWEST

- EM4 IO pin retention. This includes
 - Output enable
 - Output value
 - Pull enable
 - Pull direction
- EM4 wake-up on selected GPIO pins
- Glitch suppression input filter.
- Analog connection to e.g. ADC or LCD.
- Alternate functions (e.g. peripheral outputs and inputs)
 - Routed to several locations on the device
 - Pin connections can be enabled individually
 - Output data can be overridden by peripheral
 - Output enable can be overridden by peripheral
- Toggle, set and clear registers for output data
- Dedicated data input register (read-only)
- Interrupts
 - 2 interrupt lines from up to 16 pending sources
 - All GPIO pins are selectable
 - Separate enable, status, set and clear registers
 - Asynchronous sensing
 - Rising, falling or both edges
 - Wake up from EM0-EM3
- Peripheral Reflex System producer
 - All GPIO pins are selectable
- Configuration lock functionality to avoid accidental changes


28.3 Functional Description

An overview of the GPIO module is shown in Figure 28.1 (p. 467). The GPIO pins are grouped into 16-pin ports. Each individual GPIO pin is called P_{xn} where x indicates the port (A, B, C ...) and n indicates the pin number (0,1,...,15). Fewer than 16 bits may be available on some ports, depending on the total number of I/O pins on the package. After a reset both input and output is disabled for all pins on the device, except for debug pins. To use a pin, the port GPIO_P_x_MODEL/GPIO_P_x_MODEH registers must be configured for the pin to make it an input or output. These registers can also do more advanced configuration, which is covered in Section 28.3.1 (p. 467). When the port is either configured as an input or an output, the Data In Register (GPIO_P_x_DIN) can be used to read the level of each pin in the port (bit n in the register is connected to pin n on the port). When configured as an output, the value of the Data Out Register (GPIO_P_x_DOUT) will be driven to the pin.

The DOUT value can be changed in 4 different ways

- Writing to the GPIO_P_x_DOUT register.
- Writing a 1 to a bit in the GPIO_P_x_DOUTSET register sets the corresponding DOUT bit
- Writing a 1 to a bit in the GPIO_P_x_DOUTCLR register clears the corresponding DOUT bit
- Writing a 1 to a bit in the GPIO_P_x_DOUTTGL register toggles the corresponding DOUT bit

Reading the GPIO_P_x_DOUT register will return its contents. Reading the GPIO_P_x_DOUTSET, GPIO_P_x_CLR or GPIO_P_x_TGL will return 0.

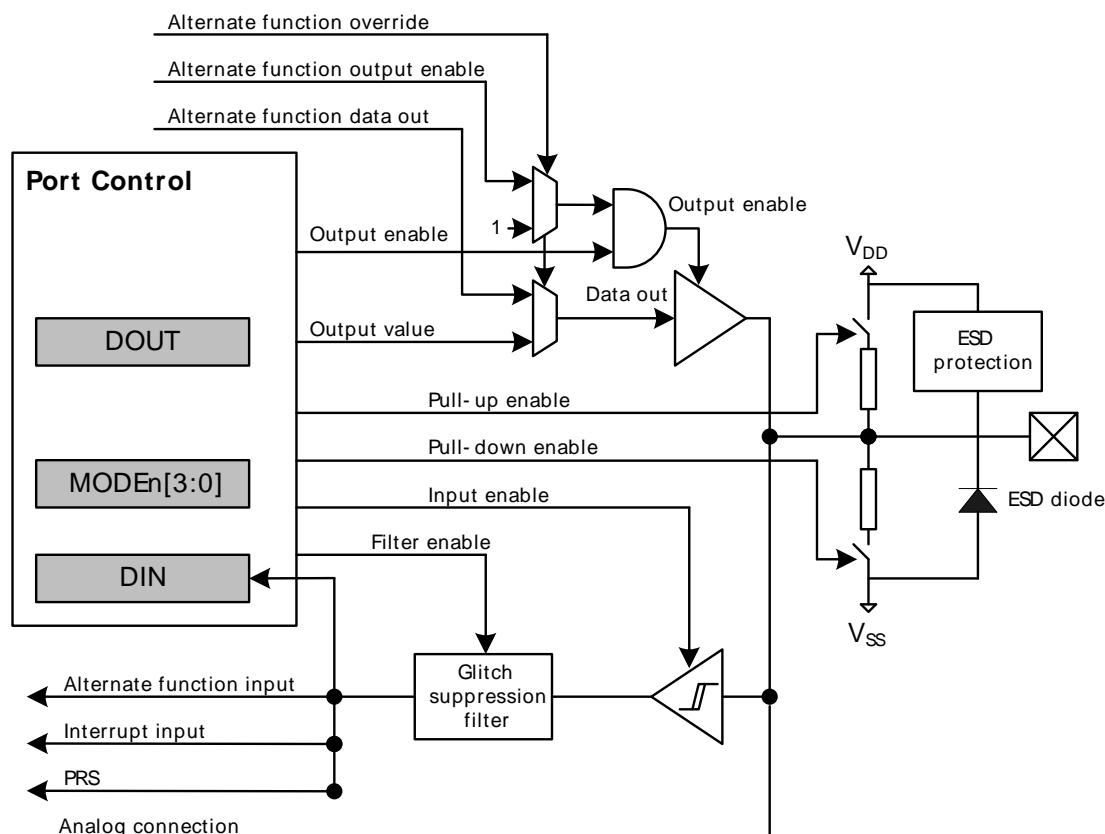Figure 28.1. Pin Configuration**Note**

There is no ESD diode to V_{DD} because if using LCD voltage boost the pin voltage will be higher than V_{DD}. Nevertheless there is an ESD protection block against over voltage.

28.3.1 Pin Configuration

In addition to setting the pins as either outputs or inputs, the GPIO_Px_MODEL and GPIO_Px_MODEH registers can be used for more advanced configurations. GPIO_Px_MODEL contains 8 bit fields named MODEn (n=0,1,..7) which control pins 0-7, while GPIO_Px_MODEH contains 8 bit fields named MODEn (n=8,9,..15) which control pins 8-15. In some modes GPIO_Px_DOUT is also used for extra configurations like pull-up/down and glitch suppression filter enable. Table 28.1 (p. 467) shows the available configurations.

Table 28.1. Pin Configuration


| MODEn | Input | Output | DOUT | Pull-down | Pull-up | Alt. strength | Input Filter | Description |
|--------|----------|----------|------|-----------|---------|---------------|--------------|------------------------------|
| 0b0000 | Disabled | Disabled | 0 | | | | | Input disabled |
| | | | 1 | | On | | | Input disabled with pull-up |
| 0b0001 | Enabled | | 0 | | | | | Input enabled |
| | | | 1 | | | | On | Input enabled with filter |
| 0b0010 | | | 0 | On | | | | Input enabled with pull-down |

| MODEn | Input | Output | DOUT | Pull-down | Pull-up | Alt. strength | Input Filter | Description |
|--------|-------|------------------------|------|-----------|---------|---------------|--------------|---|
| | | | 1 | | On | | | Input enabled with pull-up |
| 0b0011 | | | 0 | On | | | On | Input enabled with pull-down and filter |
| | | | 1 | | On | | On | Input enabled with pull-up and filter |
| 0b0100 | | Push-pull | x | | | | | Push-pull |
| 0b0101 | | | x | | | On | | Push-pull with alt. drive strength |
| 0b0110 | | Open Source (Wired-OR) | x | | | | | Open-source |
| 0b0111 | | | x | On | | | | Open-source with pull-down |
| 0b1000 | | Open Drain (Wired-AND) | x | | | | | Open-drain |
| 0b1001 | | | x | | | | On | Open-drain with filter |
| 0b1010 | | | x | | On | | | Open-drain with pull-up |
| 0b1011 | | | x | | On | | On | Open-drain with pull-up and filter |
| 0b1100 | | | x | | | On | | Open-drain with alt. drive strength |
| 0b1101 | | | x | | | On | On | Open-drain with alt. drive strength and filter |
| 0b1110 | | | x | | On | On | | Open-drain with alt. drive strength and pull-up |
| 0b1111 | | | x | | On | On | On | Open-drain with alt. drive strength, pull-up and filter |


MODEn determines which mode the pin is in at a given time. Setting MODEn to 0b0000 disables the pin, reducing power consumption to a minimum. When the output driver is disabled, the pin can be used as a connection for an analog module (e.g. ADC, LCD...). Input is enabled by setting MODEn to any value other than 0b0000. The pull-up, pull-down and filter function can optionally be applied to the input, see Figure 28.2 (p. 468) .

The internal pull-up resistance, R_{PU} , and pull-down resistance, R_{PD} , are defined in the device datasheet. When the filter is enabled it suppresses glitches with pulse widths as defined by the parameter $t_{IOGLITCH}$ in the device datasheet.

Figure 28.2. Tristated Output with Optional Pull-up or Pull-down

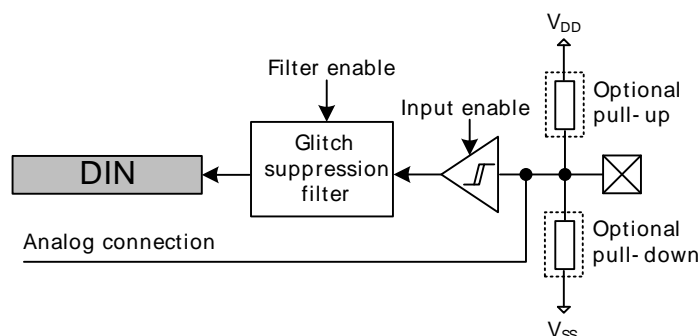


When MODEn=0b0100 or MODEn=0b0101, the pin operates in push-pull mode. In this mode, the pin is driven either high or low, dependent on the value of GPIO_Px_DOUT. The push-pull configuration is shown in Figure 28.3 (p. 469) .

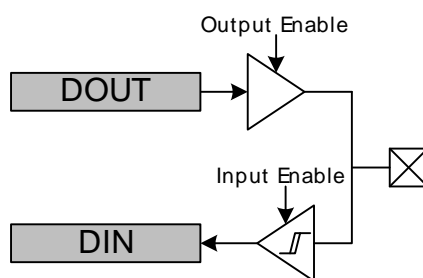Figure 28.3. Push-Pull Configuration

When $MODE_n$ is 0110 or 0111, the pin operates in open-source mode, the latter with a pull-down resistor. When driving a high value in open-source mode, the pull-down is disconnected to save power.

For the remaining $MODE_n$ values, i.e. $MODE_n \geq 1000$, the pin operates in open-drain mode as shown in Figure 28.4 (p. 469). In open-drain mode, the pin can have an input filter, a pull-up, different driver strengths or any combination of these. When driving a low value in open-drain mode, the pull-up is disconnected to save power.

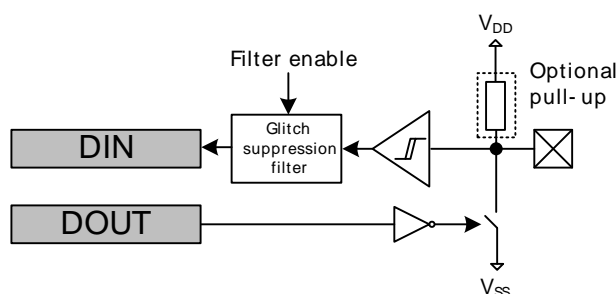Figure 28.4. Open-drain

When $MODE_n = 0b0101$ or $0b11xx$, the output driver uses the drive strength specified in $DRIVEMODE$ in $GPIO_Px_CTRL$. In all other output modes, the drive strength is set to **STANDARD**.

28.3.1.1 Configuration Lock

$GPIO_Px_MODEL$, $GPIO_Px_MODEH$, $GPIO_Px_CTRL$, $GPIO_Px_PINLOCKN$, $GPIO_EXTIPSELL$, $GPIO_EXTIPSELH$, $GPIO_INSENSE$ and $GPIO_ROUTE$ can be locked by writing any other value than 0xA534 to $GPIO_LOCK$. Writing the value 0xA534 to the $GPIOx_LOCK$ register unlocks the configuration registers.


In addition to configuration lock, $GPIO_Px_MODEL$, $GPIO_Px_MODEH$, $GPIO_Px_DOUT$, $GPIO_Px_DOUTSET$, $GPIO_Px_DOUTCLR$, and $GPIO_Px_DOUTTGL$ can be locked individually for each pin by clearing the corresponding bit in $GPIO_Px_PINLOCKN$. Bits in the $GPIO_Px_PINLOCKN$ register can only be cleared, they are set high again after reset.

28.3.2 EM4 Wake-up

It is possible to wake-up from EM4 through reset triggered from any of up to 6 selectable GPIO pins. For the wake-up logic to work correctly, EM4 retention needs to be enabled before entering EM4, as described in Section 28.3.3 (p. 470). The wake-up request can be triggered through the pins by enabling the corresponding bit in the $GPIO_EM4WUEN$ register. When EM4 wake-up is enabled for the

pin, the input filter is enabled during EM4. This is done to avoid false wake-up caused by glitches. In addition, the polarity of the EM4 wake-up request can be selected using the GPIO_EM4WUPOL register.

Figure 28.5. EM4 Wake-up Logic

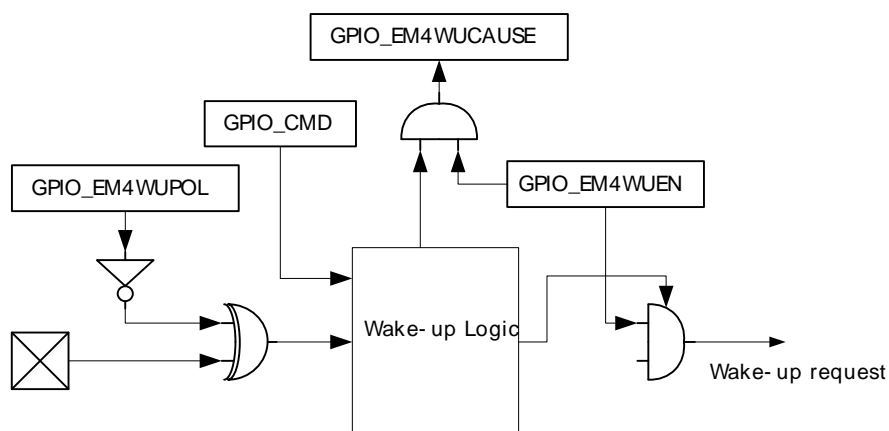

The pins used for EM4 wake-up must be configured as inputs using the GPIO_Px_MODEL/ GPIO_Px_MODEH register. Before going down to EM4, it is important to clear the wake-up logic by setting the EM4WUCLR bitfield in the GPIO_CMD register, which clears the complete wake-up logic, including the GPIO_EM4WUCAUSE register. When the chip comes out of reset, it is possible to determine what caused the reset by reading the RMU_RSTCAUSE register. If an EM4 wake-up reset occurred, the EM4RST (indicating the chip was in EM4) and the EM4WU (indicating the EM4 wake-up reset) bits should be set. It is possible to determine which pin caused the reset by reading the GPIO_EM4WUCAUSE register. The mapping between pins and the bits in the GPIO_EM4WUEN, GPIO_EM4WUPOL, and GPIO_EM4WUCAUSE registers are described in Table 28.2 (p. 470)

Table 28.2. EM4 WU Register bits to pin mapping

| Wake-up Registers Bits | Pin |
|------------------------|-----|
| bit 0 | A0 |
| bit 1 | A6 |
| bit 2 | C9 |
| bit 3 | F1 |
| bit 4 | F2 |
| bit 5 | E13 |

28.3.3 EM4 Retention

It is possible to enable retention of output enable, output value, pull enable and pull direction when in EM4. EM4 retention also makes it possible to wake up from EM4 on pin reset as described in Section 28.3.2 (p. 469) EM4 retention can be enabled by setting the EM4RET field in GPIO_CTRL register before going down in EM4.

28.3.4 Alternate Functions

Alternate functions are connections to pins from Timers, USARTs etc. These modules contain route registers, where the pin connections are enabled. In addition, these registers contain a location bit field, which configures which pins the outputs of that module will be connected to if they are enabled. If an alternate signal output is enabled for a pin and output is enabled for the pin, the alternate

function's output data and output enable signals override the data output and output enable signals from the GPIO. However, the pin configuration stays as set in GPIO_Px_MODEL, GPIO_Px_MODEH and GPIO_Px_DOUT registers. I.e. the pin configuration must be set to output enable in GPIO for a peripheral to be able to use the pin as an output.

It is possible, but not recommended to select two or more peripherals as output on the same pin. These signals will then be OR'ed together. However, TIMER CCx outputs, which are routed as alternate functions, have priority, and will never be OR'ed with other alternate functions. The reader is referred to the pin map section of the device datasheet for more information on the possible locations of each alternate function and any priority settings.

28.3.4.1 Serial Wire Debug Port Connection

The SW Debug Port is routed as an alternate function and the SWDIO and SWCLK pin connections are enabled by default with internal pull-up and pull-down resistors, respectively. It is possible to disable these pin connections (and disable the pull resistors) by setting the SWDIOPEN and SWCLKPEN bits in GPIO_ROUTE to 0.

WARNING: When the debug pins are disabled, the device can no longer be accessed by a debugger. A reset will set the debug pins back to their default state as enabled. If you do disable the debug pins, make sure you have at least a 3 second timeout at the start of your program code before you disable the debug pins. This way the debugger will have time to halt the device after a reset before the pins are disabled.

The Serial Wire Viewer Output pin (SWO) can be enabled by setting the SWOPEN bit in GPIO_ROUTE. This bit can also be routed to alternate locations by configuring the LOCATION bitfield in GPIO_ROUTE.


28.3.4.2 Analog Connections

When using the GPIO pin for analog functionality, it is recommended to disable the digital output and set the MODEN in GPIO_Px_MODEL/GPIO_Px_MODEH equal to 0b0000 to disable the input sense and pull resistors.

28.3.5 Interrupt Generation

The GPIO can generate an interrupt from the input of any GPIO pin on a device. The interrupts have asynchronous sense capability, enabling wake-up from energy modes as low as EM3, see Figure 28.6 (p. 471) .

Figure 28.6. Pin n Interrupt Generation

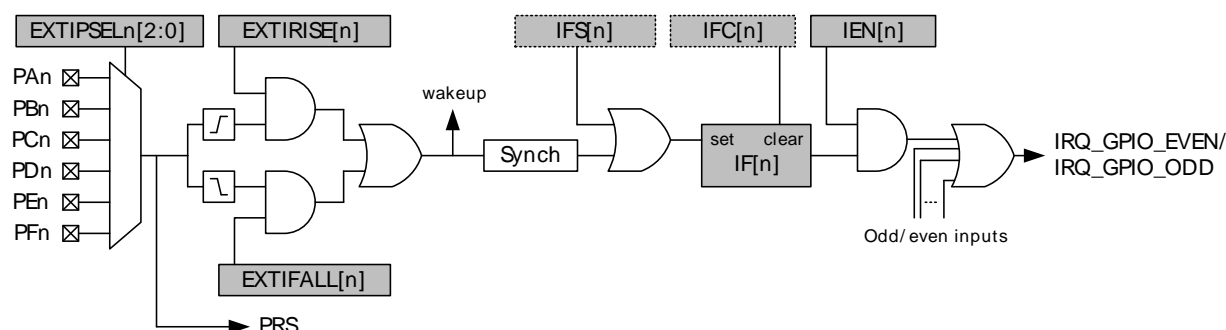

All pins with the same pin number (n) are grouped together to trigger one interrupt flag (EXT[n] in GPIO_IF). The EXTIPSELn[2:0] bits in GPIO_EXTIPSELL or GPIO_EXTIPSELH select which port will trigger the interrupt flag. The GPIO_EXTIRISE[n] and GPIO_EXTIFALL[n] registers enable sensing of rising and falling edges. By setting the EXT[n] bit in GPIO_IEN, a high interrupt flag n, will trigger one of two interrupt lines. The even interrupt line is triggered by any enabled even numbered interrupt flag,

while the odd is triggered by odd flags. The interrupt flags can be set and cleared by software by writing the GPIO_IFS and GPIO_IFC registers, see Example 28.1 (p. 472) . Since the external interrupts are asynchronous, they are sensitive to noise. To increase noise tolerance, the MODEL and MODEH fields in the GPIO_Px_MODEL and GPIO_Px_MODEH registers, respectively, should be set to include filtering for pins that have external interrupts enabled.

Example 28.1. GPIO Interrupt Example

Setting EXTIPSEL3 in GPIO_EXTIPSELL to 2 (Port C) and setting the GPIO_EXTIRISE[3] bit, the interrupt flag EXT[3] in GPIO_IF will be triggered by a rising edge on pin 3 on PORT C. If EXT[3] in GPIO_IEN is set as well, a interrupt request will be sent on IRQ_GPIO_ODD.

28.3.6 Output to PRS

All pins with the same pin number (n) are grouped together to form one PRS producer output, giving a total of 16 outputs to the PRS. The port on which the output n should be taken is selected by the EXTIPSELn[3:0] bits in the GPIO_EXTIPSELL or the GPIO_EXTIPSELH registers.

28.3.7 Synchronization

To avoid metastability in synchronous logic connected to the pins, all inputs are synchronized with double flip-flops. The flip-flops for the input data run on the HFCORECLK. Consequently, when a pin changes state, the change will have propagated to GPIO_Px_DIN after 2 positive HFCORECLK edges, or maximum 2 HFCORECLK cycles.

Synchronization (also running on the HFCORECLK) is also added for interrupt input. The input to the PRS generation is also synchronized, but these flip-flops run on the HFPERCLK. To save power when the external interrupts or PRS generation is not used, the synchronization flip-flops for these can be turned off by clearing the INTSENSE or PRSSENSE, respectively, in GPIO_INSENSE register.

Note

To use the GPIO, the GPIO clock must first be enabled in CMU_HFPERCLKEN0. Setting this bit enables the HFCORECLK and the HFPERCLK for the GPIO. HFCORECLK is used for updating registers, while HFPERCLK is only used to synchronize PRS and interrupts. The PRS and interrupt synchronization can also be disabled through GPIO_INSENSE, if these are not used.

28.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|------------------|------|-------------------------------|
| 0x000 | GPIO_PA_CTRL | RW | Port Control Register |
| 0x004 | GPIO_PA_MODEL | RW | Port Pin Mode Low Register |
| 0x008 | GPIO_PA_MODEH | RW | Port Pin Mode High Register |
| 0x00C | GPIO_PA_DOUT | RW | Port Data Out Register |
| 0x010 | GPIO_PA_DOUTSET | W1 | Port Data Out Set Register |
| 0x014 | GPIO_PA_DOUTCLR | W1 | Port Data Out Clear Register |
| 0x018 | GPIO_PA_DOUTTGL | W1 | Port Data Out Toggle Register |
| 0x01C | GPIO_PA_DIN | R | Port Data In Register |
| 0x020 | GPIO_PA_PINLOCKN | RW | Port Unlocked Pins Register |
| 0x024 | GPIO_PB_CTRL | RW | Port Control Register |
| 0x028 | GPIO_PB_MODEL | RW | Port Pin Mode Low Register |
| 0x02C | GPIO_PB_MODEH | RW | Port Pin Mode High Register |
| 0x030 | GPIO_PB_DOUT | RW | Port Data Out Register |
| 0x034 | GPIO_PB_DOUTSET | W1 | Port Data Out Set Register |
| 0x038 | GPIO_PB_DOUTCLR | W1 | Port Data Out Clear Register |
| 0x03C | GPIO_PB_DOUTTGL | W1 | Port Data Out Toggle Register |
| 0x040 | GPIO_PB_DIN | R | Port Data In Register |
| 0x044 | GPIO_PB_PINLOCKN | RW | Port Unlocked Pins Register |
| 0x048 | GPIO_PC_CTRL | RW | Port Control Register |
| 0x04C | GPIO_PC_MODEL | RW | Port Pin Mode Low Register |
| 0x050 | GPIO_PC_MODEH | RW | Port Pin Mode High Register |
| 0x054 | GPIO_PC_DOUT | RW | Port Data Out Register |
| 0x058 | GPIO_PC_DOUTSET | W1 | Port Data Out Set Register |
| 0x05C | GPIO_PC_DOUTCLR | W1 | Port Data Out Clear Register |
| 0x060 | GPIO_PC_DOUTTGL | W1 | Port Data Out Toggle Register |
| 0x064 | GPIO_PC_DIN | R | Port Data In Register |
| 0x068 | GPIO_PC_PINLOCKN | RW | Port Unlocked Pins Register |
| 0x06C | GPIO_PD_CTRL | RW | Port Control Register |
| 0x070 | GPIO_PD_MODEL | RW | Port Pin Mode Low Register |
| 0x074 | GPIO_PD_MODEH | RW | Port Pin Mode High Register |
| 0x078 | GPIO_PD_DOUT | RW | Port Data Out Register |
| 0x07C | GPIO_PD_DOUTSET | W1 | Port Data Out Set Register |
| 0x080 | GPIO_PD_DOUTCLR | W1 | Port Data Out Clear Register |
| 0x084 | GPIO_PD_DOUTTGL | W1 | Port Data Out Toggle Register |
| 0x088 | GPIO_PD_DIN | R | Port Data In Register |
| 0x08C | GPIO_PD_PINLOCKN | RW | Port Unlocked Pins Register |
| 0x090 | GPIO_PE_CTRL | RW | Port Control Register |
| 0x094 | GPIO_PE_MODEL | RW | Port Pin Mode Low Register |
| 0x098 | GPIO_PE_MODEH | RW | Port Pin Mode High Register |
| 0x09C | GPIO_PE_DOUT | RW | Port Data Out Register |

| Offset | Name | Type | Description |
|--------|------------------|------|--|
| 0x0A0 | GPIO_PE_DOUTSET | W1 | Port Data Out Set Register |
| 0x0A4 | GPIO_PE_DOUTCLR | W1 | Port Data Out Clear Register |
| 0x0A8 | GPIO_PE_DOUTTGL | W1 | Port Data Out Toggle Register |
| 0x0AC | GPIO_PE_DIN | R | Port Data In Register |
| 0x0B0 | GPIO_PE_PINLOCKN | RW | Port Unlocked Pins Register |
| 0x0B4 | GPIO_PF_CTRL | RW | Port Control Register |
| 0x0B8 | GPIO_PF_MODEL | RW | Port Pin Mode Low Register |
| 0x0BC | GPIO_PF_MODEH | RW | Port Pin Mode High Register |
| 0x0C0 | GPIO_PF_DOUT | RW | Port Data Out Register |
| 0x0C4 | GPIO_PF_DOUTSET | W1 | Port Data Out Set Register |
| 0x0C8 | GPIO_PF_DOUTCLR | W1 | Port Data Out Clear Register |
| 0x0CC | GPIO_PF_DOUTTGL | W1 | Port Data Out Toggle Register |
| 0x0D0 | GPIO_PF_DIN | R | Port Data In Register |
| 0x0D4 | GPIO_PF_PINLOCKN | RW | Port Unlocked Pins Register |
| 0x100 | GPIO_EXTIPSELL | RW | External Interrupt Port Select Low Register |
| 0x104 | GPIO_EXTIPSELH | RW | External Interrupt Port Select High Register |
| 0x108 | GPIO_EXTIRISE | RW | External Interrupt Rising Edge Trigger Register |
| 0x10C | GPIO_EXTIFALL | RW | External Interrupt Falling Edge Trigger Register |
| 0x110 | GPIO_IEN | RW | Interrupt Enable Register |
| 0x114 | GPIO_IF | R | Interrupt Flag Register |
| 0x118 | GPIO_IFS | W1 | Interrupt Flag Set Register |
| 0x11C | GPIO_IFC | W1 | Interrupt Flag Clear Register |
| 0x120 | GPIO_ROUTE | RW | I/O Routing Register |
| 0x124 | GPIO_INSENSE | RW | Input Sense Register |
| 0x128 | GPIO_LOCK | RW | Configuration Lock Register |
| 0x12C | GPIO_CTRL | RW | GPIO Control Register |
| 0x130 | GPIO_CMD | W1 | GPIO Command Register |
| 0x134 | GPIO_EM4WUEN | RW | EM4 Wake-up Enable Register |
| 0x138 | GPIO_EM4WUPOL | RW | EM4 Wake-up Polarity Register |
| 0x13C | GPIO_EM4WUCAUSE | R | EM4 Wake-up Cause Register |

28.5 Register Description

28.5.1 GPIO_Px_CTRL - Port Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-----------|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | DRIVEMODE |

| Bit | Name | Reset | Access | Description |
|------|-----------|---|----------------------|--|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1:0 | DRIVEMODE | 0x0 | RW | Drive Mode Select Select drive mode for all pins on port configured with alternate drive strength. |
| | Value | Mode | Description | |
| | 0 | STANDARD | 6 mA drive current | |
| | 1 | LOWEST | 0.1 mA drive current | |
| | 2 | HIGH | 20 mA drive current | |
| | 3 | LOW | 1 mA drive current | |

28.5.2 GPIO_Px_MODEL - Port Pin Mode Low Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|-------|----|----|----|-------|----|----|----|-------|----|----|----|-------|----|----|----|-------|----|---|---|-------|---|---|---|-------|---|---|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | |
| Access | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | |
| Name | MODE7 | | | | MODE6 | | | | MODE5 | | | | MODE4 | | | | MODE3 | | | | MODE2 | | | | MODE1 | | | | MODE0 | | | |

| Bit | Name | Reset | Access | Description |
|-------|-------|----------------------|---|---|
| 31:28 | MODE7 | 0x0 | RW | Pin 7 Mode Configure mode for pin 7. Enumeration is equal to MODE0. |
| 27:24 | MODE6 | 0x0 | RW | Pin 6 Mode Configure mode for pin 6. Enumeration is equal to MODE0. |
| 23:20 | MODE5 | 0x0 | RW | Pin 5 Mode Configure mode for pin 5. Enumeration is equal to MODE0. |
| 19:16 | MODE4 | 0x0 | RW | Pin 4 Mode Configure mode for pin 4. Enumeration is equal to MODE0. |
| 15:12 | MODE3 | 0x0 | RW | Pin 3 Mode Configure mode for pin 3. Enumeration is equal to MODE0. |
| 11:8 | MODE2 | 0x0 | RW | Pin 2 Mode Configure mode for pin 2. Enumeration is equal to MODE0. |
| 7:4 | MODE1 | 0x0 | RW | Pin 1 Mode Configure mode for pin 1. Enumeration is equal to MODE0. |
| 3:0 | MODE0 | 0x0 | RW | Pin 0 Mode Configure mode for pin 0. |
| | Value | Mode | Description | |
| | 0 | DISABLED | Input disabled. Pullup if DOUT is set. | |
| | 1 | INPUT | Input enabled. Filter if DOUT is set | |
| | 2 | INPUTPULL | Input enabled. DOUT determines pull direction | |
| | 3 | INPUTPULLFILTER | Input enabled with filter. DOUT determines pull direction | |
| | 4 | PUSHPULL | Push-pull output | |
| | 5 | PUSHPULLDRIVE | Push-pull output with drive-strength set by DRIVEMODE | |
| | 6 | WIREDOR | Wired-or output | |
| | 7 | WIREDORPULLDOWN | Wired-or output with pull-down | |
| | 8 | WIREDAND | Open-drain output | |
| | 9 | WIREDANDFILTER | Open-drain output with filter | |
| | 10 | WIREDANDPULLUP | Open-drain output with pullup | |
| | 11 | WIREDANDPULLUPFILTER | Open-drain output with filter and pullup | |
| | 12 | WIREDANDDRIVE | Open-drain output with drive-strength set by DRIVEMODE | |

| Bit | Name | Reset | Access | Description |
|-----|---------------------------|-------|--------|---|
| | Value | Mode | | Description |
| 13 | WIREDANDDRIVEFILTER | | | Open-drain output with filter and drive-strength set by DRIVEMODE |
| 14 | WIREDANDDRIVEPULLUP | | | Open-drain output with pullup and drive-strength set by DRIVEMODE |
| 15 | WIREDANDDRIVEPULLUPFILTER | | | Open-drain output with filter, pullup and drive-strength set by DRIVEMODE |

28.5.3 GPIO_Px_MODEH - Port Pin Mode High Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|---|---|-------|---|---|---|-------|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | |
| Access | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | |
| Name | MODE15 | | | | MODE14 | | | | MODE13 | | | | MODE12 | | | | MODE11 | | | | MODE10 | | | | MODE9 | | | | MODE8 | | | |

| Bit | Name | Reset | Access | Description |
|-------|--------|-------|--------|---|
| 31:28 | MODE15 | 0x0 | RW | Pin 15 Mode Configure mode for pin 15. Enumeration is equal to MODE8. |
| 27:24 | MODE14 | 0x0 | RW | Pin 14 Mode Configure mode for pin 14. Enumeration is equal to MODE8. |
| 23:20 | MODE13 | 0x0 | RW | Pin 13 Mode Configure mode for pin 13. Enumeration is equal to MODE8. |
| 19:16 | MODE12 | 0x0 | RW | Pin 12 Mode Configure mode for pin 12. Enumeration is equal to MODE8. |
| 15:12 | MODE11 | 0x0 | RW | Pin 11 Mode Configure mode for pin 11. Enumeration is equal to MODE8. |
| 11:8 | MODE10 | 0x0 | RW | Pin 10 Mode Configure mode for pin 10. Enumeration is equal to MODE8. |
| 7:4 | MODE9 | 0x0 | RW | Pin 9 Mode Configure mode for pin 9. Enumeration is equal to MODE8. |
| 3:0 | MODE8 | 0x0 | RW | Pin 8 Mode Configure mode for pin 8. |

| | | |
|-------|---------------------------|---|
| Value | Mode | Description |
| 0 | DISABLED | Input disabled. Pullup if DOUT is set. |
| 1 | INPUT | Input enabled. Filter if DOUT is set |
| 2 | INPUTPULL | Input enabled. DOUT determines pull direction |
| 3 | INPUTPULLFILTER | Input enabled with filter. DOUT determines pull direction |
| 4 | PUSHPULL | Push-pull output |
| 5 | PUSHPULLDRIVE | Push-pull output with drive-strength set by DRIVEMODE |
| 6 | WIREDOR | Wired-or output |
| 7 | WIREDORPULLDOWN | Wired-or output with pull-down |
| 8 | WIREDAND | Open-drain output |
| 9 | WIREDANDFILTER | Open-drain output with filter |
| 10 | WIREDANDPULLUP | Open-drain output with pullup |
| 11 | WIREDANDPULLUPFILTER | Open-drain output with filter and pullup |
| 12 | WIREDANDDRIVE | Open-drain output with drive-strength set by DRIVEMODE |
| 13 | WIREDANDDRIVEFILTER | Open-drain output with filter and drive-strength set by DRIVEMODE |
| 14 | WIREDANDDRIVEPULLUP | Open-drain output with pullup and drive-strength set by DRIVEMODE |
| 15 | WIREDANDDRIVEPULLUPFILTER | Open-drain output with filter, pullup and drive-strength set by DRIVEMODE |

28.5.4 GPIO_Px_DOUT - Port Data Out Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | DOUT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | DOUT | 0x0000 | RW | Data Out Data output on port. |

28.5.5 GPIO_Px_DOUTSET - Port Data Out Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W1 | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | DOUTSET | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | DOUTSET | 0x0000 | W1 | Data Out Set Write bits to 1 to set corresponding bits in GPIO_Px_DOUT. Bits written to 0 will have no effect. |

28.5.6 GPIO_Px_DOUTCLR - Port Data Out Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W1 | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | DOUTCLR | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | DOUTCLR | 0x0000 | W1 | Data Out Clear Write bits to 1 to clear corresponding bits in GPIO_Px_DOUT. Bits written to 0 will have no effect. |

28.5.7 GPIO_Px_DOUTTGL - Port Data Out Toggle Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W1 | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | DOUTTGL | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | DOUTTGL | 0x0000 | W1 | Data Out Toggle Write bits to 1 to toggle corresponding bits in GPIO_Px_DOUT. Bits written to 0 will have no effect. |

28.5.8 GPIO_Px_DIN - Port Data In Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | DIN | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|------------------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | DIN | 0x0000 | R | Data In Port data input. |

28.5.9 GPIO_Px_PINLOCKN - Port Unlocked Pins Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0xFFFF | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | PINLOCKN | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | PINLOCKN | 0xFFFF | RW | Unlocked Pins Shows unlocked pins in the port. To lock pin n, clear bit n. The pin is then locked until reset. |

28.5.10 GPIO_EXTIPSELL - External Interrupt Port Select Low Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|-----------|-----|----|----|-----------|-----|----|----|-----------|-----|----|----|-----------|-----|----|----|-----------|-----|----|----|-----------|-----|---|---|-----------|-----|---|---|-----------|-----|---|
| 0x100 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | |
| Access | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | |
| Name | | EXTIPSEL7 | | | | EXTIPSEL6 | | | | EXTIPSEL5 | | | | EXTIPSEL4 | | | | EXTIPSEL3 | | | | EXTIPSEL2 | | | | EXTIPSEL1 | | | | EXTIPSEL0 | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | |
|-------|-----------|---|--------|---|-------|------|-------------|---|-------|--|---|-------|--|---|-------|--|---|-------|--|---|-------|--|---|-------|--|
| 31 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 30:28 | EXTIPSEL7 | 0x0 | RW | External Interrupt 7 Port Select Select input port for external interrupt 7. | | | | | | | | | | | | | | | | | | | | | |
| | | | | <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PORTA</td><td>Port A pin 7 selected for external interrupt 7</td></tr><tr><td>1</td><td>PORTB</td><td>Port B pin 7 selected for external interrupt 7</td></tr><tr><td>2</td><td>PORTC</td><td>Port C pin 7 selected for external interrupt 7</td></tr><tr><td>3</td><td>PORTD</td><td>Port D pin 7 selected for external interrupt 7</td></tr><tr><td>4</td><td>PORTE</td><td>Port E pin 7 selected for external interrupt 7</td></tr><tr><td>5</td><td>PORTF</td><td>Port F pin 7 selected for external interrupt 7</td></tr></table> | Value | Mode | Description | 0 | PORTA | Port A pin 7 selected for external interrupt 7 | 1 | PORTB | Port B pin 7 selected for external interrupt 7 | 2 | PORTC | Port C pin 7 selected for external interrupt 7 | 3 | PORTD | Port D pin 7 selected for external interrupt 7 | 4 | PORTE | Port E pin 7 selected for external interrupt 7 | 5 | PORTF | Port F pin 7 selected for external interrupt 7 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PORTA | Port A pin 7 selected for external interrupt 7 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PORTB | Port B pin 7 selected for external interrupt 7 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PORTC | Port C pin 7 selected for external interrupt 7 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PORTD | Port D pin 7 selected for external interrupt 7 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PORTE | Port E pin 7 selected for external interrupt 7 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PORTF | Port F pin 7 selected for external interrupt 7 | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | |
| 26:24 | EXTIPSEL6 | 0x0 | RW | External Interrupt 6 Port Select Select input port for external interrupt 6. | | | | | | | | | | | | | | | | | | | | | |
| | | | | <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PORTA</td><td>Port A pin 6 selected for external interrupt 6</td></tr><tr><td>1</td><td>PORTB</td><td>Port B pin 6 selected for external interrupt 6</td></tr><tr><td>2</td><td>PORTC</td><td>Port C pin 6 selected for external interrupt 6</td></tr><tr><td>3</td><td>PORTD</td><td>Port D pin 6 selected for external interrupt 6</td></tr><tr><td>4</td><td>PORTE</td><td>Port E pin 6 selected for external interrupt 6</td></tr><tr><td>5</td><td>PORTF</td><td>Port F pin 6 selected for external interrupt 6</td></tr></table> | Value | Mode | Description | 0 | PORTA | Port A pin 6 selected for external interrupt 6 | 1 | PORTB | Port B pin 6 selected for external interrupt 6 | 2 | PORTC | Port C pin 6 selected for external interrupt 6 | 3 | PORTD | Port D pin 6 selected for external interrupt 6 | 4 | PORTE | Port E pin 6 selected for external interrupt 6 | 5 | PORTF | Port F pin 6 selected for external interrupt 6 |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PORTA | Port A pin 6 selected for external interrupt 6 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PORTB | Port B pin 6 selected for external interrupt 6 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PORTC | Port C pin 6 selected for external interrupt 6 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PORTD | Port D pin 6 selected for external interrupt 6 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PORTE | Port E pin 6 selected for external interrupt 6 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PORTF | Port F pin 6 selected for external interrupt 6 | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | |
|-------|---|--|--------|--|---|-------|--|---|-------|--|---|-------|--|---|-------|--|---|-------|--|---|-------|--|--|--|--|
| 23 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | |
| 22:20 | EXTIPSEL5 | 0x0 | RW | External Interrupt 5 Port Select Select input port for external interrupt 5. | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PORTA</td><td>Port A pin 5 selected for external interrupt 5</td></tr><tr><td>1</td><td>PORTB</td><td>Port B pin 5 selected for external interrupt 5</td></tr><tr><td>2</td><td>PORTC</td><td>Port C pin 5 selected for external interrupt 5</td></tr><tr><td>3</td><td>PORTD</td><td>Port D pin 5 selected for external interrupt 5</td></tr><tr><td>4</td><td>PORTE</td><td>Port E pin 5 selected for external interrupt 5</td></tr><tr><td>5</td><td>PORTF</td><td>Port F pin 5 selected for external interrupt 5</td></tr></table> | Value | Mode | Description | 0 | PORTA | Port A pin 5 selected for external interrupt 5 | 1 | PORTB | Port B pin 5 selected for external interrupt 5 | 2 | PORTC | Port C pin 5 selected for external interrupt 5 | 3 | PORTD | Port D pin 5 selected for external interrupt 5 | 4 | PORTE | Port E pin 5 selected for external interrupt 5 | 5 | PORTF | Port F pin 5 selected for external interrupt 5 | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PORTA | Port A pin 5 selected for external interrupt 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PORTB | Port B pin 5 selected for external interrupt 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PORTC | Port C pin 5 selected for external interrupt 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PORTD | Port D pin 5 selected for external interrupt 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PORTE | Port E pin 5 selected for external interrupt 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PORTF | Port F pin 5 selected for external interrupt 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 19 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | |
| 18:16 | EXTIPSEL4 | 0x0 | RW | External Interrupt 4 Port Select Select input port for external interrupt 4. | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PORTA</td><td>Port A pin 4 selected for external interrupt 4</td></tr><tr><td>1</td><td>PORTB</td><td>Port B pin 4 selected for external interrupt 4</td></tr><tr><td>2</td><td>PORTC</td><td>Port C pin 4 selected for external interrupt 4</td></tr><tr><td>3</td><td>PORTD</td><td>Port D pin 4 selected for external interrupt 4</td></tr><tr><td>4</td><td>PORTE</td><td>Port E pin 4 selected for external interrupt 4</td></tr><tr><td>5</td><td>PORTF</td><td>Port F pin 4 selected for external interrupt 4</td></tr></table> | Value | Mode | Description | 0 | PORTA | Port A pin 4 selected for external interrupt 4 | 1 | PORTB | Port B pin 4 selected for external interrupt 4 | 2 | PORTC | Port C pin 4 selected for external interrupt 4 | 3 | PORTD | Port D pin 4 selected for external interrupt 4 | 4 | PORTE | Port E pin 4 selected for external interrupt 4 | 5 | PORTF | Port F pin 4 selected for external interrupt 4 | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PORTA | Port A pin 4 selected for external interrupt 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PORTB | Port B pin 4 selected for external interrupt 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PORTC | Port C pin 4 selected for external interrupt 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PORTD | Port D pin 4 selected for external interrupt 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PORTE | Port E pin 4 selected for external interrupt 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PORTF | Port F pin 4 selected for external interrupt 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | |
| 14:12 | EXTIPSEL3 | 0x0 | RW | External Interrupt 3 Port Select Select input port for external interrupt 3. | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PORTA</td><td>Port A pin 3 selected for external interrupt 3</td></tr><tr><td>1</td><td>PORTB</td><td>Port B pin 3 selected for external interrupt 3</td></tr><tr><td>2</td><td>PORTC</td><td>Port C pin 3 selected for external interrupt 3</td></tr><tr><td>3</td><td>PORTD</td><td>Port D pin 3 selected for external interrupt 3</td></tr><tr><td>4</td><td>PORTE</td><td>Port E pin 3 selected for external interrupt 3</td></tr><tr><td>5</td><td>PORTF</td><td>Port F pin 3 selected for external interrupt 3</td></tr></table> | Value | Mode | Description | 0 | PORTA | Port A pin 3 selected for external interrupt 3 | 1 | PORTB | Port B pin 3 selected for external interrupt 3 | 2 | PORTC | Port C pin 3 selected for external interrupt 3 | 3 | PORTD | Port D pin 3 selected for external interrupt 3 | 4 | PORTE | Port E pin 3 selected for external interrupt 3 | 5 | PORTF | Port F pin 3 selected for external interrupt 3 | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PORTA | Port A pin 3 selected for external interrupt 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PORTB | Port B pin 3 selected for external interrupt 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PORTC | Port C pin 3 selected for external interrupt 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PORTD | Port D pin 3 selected for external interrupt 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PORTE | Port E pin 3 selected for external interrupt 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PORTF | Port F pin 3 selected for external interrupt 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | |
| 10:8 | EXTIPSEL2 | 0x0 | RW | External Interrupt 2 Port Select Select input port for external interrupt 2. | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PORTA</td><td>Port A pin 2 selected for external interrupt 2</td></tr><tr><td>1</td><td>PORTB</td><td>Port B pin 2 selected for external interrupt 2</td></tr><tr><td>2</td><td>PORTC</td><td>Port C pin 2 selected for external interrupt 2</td></tr><tr><td>3</td><td>PORTD</td><td>Port D pin 2 selected for external interrupt 2</td></tr><tr><td>4</td><td>PORTE</td><td>Port E pin 2 selected for external interrupt 2</td></tr><tr><td>5</td><td>PORTF</td><td>Port F pin 2 selected for external interrupt 2</td></tr></table> | Value | Mode | Description | 0 | PORTA | Port A pin 2 selected for external interrupt 2 | 1 | PORTB | Port B pin 2 selected for external interrupt 2 | 2 | PORTC | Port C pin 2 selected for external interrupt 2 | 3 | PORTD | Port D pin 2 selected for external interrupt 2 | 4 | PORTE | Port E pin 2 selected for external interrupt 2 | 5 | PORTF | Port F pin 2 selected for external interrupt 2 | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PORTA | Port A pin 2 selected for external interrupt 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PORTB | Port B pin 2 selected for external interrupt 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PORTC | Port C pin 2 selected for external interrupt 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PORTD | Port D pin 2 selected for external interrupt 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PORTE | Port E pin 2 selected for external interrupt 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | PORTF | Port F pin 2 selected for external interrupt 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | | | | | | | | | | | | | | |
| 6:4 | EXTIPSEL1 | 0x0 | RW | External Interrupt 1 Port Select Select input port for external interrupt 1. | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>PORTA</td><td>Port A pin 1 selected for external interrupt 1</td></tr><tr><td>1</td><td>PORTB</td><td>Port B pin 1 selected for external interrupt 1</td></tr><tr><td>2</td><td>PORTC</td><td>Port C pin 1 selected for external interrupt 1</td></tr><tr><td>3</td><td>PORTD</td><td>Port D pin 1 selected for external interrupt 1</td></tr><tr><td>4</td><td>PORTE</td><td>Port E pin 1 selected for external interrupt 1</td></tr></table> | Value | Mode | Description | 0 | PORTA | Port A pin 1 selected for external interrupt 1 | 1 | PORTB | Port B pin 1 selected for external interrupt 1 | 2 | PORTC | Port C pin 1 selected for external interrupt 1 | 3 | PORTD | Port D pin 1 selected for external interrupt 1 | 4 | PORTE | Port E pin 1 selected for external interrupt 1 | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | PORTA | Port A pin 1 selected for external interrupt 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | PORTB | Port B pin 1 selected for external interrupt 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | PORTC | Port C pin 1 selected for external interrupt 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | PORTD | Port D pin 1 selected for external interrupt 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | PORTE | Port E pin 1 selected for external interrupt 1 | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|---|-------|--------|--|
| | Value | Mode | | Description |
| | 5 | PORTF | | Port F pin 1 selected for external interrupt 1 |
| 3 | <i>Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 2:0 | EXTIPSEL0 | 0x0 | RW | External Interrupt 0 Port Select |
| | Select input port for external interrupt 0. | | | |
| | Value | Mode | | Description |
| | 0 | PORTA | | Port A pin 0 selected for external interrupt 0 |
| | 1 | PORTB | | Port B pin 0 selected for external interrupt 0 |
| | 2 | PORTC | | Port C pin 0 selected for external interrupt 0 |
| | 3 | PORTD | | Port D pin 0 selected for external interrupt 0 |
| | 4 | PORTE | | Port E pin 0 selected for external interrupt 0 |
| | 5 | PORTF | | Port F pin 0 selected for external interrupt 0 |

28.5.11 GPIO_EXTIPSELH - External Interrupt Port Select High Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|------------|-----|----|----|------------|-----|----|----|------------|-----|----|----|------------|-----|----|----|------------|-----|----|----|------------|-----|---|---|-----------|-----|---|---|-----------|-----|---|
| 0x104 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | | | | 0x0 | |
| Access | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | | | | RW | |
| Name | | EXTIPSEL15 | | | | EXTIPSEL14 | | | | EXTIPSEL13 | | | | EXTIPSEL12 | | | | EXTIPSEL11 | | | | EXTIPSEL10 | | | | EXTIPSEL9 | | | | EXTIPSEL8 | | |

| Bit | Name | Reset | Access | Description |
|-------|---|-------|--------|--|
| 31 | <i>Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 30:28 | EXTIPSEL15 | 0x0 | RW | External Interrupt 15 Port Select |
| | Select input port for external interrupt 15. | | | |
| | Value | Mode | | Description |
| | 0 | PORTA | | Port A pin 15 selected for external interrupt 15 |
| | 1 | PORTB | | Port B pin 15 selected for external interrupt 15 |
| | 2 | PORTC | | Port C pin 15 selected for external interrupt 15 |
| | 3 | PORTD | | Port D pin 15 selected for external interrupt 15 |
| | 4 | PORTE | | Port E pin 15 selected for external interrupt 15 |
| | 5 | PORTF | | Port F pin 15 selected for external interrupt 15 |
| 27 | <i>Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 26:24 | EXTIPSEL14 | 0x0 | RW | External Interrupt 14 Port Select |
| | Select input port for external interrupt 14. | | | |
| | Value | Mode | | Description |
| | 0 | PORTA | | Port A pin 14 selected for external interrupt 14 |
| | 1 | PORTB | | Port B pin 14 selected for external interrupt 14 |
| | 2 | PORTC | | Port C pin 14 selected for external interrupt 14 |
| | 3 | PORTD | | Port D pin 14 selected for external interrupt 14 |
| | 4 | PORTE | | Port E pin 14 selected for external interrupt 14 |
| | 5 | PORTF | | Port F pin 14 selected for external interrupt 14 |
| 23 | <i>Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | |
| 22:20 | EXTIPSEL13 | 0x0 | RW | External Interrupt 13 Port Select |
| | Select input port for external interrupt 13. | | | |

| Bit | Name | Reset | Access | Description |
|--|-----------------|-------|--|--|
| | Value | Mode | Description | |
| | 0 | PORTA | Port A pin 13 selected for external interrupt 13 | |
| | 1 | PORTB | Port B pin 13 selected for external interrupt 13 | |
| | 2 | PORTC | Port C pin 13 selected for external interrupt 13 | |
| | 3 | PORTD | Port D pin 13 selected for external interrupt 13 | |
| | 4 | PORTE | Port E pin 13 selected for external interrupt 13 | |
| | 5 | PORTF | Port F pin 13 selected for external interrupt 13 | |
| 19 | <i>Reserved</i> | | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | |
| 18:16 | EXTIPSEL12 | 0x0 | RW | External Interrupt 12 Port Select |
| Select input port for external interrupt 12. | | | | |
| | Value | Mode | Description | |
| | 0 | PORTA | Port A pin 12 selected for external interrupt 12 | |
| | 1 | PORTB | Port B pin 12 selected for external interrupt 12 | |
| | 2 | PORTC | Port C pin 12 selected for external interrupt 12 | |
| | 3 | PORTD | Port D pin 12 selected for external interrupt 12 | |
| | 4 | PORTE | Port E pin 12 selected for external interrupt 12 | |
| | 5 | PORTF | Port F pin 12 selected for external interrupt 12 | |
| 15 | <i>Reserved</i> | | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | |
| 14:12 | EXTIPSEL11 | 0x0 | RW | External Interrupt 11 Port Select |
| Select input port for external interrupt 11. | | | | |
| | Value | Mode | Description | |
| | 0 | PORTA | Port A pin 11 selected for external interrupt 11 | |
| | 1 | PORTB | Port B pin 11 selected for external interrupt 11 | |
| | 2 | PORTC | Port C pin 11 selected for external interrupt 11 | |
| | 3 | PORTD | Port D pin 11 selected for external interrupt 11 | |
| | 4 | PORTE | Port E pin 11 selected for external interrupt 11 | |
| | 5 | PORTF | Port F pin 11 selected for external interrupt 11 | |
| 11 | <i>Reserved</i> | | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | |
| 10:8 | EXTIPSEL10 | 0x0 | RW | External Interrupt 10 Port Select |
| Select input port for external interrupt 10. | | | | |
| | Value | Mode | Description | |
| | 0 | PORTA | Port A pin 10 selected for external interrupt 10 | |
| | 1 | PORTB | Port B pin 10 selected for external interrupt 10 | |
| | 2 | PORTC | Port C pin 10 selected for external interrupt 10 | |
| | 3 | PORTD | Port D pin 10 selected for external interrupt 10 | |
| | 4 | PORTE | Port E pin 10 selected for external interrupt 10 | |
| | 5 | PORTF | Port F pin 10 selected for external interrupt 10 | |
| 7 | <i>Reserved</i> | | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | |
| 6:4 | EXTIPSEL9 | 0x0 | RW | External Interrupt 9 Port Select |
| Select input port for external interrupt 9. | | | | |
| | Value | Mode | Description | |
| | 0 | PORTA | Port A pin 9 selected for external interrupt 9 | |
| | 1 | PORTB | Port B pin 9 selected for external interrupt 9 | |
| | 2 | PORTC | Port C pin 9 selected for external interrupt 9 | |
| | 3 | PORTD | Port D pin 9 selected for external interrupt 9 | |
| | 4 | PORTE | Port E pin 9 selected for external interrupt 9 | |
| | 5 | PORTF | Port F pin 9 selected for external interrupt 9 | |
| 3 | <i>Reserved</i> | | <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | |
| 2:0 | EXTIPSEL8 | 0x0 | RW | External Interrupt 8 Port Select |

| Bit | Name | Reset | Access | Description |
|---|-------|-------|--------|--|
| Select input port for external interrupt 8. | | | | |
| | Value | Mode | | Description |
| | 0 | PORTA | | Port A pin 8 selected for external interrupt 8 |
| | 1 | PORTB | | Port B pin 8 selected for external interrupt 8 |
| | 2 | PORTC | | Port C pin 8 selected for external interrupt 8 |
| | 3 | PORTD | | Port D pin 8 selected for external interrupt 8 |
| | 4 | PORTE | | Port E pin 8 selected for external interrupt 8 |
| | 5 | PORTF | | Port F pin 8 selected for external interrupt 8 |

28.5.12 GPIO_EXTIRISE - External Interrupt Rising Edge Trigger Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x108 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | EXTIRISE | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|-----------------|---|--------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | EXTIRISE | 0x0000 | RW | External Interrupt n Rising Edge Trigger Enable |
| Set bit n to enable triggering of external interrupt n on rising edge. | | | | |
| | Value | | | Description |
| | EXTIRISE[n] = 0 | | | Rising edge trigger disabled |
| | EXTIRISE[n] = 1 | | | Rising edge trigger enabled |

28.5.13 GPIO_EXTIFALL - External Interrupt Falling Edge Trigger Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x10C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | EXTIFALL | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | EXTIFALL | 0x0000 | RW | External Interrupt n Falling Edge Trigger Enable |

| Bit | Name | Reset | Access | Description |
|---|------|-------------------------------|--------|-------------|
| Set bit n to enable triggering of external interrupt n on falling edge. | | | | |
| Value | | Description | | |
| EXTIFALL[n] = 0 | | Falling edge trigger disabled | | |
| EXTIFALL[n] = 1 | | Falling edge trigger enabled | | |

28.5.14 GPIO_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x110 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | EXT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|------------------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | EXT | 0x0000 | RW | External Interrupt n Enable |
| Set bit n to enable external interrupt from pin n. | | | | |
| Value | | Description | | |
| EXT[n] = 0 | | Pin n external interrupt disabled | | |
| EXT[n] = 1 | | Pin n external interrupt enabled | | |

28.5.15 GPIO_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x114 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | R | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | EXT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--------------------------------|----------|---|--------|----------------------------------|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | EXT | 0x0000 | R | External Interrupt Flag n |
| Pin n external interrupt flag. | | | | |
| Value | | Description | | |
| EXT[n] = 0 | | Pin n external interrupt flag cleared | | |

| Bit | Name | Reset | Access | Description |
|-----|------------|-------|--------|-----------------------------------|
| | Value | | | Description |
| | EXT[n] = 1 | | | Pin n external interrupt flag set |

28.5.16 GPIO_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x118 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W1 | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | EXT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|---|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | EXT | 0x0000 | W1 | External Interrupt Flag n Set |
| | Write bit n to 1 to set interrupt flag n. | | | |
| | Value | | | Description |
| | EXT[n] = 0 | | | Pin n external interrupt flag unchanged |
| | EXT[n] = 1 | | | Pin n external interrupt flag set |

28.5.17 GPIO_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x11C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | W1 | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | EXT | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|--|---|--------|---|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | EXT | 0x0000 | W1 | External Interrupt Flag Clear |
| | Write bit n to 1 to clear external interrupt flag n. | | | |
| | Value | | | Description |
| | EXT[n] = 0 | | | Pin n external interrupt flag unchanged |
| | EXT[n] = 1 | | | Pin n external interrupt flag cleared |

28.5.18 GPIO_ROUTE - I/O Routing Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------------|---|---|---|---|---|---|---|--------|----------|----------|
| 0x120 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | 0x0 | | | | | | | | 0 | 1 | 1 |
| Access | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | RW | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | SWLOCATION | | | | | | | | SWOPEN | SWDIOPEN | SWCLKPEN |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|-------|------------|---|--------|---|-------|------|-------------|---|------|------------|---|------|------------|
| 31:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 9:8 | SWLOCATION | 0x0 | RW | I/O Location Decides the location of the SW pins. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>LOC0</td><td>Location 0</td></tr><tr><td>1</td><td>LOC1</td><td>Location 1</td></tr></table> | Value | Mode | Description | 0 | LOC0 | Location 0 | 1 | LOC1 | Location 1 |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | LOC0 | Location 0 | | | | | | | | | | | |
| 1 | LOC1 | Location 1 | | | | | | | | | | | |
| 7:3 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 2 | SWOPEN | 0 | RW | Serial Wire Viewer Output Pin Enable Enable Serial Wire Viewer Output connection to pin. | | | | | | | | | |
| 1 | SWDIOPEN | 1 | RW | Serial Wire Data Pin Enable Enable Serial Wire Data connection to pin. WARNING: When this pin is disabled, the device can no longer be accessed by a debugger. A reset will set the pin back to a default state as enabled. If you disable this pin, make sure you have at least a 3 second timeout at the start of you program code before you disable the pin. This way, the debugger will have time to halt the device after a reset before the pin is disabled. | | | | | | | | | |
| 0 | SWCLKPEN | 1 | RW | Serial Wire Clock Pin Enable Enable Serial Wire Clock connection to pin. WARNING: When this pin is disabled, the device can no longer be accessed by a debugger. A reset will set the pin back to a default state as enabled. If you disable this pin, make sure you have at least a 3 second timeout at the start of you program code before you disable the pin. This way, the debugger will have time to halt the device after a reset before the pin is disabled. | | | | | | | | | |

28.5.19 GPIO_INSENSE - Input Sense Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|-----|-----|
| 0x124 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1 | 1 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | PRS | INT |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:2 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 1 | PRS | 1 | RW | PRS Sense Enable Set this bit to enable input sensing for PRS. |
| 0 | INT | 1 | RW | Interrupt Sense Enable Set this bit to enable input sensing for interrupts. |

28.5.20 GPIO_LOCK - Configuration Lock Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x128 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | 0x0000 | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | RW | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | LOCKKEY | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----------------|----------|---|-----------------------------|--|
| 31:16 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 15:0 | LOCKKEY | 0x0000 | RW | Configuration Lock Key Write any other value than the unlock code to lock MODEL, MODEH, CTRL, PINLOCKN, EPISELL, EIPSELH, INSENSE and SWDPROUTE from editing. Write the unlock code to unlock. When reading the register, bit 0 is set when the lock is enabled. |
| Mode | | Value | Description | |
| Read Operation | | | | |
| UNLOCKED | | 0 | GPIO registers are unlocked | |
| LOCKED | | 1 | GPIO registers are locked | |
| Write Operation | | | | |
| LOCK | | 0 | Lock GPIO registers | |
| UNLOCK | | 0xA534 | Unlock GPIO registers | |

28.5.21 GPIO_CTRL - GPIO Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x12C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | EM4RET | 0 | RW | Enable EM4 retention Set to enable EM4 retention of output enable, output value and pull enable. |

28.5.22 GPIO_CMD - GPIO Command Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x130 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | EM4WUCLR | 0 | W1 | EM4 Wake-up clear Write 1 to clear all wake-up requests. |

28.5.23 GPIO_EM4WUEN - EM4 Wake-up Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---------|---|---|---|---|---|
| 0x134 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | EM4WUEN | | | | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5:0 | EM4WUEN | 0x00 | RW | EM4 Wake-up enable Write 1 to enable wake-up request, write 0 to disable wake-up request. |

| Value | Mode | Description |
|-------|------|------------------------------|
| 0x01 | A0 | Enable em4 wakeup on pin A0 |
| 0x02 | A6 | Enable em4 wakeup on pin A6 |
| 0x04 | C9 | Enable em4 wakeup on pin C9 |
| 0x08 | F1 | Enable em4 wakeup on pin F1 |
| 0x10 | F2 | Enable em4 wakeup on pin F2 |
| 0x20 | E13 | Enable em4 wakeup on pin E13 |

28.5.24 GPIO_EM4WUPOL - EM4 Wake-up Polarity Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|----------|---|---|---|---|---|
| 0x138 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | EM4WUPOL | | | | | |


| Bit | Name | Reset | Access | Description |
|---|----------|---|--------------------------------|-----------------------------|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5:0 | EM4WUPOL | 0x00 | RW | EM4 Wake-up Polarity |
| Write bit n to 1 for high wake-up request. Write bit n to 0 for low wake-up request | | | | |
| | Value | Mode | Description | |
| | 0x01 | A0 | Determines polarity on pin A0 | |
| | 0x02 | A6 | Determines polarity on pin A6 | |
| | 0x04 | C9 | Determines polarity on pin C9 | |
| | 0x08 | F1 | Determines polarity on pin F1 | |
| | 0x10 | F2 | Determines polarity on pin F2 | |
| | 0x20 | E13 | Determines polarity on pin E13 | |

28.5.25 GPIO_EM4WUCAUSE - EM4 Wake-up Cause Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|------------|---|---|---|
| 0x13C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | EM4WUCAUSE | | | |

| Bit | Name | Reset | Access | Description |
|---|------------|---|---|--------------------------|
| 31:6 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 5:0 | EM4WUCAUSE | 0x00 | R | EM4 wake-up cause |
| Bit n indicates which pin the wake-up request occurred. | | | | |
| | Value | Mode | Description | |
| | 0x01 | A0 | This bit indicates an em4 wake-up request occurred on pin A0 | |
| | 0x02 | A6 | This bit indicates an em4 wake-up request occurred on pin A6 | |
| | 0x04 | C9 | This bit indicates an em4 wake-up request occurred on pin C9 | |
| | 0x08 | F1 | This bit indicates an em4 wake-up request occurred on pin F1 | |
| | 0x10 | F2 | This bit indicates an em4 wake-up request occurred on pin F2 | |
| | 0x20 | E13 | This bit indicates an em4 wake-up request occurred on pin E13 | |

29 LCD - Liquid Crystal Display Driver

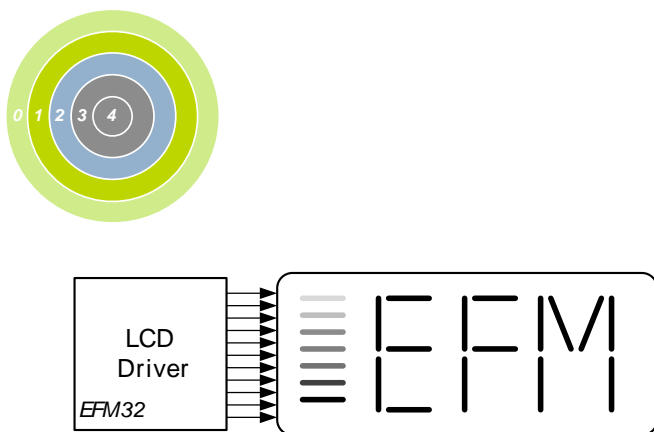

Quick Facts

What?

The LCD driver can drive up to 8x20 segmented LCD directly. The LCD driver consumes less than 900 nA in EM2. The animation feature makes it possible to have active animations without CPU intervention.

Why?

Segmented LCD displays are common way to display information. The extreme low-power LCD driver enables a lot of applications to utilize an LCD display even in energy critical systems.

How?

The low frequency clock signal, low-power waveform, animation and blink capabilities enable the LCD driver to run autonomously in EM2 for long periods. Adding the flexible frame rate setting, contrast control, and different multiplexing modes make the EFM32TG the optimal choice for battery-driven systems with LCD panels.

29.1 Introduction

The LCD driver is capable of driving a segmented LCD display combination of: 1x24, 2x24, 3x24, 4x24, 6x22 or 8x20 segments. A voltage boost function enables it to provide the LCD display with higher voltage than the supply voltage for the device. In addition, an animation feature can run custom animations on the LCD display without any CPU intervention. The LCD driver can also remain active even in Energy Mode 2 and provides a Frame Counter interrupt that can wake-up the device on a regular basis for updating data.

29.2 Features

- Up to 8x20 segments.
- Configurable multiplexing (1, 2, 3, 4, 6, 8)
- LCD supports the following COM/SEG combinations
 - 1x24, 2x24, 3x24, 4x24, 6x22, 8x20
- Configurable bias/voltage levels settings
- Configurable clock source prescaler
- Configurable Frame rate
- Segment lines can be enabled or disabled individually
- Blink capabilities
- Integrated animation functionality
- Voltage boost capabilities
- Possible to run on external power
- Programmable contrast
- Frame Counter


- LCD frame interrupt
- Direct segment control

29.3 Functional Description

An overview of the LCD module is shown in Figure 29.1 (p. 491). In its simplest form, an LCD driver would apply a voltage above a certain threshold voltage in order to darken a segment and a voltage below threshold to make a segment clear. However, the LCD display segment will degrade if the applied voltage has a DC-component. To avoid this, the applied waveforms are arranged such that the differential voltage seen by each segment has an average value of zero, and such that the RMS voltage (or differential sum of the two waveforms for fast response LCDs) is below the segment threshold voltage if the segment shall be transparent, and above the segment threshold voltage when the segment shall be dark.

The waveforms are multiplexed between eight (1-8) different common lines and segment lines to support up to 160 different LCD segments. The common lines and segment lines can be enabled or disabled individually to prevent the LCD driver from occupying more I/O resources than required.

Figure 29.1. LCD Block Diagram

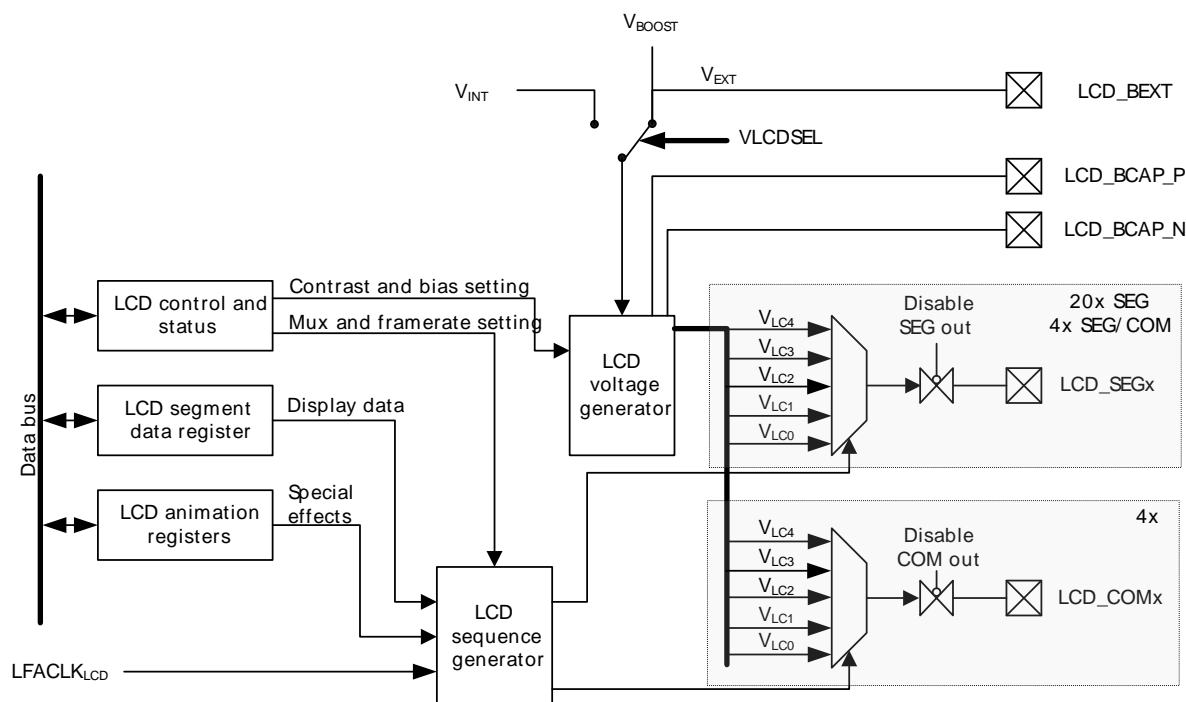

For simplicity, only one segment pin and one common terminal is shown in the figure.

29.3.1 LCD Driver Enable

Setting the EN bit in LCD_CTRL enables the LCD driver. The MUX bit-field in LCD_DISPCTRL determines which COM lines are driven by the LCD driver. By default, LCD_COM0 is driven whenever the LCD driver is enabled.

The LCD_SEGEN register determines which segment lines are enabled. Segment lines can be enabled in groups of 4 and disabled in groups of 4 or individually disabled. To enable output on segment lines 0-7 for instance, the two lowest segment groups, set the two lowest bits in LCD_SEGEN. Each LCD segment pin can also be individually disabled by setting the pin to any other state than DISABLED in the GPIO pin configuration.

Each LCD segment pin can also be individually disabled by setting the pin to any other state than DISABLED in the GPIO pin configuration.

29.3.2 Multiplexing, Bias, and Wave Settings

The LCD driver supports different multiplexing and bias settings, and these can be set individually in the MUX and BIAS bits in LCD_DISPCTRL respectively, see Table 29.1 (p. 492) and Table 29.2 (p. 492).

Note

If the MUX and BIAS settings in LCD_DISPCTRL are changed while the LCD driver is enabled, the output waveform is unpredictable and may lead to a DC-component for one LCD frame.

The MUX setting determines the number of LCD COM lines that are enabled. When using octaplex or sextaplex multiplexing, the additional COM lines used (COM4-COM7) are actually located on the SEG (SEG20-SEG23) lines. When static multiplexing is selected, LCD output is enabled on LCD_COM0, when duplex multiplexing is used, LCD_COM0-LCD_COM1 are used, when triplex multiplexing is selected, LCD_COM0-LCD_COM2 are used, when quadruplex multiplexing is selected, LCD_COM0-LCD_COM3 are used, when sextaplex multiplexing is selected, LCD_COM0-LCD_COM3 together with SEG20-SEG21 as LCD_COM4-LCD_COM5 are used, making 22 segments available, located in SEG0-SEG19, and SEG22-SEG23. Finally when octaplex multiplexing is selected, LCD_COM0-LCD_COM3 together with SEG20-SEG23 as LCD_COM4-LCD_COM7 are used, making the 36 segments available, located in SEG0-SEG19, and SEG24-SEG39.

See Section 29.3.3 (p. 493) for waveforms for the different bias and multiplexing settings.

The waveforms generated by the LCD controller can be generated in two different versions, regular and low-power. The low power mode waveforms have a lower switching frequency than the regular waveforms, and thus consume less power. The WAVE bit in LCD_DISPCTRL decides which waveforms to generate. An example of a low-power waveform is shown in Figure 29.2 (p. 493), and an example of a regular waveform is shown in Figure 29.3 (p. 493).

Table 29.1. LCD Mux Settings

| MUXE | MUX | Mode | Multiplexing |
|------|-----|------------|--|
| 0 | 00 | Static | Static (segments can be multiplexed with LCD_COM[0]) |
| 0 | 01 | Duplex | Duplex (segments can be multiplexed with LCD_COM[1:0]) |
| 0 | 10 | Triplex | Triplex (segments can be multiplexed with LCD_COM[2:0]) |
| 0 | 11 | Quadruplex | Quadruplex (segments can be multiplexed with LCD_COM[3:0]) |
| 1 | 01 | Sextaplex | Sextaplex (segments can be multiplexed with LCD_COM[3:0] and SEG[21:20]) |
| 1 | 11 | Octaplex | Octaplex (segments can be multiplexed with LCD_COM[3:0] and SEG[23:20]) |

Table 29.2. LCD BIAS Settings

| BIAS | Mode | Bias setting |
|------|-------------|---------------------|
| 00 | Static | Static (2 levels) |
| 01 | Half Bias | 1/2 Bias (3 levels) |
| 10 | Third Bias | 1/3 Bias (4 levels) |
| 11 | Fourth Bias | 1/4 Bias (5 levels) |

Table 29.3. LCD Wave Settings

| WAVE | Mode | Wave mode |
|------|----------|-------------------------------------|
| 0 | LowPower | Low power optimized waveform output |
| 1 | Normal | Regular waveform output |

Figure 29.2. LCD Low-power Waveform for LCD_COM0 in Quadruples Multiplex Mode, 1/3 Bias


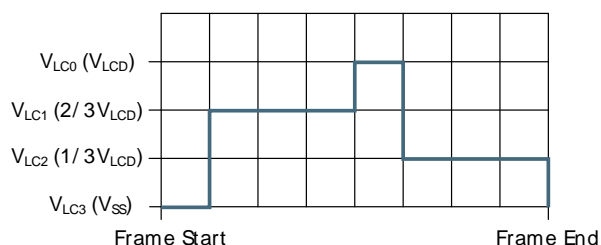


Figure 29.3. LCD Normal Waveform for LCD_COM0 in Quadruples Multiplex Mode, 1/3 Bias

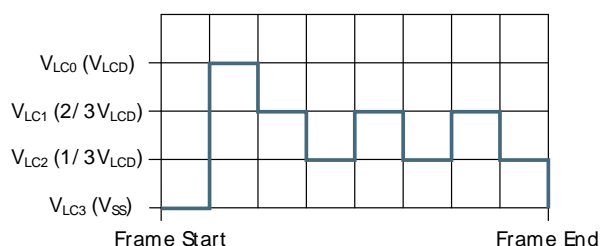


29.3.3 Waveform Examples

The numbers on the illustration's y-axes in the following sections only indicate different voltage levels. All examples are shown with low-power waveforms.

29.3.3.1 Waveforms with Static Bias and Multiplexing

- With static bias and multiplexing, each segment line can be connected to LCD_COM0. When the segment line has the same waveform as LCD_COM0, the LCD panel pixel is turned off, while when the segment line has the opposite waveform, the LCD panel pixel is turned on.
- DC voltage = 0 (over one frame)
- $V_{RMS} (on) = V_{LCD_OUT}$
- $V_{RMS} (off) = 0 (V_{SS})$

Figure 29.4. LCD Static Bias and Multiplexing - LCD_COM0

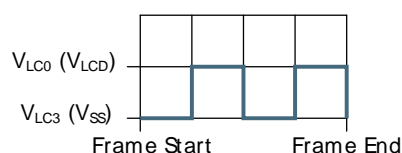

29.3.3.2 Waveforms with 1/2 Bias and Duplex Multiplexing

In this mode, each frame is divided into 4 periods. LCD_COM[1:0] lines can be multiplexed with all segment lines. Figures show 1/2 bias and duplex multiplexing (waveforms show two frames)

Figure 29.5. LCD 1/2 Bias and Duplex Multiplexing - LCD_COM0


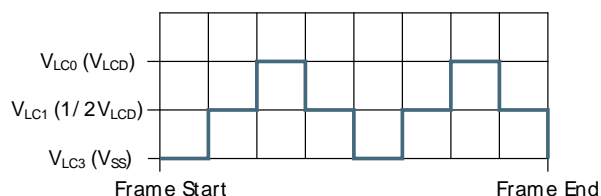


Figure 29.6. LCD 1/2 Bias and Duplex Multiplexing - LCD_COM1

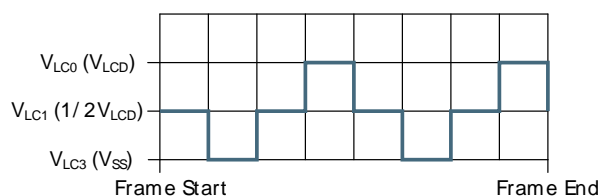

1/2 bias and duplex multiplexing - LCD_SEG0

The LCD_SEG0 waveform on the left is just an example to illustrate how different segment waveforms can be multiplexed with the LCD_COM lines in order to turn on and off LCD pixels. As illustrated in the figures below, this waveform will turn ON pixels connected to LCD_COM0, while pixels connected to LCD_COM1 will be turned OFF.

Figure 29.7. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0



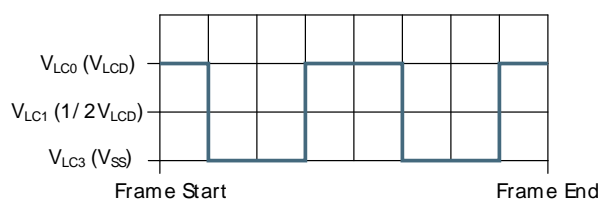


Figure 29.8. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0 Connection

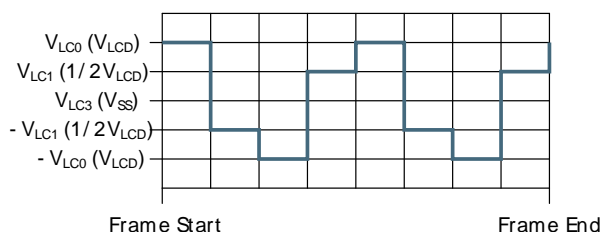


1/2 bias and duplex multiplexing - LCD_SEG0-LCD_COM0

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.79 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM0 will be ON with this waveform.

Figure 29.9. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM0

1/2 bias and duplex multiplexing - LCD_SEG0-LCD_COM1

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.35 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM0 will be OFF with this waveform

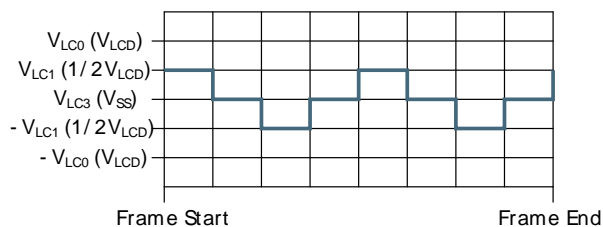Figure 29.10. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM1**29.3.3.3 Waveforms with 1/3 Bias and Duplex Multiplexing**

In this mode, each frame is divided into 4 periods. LCD_COM[1:0] lines can be multiplexed with all segment lines. Figures show 1/3 bias and duplex multiplexing (waveforms show two frames).

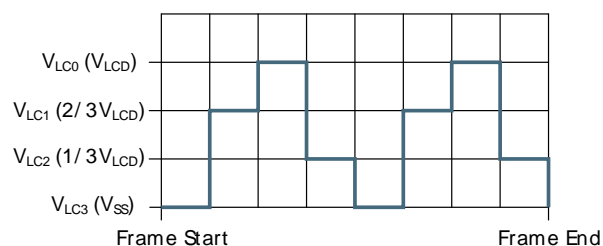
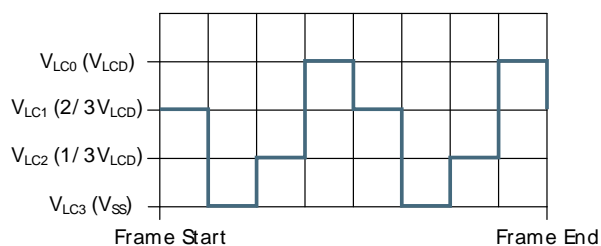
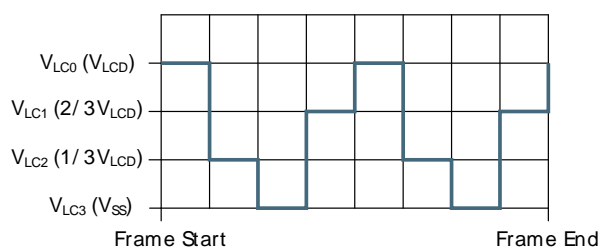

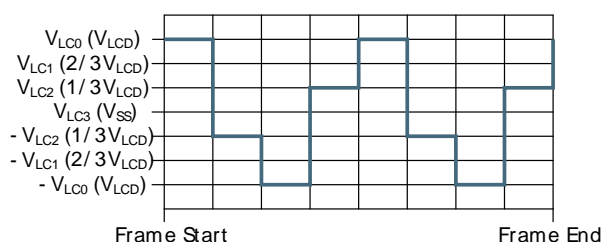
Figure 29.11. LCD 1/3 Bias and Duplex Multiplexing - LCD_COM0

Figure 29.12. LCD 1/3 Bias and Duplex Multiplexing - LCD_COM1**1/3 bias and duplex multiplexing - LCD_SEG0**

The LCD_SEG0 waveform on the left is just an example to illustrate how different segment waveforms can be multiplexed with the COM lines in order to turn on and off LCD pixels. As illustrated in the figures below, this waveform will turn ON pixels connected to LCD_COM0, while pixels connected to LCD_COM1 will be turned OFF.


Figure 29.13. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0**Figure 29.14. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0 Connection****1/3 bias and duplex multiplexing - LCD_SEG0-LCD_COM0**

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.75 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM0 will be ON with this waveform

Figure 29.15. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM0

1/3 bias and duplex multiplexing - LCD_SEG0-LCD_COM0

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.33 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM1 will be OFF with this waveform

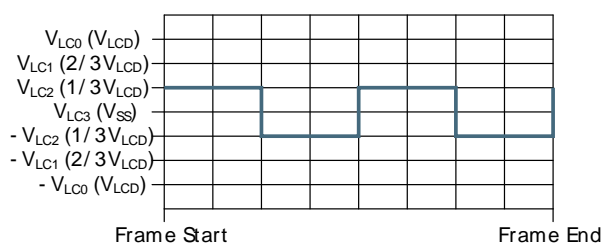Figure 29.16. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM1

29.3.3.4 Waveforms with 1/2 Bias and Triplex Multiplexing

In this mode, each frame is divided into 6 periods. LCD_COM[2:0] lines can be multiplexed with all segment lines. Figures show 1/2 bias and triplex multiplexing (waveforms show two frames).

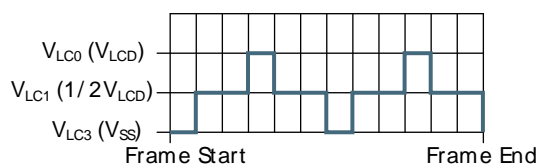
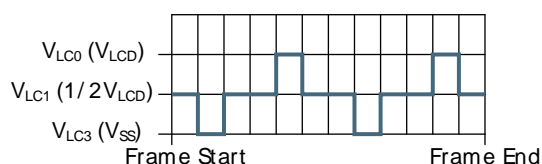
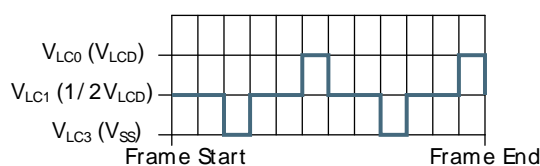
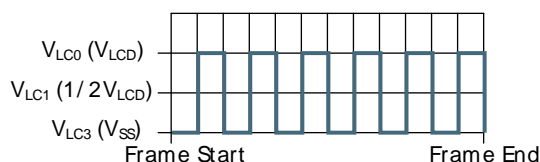

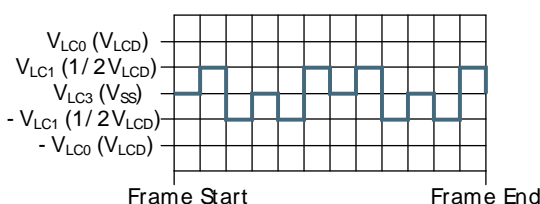
Figure 29.17. LCD 1/2 Bias and Triplex Multiplexing - LCD_COM0**Figure 29.18. LCD 1/2 Bias and Triplex Multiplexing - LCD_COM1**

Figure 29.19. LCD 1/2 Bias and Triplex Multiplexing - LCD_COM2**1/2 bias and triplex multiplexing - LCD_SEG0**

The LCD_SEG0 waveform on the left is just an example to illustrate how different segment waveforms can be multiplexed with the COM lines in order to turn on and off LCD pixels. As illustrated in the figures below, this waveform will turn ON pixels connected to LCD_COM1, while pixels connected to LCD_COM0 and LCD_COM2 will be turned OFF.


Figure 29.20. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0**Figure 29.21. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0 Connection****1/2 bias and triplex multiplexing - LCD_SEG0-LCD_COM0**

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.4 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM0 will be OFF with this waveform

Figure 29.22. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM0


1/2 bias and triplex multiplexing - LCD_SEG0-LCD_COM1

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.7 V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM1 will be ON with this waveform

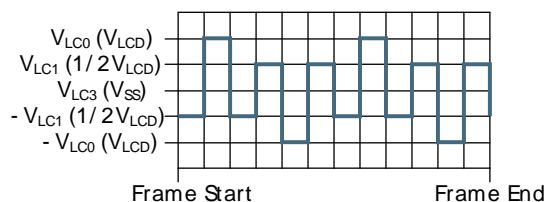Figure 29.23. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM1

1/2 bias and triplex multiplexing - LCD_SEG0-LCD_COM2

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.4 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM2 will be OFF with this waveform

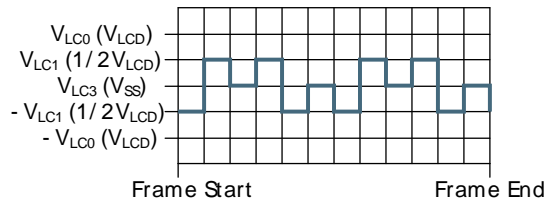Figure 29.24. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM2**29.3.3.5 Waveforms with 1/3 Bias and Triplex Multiplexing**

In this mode, each frame is divided into 6 periods. LCD_COM[2:0] lines can be multiplexed with all segment lines. Figures show 1/3 bias and triplex multiplexing (waveforms show two frames).

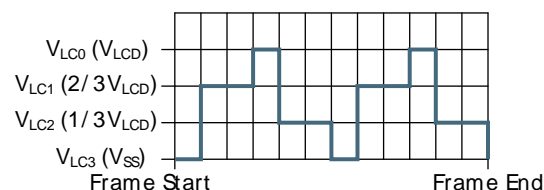
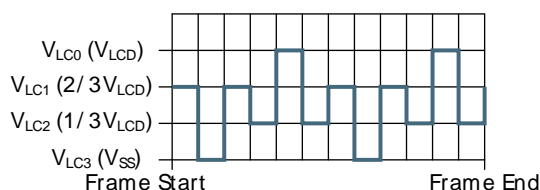
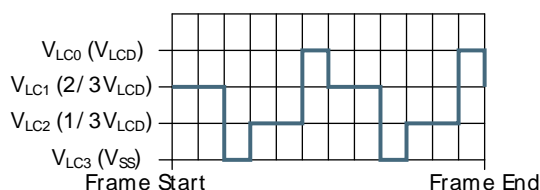
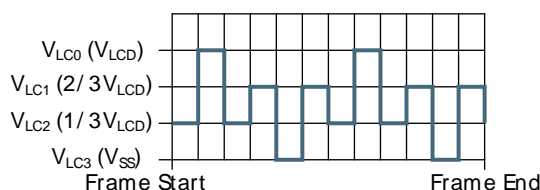

Figure 29.25. LCD 1/3 Bias and Triplex Multiplexing - LCD_COM0

Figure 29.26. LCD 1/3 Bias and Triplex Multiplexing - LCD_COM1**Figure 29.27. LCD 1/3 Bias and Triplex Multiplexing - LCD_COM2**


1/3 bias and triplex multiplexing - LCD_SEG0

The LCD_SEG0 waveform illustrates how different segment waveforms can be multiplexed with the COM lines in order to turn on and off LCD pixels. As illustrated in the figures below, this waveform will turn ON pixels connected to LCD_COM1, while pixels connected to LCD_COM0 and LCD_COM2 will be turned OFF.

Figure 29.28. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0**Figure 29.29. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0 Connection**


1/3 bias and triplex multiplexing - LCD_SEG0-LCD_COM0

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.33 V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM0 will be OFF with this waveform

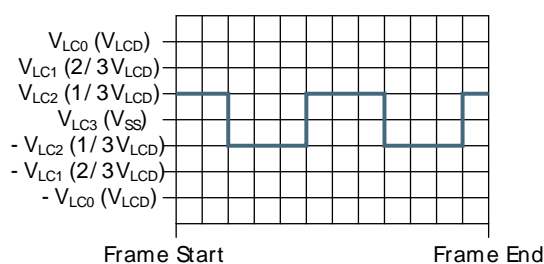Figure 29.30. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM0


1/3 bias and triplex multiplexing - LCD_SEG0-LCD_COM1

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.64 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM1 will be ON with this waveform

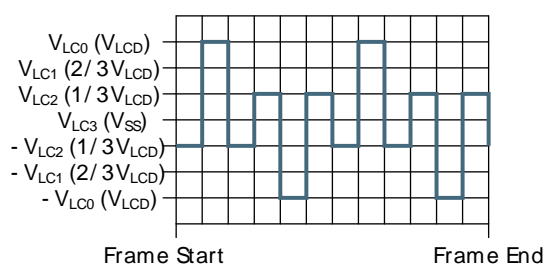Figure 29.31. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM1





1/3 bias and triplex multiplexing - LCD_SEG0-LCD_COM2

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.33 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM2 will be OFF with this waveform


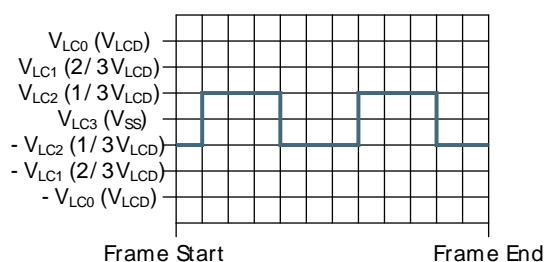
Figure 29.32. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM2

29.3.3.6 Waveforms with 1/3 Bias and Quadruplex Multiplexing

In this mode, each frame is divided into 8 periods. All COM lines can be multiplexed with all segment lines. Figures show 1/3 bias and quadruplex multiplexing (waveforms show two frames).

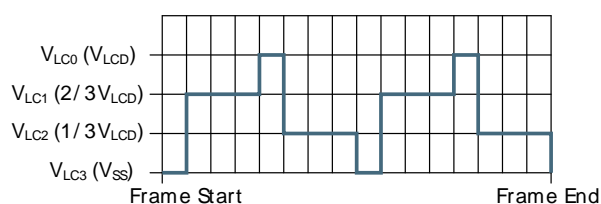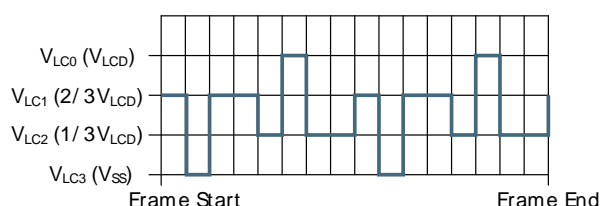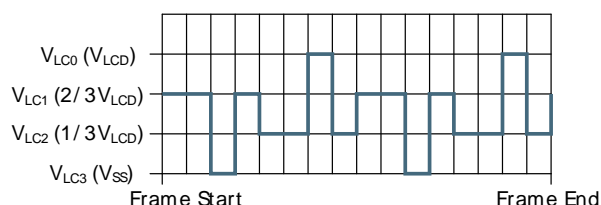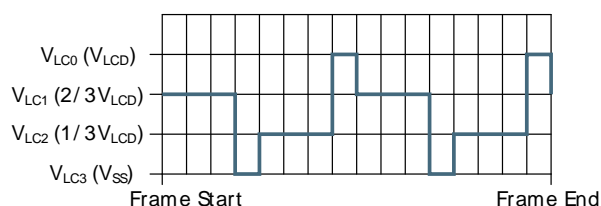
Figure 29.33. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM0**Figure 29.34. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM1****Figure 29.35. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM2****Figure 29.36. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM3****1/3 bias and quadruplex multiplexing - LCD_SEG0**

The LCD_SEG0 waveform on the left is just an example to illustrate how different segment waveforms can be multiplexed with the COM lines in order to turn on and off LCD pixels. As illustrated in the figures below, this wave form will turn ON pixels connected to LCD_COM0 and LCD_COM2, while pixels connected to LCD_COM1 and LCD_COM3 will be turned OFF.

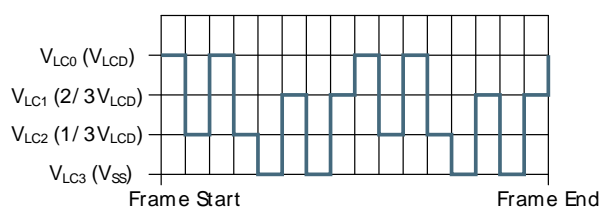Figure 29.37. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0**Figure 29.38. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0 Connection**


1/3 bias and quadruplex multiplexing - LCD_SEG0-LCD_COM0

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.58 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM0 will be ON with this waveform

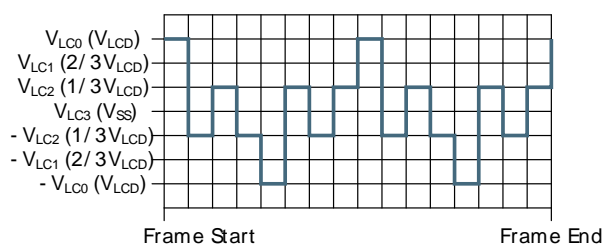Figure 29.39. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0-LCD_COM0


1/3 bias and quadruplex multiplexing - LCD_SEG0-LCD_COM1

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.33 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM1 will be OFF with this waveform

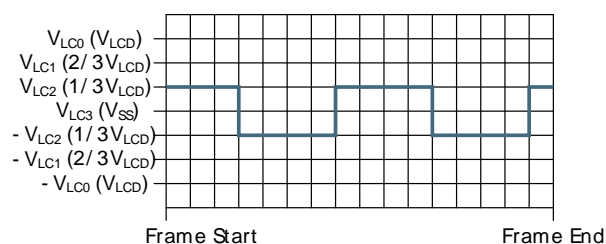Figure 29.40. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0-LCD_COM1


1/3 bias and quadruplex multiplexing - LCD_SEG0-LCD_COM2

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.58 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM2 will be ON with this waveform

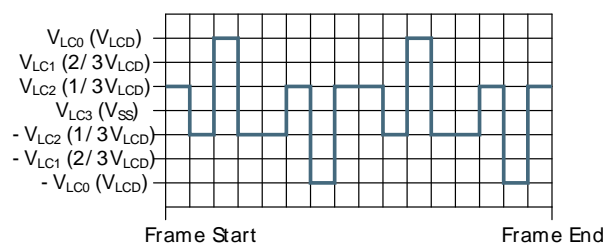Figure 29.41. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0-LCD_COM2

1/3 bias and quadruplex multiplexing - LCD_SEG0-LCD_COM2

- DC voltage = 0 (over one frame)
- $V_{RMS} = 0.33 \times V_{LCD_OUT}$
- The LCD display pixel that is connected to LCD_SEG0 and LCD_COM3 will be OFF with this waveform

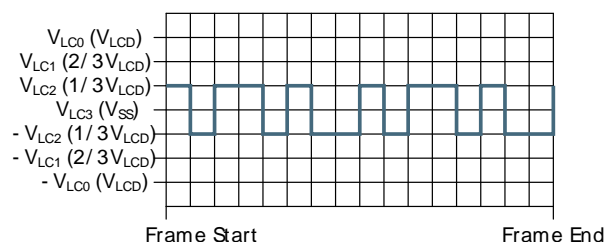Figure 29.42. LCD 1/3 Bias and Quadruplex Multiplexing- LCD_SEG0-LCD_COM3

29.3.4 LCD Contrast

Different LCD panels have different characteristics and also temperature may affect the characteristics of the LCD panels. To compensate for such variations, the LCD driver has a programmable contrast that

adjusts the V_{LCD_OUT} . The contrast is set by CONLEV in LCD_DISPCTRL, and can be adjusted relative to either V_{DD} (V_{LCD}) or Ground using CONCONF in LCD_DISPCTRL. See Table 29.4 (p. 505) and Table 29.5 (p. 505), Table 29.5 (p. 505) and Table 29.6 (p. 506).

Table 29.4. LCD Contrast

| BIAS | CONLEV | Equation | Range |
|------|-------------|--|---|
| 00 | 00000-11111 | $V_{LCD_OUT} = V_{LCD} \times (0.61 \times (1 + CONLEV/(2^5 - 1)))$ | CONLEV = 0 $\Rightarrow V_{LCD_OUT} = 0.61V_{LCD}$ CONLEV = 31 $\Rightarrow V_{LCD_OUT} = V_{LCD}$ |
| 01 | 00000-11111 | $V_{LCD_OUT} = V_{LCD} \times (0.53 \times (1 + CONLEV/(2^5 - 1)))$ | CONLEV = 0 $\Rightarrow V_{LCD_OUT} = 0.53V_{LCD}$ CONLEV = 31 $\Rightarrow V_{LCD_OUT} = V_{LCD}$ |
| 10 | 00000-11111 | $V_{LCD_OUT} = V_{LCD} \times (0.61 \times (1 + CONLEV/(2^5 - 1)))$ | CONLEV = 0 $\Rightarrow V_{LCD_OUT} = 0.61V_{LCD}$ CONLEV = 31 $\Rightarrow V_{LCD_OUT} = V_{LCD}$ |
| 11 | 00000-11111 | $V_{LCD_OUT} = V_{LCD} \times (0.61 \times (1 + CONLEV/(2^5 - 1)))$ | CONLEV = 0 $\Rightarrow V_{LCD_OUT} = 0.61V_{LCD}$ CONLEV = 31 $\Rightarrow V_{LCD_OUT} = V_{LCD}$ |













Note

Reset value is maximum contrast

Table 29.5. LCD Contrast Function

| CONCONF | Function |
|---------|---|
| 0 | Contrast is adjusted relative to V_{DD} (V_{LCD}) |
| 1 | Contrast is adjusted relative to Ground |

Table 29.6. LCD Principle of Contrast Adjustment for Different Bias Settings.
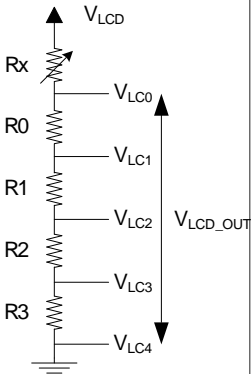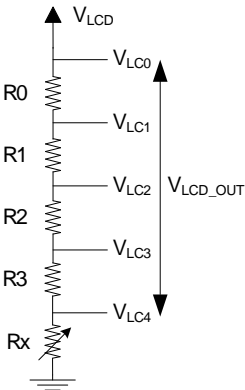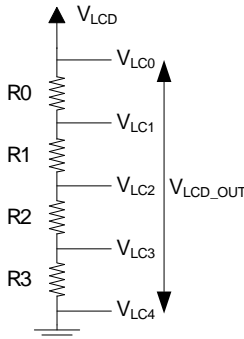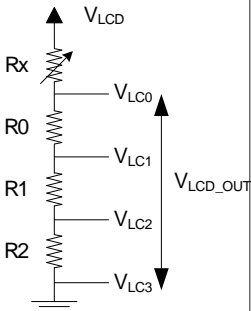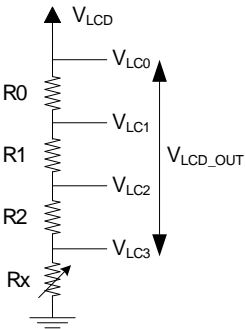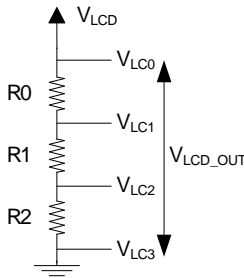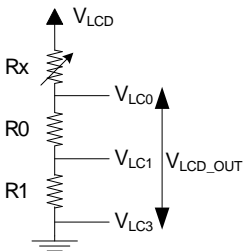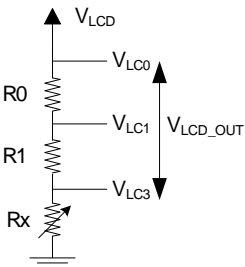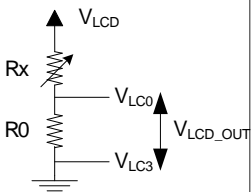
| | Contrast adjustment relative to V_{DD} (V_{LCD}) (CONCONF = 0) | Contrast adjustment relative to GND (CONCONF = 1) | No contrast adjustment (CONLEV = 11111) |
|----------|---|--|---|
| 1/4 bias |  |  |  |
| 1/3 bias |  |  |  |
| 1/2 bias |  |  |  |
| Static |  |  |  |

$R0 = R1 = R2 = R3$ in the figure, while Rx is adjusted by changing the CONLEV bits.

29.3.5 V_{LCD} Selection

By default, the LCD driver runs on main external power ($V_{LCD} = V_{DD}$), see Table 29.7 (p. 507) . An internal boost circuit can be enabled by setting VBOOSTEN in CMU_LCDCTRL and selecting the boosted voltage by setting VLCDSEL in LCD_DISPCTRL. This will boost V_{LCD} to V_{BOOST} . V_{BOOST} can be selected in the range of 3.0 V – 3.6 V by configuring VBLEV in LCD_DISPCTRL. Note that the boost circuit is not designed to operate with the selected boost voltage, V_{BOOST} , smaller than V_{DD} . The boost circuit can boost the V_{LCD} up to 3.6 V when V_{DD} is as low as 2.0 V.

When using the voltage booster, the LCD_BEXT pin must be connected through a 1 μ F capacitor to VSS, and the LCD_BCAP_P and LCD_BCAP_N pins must be connected to each other through a 22 nF capacitor.

It is also possible to connect a dedicated power supply to the LCD module. The LCD external power supply must be connected to the LCD_BEXT pin and VLCDSEL in LCD_DISPCTRL must be set. In this mode, the voltage booster should be disabled.

Table 29.7. LCD V_{LCD}

| VLCDSEL | Mode | V _{LCD} |
|---------|--------|---|
| 0 | VDD | V _{DD} (same as main external power) |
| 1 | VBOOST | Voltage booster/External V _{DD} |

29.3.6 VBOOST Control

The boost voltage is configurable. By programming the VBLEV bits in LCD_DISPCTRL, the boost voltage level can be adjusted between 3.0V and 3.6V.

The boost circuit will use an update frequency given by the VBFDIV bits in CMU_LCDCTRL, see Table 29.8 (p. 507)). It is possible to adjust the frequency to optimize performance for all kinds of LCD panels (large capacitors may require less frequent updates, while small capacitors may require more frequent updates). A lower update frequency would in general lead to smaller current consumption.

Table 29.8. LCD V_{BOOST} Frequency

| VBFDIV | V _{BOOST} Update Frequency |
|--------|-------------------------------------|
| 000 | LFACLK |
| 001 | LFACLK/2 |
| 010 | LFACLK/4 |
| 011 | LFACLK/8 |
| 100 | LFACLK/16 |
| 101 | LFACLK/32 |
| 110 | LFACLK/64 |
| 111 | LFACLK/128 |

29.3.7 Frame rate

It is important to choose the correct frame rate for the LCD display. Normally, the frame rate should be between 30 and 100 Hz. A frame rate below 30 Hz may lead to flickering, while a frame rate above 100 Hz may lead to ghosting and unnecessarily high power consumption.

29.3.7.1 Clock Selection and Prescaler

The LFACLK is prescaled to LFACLK_{LCDpre} in the CMU. The available prescaler settings are:

- LFCLK16: $\text{LFACLK}_{\text{LCDpre}} = \text{LFACLK}/16$
- LFCLK32: $\text{LFACLK}_{\text{LCDpre}} = \text{LFACLK}/32$
- LFCLK64: $\text{LFACLK}_{\text{LCDpre}} = \text{LFACLK}/64$
- LFCLK128: $\text{LFACLK}_{\text{LCDpre}} = \text{LFACLK}/128$

In addition to selecting the correct prescaling, the clock source can be selected in the CMU.

To use this module, the LE interface clock must be enabled in CMU_HFCORECLKEN0, in addition to the module clock.

29.3.7.2 Frame rate Division Register

The frame rate is set in the CMU by programming the frame rate division bits FDIV in CMU_LCDCTRL. This setting should not be changed while the LCD driver is running. The equation for calculating the resulting frame rate is given from Equation 29.1 (p. 508)

LCD Frame rate Calculation

$$\text{LFACLK}_{\text{LCD}} = \text{LFACLK}_{\text{LCDpre}} / (1 + \text{FDIV}) \quad (29.1)$$

Table 29.9. LCD Frame rate Conversion Table

| MUX Mode | Frame- rate formula | Resulting Frame rate, $\text{CLK}_{\text{FRAME}}(\text{Hz})$ | | | | | | | |
|------------|---------------------------------|--|--------|---|-------|---|-------|--|-------|
| | | $\text{LFACLK}_{\text{LCDpre}} = 2 \text{ kHz}$ | | $\text{LFACLK}_{\text{LCDpre}} = 1 \text{ kHz}$ | | $\text{LFACLK}_{\text{LCDpre}} = 0.5 \text{ kHz}$ | | $\text{LFACLK}_{\text{LCDpre}} = 0.25 \text{ kHz}$ | |
| | | Min | Max | Min | Max | Min | Max | Min | Max |
| Static | $\text{LFACLK}_{\text{LCD}}/2$ | 128 | 1024 | 64 | 512 | 32 | 256 | 16 | 128 |
| Duplex | $\text{LFACLK}_{\text{LCD}}/4$ | 64 | 512 | 32 | 256 | 16 | 128 | 8 | 64 |
| Triplex | $\text{LFACLK}_{\text{LCD}}/6$ | 43 | 341 | 21 | 171 | 11 | 85 | 5 | 43 |
| Quadruplex | $\text{LFACLK}_{\text{LCD}}/8$ | 32 | 256 | 16 | 128 | 8 | 64 | 4 | 32 |
| Sextaplex | $\text{LFACLK}_{\text{LCD}}/12$ | 21.33 | 170.67 | 10.67 | 85.33 | 5.33 | 42.67 | 2.67 | 21.33 |
| Octaplex | $\text{LFACLK}_{\text{LCD}}/16$ | 16 | 128 | 8 | 64 | 4 | 32 | 2 | 16 |

Table settings: Min: FDIV = 7, Max: FDIV = 0

29.3.8 Data Update

The LCD Driver logic that controls the output waveforms is clocked on $\text{LFACLK}_{\text{LCDpre}}$. The LCD data and Control Registers are clocked on the HFCORECLK. To avoid metastability and unpredictable behavior, the data in the Segment Data (SEGDN) registers must be synchronized to the LCD driver logic. Also, it is important that data is updated at the beginning of an LCD frame since the segment waveform depends on the segment data and a change in the middle of a frame may lead to a DC-component in that frame. The LCD driver has dedicated functionality to synchronize data transfer to the LCD frames. The synchronization logic is applied to all data that need to be updated at the beginning of the LCD frames:

- LCD_SEGDN
- LCD_AREGA
- LCD_AREGB
- LCD_BACTRL

The different methods to update data are controlled by the UDCTRL bits in LCD_CTRL.

Table 29.10. LCD Update Data Control (UDCTRL) Bits

| UDCTRL | Mode | Description |
|--------|------------|---|
| 00 | REGULAR | The data transfer is controlled by SW and data synchronization is initiated by writing data to the buffers. Data is transferred as soon as possible, possibly creating a frame with a DC component on the LCD. |
| 01 | FCEVENT | The data transfer is done at the next event triggered by the Frame Counter (FC). See Section 29.3.10 (p. 509) for details on how to configure the Frame Counter. Optionally, the Frame Counter can also generate an interrupt at every event. |
| 10 | FRAMESTART | The data transfer is done at frame-start. |

29.3.9 Direct Segment Control (DSC)

It is possible to gain direct control over the bias levels for each SEG/COM line by setting DSC in LCD_CTRL, overwriting the BIAS settings in LCD_DISPCTRL. The SEG lines bias levels can be set in SEGD0-SEGD3, while the COM line bias levels can be set in SEGD4. To represent the different bias levels, 2-bits per SEG lines are needed. For example, SEG0's bias levels can be set using SEGD0[1:0], and SEG1 can be controlled through SEGD0[3:2] etc. Bias level encoding is shown in Table 29.11 (p. 509).

Table 29.11. DSC BIAS Encoding

| SEGD | Mode | Bias setting |
|------|-------------|---------------------|
| 00 | Static | Static (2 levels) |
| 01 | Half Bias | 1/2 Bias (3 levels) |
| 10 | Third Bias | 1/3 Bias (4 levels) |
| 11 | Fourth Bias | 1/4 Bias (5 levels) |

29.3.10 Frame Counter (FC)

The Frame Counter is synchronized to the LCD frame start and will generate an event after a programmable number of frames. An FC event can trigger:

- LCD ready interrupt
- Blink (controlling the blink frequency)
- Next state in the Animation State Machine
- Data update if UDCTRL = 01

The Frame Counter is a down counter. It is enabled by writing FCEN in LCD_BACTRL. Optionally, the Frame Counter can be prescaled so that the Frame Counter is decremented at:

- Every frame
- Every second frame
- Every fourth frame
- Every eight frame

This is controlled by the FCPRESC in LCD_BACTRL, see Table 29.12 (p. 510)

Table 29.12. FCPRESC

| FCPRESC | Mode | Description | General equation |
|---------|------|-------------------------|--|
| 00 | Div1 | CLK _{FRAME} /1 | $CLK_{FC} = CLK_{FRAME} / 2^{FCPRESC}$ |
| 01 | Div2 | CLK _{FRAME} /2 | |
| 10 | Div4 | CLK _{FRAME} /4 | |
| 11 | Div8 | CLK _{FRAME} /8 | |

The top value for the Frame Counter is set by FCTOP in LCD_BACTRL. Every time the frame counter reaches zero, it is reloaded with the top value, and at the same time an event, which can cause an interrupt, data update, blink, or an animation state transition is triggered.

LCD Event Frequency Equation


$$CLK_{EVENT} = CLK_{FC} / (1 + FCTOP[5:0]) \text{ Hz} \quad (29.2)$$

The above equation shows how to set-up the LCD event frequency. In this example, the frame rate is 64Hz, and the LCD event frequency should be set-up to 2 seconds.

Example 29.1. LCD Event Frequency Example

- Write FCPRESC to 3 => CLK_{FC} = 8Hz (0.125 seconds)
- Write FCTOP to 15 => CLK_{EVENT} = 0.5Hz (2 seconds)

If higher resolution is required, configure a lower prescaler value and increase the FCPRESC in LCD_BACTRL accordingly (e.g. FCPRESC = 2, FCTOP = 31).

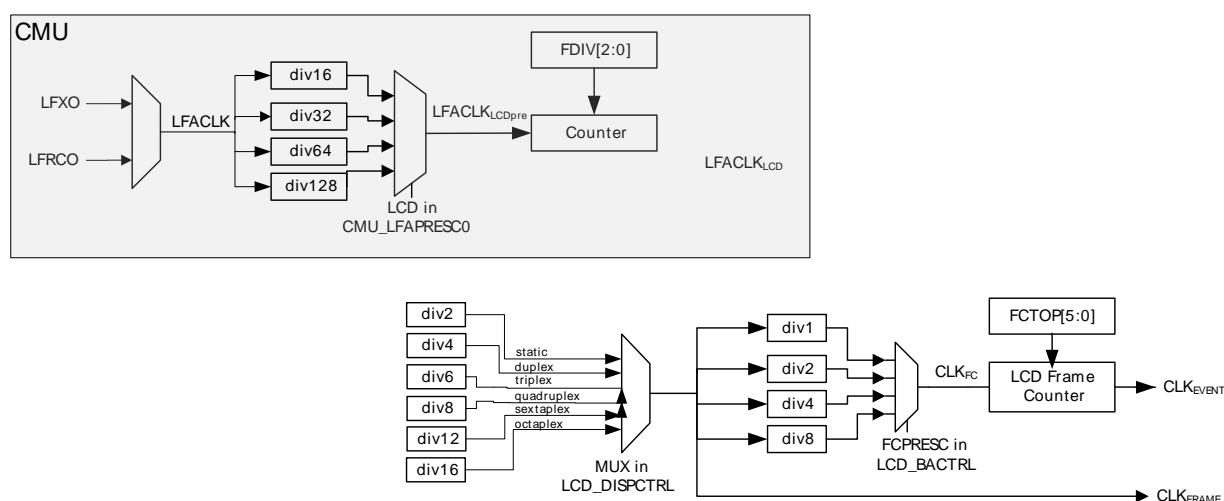Figure 29.43. LCD Clock System in LCD Driver**29.3.11 LCD Interrupt**

The LCD interrupt can be used to synchronize data update. The FC interrupt flag is set at every LCD Frame Counter Event, which must be set-up separately. The interrupt is enabled by setting FC bit in LCD_IEN.

29.3.12 Blink, Blank, and Animation Features

29.3.12.1 Blink

The LCD driver can be configured to blink, alternating all enabled segments between on and off. The blink frequency is given by the CLK_{EVENT} frequency, see Section 29.3.10 (p. 509). See Section 29.3.8 (p. 508) for details regarding synchronization of the blink feature. The FC must be on for blink to work.

29.3.12.2 Blank

Setting BLANK in LCD_BACTRL will output the “OFF” waveform on all enabled segments, effectively blanking the entire display. Writing the BLANK bit to zero disables the blanking and segment data will be output as normal. See Section 29.3.8 (p. 508) for details regarding synchronization of blank.

29.3.12.3 Animation State Machine

The Animation State Machine makes it possible to enable different animations without updating the data registers, allowing specialized patterns running on the LCD panel while the microcontroller remains in Low Energy Mode and thus saving power consumption. The animation feature is available on segment 0 to 7 multiplexed with LCD_COM0. The animation is implemented as two programmable 8 bits registers that are shifted left or right every other Animation state for a total of 16 states.

The shift operations applied to the shift registers are controlled by AREGASC and AREGBSC in LCD_BACTRL as shown in the table below. Note also that the FC must be on for animation to work, as it is the FC event that drives the animation state machine.

Table 29.13. LCD Animation Shift Register

| AREGnSC, n = A or B | Mode | Description |
|---------------------|------------|---|
| 00 | NOSHIFT | No Shift operation |
| 01 | SHIFTLEFT | Animation register is shifted left (LCD_AREGA is shifted every odd state, LCD_AREGB is shifted every even state) |
| 10 | SHIFTRIGHT | Animation register is shifted right (LCD_AREGA is shifted every odd state, LCD_AREGB is shifted every even state) |
| 11 | Reserved | Reserved |

The two registers are either OR'ed or AND'ed to achieve the displayed animation pattern. This is controlled by ALOGSEL in LCD_BACTRL as shown in Table 29.14 (p. 511). In addition, the regular segment data SEG0[7:0] is OR'ed with the animation pattern to generate the resulting output.

Table 29.14. LCD Animation Pattern


| ALOGSEL | Mode | Description |
|---------|------|---|
| 0 | AND | LCD_AREGA and LCD_AREGB are AND'ed together |
| 1 | OR | LCD_AREGA and LCD_AREGB are OR'ed together |

Each state is displayed one CLK_{EVENT} period, see Section 29.3.10 (p. 509). By reading ASTATE in LCD_STATUS, software can identify which state that is currently active in the state sequence. Note that the shifting operation is performed on internal registers that are not accessible in SW (when reading LCD_AREGA and LCD_AREGB, the data that was original written will also be read back). The SW must utilize the knowledge about the current state (ASTATE) to calculate what is currently output. ASTATE is cleared when LCD_AREGA or LCD_AREGB are updated with new values. See Table 29.15 (p. 512) for an example.

Table 29.15. LCD Animation Example

| ASTATE | LCD_AREGA | LCD_AREGB | Resulting Data |
|--------|-----------|-----------|----------------|
| 0 | 11000000 | 11000000 | 11000000 |
| 1 | 01100000 | 11000000 | 11100000 |
| 2 | 01100000 | 01100000 | 01100000 |
| 3 | 00110000 | 01100000 | 01110000 |
| 4 | 00110000 | 00110000 | 00110000 |
| 5 | 00011000 | 00110000 | 00111000 |
| 6 | 00011000 | 00011000 | 00011000 |
| 7 | 00001100 | 00011000 | 00011100 |
| 8 | 00001100 | 00001100 | 00001100 |
| 9 | 00000110 | 00001100 | 00001110 |
| 10 | 00000110 | 00000110 | 00000110 |
| 11 | 00000011 | 00000110 | 00000111 |
| 12 | 00000011 | 00000011 | 00000011 |
| 13 | 10000001 | 00000011 | 10000011 |
| 14 | 10000001 | 10000001 | 10000001 |
| 15 | 11000000 | 10000001 | 11000001 |

In the table, AREGASC = 10, AREGBSC = 10, ALOGSEL = 1 and the resulting data is to be displayed on segment lines 7-0 multiplexed with LCD_COM0.

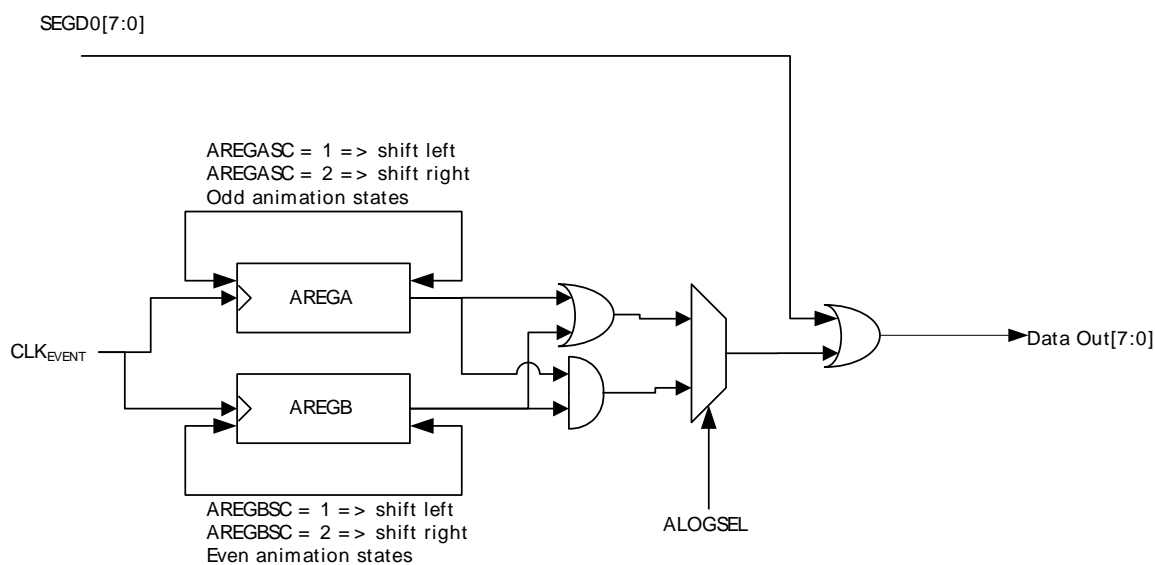Figure 29.44. LCD Block Diagram of the Animation Circuit

Example 29.2. LCD Animation Enable Example

- Write data into the animation registers LCD_AREGA, LCD_AREGB
- Enable the correct shift direction (if any)
- Decide which logical function to perform on the registers
 - ALOGSEL = 0: Data_out = LCD_AREGA & LCD_AREGB
 - ALOGSEL = 1: Data_out = LCD_AREGA | LCD_AREGB
- Configure the right animation period (CLK_{EVENT})
- Enable the animation pattern and frame counter (AEN = 1, FCEN = 1)

For updating data in the LCD while it is running an animation, and the new animation data depends on the pattern visible on the LCD, see the following example.

Example 29.3. LCD Animation Dependence Example

- Enable the LCD interrupt (the interrupt will be triggered simultaneously as the Animation State machine changes state)
- In the interrupt handler, read back the current state (ASTATE)
- Knowing the current state of the Animation State Machine makes it possible to calculate what data that is currently output
- Modify data as required (Data will be updated at the next Frame Counter Event). It is important that new data is written before the next Frame Counter Event.

29.3.13 LCD in Low Energy Modes

As long as the LFACLK is running (EM0-EM2), the LCD controller continues to output LCD waveforms according to the data that is currently synchronized to the LCD Driver logic. In addition, the following features are still active if enabled:

- Animation State Machine
- Blink
- LCD Event Interrupt

29.3.14 Register access

Since this module is a Low Energy Peripheral, and runs off a clock which is asynchronous to the HFCORECLK, special considerations must be taken when accessing registers. Please refer to Section 5.3 (p. 20) for a description on how to perform register accesses to Low Energy Peripherals.

29.4 Register Map

The offset register address is relative to the registers base address.

| Offset | Name | Type | Description |
|--------|--------------|------|--------------------------------------|
| 0x000 | LCD_CTRL | RW | Control Register |
| 0x004 | LCD_DISPCTRL | RW | Display Control Register |
| 0x008 | LCD_SEGEN | RW | Segment Enable Register |
| 0x00C | LCD_BACTRL | RW | Blink and Animation Control Register |
| 0x010 | LCD_STATUS | R | Status Register |
| 0x014 | LCD_AREGA | RW | Animation Register A |
| 0x018 | LCD_AREGB | RW | Animation Register B |
| 0x01C | LCD_IF | R | Interrupt Flag Register |
| 0x020 | LCD_IFS | W1 | Interrupt Flag Set Register |
| 0x024 | LCD_IFC | W1 | Interrupt Flag Clear Register |
| 0x028 | LCD_IEN | RW | Interrupt Enable Register |
| 0x040 | LCD_SEGD0L | RW | Segment Data Low Register 0 |
| 0x044 | LCD_SEGD1L | RW | Segment Data Low Register 1 |
| 0x048 | LCD_SEGD2L | RW | Segment Data Low Register 2 |
| 0x04C | LCD_SEGD3L | RW | Segment Data Low Register 3 |
| 0x060 | LCD_FREEZE | RW | Freeze Register |
| 0x064 | LCD_SYNCBUSY | R | Synchronization Busy Register |
| 0x0CC | LCD_SEGD4L | RW | Segment Data Low Register 4 |
| 0x0D0 | LCD_SEGD5L | RW | Segment Data Low Register 5 |
| 0x0D4 | LCD_SEGD6L | RW | Segment Data Low Register 6 |
| 0x0D8 | LCD_SEGD7L | RW | Segment Data Low Register 7 |

29.5 Register Description

29.5.1 LCD_CTRL - Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|--------|----|
| 0x000 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | 0 | | | | | | | | | | | | | | | | | | | | | 0x0 | 0 |
| Access | | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | RW | RW |
| Name | | | | | | | | | | DSC | | | | | | | | | | | | | | | | | | | | | UDCTRL | EN |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|-------------|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |

23 DSC 0 RW **Direct Segment Control**

This bit enables direct control over bias levels for each SEG/COM line.

| Value | Description |
|-------|-------------|
| 0 | DSC disable |

| Bit | Name | Reset | Access | Description |
|--|--|-------------|--|---------------------|
| | Value | Description | | |
| | 1 | DSC enable | | |
| 22:3 | Reserved To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | |
| 2:1 | UDCTRL | 0x0 | RW | Update Data Control |
| These bits control how data from the SEGn registers are transferred to the LCD driver. | | | | |
| | Value | Mode | Description | |
| | 0 | REGULAR | The data transfer is controlled by SW. Transfer is performed as soon as possible | |
| | 1 | FCEVENT | The data transfer is done at the next event triggered by the Frame Counter | |
| | 2 | FRAMESTART | The data transfer is done continuously at every LCD frame start | |
| 0 | EN | 0 | RW | LCD Enable |
| When this bit is set, the LCD driver is enabled and the driver will start outputting waveforms on the com/segment lines. | | | | |

29.5.2 LCD_DISPCTRL - Display Control Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|------|----|-------|----|----|----|---------|---------|----|--------|----|----|----|---|---|---|---|------|-----|------|---|-----|---|
| 0x004 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | 0 | | 0x3 | | | | 0 | 0 | | 0x1F | | | | | | | | 0 | 0x0 | | | 0x0 | |
| Access | | | | | | | | | | RW | | | RW | | | RW | RW | | RW | | | | | | | | RW | | RW | | RW | |
| Name | | | | | | | | | | MUXE | | VBLEV | | | | VLCDSEL | CONCONF | | CONLEV | | | | | | | | WAVE | | BIAS | | MUX | |

| Bit | Name | Reset | Access | Description |
|-------|----------|-------|--------|---|
| 31:23 | Reserved | | | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) |
| 22 | MUXE | 0 | RW | Extended Mux Configuration |
| | | | | This bit redefines the meaning of the MUX field. |
| Value | | Mode | | Description |
| 0 | | MUX | | Multiplex mode determined by MUX field. |
| 1 | | MUXE | | Mux extended mode. Extends the meaning of the MUX field. |

| | | | | |
|-------|----------|--------|----|---|
| 21 | Reserved | | | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) |
| 20:18 | VBLEV | 0x3 | RW | Voltage Boost Level |
| | | | | These bits control Voltage Boost level. Please refer to datasheet for further details of the boost levels. |
| Value | | Mode | | Description |
| 0 | | LEVEL0 | | Minimum boost level |
| 1 | | LEVEL1 | | |
| 2 | | LEVEL2 | | |
| 3 | | LEVEL3 | | |
| 4 | | LEVEL4 | | |
| 5 | | LEVEL5 | | |
| 6 | | LEVEL6 | | |
| 7 | | LEVEL7 | | Maximum boost level |

| | | | | |
|-------|----------|-----------|----|---|
| 17 | Reserved | | | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) |
| 16 | VLCDSEL | 0 | RW | V_{LCD} Selection |
| | | | | This bit controls which Voltage source that is connected to V _{LCD} . |
| Value | | Mode | | Description |
| 0 | | VDD | | VDD |
| 1 | | VEXTBOOST | | Voltage Booster/External VDD |

| Bit | Name | Reset | Access | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|---|---|---|-------|------|-------------|-------------|----------|---|--------|---------------------------------|---|---|----------|---|---|-----------|----------|--|---|---|------------|---|---|---|-----------|--|---|---|----------|---|
| 15 | CONCONF | 0 | RW | Contrast Configuration This bit selects whether the contrast adjustment is done relative to V _{LCD} or Ground. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>VLCD</td><td>Contrast is adjusted relative to V_{LCD}</td></tr><tr><td>1</td><td>GND</td><td>Contrast is adjusted relative to Ground</td></tr></table> | Value | Mode | Description | 0 | VLCD | Contrast is adjusted relative to V _{LCD} | 1 | GND | Contrast is adjusted relative to Ground | | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | VLCD | Contrast is adjusted relative to V _{LCD} | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | GND | Contrast is adjusted relative to Ground | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14:13 | Reserved <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12:8 | CONLEV | 0x1F | RW | Contrast Level These bits control the contrast setting according to this formula: V _{LCD_OUT} = V _{LCD} × 0.5(1+CONLEV/31). <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>MIN</td><td>Minimum contrast</td></tr><tr><td>31</td><td>MAX</td><td>Maximum contrast</td></tr></table> | Value | Mode | Description | 0 | MIN | Minimum contrast | 31 | MAX | Maximum contrast | | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | MIN | Minimum contrast | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | MAX | Maximum contrast | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7:5 | Reserved <i>To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3)</i> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | WAVE | 0 | RW | Waveform Selection This bit configures the output waveform. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>LOWPOWER</td><td>Low power waveform</td></tr><tr><td>1</td><td>NORMAL</td><td>Normal waveform</td></tr></table> | Value | Mode | Description | 0 | LOWPOWER | Low power waveform | 1 | NORMAL | Normal waveform | | | | | | | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | LOWPOWER | Low power waveform | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | NORMAL | Normal waveform | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3:2 | BIAS | 0x0 | RW | Bias Configuration These bits set the bias mode for the LCD Driver. <table><tr><td>Value</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>STATIC</td><td>Static</td></tr><tr><td>1</td><td>ONEHALF</td><td>1/2 Bias</td></tr><tr><td>2</td><td>ONETHIRD</td><td>1/3 Bias</td></tr><tr><td>3</td><td>ONEFOURTH</td><td>1/4 Bias</td></tr></table> | Value | Mode | Description | 0 | STATIC | Static | 1 | ONEHALF | 1/2 Bias | 2 | ONETHIRD | 1/3 Bias | 3 | ONEFOURTH | 1/4 Bias | | | | | | | | | | | | | |
| Value | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | STATIC | Static | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | ONEHALF | 1/2 Bias | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | ONETHIRD | 1/3 Bias | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | ONEFOURTH | 1/4 Bias | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1:0 | MUX | 0x0 | RW | Mux Configuration These bits set the multiplexing mode for the LCD Driver. The field is dependent on the value of MUXE field <table><tr><td>MUX</td><td>MUXE</td><td>Mode</td><td>Description</td></tr><tr><td>0</td><td>0</td><td>STATIC</td><td>Static. Uses com line LCD_COM0.</td></tr><tr><td>1</td><td>0</td><td>DUPLEX</td><td>Duplex. Uses com lines LCD_COM0-LCD_COM1.</td></tr><tr><td>2</td><td>0</td><td>TRIPLEX</td><td>Triplex. Uses com lines LCD_COM0-LCD_COM2.</td></tr><tr><td>3</td><td>0</td><td>QUADRUPLEX</td><td>Quadruplex. Uses com lines LCD_COM0-LCD_COM3.</td></tr><tr><td>1</td><td>1</td><td>SEXTAPLEX</td><td>Sextaplex. Uses com lines LCD_COM0-LCD_COM5.</td></tr><tr><td>3</td><td>1</td><td>OCTAPLEX</td><td>Octaplex. Uses com lines LCD_COM0-LCD_COM7.</td></tr></table> | MUX | MUXE | Mode | Description | 0 | 0 | STATIC | Static. Uses com line LCD_COM0. | 1 | 0 | DUPLEX | Duplex. Uses com lines LCD_COM0-LCD_COM1. | 2 | 0 | TRIPLEX | Triplex. Uses com lines LCD_COM0-LCD_COM2. | 3 | 0 | QUADRUPLEX | Quadruplex. Uses com lines LCD_COM0-LCD_COM3. | 1 | 1 | SEXTAPLEX | Sextaplex. Uses com lines LCD_COM0-LCD_COM5. | 3 | 1 | OCTAPLEX | Octaplex. Uses com lines LCD_COM0-LCD_COM7. |
| MUX | MUXE | Mode | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | STATIC | Static. Uses com line LCD_COM0. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | DUPLEX | Duplex. Uses com lines LCD_COM0-LCD_COM1. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 0 | TRIPLEX | Triplex. Uses com lines LCD_COM0-LCD_COM2. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 0 | QUADRUPLEX | Quadruplex. Uses com lines LCD_COM0-LCD_COM3. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | SEXTAPLEX | Sextaplex. Uses com lines LCD_COM0-LCD_COM5. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 1 | OCTAPLEX | Octaplex. Uses com lines LCD_COM0-LCD_COM7. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

29.5.3 LCD_SEGEN - Segment Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|---|---|---|---|---|---|---|---|---|
| 0x008 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | 0x000 | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | SEGEN | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:10 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 9:0 | SEGEN | 0x000 | RW | Segment Enable Determines which segment lines are enabled. Each bit represents a group of 4 segment lines. To enable segment lines X to X+3, set bit X/4, i.e. to enable output on segment lines 4,5,6 and 7, set bit 1. Each LCD segment pin can also be individually disabled by setting the pin to any other state than DISABLED in the GPIO pin configuration. |

29.5.4 LCD_BACTRL - Blink and Animation Control Register (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|-------|----|----|----|---------|----|----|----|----|----|----|----|----|----|------|---------|---------|----|---------|-----|-------|---------|---|---|
| 0x00C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x00 | | | | 0x0 | | | | | | | | | | 0 | 0 | 0x0 | | 0x0 | 0 | 0 | 0 | 0 | |
| Access | | | | | | | | | RW | | | | RW | | | | | | | | | | RW | RW | RW | RW | RW | RW | RW | RW | | |
| Name | | | | | | | | | FCTOP | | | | FCPRESC | | | | | | | | | | FCEN | ALOGSEL | AREGBSC | | AREGASC | AEN | BLANK | BLINKEN | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-----|---------|--------------------------|--------|--|
| | Value | Mode | | Description |
| | 1 | SHIFTLEFT | | Animation Register A is shifted left |
| | 2 | SHIFTRIGHT | | Animation Register A is shifted right |
| 2 | AEN | 0 | RW | Animation Enable When this bit is set, the animate function is enabled. |
| 1 | BLANK | 0 | RW | Blank Display When this bit is set, all segment output waveforms are configured to blank the LCD display. The Segment Data Registers are not affected when writing this bit. |
| | Value | Description | | |
| | 0 | Display is not "blanked" | | |
| | 1 | Display is "blanked" | | |
| 0 | BLINKEN | 0 | RW | Blink Enable When this bit is set, the Blink function is enabled. Every "ON" segment will alternate between on and off at every Frame Counter Event. |

29.5.5 LCD_STATUS - Status Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|-------|---|---|---|---|---|--------|---|---|
| 0x010 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | 0 | | | | | | 0x0 | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | R | | | | | | R | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | BLINK | | | | | | ASTATE | | |

| Bit | Name | Reset | Access | Description |
|------|----------|---|--------|---|
| 31:9 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 8 | BLINK | 0 | R | Blink State This bits indicates the blink status. If this bit is 1, all segments are off. If this bit is 0, the segments(LCD_SEGDxn) which are set to 1 are on. |
| 7:4 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 3:0 | ASTATE | 0x0 | R | Current Animation State Contains the current animation state (0-15). |

29.5.6 LCD_AREGA - Animation Register A (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------|---|---|---|---|---|---|---|
| 0x014 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | AREGA | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|----------------------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | AREGA | 0x00 | RW | Animation Register A Data |
| This register contains the A data for generating animation pattern. | | | | |

29.5.7 LCD_AREGB - Animation Register B (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|-------|---|---|---|---|---|---|---|
| 0x018 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | 0x00 | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | RW | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | AREGB | | | | | | | |

| Bit | Name | Reset | Access | Description |
|---|----------|---|--------|---------------------------|
| 31:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7:0 | AREGB | 0x00 | RW | Animation Register B Data |
| This register contains the B data for generating animation pattern. | | | | |

29.5.8 LCD_IF - Interrupt Flag Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|----|
| 0x01C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | R |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | FC |

| Bit | Name | Reset | Access | Description |
|---------------------------------|----------|---|--------|------------------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | FC | 0 | R | Frame Counter Interrupt Flag |
| Set when Frame Counter is zero. | | | | |

29.5.9 LCD_IFS - Interrupt Flag Set Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x020 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | 0 | | | | | | | | | | | |
| Access | | | | | | | | | | | | | | | | | | | | | W1 | | | | | | | | | | | |
| Name | | | | | | | | | | | | | | | | | | | | | FC | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|--------------------------------------|----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | FC | 0 | W1 | Frame Counter Interrupt Flag Set |
| Write to 1 to set FC interrupt flag. | | | | |

29.5.10 LCD_IFC - Interrupt Flag Clear Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|----|
| 0x024 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | W1 |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | FC |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|---|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | FC | 0 | W1 | Frame Counter Interrupt Flag Clear |
| Write to 1 to clear FC interrupt flag. | | | | |

29.5.11 LCD_IEN - Interrupt Enable Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|----|
| 0x028 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | FC |

| Bit | Name | Reset | Access | Description |
|--|----------|---|--------|---------------------------------------|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 0 | FC | 0 | RW | Frame Counter Interrupt Enable |
| Set to enable interrupt on frame counter interrupt flag. | | | | |

29.5.12 LCD_SEGD0L - Segment Data Low Register 0 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x040 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD0L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEGD0L | 0x000000 | RW | COM0 Segment Data Low This register contains segment data for segment lines 0-23 for COM0. |

29.5.13 LCD_SEGD1L - Segment Data Low Register 1 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x044 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD1L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEGD1L | 0x000000 | RW | COM1 Segment Data Low This register contains segment data for segment lines 0-23 for COM1. |

29.5.14 LCD_SEGD2L - Segment Data Low Register 2 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x048 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD2L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEG2L | 0x000000 | RW | COM2 Segment Data Low This register contains segment data for segment lines 0-23 for COM2. |

29.5.15 LCD_SEG2L - Segment Data Low Register 2 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x04C | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD3L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEG3L | 0x000000 | RW | COM3 Segment Data Low This register contains segment data for segment lines 0-23 for COM3. |

29.5.16 LCD_FREEZE - Freeze Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|-----------|
| 0x060 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| Reset | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 0 |
| Access | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | RW |
| Name | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | REGFREEZE |

| Bit | Name | Reset | Access | Description | | | | | | | | | |
|---|-----------|---|--------|---|-------|------|-------------|---|--------|--|---|--------|--|
| 31:1 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | | | | | | | | | | |
| 0 | REGFREEZE | 0 | RW | Register Update Freeze When set, the update of the LCD is postponed until this bit is cleared. Use this bit to update several registers simultaneously. | | | | | | | | | |
| <table><tr><th>Value</th><th>Mode</th><th>Description</th></tr><tr><td>0</td><td>UPDATE</td><td>Each write access to an LCD register is updated into the Low Frequency domain as soon as possible.</td></tr><tr><td>1</td><td>FREEZE</td><td>The LCD is not updated with the new written value.</td></tr></table> | | | | | Value | Mode | Description | 0 | UPDATE | Each write access to an LCD register is updated into the Low Frequency domain as soon as possible. | 1 | FREEZE | The LCD is not updated with the new written value. |
| Value | Mode | Description | | | | | | | | | | | |
| 0 | UPDATE | Each write access to an LCD register is updated into the Low Frequency domain as soon as possible. | | | | | | | | | | | |
| 1 | FREEZE | The LCD is not updated with the new written value. | | | | | | | | | | | |

29.5.17 LCD_SYNCBUSY - Synchronization Busy Register

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----|----|----|----|--------|----|--------|----|--------|----|--------|----|----|----|---|---|---|---|---|---|--------|---|--------|---|--------|---|--------|---|-------|---|-------|---|--------|--|------|
| 0x064 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | |
| Reset | | | | | | | | | | | | | R | 0 | R | 0 | R | 0 | R | 0 | | | | | | | | | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | R | 0 | | | |
| Access | | | | | | | | | | | | | R | | R | | R | | R | | | | | | | | | | R | | R | | R | | R | | R | | R | | R | | |
| Name | | | | | | | | | | | | | SEGD7L | | SEGD6L | | SEGD5L | | SEGD4L | | | | | | | | | | SEGD3L | | SEGD2L | | SEGD1L | | SEGD0L | | AREGB | | AREGA | | BACTRL | | CTRL |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:20 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 19 | SEGD7L | 0 | R | SEGD7L Register Busy Set when the value written to SEG7L is being synchronized. |
| 18 | SEGD6L | 0 | R | SEGD6L Register Busy Set when the value written to SEG6L is being synchronized. |
| 17 | SEGD5L | 0 | R | SEGD5L Register Busy Set when the value written to SEG5L is being synchronized. |
| 16 | SEGD4L | 0 | R | SEGD4L Register Busy Set when the value written to SEG4L is being synchronized. |
| 15:8 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 7 | SEGD3L | 0 | R | SEGD3L Register Busy Set when the value written to SEG3L is being synchronized. |
| 6 | SEGD2L | 0 | R | SEGD2L Register Busy Set when the value written to SEG2L is being synchronized. |
| 5 | SEGD1L | 0 | R | SEGD1L Register Busy Set when the value written to SEG1L is being synchronized. |
| 4 | SEGD0L | 0 | R | SEGD0L Register Busy Set when the value written to SEG0L is being synchronized. |
| 3 | AREGB | 0 | R | AREGB Register Busy Set when the value written to AREGB is being synchronized. |
| 2 | AREGA | 0 | R | AREGA Register Busy Set when the value written to AREGA is being synchronized. |
| 1 | BACTRL | 0 | R | BACTRL Register Busy Set when the value written to BACTRL is being synchronized. |
| 0 | CTRL | 0 | R | CTRL Register Busy Set when the value written to CTRL is being synchronized. |

29.5.18 LCD_SEGD4L - Segment Data Low Register 4 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x0CC | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD4L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEGD4L | 0x000000 | RW | COM4 Segment Data This register contains segment data for segment lines 0-23 for COM4. |

29.5.19 LCD_SEGD5L - Segment Data Low Register 5 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x0D0 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD5L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEGD5L | 0x000000 | RW | COM5 Segment Data This register contains segment data for segment lines 0-23 for COM5. |

29.5.20 LCD_SEGD6L - Segment Data Low Register 6 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x0D4 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD6L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEGD6L | 0x000000 | RW | COM6 Segment Data This register contains segment data for segment lines 0-23 for COM6. |

29.5.21 LCD_SEGD7L - Segment Data Low Register 7 (Async Reg)

For more information about Asynchronous Registers please see Section 5.3 (p. 20) .

| Offset | Bit Position | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|--------------|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 0x0D8 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Reset | | | | | | | | | 0x0000000 | | | | | | | | | | | | | | | | | | | | | | | |
| Access | | | | | | | | | RW | | | | | | | | | | | | | | | | | | | | | | | |
| Name | | | | | | | | | SEGD7L | | | | | | | | | | | | | | | | | | | | | | | |

| Bit | Name | Reset | Access | Description |
|-------|----------|---|--------|--|
| 31:24 | Reserved | To ensure compatibility with future devices, always write bits to 0. More information in Section 2.1 (p. 3) | | |
| 23:0 | SEGD7L | 0x000000 | RW | COM7 Segment Data This register contains segment data for segment lines 0-23 for COM7. |

30 Revision History

30.1 Revision 1.20

July 2nd, 2014

Added QFP part numbers to Product Overview table.

Updated current numbers and voltage supply range.

Moved chapter "Device Revision" to section 3.

30.2 Revision 1.10

August 22nd, 2013

Corrected UART data frame rate.

Corrected MSC_WDATA description.

Corrected CMU IFS description.

Updated OPAMP register description.

Corrected 3 Opamp Differential Amplifier gain programming bits.

Corrected Opamp Cascaded gain equations.

Corrected alternative location number for LEAURT and I2C.

Updated CMU LFA/LFAE and LFB/LFBE CLKSEL description.

Updated info page size for Flash memory.

Updated DI page table with family part number and corrected the address of AUXHFRCO calibration value.

Updated package types.

Updated LETIMER Async Support in Reflex Producers table.

Updated the I2C Clock Mode table and added the Maximum Data Hold Time formula.

Added the minimum HFPERCLK requirement for I2C Slave Operation.

Added a new register access type RW1H.

Updated RMU Reset Cause Register Interpretation table.

Updated CMU_CALCNT description.

Updated DMA_CHENC register description.

Updated description of number of wait-states for Immediate Synchronization.

Updated description of the Excite Phase timing in LESENSE.

Updated the LETIMER PRS description.

Updated OPAMP description.

Added LPFMODE recommendation for the ADC Input Filtering.

Updated the LETIMER description for usage in EM3.

Updated the RTC description for usage in EM3.

Updated WRITEONCE bitfield description in MSC_WRITECMD register.

Updated the MSC_TIMEBASE register description.

Updated the DMA access description.

Document changed status from "Preliminary".

Updated trademark, disclaimer and contact information.

Other minor corrections.

30.3 Revision 1.00

May 19th, 2011

Added information about backpowering the MCU if V_{dd} drops below SCL and SDA lines voltage.

Added information on ACMP warm up with LPREF.

Changed formula in VDDLEVEL bitfield in ACMPn_INPUTSEL.

Added sine wave minimum amplitude to BUFEXTCLK.

Changed description of IRQERASEABORT.

Updated description of WARMUPMODE in ADC section.

Added documentation for DMA_CHREQSTATUS, DMA_CHSREQSTATUS.

Renamed DMA_WAITSTATUS to DMA_CHWAITSTATUS and updated bit fields.

Updated general description of bus system.

Updated frequency limitations when clocking TIMER from external source.

Updated information on disabling of individual LCD segment lines.

Added LETIMER and LESENSE to asyncheronous support table.

Updated gain settings for 3 diff Opamp mode.

Update description of OPAMP output to ADC.

Updated description of the Low Pass Filter on the input of the Opamps.

Corrected COM4-COM7 SEG line placement.

Corrected I2S Mono waveform.

Corrected the I2C Clock Modes FAST value to 14:9.

Corrected EFM32TG Microcontroller Series table.

Updated HFXO/LFXO description.

Updated EM0-EM4 current consumption.

30.4 Revision 0.90

December 21th, 2010

Major updates to all chapters.

30.5 Revision 0.80

October 1st, 2010

Initial preliminary revision.

A Abbreviations

A.1 Abbreviations

This section lists abbreviations used in this document.

Table A.1. Abbreviations

| Abbreviation | Description |
|------------------|--|
| ACMP | Analog Comparator |
| ADC | Analog to Digital Converter |
| AHB | AMBA Advanced High-performance Bus. AMBA is short for "Advanced Microcontroller Bus Architecture". |
| APB | AMBA Advanced Peripheral Bus. AMBA is short for "Advanced Microcontroller Bus Architecture". |
| ALE | Address Latch Enable |
| AUXHFRCO | Auxiliary High Frequency RC Oscillator. |
| CC | Compare / Capture |
| CLK | Clock |
| CMD | Command |
| CMU | Clock Management Unit |
| CTRL | Control |
| DAC | Digital to Analog Converter |
| DBG | Debug |
| DMA | Direct Memory Access |
| DRD | Dual Role Device |
| EFM | Energy Friendly Microcontroller |
| EM | Energy Mode |
| EM0 | Energy Mode 0 (also called active mode) |
| EM1 to EM4 | Energy Mode 1 to Energy Mode 4 (also called low energy modes) |
| EMU | Energy Management Unit |
| ENOB | Effective Number of Bits |
| FS | Full-speed |
| GPIO | General Purpose Input / Output |
| HFRCO | High Frequency RC Oscillator |
| HFXO | High Frequency Crystal Oscillator |
| HW | Hardware |
| I ² C | Inter-Integrated Circuit interface |
| LCD | Liquid Crystal Display |
| LESENSE | Low Energy Sensor Interface |
| LETIMER | Low Energy Timer |
| LEUART | Low Energy Universal Asynchronous Receiver Transmitter |

| Abbreviation | Description |
|--------------|---|
| LFRCO | Low Frequency RC Oscillator |
| LFXO | Low Frequency Crystal Oscillator |
| LS | Low-speed |
| MAC | Media Access Controller |
| NVIC | Nested Vector Interrupt Controller |
| OPA/OPAMP | Operational Amplifier |
| OSR | Oversampling Ratio |
| OTG | On-the-go |
| PCNT | Pulse Counter |
| PGA | Programmable Gain Array |
| PHY | Physical Layer |
| PRS | Peripheral Reflex System |
| PSRR | Power Supply Rejection Ratio |
| PWM | Pulse Width Modulation |
| RC | Resistance and Capacitance |
| RMU | Reset Management Unit |
| RTC | Real Time Clock |
| SAR | Successive Approximation Register |
| SOF | Start of Frame |
| SPI | Serial Peripheral Interface |
| SW | Software |
| THD | Total Harmonic Distortion |
| USART | Universal Synchronous Asynchronous Receiver Transmitter |
| USB | Universal Serial Bus |
| VCMP | Voltage supply Comparator |
| WDOG | Watchdog timer |
| XTAL | Crystal |

B Disclaimer and Trademarks

B.1 Disclaimer

Silicon Laboratories intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Laboratories products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Laboratories reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Silicon Laboratories shall have no liability for the consequences of use of the information supplied herein. This document does not imply or express copyright licenses granted hereunder to design or fabricate any integrated circuits. The products must not be used within any Life Support System without the specific written consent of Silicon Laboratories. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Laboratories products are generally not intended for military applications. Silicon Laboratories products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons.

B.2 Trademark Information

Silicon Laboratories Inc., Silicon Laboratories, Silicon Labs, SiLabs and the Silicon Labs logo, CMEMS[®], EFM, EFM32, EFR, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember[®], EZLink[®], EZMac[®], EZRadio[®], EZRadioPRO[®], DSPLL[®], ISOmodem[®], Precision32[®], ProSLIC[®], SiPHY[®], USBXpress[®] and others are trademarks or registered trademarks of Silicon Laboratories Inc. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. All other products or brand names mentioned herein are trademarks of their respective holders.

C Contact Information

Silicon Laboratories Inc.

400 West Cesar Chavez

Austin, TX 78701

Please visit the Silicon Labs Technical Support web page:

<http://www.silabs.com/support/pages/contacttechnicalsupport.aspx>

and register to submit a technical support request.

Table of Contents

| | |
|--|-----|
| 1. Energy Friendly Microcontrollers | 2 |
| 1.1. Typical Applications | 2 |
| 1.2. EFM32TG Development | 2 |
| 2. About This Document | 3 |
| 2.1. Conventions | 3 |
| 2.2. Related Documentation | 4 |
| 3. System Overview | 5 |
| 3.1. Introduction | 5 |
| 3.2. Features | 5 |
| 3.3. Block Diagram | 6 |
| 3.4. Energy Modes | 7 |
| 3.5. Product Overview | 8 |
| 3.6. Device Revision | 10 |
| 4. System Processor | 11 |
| 4.1. Introduction | 11 |
| 4.2. Features | 11 |
| 4.3. Functional Description | 12 |
| 5. Memory and Bus System | 14 |
| 5.1. Introduction | 14 |
| 5.2. Functional Description | 15 |
| 5.3. Access to Low Energy Peripherals (Asynchronous Registers) | 20 |
| 5.4. Flash | 23 |
| 5.5. SRAM | 23 |
| 5.6. Device Information (DI) Page | 23 |
| 6. DBG - Debug Interface | 25 |
| 6.1. Introduction | 25 |
| 6.2. Features | 25 |
| 6.3. Functional Description | 25 |
| 6.4. Debug Lock and Device Erase | 26 |
| 6.5. Register Map | 28 |
| 6.6. Register Description | 28 |
| 7. MSC - Memory System Controller | 30 |
| 7.1. Introduction | 30 |
| 7.2. Features | 31 |
| 7.3. Functional Description | 31 |
| 7.4. Register Map | 37 |
| 7.5. Register Description | 37 |
| 8. DMA - DMA Controller | 46 |
| 8.1. Introduction | 46 |
| 8.2. Features | 46 |
| 8.3. Block Diagram | 47 |
| 8.4. Functional Description | 48 |
| 8.5. Examples | 65 |
| 8.6. Register Map | 67 |
| 8.7. Register Description | 68 |
| 9. RMU - Reset Management Unit | 85 |
| 9.1. Introduction | 85 |
| 9.2. Features | 85 |
| 9.3. Functional Description | 85 |
| 9.4. Register Map | 89 |
| 9.5. Register Description | 89 |
| 10. EMU - Energy Management Unit | 91 |
| 10.1. Introduction | 91 |
| 10.2. Features | 91 |
| 10.3. Functional Description | 92 |
| 10.4. Register Map | 97 |
| 10.5. Register Description | 97 |
| 11. CMU - Clock Management Unit | 99 |
| 11.1. Introduction | 99 |
| 11.2. Features | 99 |
| 11.3. Functional Description | 100 |
| 11.4. Register Map | 109 |
| 11.5. Register Description | 110 |
| 12. WDOG - Watchdog Timer | 130 |
| 12.1. Introduction | 130 |
| 12.2. Features | 130 |
| 12.3. Functional Description | 130 |
| 12.4. Register Map | 132 |
| 12.5. Register Description | 132 |
| 13. PRS - Peripheral Reflex System | 135 |
| 13.1. Introduction | 135 |

| | |
|---|-----|
| 13.2. Features | 135 |
| 13.3. Functional Description | 135 |
| 13.4. Register Map | 140 |
| 13.5. Register Description | 140 |
| 14. I ² C - Inter-Integrated Circuit Interface | 145 |
| 14.1. Introduction | 145 |
| 14.2. Features | 145 |
| 14.3. Functional Description | 146 |
| 14.4. Register Map | 167 |
| 14.5. Register Description | 167 |
| 15. USART - Universal Synchronous Asynchronous Receiver/Transmitter | 179 |
| 15.1. Introduction | 179 |
| 15.2. Features | 179 |
| 15.3. Functional Description | 180 |
| 15.4. Register Map | 205 |
| 15.5. Register Description | 205 |
| 16. LEUART - Low Energy Universal Asynchronous Receiver/Transmitter | 225 |
| 16.1. Introduction | 225 |
| 16.2. Features | 225 |
| 16.3. Functional Description | 226 |
| 16.4. Register Map | 237 |
| 16.5. Register Description | 237 |
| 17. TIMER - Timer/Counter | 251 |
| 17.1. Introduction | 251 |
| 17.2. Features | 251 |
| 17.3. Functional Description | 252 |
| 17.4. Register Map | 266 |
| 17.5. Register Description | 267 |
| 18. RTC - Real Time Counter | 285 |
| 18.1. Introduction | 285 |
| 18.2. Features | 285 |
| 18.3. Functional Description | 286 |
| 18.4. Register Map | 289 |
| 18.5. Register Description | 289 |
| 19. LETIMER - Low Energy Timer | 294 |
| 19.1. Introduction | 294 |
| 19.2. Features | 294 |
| 19.3. Functional Description | 295 |
| 19.4. Register Map | 308 |
| 19.5. Register Description | 308 |
| 20. PCNT - Pulse Counter | 317 |
| 20.1. Introduction | 317 |
| 20.2. Features | 317 |
| 20.3. Functional Description | 317 |
| 20.4. Register Map | 323 |
| 20.5. Register Description | 323 |
| 21. LESENSE - Low Energy Sensor Interface | 332 |
| 21.1. Introduction | 332 |
| 21.2. Features | 332 |
| 21.3. Functional description | 333 |
| 21.4. Register Map | 348 |
| 21.5. Register Description | 349 |
| 22. ACMP - Analog Comparator | 378 |
| 22.1. Introduction | 378 |
| 22.2. Features | 378 |
| 22.3. Functional Description | 379 |
| 22.4. Register Map | 383 |
| 22.5. Register Description | 383 |
| 23. VCMP - Voltage Comparator | 389 |
| 23.1. Introduction | 389 |
| 23.2. Features | 389 |
| 23.3. Functional Description | 390 |
| 23.4. Register Map | 393 |
| 23.5. Register Description | 393 |
| 24. ADC - Analog to Digital Converter | 397 |
| 24.1. Introduction | 397 |
| 24.2. Features | 397 |
| 24.3. Functional Description | 398 |
| 24.4. Register Map | 408 |
| 24.5. Register Description | 408 |
| 25. DAC - Digital to Analog Converter | 421 |
| 25.1. Introduction | 421 |
| 25.2. Features | 421 |
| 25.3. Functional Description | 422 |

| | |
|--|-----|
| 25.4. Register Map | 427 |
| 25.5. Register Description | 427 |
| 26. OPAMP - Operational Amplifier | 442 |
| 26.1. Introduction | 442 |
| 26.2. Features | 442 |
| 26.3. Functional Description | 443 |
| 26.4. Register Description | 452 |
| 26.5. Register Map | 452 |
| 27. AES - Advanced Encryption Standard Accelerator | 453 |
| 27.1. Introduction | 453 |
| 27.2. Features | 453 |
| 27.3. Functional Description | 453 |
| 27.4. Register Map | 457 |
| 27.5. Register Description | 457 |
| 28. GPIO - General Purpose Input/Output | 465 |
| 28.1. Introduction | 465 |
| 28.2. Features | 465 |
| 28.3. Functional Description | 466 |
| 28.4. Register Map | 473 |
| 28.5. Register Description | 474 |
| 29. LCD - Liquid Crystal Display Driver | 490 |
| 29.1. Introduction | 490 |
| 29.2. Features | 490 |
| 29.3. Functional Description | 491 |
| 29.4. Register Map | 514 |
| 29.5. Register Description | 514 |
| 30. Revision History | 526 |
| 30.1. Revision 1.20 | 526 |
| 30.2. Revision 1.10 | 526 |
| 30.3. Revision 1.00 | 527 |
| 30.4. Revision 0.90 | 528 |
| 30.5. Revision 0.80 | 528 |
| A. Abbreviations | 529 |
| A.1. Abbreviations | 529 |
| B. Disclaimer and Trademarks | 531 |
| B.1. Disclaimer | 531 |
| B.2. Trademark Information | 531 |
| C. Contact Information | 532 |
| C.1. | 532 |

List of Figures

| | |
|---|-----|
| 3.1. Block Diagram of EFM32TG | 7 |
| 3.2. Energy Mode Indicator | 7 |
| 3.3. Revision Number Extraction | 10 |
| 4.1. Interrupt Operation | 12 |
| 5.1. EFM32TG Bus System | 15 |
| 5.2. System Address Space | 16 |
| 5.3. Write operation to Low Energy Peripherals | 21 |
| 5.4. Read operation from Low Energy Peripherals | 22 |
| 6.1. AAP - Authentication Access Port | 26 |
| 6.2. Device Unlock | 27 |
| 6.3. AAP Expansion | 27 |
| 7.1. Instruction Cache | 34 |
| 8.1. DMA Block Diagram | 47 |
| 8.2. Polling flowchart | 50 |
| 8.3. Ping-pong example | 52 |
| 8.4. Memory scatter-gather example | 55 |
| 8.5. Peripheral scatter-gather example | 57 |
| 8.6. Memory map for 8 channels, including the alternate data structure | 59 |
| 8.7. Detailed memory map for the 8 channels, including the alternate data structure | 60 |
| 8.8. channel_cfg bit assignments | 61 |
| 9.1. RMU Reset Input Sources and Connections. | 86 |
| 9.2. RMU Power-on Reset Operation | 87 |
| 9.3. RMU Brown-out Detector Operation | 88 |
| 10.1. EMU Overview | 92 |
| 10.2. EMU Energy Mode Transitions | 93 |
| 11.1. CMU Overview | 101 |
| 11.2. CMU Switching from HFRCO to HFXO before HFXO is ready | 104 |
| 11.3. CMU Switching from HFRCO to HFXO after HFXO is ready | 105 |
| 11.4. HFXO Pin Connection | 105 |
| 11.5. LFXO Pin Connection | 106 |
| 11.6. HW-support for RC Oscillator Calibration | 107 |
| 11.7. Single Calibration (CONT=0) | 107 |
| 11.8. Continuous Calibration (CONT=1) | 107 |
| 13.1. PRS Overview | 136 |
| 13.2. TIMER0 overflow starting ADC0 single conversions through PRS channel 5. | 139 |
| 14.1. I ² C Overview | 146 |
| 14.2. I ² C-Bus Example | 146 |
| 14.3. I ² C START and STOP Conditions | 147 |
| 14.4. I ² C Bit Transfer on I ² C-Bus | 147 |
| 14.5. I ² C Single Byte Write to Slave | 148 |
| 14.6. I ² C Double Byte Read from Slave | 148 |
| 14.7. I ² C Single Byte Write, then Repeated Start and Single Byte Read | 148 |
| 14.8. I ² C Master Transmitter/Slave Receiver with 10-bit Address | 149 |
| 14.9. I ² C Master Receiver/Slave Transmitter with 10-bit Address | 149 |
| 14.10. I ² C Master State Machine | 153 |
| 14.11. I ² C Slave State Machine | 160 |
| 15.1. USART Overview | 180 |
| 15.2. USART Asynchronous Frame Format | 181 |
| 15.3. USART Transmit Buffer Operation | 185 |
| 15.4. USART Receive Buffer Operation | 187 |
| 15.5. USART Sampling of Start and Data Bits | 188 |
| 15.6. USART Sampling of Stop Bits when Number of Stop Bits are 1 or More | 189 |
| 15.7. USART Local Loopback | 190 |
| 15.8. USART Half Duplex Communication with External Driver | 191 |
| 15.9. USART Transmission of Large Frames | 192 |
| 15.10. USART Transmission of Large Frames, MSBF | 192 |
| 15.11. USART Reception of Large Frames | 193 |
| 15.12. USART ISO 7816 Data Frame Without Error | 194 |
| 15.13. USART ISO 7816 Data Frame With Error | 195 |
| 15.14. USART SmartCard Stop Bit Sampling | 195 |
| 15.15. USART SPI Timing | 197 |
| 15.16. USART Standard I2S waveform | 199 |
| 15.17. USART Standard I2S waveform (reduced accuracy) | 200 |
| 15.18. USART Left-justified I2S waveform | 200 |
| 15.19. USART Right-justified I2S waveform | 200 |
| 15.20. USART Mono I2S waveform | 201 |
| 15.21. USART Example RZI Signal for a given Asynchronous USART Frame | 203 |
| 16.1. LEUART Overview | 226 |
| 16.2. LEUART Asynchronous Frame Format | 227 |
| 16.3. LEUART Transmitter Overview | 229 |
| 16.4. LEUART Receiver Overview | 231 |

| | |
|---|-----|
| 16.5. LEUART Local Loopback | 234 |
| 16.6. LEUART Half Duplex Communication with External Driver | 234 |
| 16.7. LEUART - NRZ vs. RZI | 236 |
| 17.1. TIMER Block Overview | 252 |
| 17.2. TIMER Hardware Timer/Counter Control | 254 |
| 17.3. TIMER Clock Selection | 254 |
| 17.4. TIMER Connections | 255 |
| 17.5. TIMER TOP Value Update Functionality | 255 |
| 17.6. TIMER Quadrature Encoded Inputs | 256 |
| 17.7. TIMER Quadrature Decoder Configuration | 256 |
| 17.8. TIMER X2 Decoding Mode | 257 |
| 17.9. TIMER X4 Decoding Mode | 257 |
| 17.10. TIMER Input Pin Logic | 258 |
| 17.11. TIMER Input Capture Buffer Functionality | 259 |
| 17.12. TIMER Output Compare/PWM Buffer Functionality | 259 |
| 17.13. TIMER Input Capture | 260 |
| 17.14. TIMER Period and/or Pulse width Capture | 260 |
| 17.15. TIMER Block Diagram Showing Comparison Functionality | 261 |
| 17.16. TIMER Output Logic | 261 |
| 17.17. TIMER Up-count Frequency Generation | 262 |
| 17.18. TIMER Up-count PWM Generation | 262 |
| 17.19. TIMER CC out in 2x mode | 263 |
| 17.20. TIMER Up/Down-count PWM Generation | 264 |
| 17.21. TIMER CC out in 2x mode | 264 |
| 18.1. RTC Overview | 286 |
| 19.1. LETIMER Overview | 295 |
| 19.2. LETIMER State Machine for Free-running Mode | 297 |
| 19.3. LETIMER One-shot Repeat State Machine | 298 |
| 19.4. LETIMER Buffered Repeat State Machine | 299 |
| 19.5. LETIMER Double Repeat State Machine | 300 |
| 19.6. LETIMER Simple Waveforms Output | 302 |
| 19.7. LETIMER Repeated Counting | 302 |
| 19.8. LETIMER Dual Output | 303 |
| 19.9. LETIMER Triggered Operation | 304 |
| 19.10. LETIMER Continuous Operation | 305 |
| 19.11. LETIMER LETIMERn_CNT Not Initialized to 0 | 306 |
| 20.1. PCNT Overview | 318 |
| 20.2. PCNT Quadrature Coding | 319 |
| 20.3. PCNT Direction Change Interrupt (DIRCNG) Generation | 322 |
| 21.1. LESENSE block diagram | 333 |
| 21.2. Scan sequence | 335 |
| 21.3. Timing diagram, short excitation | 335 |
| 21.4. Pin sequencing | 337 |
| 21.5. Scan result and interrupt generation | 338 |
| 21.6. Sensor scan and decode sequence | 338 |
| 21.7. Decoder state transition evaluation | 340 |
| 21.8. Decoder hysteresis | 341 |
| 21.9. Circular result buffer | 342 |
| 21.10. Capacitive sense setup | 344 |
| 21.11. LC sensor setup | 344 |
| 21.12. LC sensor oscillations | 345 |
| 21.13. FSM example 1 | 346 |
| 21.14. FSM example 2 | 346 |
| 22.1. ACMP Overview | 379 |
| 22.2. 20 mV Hysteresis Selected | 381 |
| 22.3. Capacitive Sensing Set-up | 382 |
| 23.1. VCMP Overview | 390 |
| 23.2. VCMP 20 mV Hysteresis Enabled | 391 |
| 24.1. ADC Overview | 399 |
| 24.2. ADC Conversion Timing | 400 |
| 24.3. ADC Analog Power Consumption With Different WARMUPMODE Settings | 401 |
| 24.4. ADC RC Input Filter Configuration | 402 |
| 24.5. ADC Bias Programming | 403 |
| 24.6. ADC Conversion Tailgating | 404 |
| 25.1. DAC Overview | 422 |
| 25.2. DAC Bias Programming | 424 |
| 25.3. DAC Sine Mode | 425 |
| 26.1. OPAMP System Overview | 443 |
| 26.2. OPAMP Overview | 444 |
| 26.3. Opamp Output Stage Overview | 445 |
| 26.4. Voltage Follower Unity Gain Overview | 446 |
| 26.5. Inverting input PGA Overview | 447 |
| 26.6. Non-inverting PGA Overview | 447 |
| 26.7. Cascaded Inverting PGA Overview | 448 |

| | |
|---|-----|
| 26.8. Cascaded Non-inverting PGA Overview | 449 |
| 26.9. Two Op-amp Differential Amplifier Overview | 450 |
| 26.10. Three Op-amp Differential Amplifier Overview | 451 |
| 26.11. Dual Buffer ADC Driver Overview | 452 |
| 27.1. AES Key and Data Definitions | 454 |
| 27.2. AES Data and Key Orientation as Defined in the Advanced Encryption Standard | 454 |
| 27.3. AES Data and Key Register Operation | 455 |
| 28.1. Pin Configuration | 467 |
| 28.2. Tristated Output with Optional Pull-up or Pull-down | 468 |
| 28.3. Push-Pull Configuration | 469 |
| 28.4. Open-drain | 469 |
| 28.5. EM4 Wake-up Logic | 470 |
| 28.6. Pin n Interrupt Generation | 471 |
| 29.1. LCD Block Diagram | 491 |
| 29.2. LCD Low-power Waveform for LCD_COM0 in Quadruples Multiplex Mode, 1/3 Bias | 493 |
| 29.3. LCD Normal Waveform for LCD_COM0 in Quadruples Multiplex Mode, 1/3 Bias | 493 |
| 29.4. LCD Static Bias and Multiplexing - LCD_COM0 | 493 |
| 29.5. LCD 1/2 Bias and Duplex Multiplexing - LCD_COM0 | 494 |
| 29.6. LCD 1/2 Bias and Duplex Multiplexing - LCD_COM1 | 494 |
| 29.7. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0 | 494 |
| 29.8. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0 Connection | 494 |
| 29.9. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM0 | 495 |
| 29.10. LCD 1/2 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM1 | 495 |
| 29.11. LCD 1/3 Bias and Duplex Multiplexing - LCD_COM0 | 495 |
| 29.12. LCD 1/3 Bias and Duplex Multiplexing - LCD_COM1 | 496 |
| 29.13. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0 | 496 |
| 29.14. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0 Connection | 496 |
| 29.15. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM0 | 497 |
| 29.16. LCD 1/3 Bias and Duplex Multiplexing - LCD_SEG0-LCD_COM1 | 497 |
| 29.17. LCD 1/2 Bias and Triplex Multiplexing - LCD_COM0 | 497 |
| 29.18. LCD 1/2 Bias and Triplex Multiplexing - LCD_COM1 | 497 |
| 29.19. LCD 1/2 Bias and Triplex Multiplexing - LCD_COM2 | 498 |
| 29.20. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0 | 498 |
| 29.21. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0 Connection | 498 |
| 29.22. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM0 | 498 |
| 29.23. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM1 | 499 |
| 29.24. LCD 1/2 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM2 | 499 |
| 29.25. LCD 1/3 Bias and Triplex Multiplexing - LCD_COM0 | 499 |
| 29.26. LCD 1/3 Bias and Triplex Multiplexing - LCD_COM1 | 500 |
| 29.27. LCD 1/3 Bias and Triplex Multiplexing - LCD_COM2 | 500 |
| 29.28. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0 | 500 |
| 29.29. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0 Connection | 500 |
| 29.30. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM0 | 501 |
| 29.31. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM1 | 501 |
| 29.32. LCD 1/3 Bias and Triplex Multiplexing - LCD_SEG0-LCD_COM2 | 501 |
| 29.33. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM0 | 502 |
| 29.34. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM1 | 502 |
| 29.35. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM2 | 502 |
| 29.36. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_COM3 | 502 |
| 29.37. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0 | 503 |
| 29.38. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0 Connection | 503 |
| 29.39. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0-LCD_COM0 | 503 |
| 29.40. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0-LCD_COM1 | 504 |
| 29.41. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0-LCD_COM2 | 504 |
| 29.42. LCD 1/3 Bias and Quadruplex Multiplexing - LCD_SEG0-LCD_COM3 | 504 |
| 29.43. LCD Clock System in LCD Driver | 510 |
| 29.44. LCD Block Diagram of the Animation Circuit | 512 |

List of Tables

| | |
|--|-----|
| 2.1. Register Access Types | 3 |
| 3.1. Energy Mode Description | 8 |
| 3.2. EFM32TG Microcontroller Series | 8 |
| 3.3. Minor Revision Number Interpretation | 10 |
| 4.1. Interrupt Request Lines (IRQ) | 12 |
| 5.1. Memory System Core Peripherals | 17 |
| 5.2. Memory System Low Energy Peripherals | 18 |
| 5.3. Memory System Peripherals | 19 |
| 5.4. Device Information Page Contents | 23 |
| 7.1. MSC Flash Memory Mapping | 32 |
| 7.2. Lock Bits Page Structure | 32 |
| 8.1. AHB bus transfer arbitration interval | 49 |
| 8.2. DMA channel priority | 49 |
| 8.3. DMA cycle types | 51 |
| 8.4. channel_cfg for a primary data structure, in memory scatter-gather mode | 54 |
| 8.5. channel_cfg for a primary data structure, in peripheral scatter-gather mode | 56 |
| 8.6. Address bit settings for the channel control data structure | 59 |
| 8.7. src_data_end_ptr bit assignments | 60 |
| 8.8. dst_data_end_ptr bit assignments | 61 |
| 8.9. channel_cfg bit assignments | 61 |
| 8.10. DMA cycle of six words using a word increment | 64 |
| 8.11. DMA cycle of 12 bytes using a halfword increment | 65 |
| 9.1. RMU Reset Cause Register Interpretation | 87 |
| 10.1. EMU Energy Mode Overview | 94 |
| 10.2. EMU Entering a Low Energy Mode | 95 |
| 10.3. EMU Wakeup Triggers from Low Energy Modes | 96 |
| 13.1. Reflex Producers | 137 |
| 13.2. Reflex Consumers | 138 |
| 14.1. I ² C Reserved I ² C Addresses | 148 |
| 14.2. I ² C High and Low Periods for Low CLKDIV | 150 |
| 14.3. I ² C Clock Mode | 151 |
| 14.4. I ² C Interactions in Prioritized Order | 154 |
| 14.5. I ² C Master Transmitter | 156 |
| 14.6. I ² C Master Receiver | 158 |
| 14.7. I ² C STATE Values | 159 |
| 14.8. I ² C Transmission Status | 159 |
| 14.9. I ² C Slave Transmitter | 162 |
| 14.10. I ² C - Slave Receiver | 163 |
| 14.11. I ² C Bus Error Response | 164 |
| 15.1. USART Asynchronous vs. Synchronous Mode | 181 |
| 15.2. USART Pin Usage | 181 |
| 15.3. USART Data Bits | 182 |
| 15.4. USART Stop Bits | 182 |
| 15.5. USART Parity Bits | 183 |
| 15.6. USART Oversampling | 183 |
| 15.7. USART Baud Rates @ 4MHz Peripheral Clock | 184 |
| 15.8. USART SPI Modes | 196 |
| 15.9. USART I2S Modes | 199 |
| 15.10. USART IrDA Pulse Widths | 204 |
| 16.1. LEUART Parity Bit | 227 |
| 16.2. LEUART Baud Rates | 228 |
| 17.1. TIMER Counter Response in X2 Decoding Mode | 257 |
| 17.2. TIMER Counter Response in X4 Decoding Mode | 257 |
| 17.3. TIMER Events | 265 |
| 18.1. RTC Resolution Vs Overflow | 287 |
| 19.1. LETIMER Repeat Modes | 296 |
| 19.2. LETIMER Underflow Output Actions | 301 |
| 20.1. PCNT QUAD Mode Counter Control Function | 320 |
| 21.1. LESENSE scan configuration selection | 334 |
| 21.2. LESENSE excitation pin mapping | 336 |
| 21.3. LESENSE decoder configuration | 346 |
| 21.4. LESENSE decoder configuration | 347 |
| 22.1. Bias Configuration | 380 |
| 23.1. Bias Configuration | 390 |
| 24.1. ADC Single Ended Conversion | 404 |
| 24.2. ADC Differential Conversion | 405 |
| 24.3. Oversampling Result Shifting and Resolution | 405 |
| 24.4. ADC Results Representation | 406 |
| 24.5. Calibration Register Effect | 407 |
| 26.1. General Opamp Mode Configuration | 446 |
| 26.2. Voltage Follower Unity Gain Configuration | 446 |

| | |
|--|-----|
| 26.3. Inverting input PGA Configuration | 447 |
| 26.4. Non-inverting PGA Configuration | 447 |
| 26.5. Cascaded Inverting PGA Configuration | 448 |
| 26.6. Cascaded Non-inverting PGA Configuration | 449 |
| 26.7. OPA0/OPA1 Differential Amplifier Configuration | 450 |
| 26.8. OPA1/OPA2 Differential Amplifier Configuration | 450 |
| 26.9. Three Opamp Differential Amplifier Gain Programming | 451 |
| 26.10. Three Opamp Differential Amplifier Configuration | 451 |
| 26.11. Dual Buffer ADC Driver Configuration | 452 |
| 28.1. Pin Configuration | 467 |
| 28.2. EM4 WU Register bits to pin mapping | 470 |
| 29.1. LCD Mux Settings | 492 |
| 29.2. LCD BIAS Settings | 492 |
| 29.3. LCD Wave Settings | 493 |
| 29.4. LCD Contrast | 505 |
| 29.5. LCD Contrast Function | 505 |
| 29.6. LCD Principle of Contrast Adjustment for Different Bias Settings. | 506 |
| 29.7. LCD V_{LCD} | 507 |
| 29.8. LCD V_{BOOST} Frequency | 507 |
| 29.9. LCD Frame rate Conversion Table | 508 |
| 29.10. LCD Update Data Control (UDCTRL) Bits | 509 |
| 29.11. DSC BIAS Encoding | 509 |
| 29.12. FCPRESC | 510 |
| 29.13. LCD Animation Shift Register | 511 |
| 29.14. LCD Animation Pattern | 511 |
| 29.15. LCD Animation Example | 512 |
| A.1. Abbreviations | 529 |

List of Examples

| | |
|--|-----|
| 8.1. DMA Transfer | 66 |
| 15.1. USART Multi-processor Mode Example | 193 |
| 19.1. LETIMER Triggered Output Generation | 304 |
| 19.2. LETIMER Continuous Output Generation | 305 |
| 19.3. LETIMER PWM Output | 306 |
| 19.4. LETIMER PWM Output | 306 |
| 27.1. AES Cipher Block Chaining | 456 |
| 28.1. GPIO Interrupt Example | 472 |
| 29.1. LCD Event Frequency Example | 510 |
| 29.2. LCD Animation Enable Example | 513 |
| 29.3. LCD Animation Dependence Example | 513 |

List of Equations

| | |
|---|-----|
| 5.1. Memory SRAM Area Set/Clear Bit | 16 |
| 5.2. Memory Peripheral Area Bit Modification | 17 |
| 5.3. Memory Wait Cycles with Clock Equal or Faster than HFCORECLK | 20 |
| 5.4. Memory Wait Cycles with Clock Slower than CPU | 20 |
| 12.1. WDOG Timeout Equation | 131 |
| 14.1. I ² C Pull-up Resistor Equation | 146 |
| 14.2. I ² C Maximum Transmission Rate | 150 |
| 14.3. I ² C High and Low Cycles Equations | 150 |
| 14.4. Maximum Data Hold Time | 150 |
| 15.1. USART Baud Rate | 183 |
| 15.2. USART Desired Baud Rate | 183 |
| 15.3. USART Synchronous Mode Bit Rate | 196 |
| 15.4. USART Synchronous Mode Clock Division Factor | 196 |
| 16.1. LEUART Baud Rate Equation | 228 |
| 16.2. LEUART CLKDIV Equation | 228 |
| 16.3. LEUART Optimal Sampling Point | 232 |
| 16.4. LEUART Actual Sampling Point | 232 |
| 17.1. TIMER Rotational Position Equation | 257 |
| 17.2. TIMER Up-count Frequency Generation Equation | 262 |
| 17.3. TIMER Up-count PWM Resolution Equation | 262 |
| 17.4. TIMER Up-count PWM Frequency Equation | 262 |
| 17.5. TIMER Up-count Duty Cycle Equation | 263 |
| 17.6. TIMER 2x PWM Resolution Equation | 263 |
| 17.7. TIMER 2x Mode PWM Frequency Equation(Up-count) | 263 |
| 17.8. TIMER 2x Mode Duty Cycle Equation | 263 |
| 17.9. TIMER Up/Down-count PWM Resolution Equation | 264 |
| 17.10. TIMER Up/Down-count PWM Frequency Equation | 264 |
| 17.11. TIMER Up/Down-count Duty Cycle Equation | 264 |
| 17.12. TIMER 2x PWM Resolution Equation | 264 |
| 17.13. TIMER 2x Mode PWM Frequency Equation(Up/Down-count) | 265 |
| 17.14. TIMER 2x Mode Duty Cycle Equation | 265 |
| 18.1. RTC Frequency Equation | 286 |
| 19.1. LETIMER Clock Frequency | 300 |
| 20.1. Absolute position with hysteresis and even TOP value | 320 |
| 20.2. Absolute position with hysteresis and odd TOP value | 320 |
| 21.1. Scan frequency | 335 |
| 22.1. V _{DD} Scaled | 381 |
| 23.1. VCMP V _{DD} Trigger Level | 391 |
| 24.1. ADC Total Conversion Time (in ADC_CLK cycles) Per Output | 399 |
| 24.2. ADC Temperature Measurement | 402 |
| 25.1. DAC Clock Prescaling | 423 |
| 25.2. DAC Single Ended Output Voltage | 424 |
| 25.3. DAC Differential Output Voltage | 424 |
| 25.4. DAC Sine Generation | 425 |
| 29.1. LCD Frame rate Calculation | 508 |
| 29.2. LCD Event Frequency Equation | 510 |

silabs.com

